TeSys H
Ultra-compact starters

Introduction A3/2

TeSys H Ultra-compact 22.5 mm motor starters

Type of product	Range		Page
Ultra-compact starters IEC ratings Standard starters, screw or spring terminals, direct-on-line or reverse	Up to 3 kW AC53a Up to 9 A AC51		A3/6
Safety starters, screw or spring terminals, direct-on-line or reverse			
Ultra-compact starters UL ratings Standard starters, screw or spring terminals, direct-on-line or reverse	Up to 3 hp AC53a Up to 9 A AC51		A3/7
Safety starters, screw or spring terminals, direct-on-line or reverse			
Circuit breakers for a group of starters Selection of magnetic motor circuit breakers GV2L – rotary knob GV2LE – rocker lever	Up to 32 A		A3/8

Technical Data for Designers A3/9

The most compact 3 KW / 400 V starter in the world

Up to 75 % of space reduction

- Ultra-compact 22.5 mm starter
- Reversing starter in the same width
- Maximum space savings for group starter architecture

Long electrical durability

- Suitable for high demanding application
- 30 000 000 of AC53a electrical cycles

> With printed QR code, refering directly to the product data sheet.

Easy Design

- Wide range setting motor protection
- Automatic, manual or remote reset after thermal trip
- Wide range of control voltage

Easy to integrate

- Direct mounting installation on DIN rail
- Control terminals on the upper side
- Power terminal on the lower side

Standard version

- 2 ratings:
  - 2.4 A 400 V AC53a
  - 6.5 A 400 V AC53a
- 2 control voltages:
  - 24 V DC
  - 110 V / 230 V AC
- 2 terminal types:
  - Screw clamps
  - Spring
- Can provide up to 3 functions:
  - Forward running
  - Reverse running
  - Overload protection

Safety version

- Safe Torque Off embedded:
  - SIL3 according to IEC61508-1
  - Ple according to ISO13849-1
- ATEX:
  - As associated devices for motor protection

> **TeSys** H is a solution dedicated to low footprint applications, in industries as food and beverage, logistics, and durable goods.

Conventional..... OR .....**TeSys** H standard solutions

Direct-on-line



Reverse

> How does the hybrid technology work ?

Hybrid technology:

Each contact is coupled with a power semiconductor for switching

> Higher number of on/off switches, extended durability.

> Closing



Start: conduction through the semiconductor.

Contact closure under zero voltage. No electrical arc: the contact is preserved.



The semiconductor is non-conducting.

> Opening





Before the opening of the contact the semiconductor is triggered.



Contact opening:
- no arc: the contact is preserved.



Stop: the semiconductor becomes non-conducting.

Conventional ..... OR ..... TeSys H safety solutions

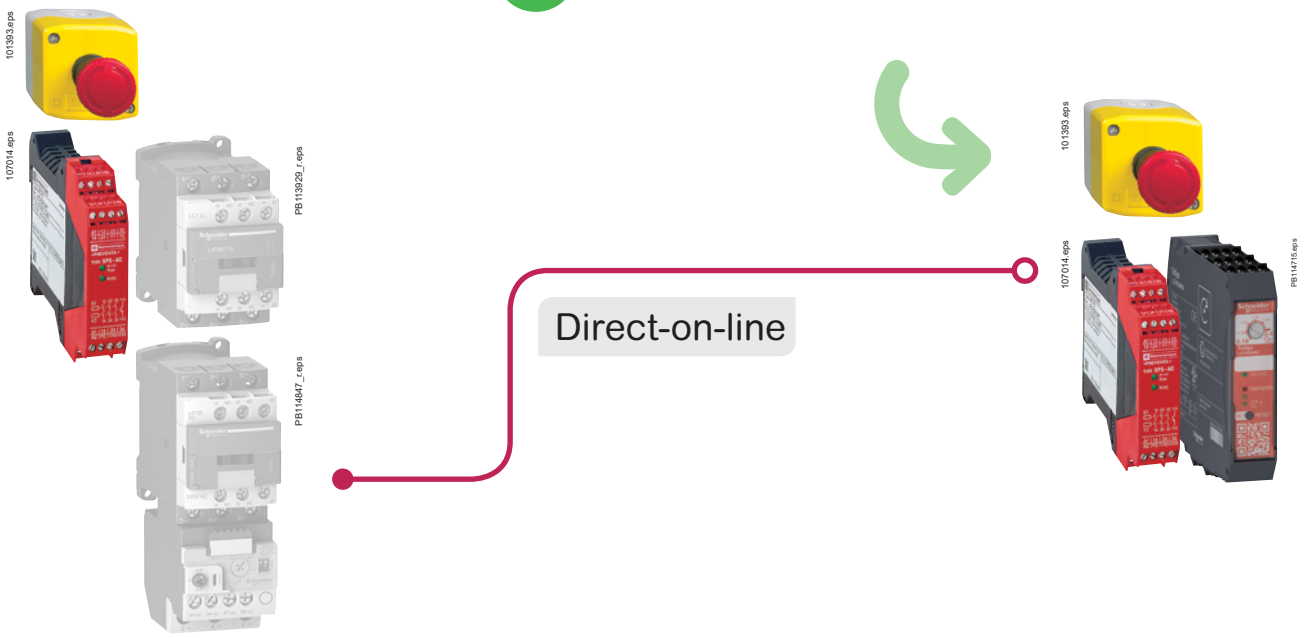

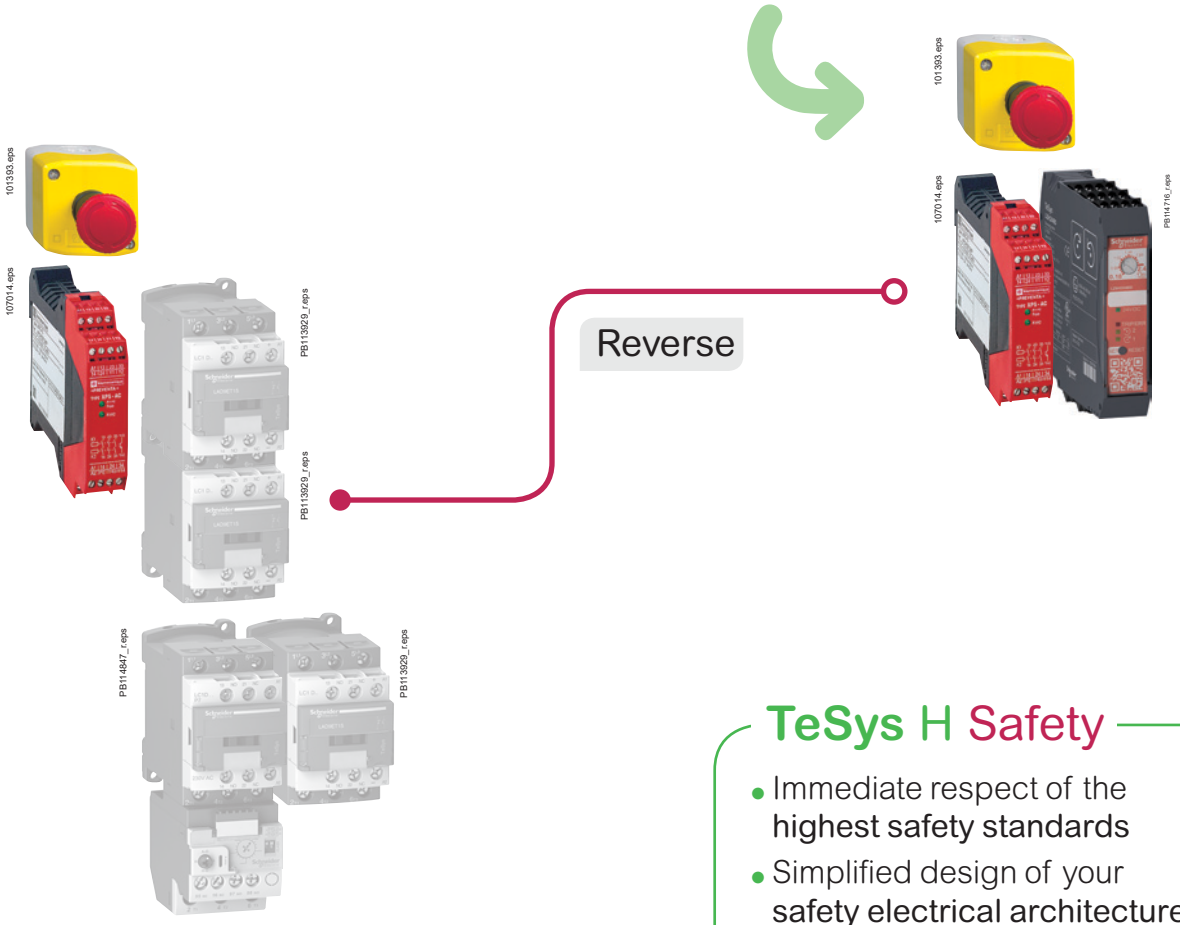

TeSys H Safety

- Immediate respect of the **highest safety standards**
- Simplified design of your **safety electrical architecture**
- **Quicker** panel implementation

PB114711.eps

LZ1H2X4BD

Starters for asynchronous motors - AC53a utilization category:

Standard starters TeSys H per IEC ratings

Starters	3- phases motor: max power (KW) for various voltage							Current range	Commercial references (1)
	220 V	230 V	380 V	400 V	415 V	440 V	500 V	A	
Direct-on-line									
Screw terminals	0.37	0.37	0.75	0.75	0.75	0.75	1.1	0.18...2.4	**LZ1H2X4●●**
	1.5	1.5	2.2	3	3	3	3	1.5...6.5	**LZ1H6X5●●**
Spring terminals	0.37	0.37	0.75	0.75	0.75	0.75	1.1	0.18...2.4	**LZ1H2X43●●**
	1.5	1.5	2.2	3	3	3	3	1.5...6.5	**LZ1H6X53●●**
Reverse									
Screw terminals	0.37	0.37	0.75	0.75	0.75	0.75	1.1	0.18...2.4	**LZ2H2X4●●**
	1.5	1.5	2.2	3	3	3	3	1.5...6.5	**LZ2H6X5●●**
Spring terminals	0.37	0.37	0.75	0.75	0.75	0.75	1.1	0.18...2.4	**LZ2H2X43●●**
	1.5	1.5	2.2	3	3	3	3	1.5...6.5	**LZ2H6X53●●**

(1) Remplace the ●● in the reference by the bobine code: BD (24 V DC) or FU (110-230 V AC).

PB114715.eps

LZ7H2X4BD

Safety starters TeSys H per IEC ratings

Starters	3- phases motor: max power (KW) for different tensions							Current range	Commercial references (1)
	220 V	230 V	380 V	400 V	415 V	440 V	500 V	A	
Direct-on-line									
Screw terminals	0.37	0.37	0.75	0.75	0.75	0.75	1.1	0.18...2.4	**LZ7H2X4●●**
	1.5	1.5	2.2	3	3	3	3	1.5...6.5	**LZ7H6X5●●**
Spring terminals	0.37	0.37	0.75	0.75	0.75	0.75	1.1	0.18...2.4	**LZ7H2X43●●**
	1.5	1.5	2.2	3	3	3	3	1.5...6.5	**LZ7H6X53●●**
Reverse									
Screw terminals	0.37	0.37	0.75	0.75	0.75	0.75	1.1	0.18...2.4	**LZ8H2X4●●**
	1.5	1.5	2.2	3	3	3	3	1.5...6.5	**LZ8H6X5●●**
Spring terminals	0.37	0.37	0.75	0.75	0.75	0.75	1.1	0.18...2.4	**LZ8H2X43●●**
	1.5	1.5	2.2	3	3	3	3	1.5...6.5	**LZ8H6X53●●**

(1) Remplace the ●● in the reference by the bobine code: BD (24 V DC) or FU (110-230 V AC).

Starters for resistive load AC51 utilization category:

Starters	Resistive load current	Application	Commercial references (1)
	A		
Screw terminals	2.4	Standard	**LZ1H2X4●●**
		Safety	**LZ7H2X4●●**
	9	Standard	**LZ1H6X5●●**
		Safety	**LZ7H6X5●●**
Spring terminals	2.4	Standard	**LZ1H2X43●●**
		Safety	**LZ7H2X43●●**
	9	Standard	**LZ1H6X53●●**
		Safety	**LZ7H6X53●●**

(1) Remplace the ●● in the reference by the bobine code: BD (24 V DC) or FU (110-230 V AC).

PB114713.eps

LZ1H2X43BD

Starters for asynchronous motors - AC53a utilization category:

Standard starters TeSys H per UL ratings

Starters	3- phases motor in HP			Current range	Commercial references (1)
	208 V	220 V - 240 V	440 V - 480 V	A	
Direct-on-line					
Screw terminals	1/2	1/2	1	0.18...2.4	**LZ1H2X4●●**
	1	1.5	3	1.5...6.5	**LZ1H6X5●●**
Spring terminals	1/2	1/2	1	0.18...2.4	**LZ1H2X43●●**
	1	1.5	3	1.5...6.5	**LZ1H6X53●●**
Reverse					
Screw terminals	1/2	1/2	1	0.18...2.4	**LZ2H2X4●●**
	1	1.5	3	1.5...6.5	**LZ2H6X5●●**
Spring terminals	1/2	1/2	1	0.18...2.4	**LZ2H2X43●●**
	1	1.5	3	1.5...6.5	**LZ2H6X53●●**

(1) Remplace the ●● in the reference by the bobine code: BD (24 V DC) or FU (110-230 V AC).

PB114716.eps

LZ8H6X5BD

Safety starters TeSys H per UL ratings

Starters	3- phases motor in HP			Current range	Commercial references (1)
	208 V	220 V - 240 V	440 V - 480 V	A	
Direct-on-line					
Screw terminals	1/2	1/2	1	0.18...2.4	**LZ7H2X4●●**
	1	1.5	3	1.5...6.5	**LZ7H6X5●●**
Spring terminals	1/2	1/2	1	0.18...2.4	**LZ7H2X43●●**
	1	1.5	3	1.5...6.5	**LZ7H6X53●●**
Reverse					
Screw terminals	1/2	1/2	1	0.18...2.4	**LZ8H2X4●●**
	1	1.5	3	1.5...6.5	**LZ8H6X5●●**
Spring terminals	1/2	1/2	1	0.18...2.4	**LZ8H2X43●●**
	1	1.5	3	1.5...6.5	**LZ8H6X53●●**

(1) Remplace the ●● in the reference by the bobine code: BD (24 V DC) or FU (110-230 V AC).

Starters for resistive load AC51 utilization category:

Starters	Resistive load current	Application	Commercial references (1)
	A		
Screw terminals	2.4	Standard	**LZ1H2X4●●**
		Safety	**LZ7H2X4●●**
	9	Standard	**LZ1H6X5●●**
		Safety	**LZ7H6X5●●**
Spring terminals	2.4	Standard	**LZ1H2X43●●**
		Safety	**LZ7H2X43●●**
	9	Standard	**LZ1H6X53●●**
		Safety	**LZ7H6X53●●**

(1) Remplace the ●● in the reference by the bobine code: BD (24 V DC) or FU (110-230 V AC).

Description: pages A3/10 and A3/11
Characteristics: pages A3/12 and A3/13
Curves: pages A3/14 and A3/15
Dimensions, schemes: page A3/16

Selection table

GV2L + LZ2H2X4BD

Magnetic motor circuit breakers:
- GV2L: rotary knob type - Ue = 500 V
- GV2LE: rocker lever type - Ue = 415 V.

Selection of the circuit breaker
Type 1 coordination according to IEC/EN 60947-4-2

Max	Iq	Number of TeSys H		Reference Circuit breaker	
		2.4 A	6.5 A	Rotary	Rocker
A	kA				
0.4	50.0	1	–	**GV2L03**	**GV2LE03**
0.63	50.0	1	–	**GV2L04**	**GV2LE04**
1	50.0	1	1	**GV2L05**	**GV2LE05**
1.6	50.0	1	1	**GV2L06**	**GV2LE06**
2.5	35.0	1	1	**GV2L07**	**GV2LE07**
4	12.5	1	1	**GV2L08**	**GV2LE08**
6.3	8.0	2	1	**GV2L10**	**GV2LE10**
10	7.0	4	1	**GV2L14**	**GV2LE14**
14	5.0	5	2	**GV2L16**	**GV2LE16**
18	4.0	7	2	**GV2L20**	**GV2LE20**
25	4.0	10	3	**GV2L22**	**GV2LE22**
32	3.0	13	4	**GV2L32**	**GV2LE32**

TeSys H

Technical Data for Designers

Contents

Description ..... A3/10 to A3/11
Characteristics..... A3/12 to A3/13
Curves ..... A3/14 to A3/15
Dimensions and schemes A3/16

Identification of terminals / Indicators / Setting means and procedure

Setting procedure

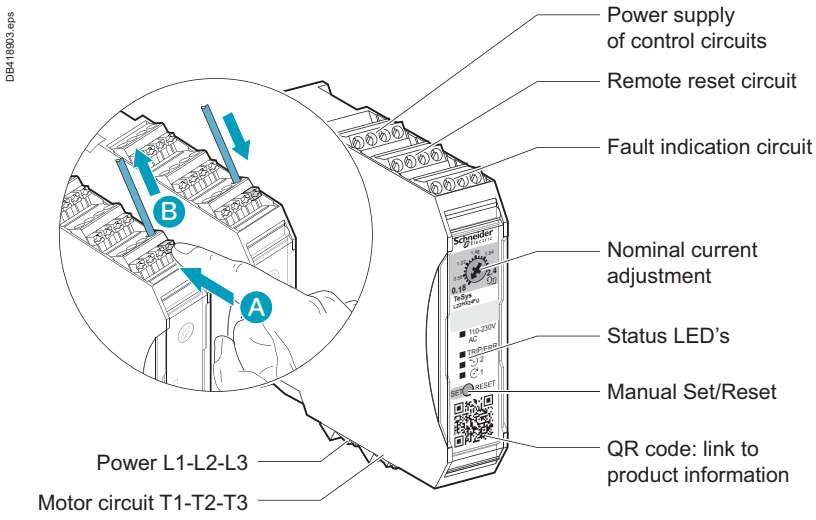

STEP	ACTION
1	Lift the cover on the front of the TeSys H motor starter to access the SET/RESET button.
2	Press and hold down the SET/RESET button for at least 6 seconds. After 6 seconds the 110-230 V AC or 24 V DC LED flashes once.
3	After the LED has flashed once, release the SET/RESET button.
4	Turn the potentiometer to select a nominal current, and then fine-tune the position until the LEDs indicate the exact nominal current.
5	Press the SET/RESET button to save the selected nominal current. The 110-230 V AC or 24 V DC LED comes on and the other LEDs go off.
6	Drop the cover back over the front of the TeSys H motor starter.

Protection functions

The protection of three - phase motors is ensured against potential faults

- Thermal overload: the motor currents exceed the set value.
- Phase unbalanced: the motor currents differ from each other by more than 33 %
- Phase loss: power missing on one or several phases
- Stall and jam: motor current exceeding 45 A for more that 2 s during starting or running phase - No motor is connected - Motor current is lower that the minimum configurable current for more than 2 seconds, on at least two phases.

For all this detected situations, the TeSys H motor starter will switch off, activate its TRP/ERR LED and fault signaling contact.

Please refer to the “Instruction sheet and User Guide” for more information.

Electrical diagrams for Safety chain applications

Preferred

Electrical life time: 30000000 AC53a electrical cycles

Safety Chain Application for Monitoring Emergency STOP Circuits with Two Channel Inputs and Two Channel Outputs with Preventa XPSAF Safety Processing Device.

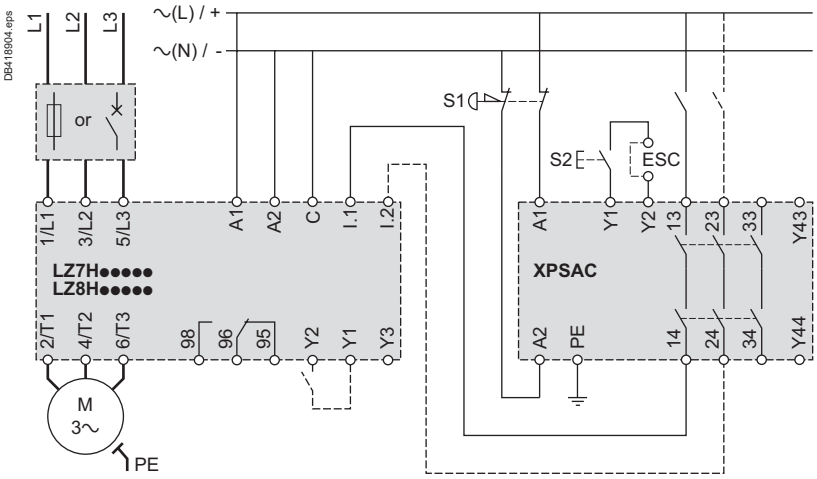

Possible but non- recommended

Electrical life time: 10000 AC53 a electrical cycles

Safety Chain Application for Monitoring Emergency Stop Circuits with Two Channel Inputs and Two Channel Outputs with Preventa XPSAC Safety Processing Device.

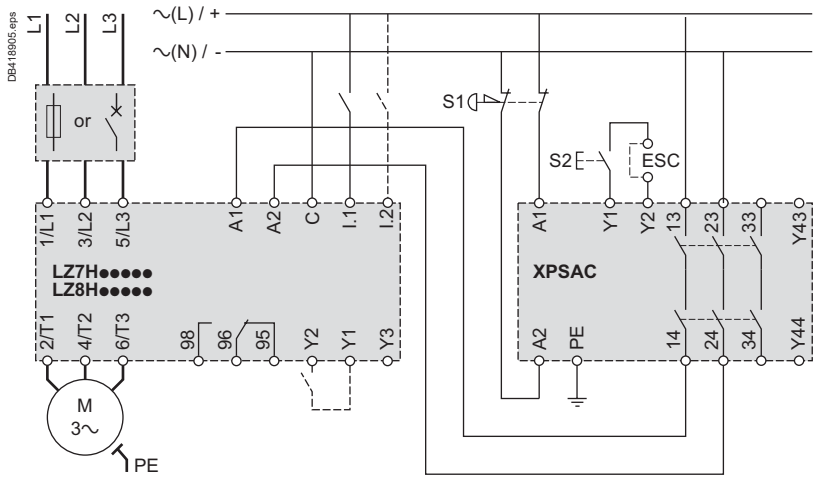

References:
pages A3/6 and A3/7
Characteristics:
pages A3/12 and A3/13
Curves:
pages A3/14 and A3/15
Dimensions, schemes:
page A3/16

Characteristics

Environment

Rated insulation voltage (Ui)	Conforming to IEC/EN 60947-1, overvoltage category III, degree of pollution: 2	**V**	500
Rated impulse withstand voltage (Uimp)	Conforming to IEC/EN 60947-4-2	**kV**	6 (24 V DC control voltage); 4 (110 V - 230 V AC control voltage)
Conforming to standards			IEC / EN 60947-4-2
Product certifications			CE, CUL, ATEX (for failsafe product), CCC
Degree of protection	Conforming to IEC / EN 60947-1		IP20
Environment category	Conforming to IEC / EN 60947-1		E
Climatic withstand			Conforming to IEC/EN 60068-2-30
Ambient air temperature around the device	Storage	**°C**	-40…+80
	Operation (see derating curves)	**°C**	-25…+70
Maximum operating altitude	without derating	**m**	2000
	with derating	**m**	No
Operating positions (see derating curves)	Vertical axis (horizontal DIN rail)		Yes
	Horizontal axis (vertical DIN rail)		Not authorised
Shock resistance 1/2 sine wave = 18 ms	Conforming to IEC/EN 60068-2-27	**gn**	30 Starter OFF
		gn	30 Starter ON
Vibration resistance 10…150 Hz	Conforming to IEC/EN 60068-2-6	**gn**	5 Starter OFF
		gn	5 Starter ON
Resistance to electrostatic discharge	Conforming to IEC/EN 61000-4-2	**kV**	Air discharge: 8 kV
		kV	Contact discharge: 6 kV
Immunity to radiated high-frequency disturbance	Conforming to IEC/EN 61000-4-3		
	80 - 1 GHz	**V/m**	20
	1.0 - 6 GHz	**V/m**	10
Immunity to fast transient currents	Conforming to IEC/EN 61000-4-4	**kV**	3
Immunity to conducted high frequency disturbances	Conforming to IEC/EN 61000-4-6	**V**	10
Radiated emission and conducted	Conforming to CISPR 11 and EN 55011		Class A
Surge	Conforming to IEC/EN 61000-4-5	**kV**	1 symmetrical
		kV	2 asymmetrical

Control circuit characteristics

Rated voltage	∼ 50/60 Hz	**V**	110 - 230
	⎓	**V**	24
Voltage limits	∼ 50/60 Hz	**V**	85…253
	⎓	**V**	19.2…30
Voltage dips		**ms**	3
Short time interruptions		**ms**	3

Power circuit characteristics

			LZ●2X4●●	LZ●6X5●●
Power disipation for corresponding Rated Operating Current (see derating curve)		**W**	0.88 … 4.1	0.88 … 7
Rated Operating Current	AC51 conforming to IEC/EN 60947-4-3	**A**	0.18 - 2.4	1.5 - 9
	AC53a conforming to IEC/EN 60947-4-2	**A**	0.18 - 2.4	1.5 - 6.5
Electrical life	AC51	**Op**	30 000 000 (1)	
		Op	10 000 (2)	
	AC53A	**Op**	30 000 000 (1)	
		Op	10 000 (2)	
Maximum Operating rate	AC51	**Op/h**	7200	
	AC53A		See curves	
Time to restart after overload trip	Manual or remote mode	**mn**	2	
	Automatic	**mn**	20	

Power and control terminal Characteristics

	Terminal type		Screw M3	Push in
Flexible cable without cable end	1 conductor	**mm²**	0.25…2.5	0.25…2.5
	2 conductors	**mm²**	0.25…0.75	
Flexible cable with cable end	1 conductor	**mm²**	0.25…2.5	0.25…2.5
	2 conductors	**mm²**	0.25…1.5	0.25…1.5
Solid cable without cable end	1 conductor	**mm²**	0.25…2.5	0.25…2.5
	2 conductors	**mm²**	0.25…0.75	
Screwdriver		**mm**	flat screwdriver: 3 mm	
Tightening torque		**N.m**	0.5..0.6	

(1) With ON/OFF control through control inputs (I_1, I_2 terminals) *(2) With ON/OFF control through power supply (A_1, A_2 terminals).*

References: pages A3/6 and A3/7
Description: pages A3/10 and A3/11
Curves: pages A3/14 and A3/15
Dimensions, schemes: page A3/16

Characteristics

System conditons

Database for failure rates		SN 29500
System type		Type B
Standard used		IEC 61508
Beta factor		1 %
Mean time to failure (MTTF) at an ambient temperature 40 °C		39.3 (LZ7H or LZ8H 24 V DC) 39.1 (LZ7H or LZ8H 110/230 V AC)

Safe torque-off

		LZ7H or LZ8H 24 V DC	LZ7H or LZ8H 110/230 V AC
Ambient temperature	°C	40	40
Mean time to failure (MTTF)		517	289
Switch-off time		80	100
λsd [FIT] safe, detectable		664	638
λsu [FIT] safe, undetectable		968	935
λdd [FIT] dangerous, detectable		218	388
λdu [FIT] dangerous, undetectable		2.67	6.82
SFF [%] Safe failure fraction		99	99
DCS [%] Diagnostic coverage safe		40.7	40.6
DC [%] Diagnosctic coverage		98	98
PFH Probability of dangerous failure per hour		2.67×10^{-9}	6.82×10^{-9}
Safety level		IEC/CEI 61508-1: SIL 3 ISO 13849-1: Category 3 PL e EN 60954-1: Category 3	

Motor overload protection

		LZ7H or LZ8H 24 V DC	LZ7H or LZ8H 110/230 V AC
Ambient temperature	°C	40	40
Mean time to failure (MTTF)		447	273
Time to trip		As for Class 10 A, IEC/CEI 60947-4-2	
λsd [FIT] safe, detectable		637	636
λsu [FIT] safe, undetectable		870	841
λdd [FIT] dangerous, detectable		239	402
λdu [FIT] dangerous, undetectable		17	17
SFF [%] Safe failure fraction		99	99
DCS [%] Diagnostic coverage safe		42.3	43.1
DC [%] Diagnosctic coverage		93	95
Safety level		IEC/CEI 61508-1: SIL 2	

Overload protection tripping curve at 20 °C

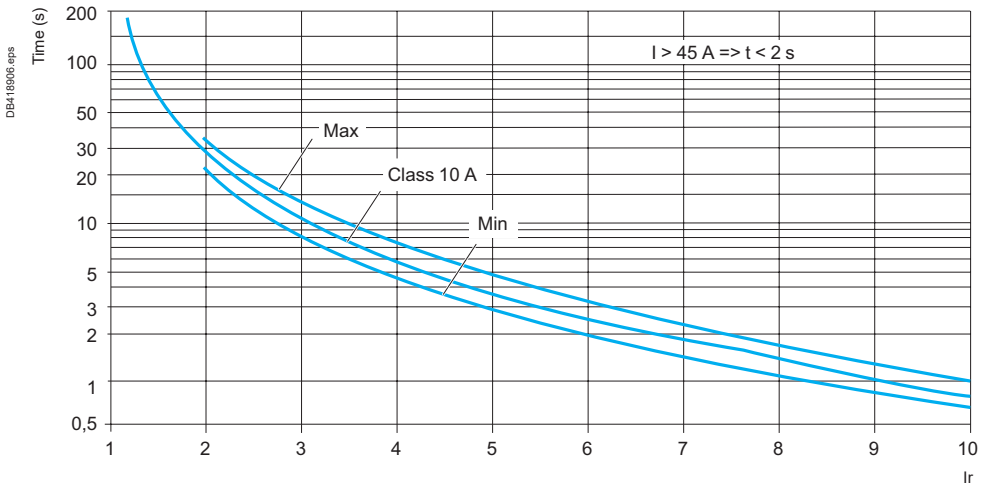

Derating curves: maximum load current (In)

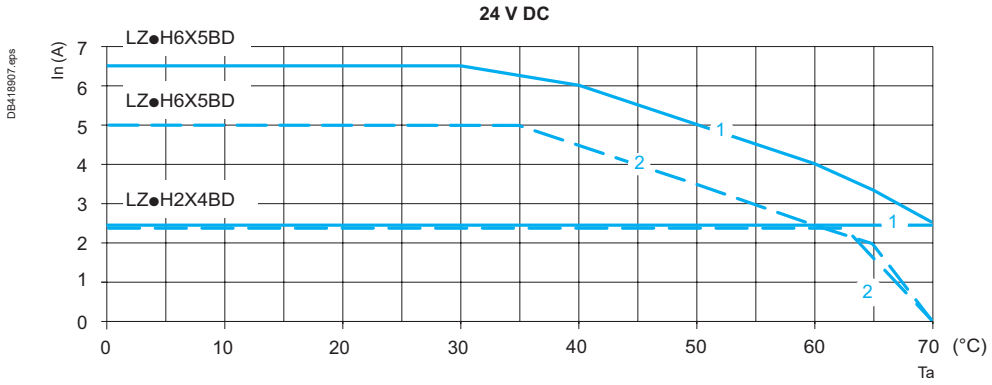

Derating according:
- motor starter control power supply
- ambient temperature (Ta)
- distance between devices **1**: 20 mm, with spacing
  2: without spacing.

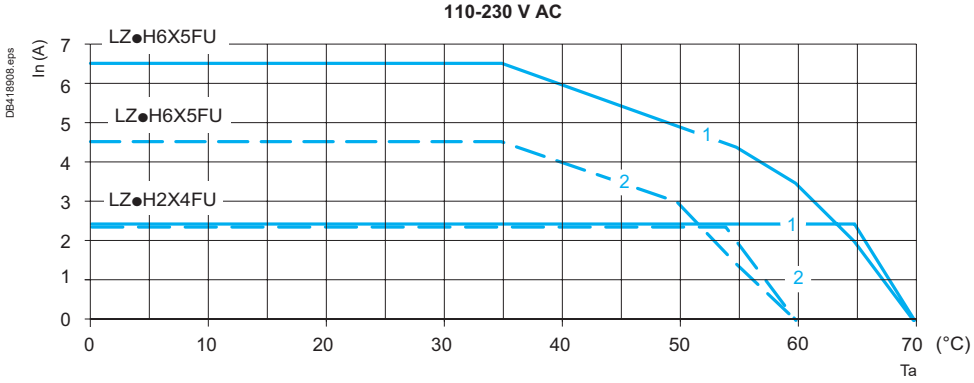

Minimum duty cycle t/T (%) versus cycle duration T (s)

Due to the effect of the peak current on the TeSys H monitoring circuit during the starting time, a stop/start sequence should not occur before a certain amount of time. The diagrams below show the minimum duty cycle according the total period for 2 typical starting time values.

With a starting time = 100 ms

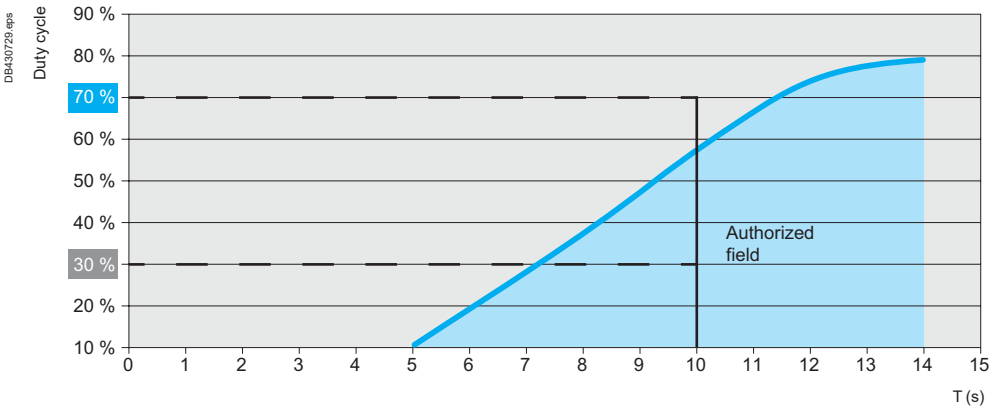

Example for starting time of 100 ms with period T = 10 s.

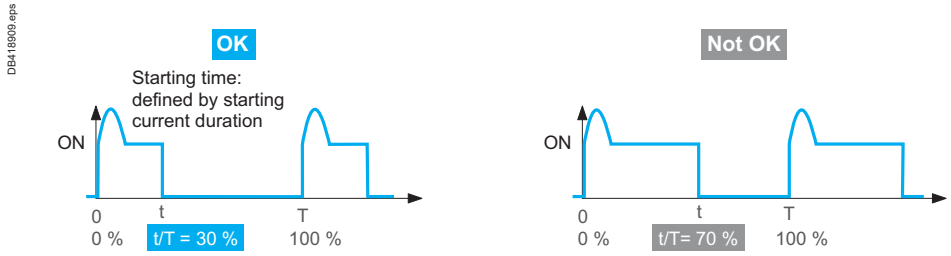

With a starting time = 150 ms

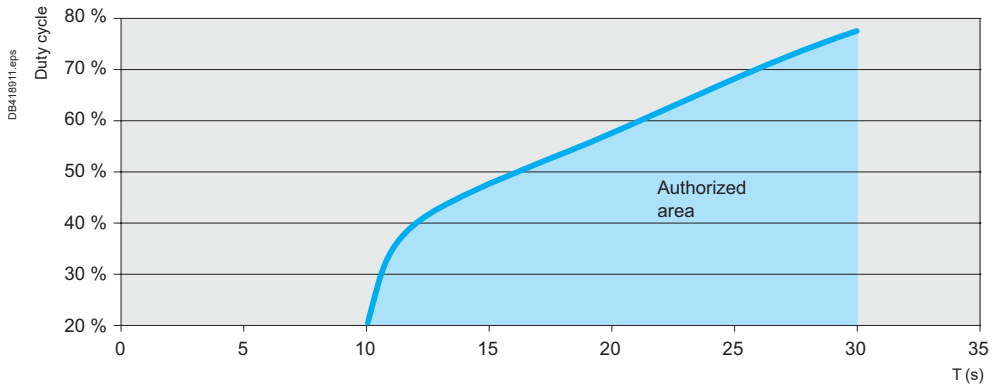

Dimensions, schemes

Dimensions mm

LZ●H●●●●●

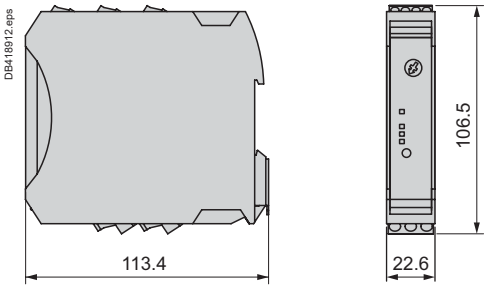

LZ●H●●●3●●

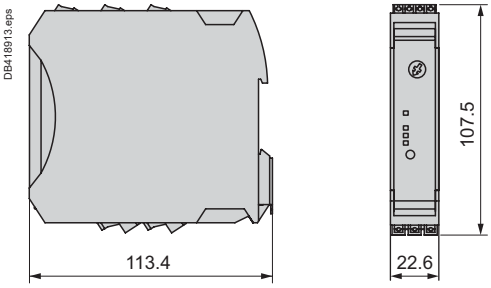

Wiring diagrams

Motor control by standard starter

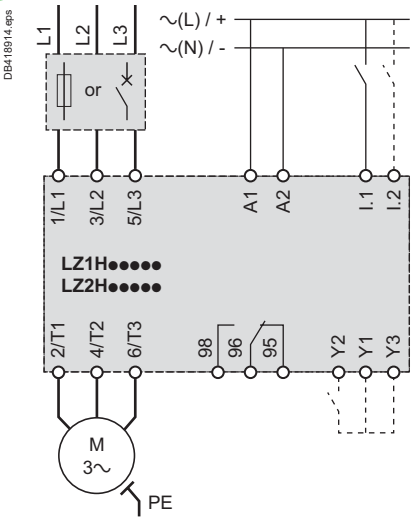

Motor control by safety starter

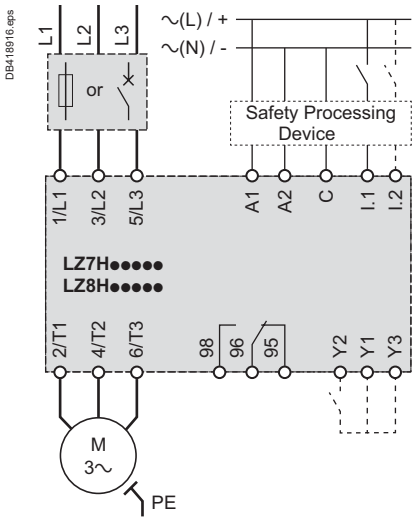

Power terminals

T1, T2, T3	*Motor connection*
L1, L2, L3	*Power inputs*

Control terminals

A1, A2	*Auxiliary power unit*
I.1	*Control input, direction 1*
I.2	*Control input, direction 2 (LZ2H and LZ8H only)*
C	*Control inputs common point (LZ7H and LZ8H only)*
Y1	*Reset mode, common point*
Y2	*Reset mode, remote, manual*
Y3	*Reset mode, automatic*
98, 96, 95	*Trip or error signaling contact*

References: pages A3/6 and A3/7
Description: pages A3/10 and A3/11
Characteristics: pages A3/12 and A3/13
Curves: pages A3/14 and A3/15

Life Is On Schneider Electric