
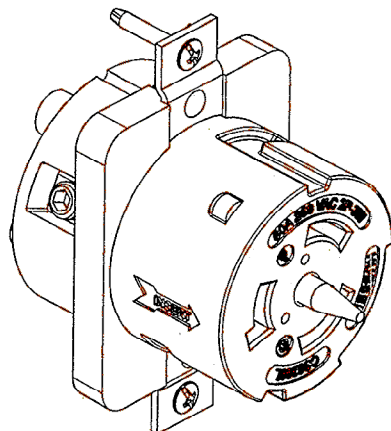
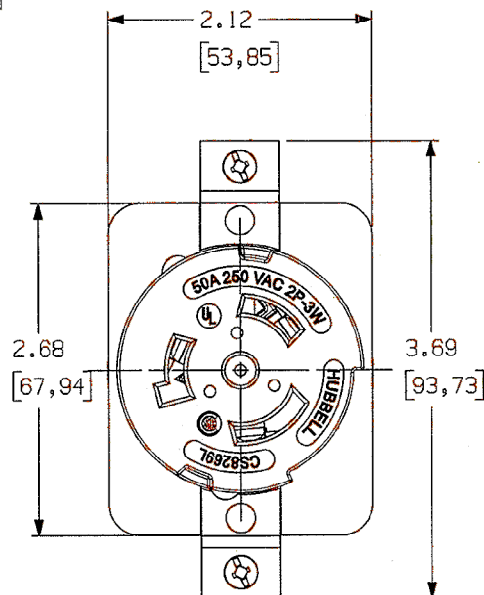
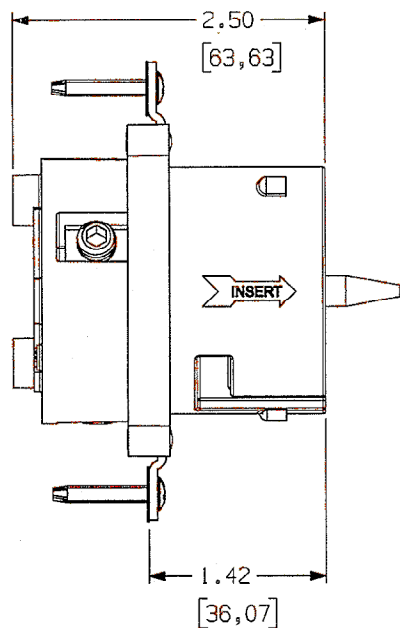


M-11724 1

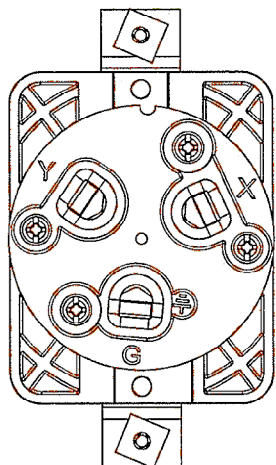

NOTES: UNLESS OTHERWISE SPECIFIED
1. UL & CSA CERTIFIED.

2. DIMENSIONS IN INCHES (mm)

3. TOLERANCES: $\pm .10$

CATALOG NO.	RATING	CONDUCTOR & CABLE RANGE
CS8269L	50A 250V	8/3+10/1 TO 4/4 .83-1.25 (21.1-31.8)

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
HOUSING	NYLON	
CONTACT HOLDER	NYLON	
CONTACT COVER	NYLON	
GUIDE PIN	STEEL	NICKEL
CONTACTS	BRASS	
ASSY RIVETS	BRASS	
DIVIDER	POLYCARBONATE	
TERMINALS	ALUMINUM	TIN
TERMINAL SCREWS	STEEL	TIN
ASSY SCREWS	STEEL	ZINC
GROUND CONTACT	BRASS	

1	RELEASE PER DCN #16943	WRV	09/09/10
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE
PRODUCT SHOWN ON THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT NOTICE

TITLE

RECEPTACLE

TOLERANCES UNLESS
OTHERWISE SPECIFIED

FRACTIONS $\pm 1/64$
DECIMALS $\pm .005$
ANGLES $\pm 2'$

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
BRIDGEPORT, CT

DR. BY WRV	APP. BY
TR. BY	SCALE 1:1
CHK'D BY TLS	DATE 09/09/10

DIMENSION SHEET FOR CAT. NO.

REPAIRABLE ☐ NON-REPAIRABLE ☐

B

M-11724

1