



YA6CL2TC1090, Cu Compression, 2-Hole, #10 Stud, 5/8" Spacing, Standard Barrel, 90 Degree, 6 AWG

By Burndy

Catalog # [YA6CL2TC1090](#)

Cu Comp Terminal, 2 Holes W/insp window, #6 AWG, 600V-35kV, #10 stud, Tin plated, 90 Deg Bend, Blue, 7 or 374 Index ,
UL Listed 90 Deg C

Features

- Barrel designed with internal chamfer at wire entry for smooth insertion of wire, preventing possible damage of the strands
- Standard barrel length is recommended for installations with limited space availability
- Electro-tin plated unless otherwise specified to reduce galvanic corrosion (bimetallic) and resist corrosive elements
- Connectors are clearly marked with stamping and barrel color coding
- 2-Hole design prevents rotation

Application


Wire Termination

General

Catalog Number	YA6CL2TC1090
Color Code	Blue
Connector Type	STANDARD BARREL
Die Index	7
EU RoHS Indicator	Yes
Feature - Barrel Style	• Chamfered • Skived
Feature - Barrel Type	Standard
Finish Type	Tin-Plated
Material	COPPER
Physical Attribute - Number of Holes	2
Physical Attribute - Tongue Type	Standard
Plated	Y
Plating Type	Tin - Electro Plated
Sub Brand	TERMINALS, HYLUG
Trade Name	HYLUG™
Type	Standard Barrel, Tin Plated
UPC	781810019153
UPC 12 Digit	7818100191533

Dimensions

Dimension - B Length fraction	9/16 in
-------------------------------	---------

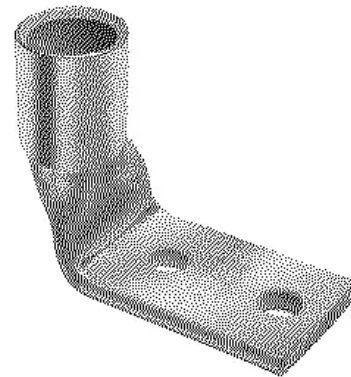

Dimension - B Length inch	0.54 in
Dimension - Bolt Hole Size inch	0.20 in
Dimension - Bolt Size fraction	#8-#10
Dimension - Bolt Size inch	0.21
Dimension - Height inch	0.94 in
Dimension - Hole Size fraction	#10
Dimension - Hole Size inch	0.21
Dimension - Hole Size mm	5.3 mm
Dimension - L Length Overall mm	35 mm
Dimension - Length Overall inch	1.39 in
Dimension - N inch	0.25 in
Dimension - Outside Diameter inch	0.29 in
Dimension - Pad Width inch	0.42 in
Dimension - Strip Length inch	5/8 in
Dimension - Stud Size fraction	#10
Dimension - Stud Size inch	#10
Dimension - Z (inch)	0.27 in
Physical Attribute - Tongue Angle	90 Degree

Electrical Ratings

Voltage - Maximum	35000
Voltage Rating	35 kV

Conductor Related

Conductor - Copper Solid Size	6 AWG
Conductor - Copper Str Size	6 AWG
Conductor - Copper Str Size Range	6 AWG
Conductor - Material	COPPER
Conductor Size	6 AWG
Conductor Type	CODE

Certifications And Compliance

Buy American Compliant	Yes
Certification - CSA Approved	Yes
Certification - ETL	No
Certification - UL Recognized	No

Certification - cULus	No
Industry Standard(s)	UL 486A-486B
Standards - Industry Standards Met	UL 486A-486B
Standards - RoHS Compliance Status	CM
UL Listed	Yes

Logistics

Carton Quantity	50
-----------------	----

Minimum Pack Quantity1

Product Assets

- Catalogs - BURNDY Master Catalog - Full Line BURNDY Catalog
- Customer Notices - Prop 65 Notice
- Interactive Catalog - BURNDY Full-Line Digital Catalog
- Sales Drawings - SE209512-03
- Specifications - YA6CL2TC1090
- Video - HYDENT Compression Terminal Overview Video



A Hubbell brand