



CONTACT MODULE S-PKZ2

Part no.

S-PKZ2(24V50/60HZ)


Article no.

062500



Powering Business Worldwide™

Delivery programme

Contact sequence			
Product range			Accessories: PKZ2 System - PRODUCT DISCONTINUATION IN 2012
Accessories			Contact module
Max. motor rating			
AC-3			
220 V 230 V 240 V			
220 V 230 V	P	kW	11
380 V 400 V 415 V			
380 V 400 V	P	kW	20
440 V	P	kW	22
500 V	P	kW	24
660 V 690 V			
660 V 690 V	P	kW	30
Auxiliary contacts			
N/O = Normally open			1 M
N/C = Normally closed			1 V
For use with			PKZ2(4)
Actuating voltage			24 V 50/60 Hz
Notes			
Clip plate for snap-fitting the combination to be ordered separately. Can be fitted to 3- or 4-pole circuit-breaker. With clip plate fitted, can be snap fitted onto one 15 mm or two 10 mm IEC/EN 60715 top-hat rails.			
Can be mounted separately using base (see below), RC suppressor on request			
The coil cannot be changed. The HI10-S-PKZ2 integral auxiliary contact is freely configurable. The auxiliary contact cannot be changed. with varistor suppressor present.			
High-capacity contact module Serial No.01 suitable for mounting with MV-PKZ2.			
Notes			
Accessories			
1 Motor-protective circuit-breakers, circuit-breakers			
3 Standard auxiliary contact			
4 Standard auxiliary contact			
5 Trip-indicating auxiliary contact			
6 Shunt releases, undervoltage releases			
7 Remote operators			
9 Clip plate			
Other actuating voltages			
Other accessories			
		Page	


Approvals

Product Standards	UL 508; CSA-C22.2 No. 14; IEC60947-4-1; CE marking
UL File No.	E36332
UL CCN	NLRV
CSA File No.	12528
CSA Class No.	3211-05
NA Certification	UL listed, CSA certified
Specially designed for NA	No

Technical data ETIM 4.0

Rated control voltage Us at AC 50 Hz		V	24
Rated control voltage Us at AC 60 Hz		V	24
Rated control voltage Us at DC		V	0
Design of contact module			Magnet system
Voltage type for actuation			AC

Dimensions

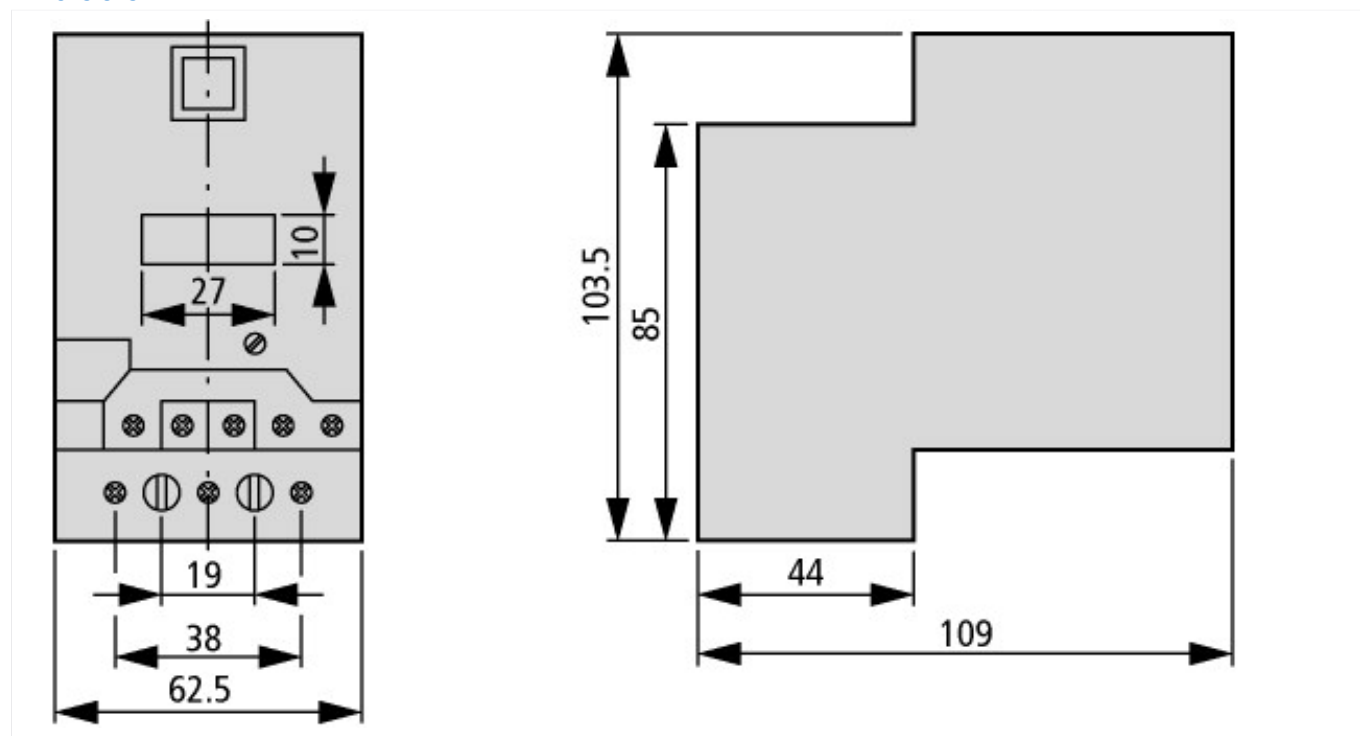

Additional product information (links)

AWA1280-1130 Auxiliary contact for contact module	
	AWA1280-1130 Auxiliary contact for contact module
AWA1280-1233 (High-capacity) contact module	
	AWA1280-1233 (High-capacity) contact module
Motor starters and "Special Purpose Ratings" for the North American market	http://www.moeller.net/binary/ver_techpapers/ver953en.pdf
Busbar Component Adapters for modern Industrial control panels	http://www.moeller.net/binary/ver_techpapers/ver960en.pdf