

PermaGround™ Ground Clamp Connectors

Two Parallel Cables of Wires to Pipe or Rod


TYPE GT

Features

- Manufactured from copper alloy
- Furnished with silicon bronze nut, and lock washer
- UL 467 Listed for grounding and bonding up to 250kcmil

Benefits

- Provides maximum conductivity
- For clamping parallel cable and wires to pipe or rod in perpendicular orientation
- Suitable for direct burial in earth or concrete

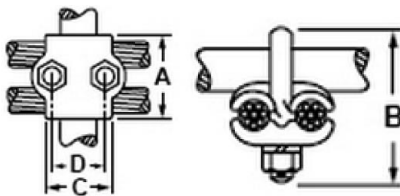

Catalog Number	Accommodates		Wire Range	Dimensions - in. (mm)								Bolt Size
	Rod	Iron Pipe Size		A		B		C		D		
GT-1*	1/2	1/4	4str-8sol	1.625	(41.3)	2.000	(50.8)	1.625	(41.3)	1.000	(25.4)	3/8
GT-3*	1/2	1/4	250kcmil-2/0sol	2.500	(63.5)	2.250	(57.2)	1.875	(47.6)	1.000	(25.4)	3/8
GT-4*	5/8 or 3/4	3/8	4str-8sol	1.625	(41.3)	2.125	(54.0)	1.625	(41.3)	1.125	(28.6)	3/8
GT-5*	5/8 or 3/4	3/8	2/0str-4sol	2.000	(50.8)	2.500	(63.5)	1.750	(44.5)	1.125	(28.6)	3/8
GT-6*	5/8 or 3/4	3/8	250kcmil-2/0sol	2.500	(63.5)	2.625	(66.7)	1.875	(47.6)	1.125	(28.6)	3/8
GT-7	5/8 or 3/4	3/8	500kcmil-300kcmil	2.750	(69.9)	2.750	(69.9)	2.000	(50.8)	1.125	(28.6)	3/8
GT-8*	7/8 or 1	1/2 or 3/4	4str-8sol	1.625	(41.3)	2.500	(63.5)	1.625	(41.3)	1.500	(38.1)	3/8
GT-9*	7/8 or 1	1/2 or 3/4	2/0str-4sol	2.000	(50.8)	2.750	(69.9)	1.750	(44.5)	1.500	(38.1)	3/8
GT-10*	7/8 or 1	1/2 or 3/4	250kcmil-2/0sol	2.500	(63.5)	2.875	(73.0)	1.875	(47.6)	1.500	(38.1)	3/8
GT-13*	-	1	4str-8sol	1.625	(41.3)	2.750	(69.9)	1.625	(41.3)	1.750	(44.5)	3/8
GT-14*	-	1	2/0str-4sol	2.000	(50.8)	3.000	(76.2)	1.750	(44.5)	1.750	(44.5)	3/8
GT-15*	-	1	250kcmil-2/0sol	2.500	(63.5)	3.875	(98.4)	3.125	(79.4)	1.750	(44.5)	3/8
GT-18*	-	1 1/4	4str-8sol	1.625	(41.3)	3.000	(76.2)	1.875	(47.6)	2.063	(52.4)	3/8
GT-19*	-	1 1/4	2/0str-4sol	2.000	(50.8)	3.250	(82.6)	2.000	(50.8)	2.063	(52.4)	3/8
GT-20*	-	1 1/4	250kcmil-2/0sol	2.500	(63.5)	3.500	(88.9)	2.125	(54.0)	2.063	(52.4)	3/8
GT-25*	-	1 1/2	2/0str-4sol	2.000	(50.8)	3.500	(88.9)	2.375	(60.3)	2.375	(60.3)	3/8
GT-26*	-	1 1/2	250kcmil-2/0sol	2.500	(63.5)	3.875	(98.4)	2.500	(63.5)	2.375	(60.3)	3/8
GT-30*	-	2	4str-8sol	1.750	(44.5)	3.875	(98.4)	2.750	(69.9)	2.813	(71.4)	3/8
GT-31*	-	2	2/0str-4sol	2.000	(50.8)	4.125	(104.8)	2.875	(73.0)	2.813	(71.4)	3/8
GT-32*	-	2	250kcmil-2/0sol	2.625	(66.7)	4.250	(108.0)	3.000	(76.2)	2.813	(71.4)	3/8
GT-37*	-	2 1/2	2/0str-4sol	2.000	(50.8)	4.500	(114.3)	3.375	(85.7)	3.313	(84.1)	3/8
GT-38*	-	2 1/2	250kcmil-2/0sol	2.625	(66.7)	4.750	(120.7)	3.500	(88.9)	3.313	(84.1)	3/8
GT-43*	-	3	2/0str-4sol	2.000	(50.8)	5.250	(133.4)	3.750	(95.3)	3.938	(100.0)	3/8
GT-44*	-	3	250kcmil-2/0sol	2.625	(66.7)	5.500	(139.7)	3.750	(95.3)	3.938	(100.0)	3/8
GT-49*	-	3 1/2	2/0str-4sol	2.000	(50.8)	5.875	(149.2)	3.875	(98.4)	4.438	(112.7)	3/8
GT-50*	-	3 1/2	250kcmil-2/0sol	2.625	(66.7)	6.125	(155.6)	4.000	(101.6)	4.438	(112.7)	3/8
GT-51	-	3 1/2	500kcmil-300kcmil	2.875	(73.0)	6.500	(165.1)	4.250	(108.0)	4.563	(115.9)	1/2
GT-53	-	3 1/2	1000kcmil-750kcmil	4.000	(101.6)	7.375	(187.3)	4.625	(117.5)	4.688	(119.1)	5/8
GT-55*	-	4	250kcmil-2/0sol	2.625	(66.7)	6.500	(165.1)	4.750	(120.7)	4.938	(125.4)	3/8

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)

*UL File E158587