

GROUND ROD CLAMP, U-BOLT, BARE, ONE CONDUCTOR, #4 SOLID-300 KCMIL STRANDED, 70 MM² STRANDED-185 MM² STRANDED

CATALOG NUMBER

GUV70185



FEATURES

Accepts conductors in both parallel and perpendicular orientations

For use with copper-bonded ground rods

PRODUCT ATTRIBUTES

Material: Leadad Gunmetal;Stainless Steel 316 (EN 1.4401)

Ground Rod Diameter, Nominal: 5/8" - 1"


Ground Rod Diameter, Actual (Ø): 0.560" - 0.91"

Conductor Size: #4 Solid - 300 kcmil Stranded;70 mm² Stranded - 185 mm² Stranded

Complies With: IEC® EN 62561-1

Unit Weight: 0.55 lb

DIAGRAMS

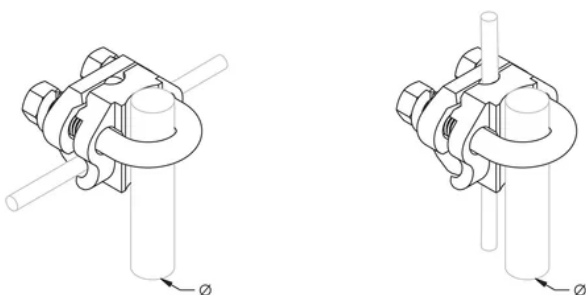

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

⚠ **WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

North America

+1.800.753.9221
Option 1 – Customer Care
Option 2 – Technical Support

Europe

Netherlands:
+31 800-0200135
France:
+33 800 901 793

Europe

Germany:
800 1890272
Other Countries:
+31 13 5835404

APAC

Shanghai:
+ 86 21 2412 1618/19
Sydney:
+61 2 9751 8500



Our powerful portfolio of brands:
nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF
TRACER