



T8

14T8/48-5000 IF 10/1 DIM TAA/NAFTA

Our TLEDs are available in InstantFit (Type A / Type C) or MainsFit (Ballast bypass / Type B) versions. The InstantFit lamps work on a broad variety of ballasts and LED drivers. Only InstantFit has over 15,000 lamp & ballast combinations delivering even light output, energy savings and a long lifetime. Our MainsFit products feature a double-ended design, simplifying installation while a proprietary safety circuit minimizes a shock risk. Lamp sizes range from 2-foot to 8-foot and U-bend with a variety of lumen outputs.

Product data


General Information		Wattage Equivalent	
Base	G13 [Medium Bi-Pin Fluorescent]	32 W	
EU RoHS compliant	Yes	Starting Time (Nom)	
Nominal Lifetime (Nom)	50000 h	0.5 s	
Switching Cycle	50000X	Warm Up Time to 60% Light (Nom)	
Light Technical		0.5 s	
Color Code	850 [CCT of 5000K]	UL Type	
Beam Angle (Nom)	180 °	Type A - works on ballast	
Initial lumen (Nom)	2100 lm	Power Factor (Nom)	
Color Designation	Daylight	0.9	
Correlated Color Temperature (Nom)	5000 K	Voltage (Nom)	
Luminous Efficacy (rated) (Nom)	150.00 lm/W	120-277, 347 V	
Color Consistency	<6	Temperature	
Color Rendering Index (Nom)	82	T-Ambient (Max)	
LLMF At End Of Nominal Lifetime (Nom)	70 %	45 °C	
Operating and Electrical		T-Ambient (Min)	
Input Frequency	50 to 60 Hz	-20 °C	
Power (Rated) (Nom)	14 W	T-Storage (Max)	
		65 °C	
		T-Storage (Min)	
		-40 °C	
		T-Case Maximum (Nom)	
		45 °C	
		Controls and Dimming	
		Dimmable	
		Yes	
		Mechanical and Housing	
		Bulb Finish	
		Frosted	
		Bulb Material	
		Plastic	

Product Length	48 in
Bulb Shape	Tube, double-ended
Approval and Application	
Energy Saving Product	Yes
Approbation Marks	UL certificate RoHS compliance DLC compliance
Energy Consumption kWh/1000 h	- kWh
Energy Certifications	DLC Standard

Product Data	
Order product name	14T8/48-5000 IF 10/1 DIM TAA/NAFTA



EAN/UPC - Product	046677472672
Order code	469635
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001158884
Net Weight (Piece)	0.001 kg
Model Number	9290011588C

Dimensional drawing

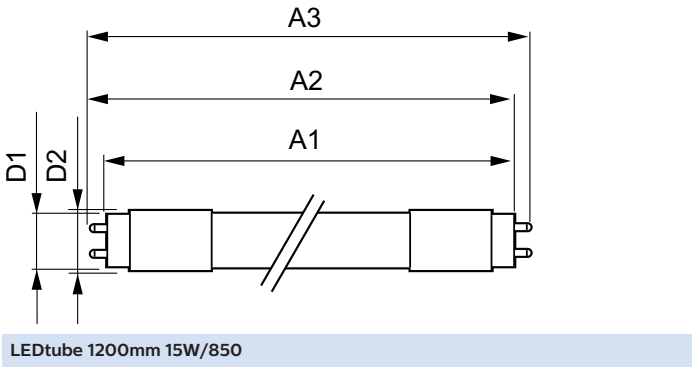


Product	D1	D2	A1	A2	A3
14T8/48-5000 IF 10/1 DIM TAA/NAFTA	25.7 mm	28 mm	1198.0 mm	1205.0 mm	1212.0 mm

Photometric data

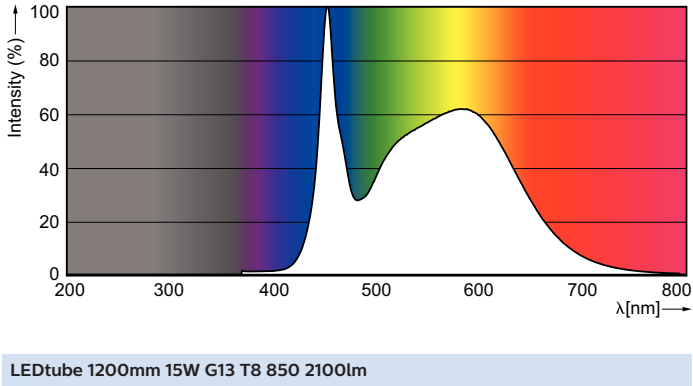


Photometric data




LEDtube 1200mm 15W G13 T8 850 2100lm

Lifetime

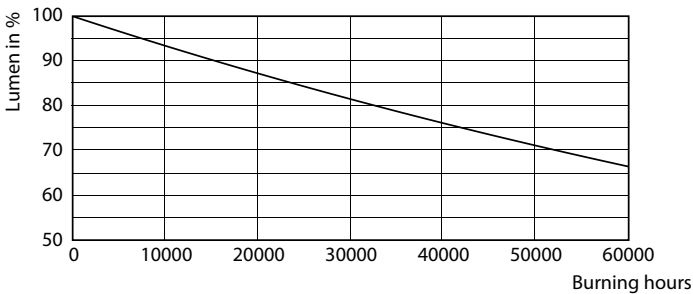

LEDtube HF 1500mm 26W G5 T5

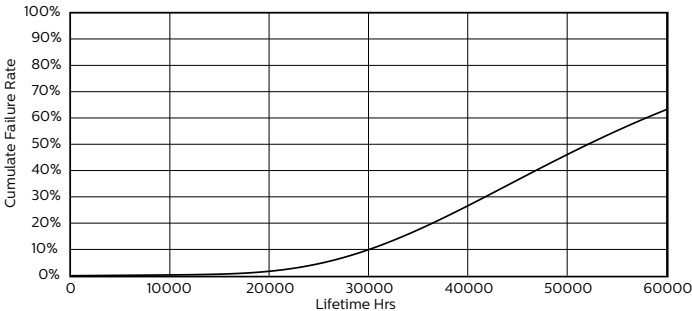

LEDtube 1200mm 14-32W G13

