


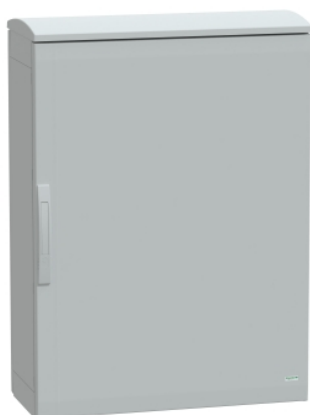

Main

Range	Thalassa
Product name	Thalassa PLA
Enclosure type	Multi-purpose
Product or Component Type	Suitable enclosure
Version	PLAT
Nominal height	39.37 in (1000 mm)
Nominal width	29.53 in (750 mm)
Nominal depth	12.60 in (320 mm)
Enclosure mounting	Floor-standing
Device composition	1 top part 1 bottom part 2 side part 1 rear panel 1 door 1 canopy

Complementary

Body type	Open top and sealed bottom part assembled with side parts
Door type	Solid front
Number of doors	1
Door opening side	Reversible 120 °)
Lock type	4 points lock, handle with 5 mm double bar insert
Accessibility for operation	Front Rear Top
Removable parts	Door by hinges Rear panel by fixing element Canopy by fixing element
Material	Polyester reinforced with fibreglass
Color	Gray RAL 7035)
Standards	IEC 62208
Product certifications	Veritas
Electrical insulation class	Class II

Environment

IP degree of protection	IP44 IEC 60529 with ventilated canopy)
IK degree of protection	IK10 IEC 62262 plain door)
Fire resistance	1760 °F (960 °C) IEC 62208
Ambient Air Temperature for Storage	-31...194 °F (-35...90 °C)

Ordering and shipping details

Category	80034-ENCLOSURE SYSTEMS WALL MOUNT METAL
Discount Schedule	ES1
GTIN	3606480775215
Nbr. of units in pkg.	1
Package weight(Lbs)	65.76 lb(US) (29.83 kg)
Returnability	No
Country of origin	ES

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	39.76 in (101 cm)
Package 1 width	30.71 in (78 cm)
Package 1 Length	14.96 in (38 cm)

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile