



### Main

|                               |                              |
|-------------------------------|------------------------------|
| Range of Product              | Harmony XB4                  |
| Product or Component Type     | Head for key selector switch |
| Device short name             | ZB4                          |
| Bezel material                | Chromium plated metal        |
| Mounting diameter             | 0.87 in (22 mm)              |
| Head type                     | Standard                     |
| Sale per indivisible quantity | 1                            |
| Shape of signaling unit head  | Round                        |
| Operator profile              | Black key switch             |
| Type of operator              | Stay put                     |
| Operator position information | 3 positions +/- 45°          |
| Type of keylock               | Ronis 3131A                  |
| Key withdrawal position       | In any position              |

### Complementary

|                                    |                                                                                                                                                                                                                                                  |
|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CAD overall width                  | 1.14 in (29 mm)                                                                                                                                                                                                                                  |
| CAD overall height                 | 1.14 in (29 mm)                                                                                                                                                                                                                                  |
| CAD overall depth                  | 2.83 in (72 mm)                                                                                                                                                                                                                                  |
| Net Weight                         | 0.22 lb(US) (0.098 kg)                                                                                                                                                                                                                           |
| Resistance to high pressure washer | 1015.26 psi (7000000 Pa) 131 °F (55 °C) 0.1 m                                                                                                                                                                                                    |
| Mechanical durability              | 1000000 cycles                                                                                                                                                                                                                                   |
| Electrical composition code        | C3 6 single front mounting<br>C4 6 single and double front mounting<br>C5 5 single front mounting<br>C6 5 single and double front mounting<br>C7 4 single front mounting<br>C8 4 single and double front mounting<br>C11 3 single front mounting |
| Device presentation                | Basic element                                                                                                                                                                                                                                    |

### Environment

|                                       |                                                                                                                       |
|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| Protective treatment                  | TH                                                                                                                    |
| Ambient Air Temperature for Storage   | -40...158 °F (-40...70 °C)                                                                                            |
| Ambient Air Temperature for Operation | -40...158 °F (-40...70 °C)                                                                                            |
| Overvoltage category                  | Class I IEC 60536                                                                                                     |
| IP degree of protection               | IP66 IEC 60529<br>IP67<br>IP69<br>IP69K                                                                               |
| NEMA degree of protection             | NEMA 13<br>NEMA 4X                                                                                                    |
| Standards                             | UL 508<br>EN/IEC 60947-5-5<br>EN/IEC 60947-1<br>EN/IEC 60947-5-4<br>GB 14048.5<br>CSA C22.2 No 14<br>EN/IEC 60947-5-1 |

|                        |                                                                                                                    |
|------------------------|--------------------------------------------------------------------------------------------------------------------|
| Product certifications | DNV<br>UL Listed<br>LROS (Lloyds register of shipping)<br>BV<br>GL<br>CSA                                          |
| Vibration resistance   | 5 gn 2...500 Hz)IEC 60068-2-6                                                                                      |
| Shock resistance       | 30 gn 18 ms) half sine wave acceleration IEC 60068-2-27<br>50 gn 11 ms) half sine wave acceleration IEC 60068-2-27 |

## Ordering and shipping details

|                       |                                   |
|-----------------------|-----------------------------------|
| Category              | 22468-PUSHBUTTONS,22MM(METAL) NEW |
| Discount Schedule     | CS2                               |
| GTIN                  | 3389110121025                     |
| Nbr. of units in pkg. | 1                                 |
| Package weight(Lbs)   | 2.43 oz (69 g)                    |
| Returnability         | Yes                               |
| Country of origin     | FR                                |

## Packing Units

|                              |                         |
|------------------------------|-------------------------|
| Unit Type of Package 1       | PCE                     |
| Package 1 Height             | 3.46 in (8.8 cm)        |
| Package 1 width              | 1.34 in (3.4 cm)        |
| Package 1 Length             | 2.13 in (5.4 cm)        |
| Unit Type of Package 2       | S02                     |
| Number of Units in Package 2 | 50                      |
| Package 2 Weight             | 12.36 lb(US) (5.605 kg) |
| Package 2 Height             | 5.91 in (15 cm)         |
| Package 2 width              | 11.81 in (30 cm)        |
| Package 2 Length             | 15.75 in (40 cm)        |

## Offer Sustainability

|                            |                                                                                                                                                                                                                                                                                             |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                                                                                                                                                                                                                       |
| California proposition 65  | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |
| REACH Regulation           | <a href="#">REACH Declaration</a>                                                                                                                                                                                                                                                           |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>                                                                                                                                                                                              |
| Mercury free               | Yes                                                                                                                                                                                                                                                                                         |
| RoHS exemption information | <a href="#">Yes</a>                                                                                                                                                                                                                                                                         |
| China RoHS Regulation      | <a href="#">China RoHS Declaration</a>                                                                                                                                                                                                                                                      |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>                                                                                                                                                                                                                                               |
| Circularity Profile        | <a href="#">End Of Life Information</a>                                                                                                                                                                                                                                                     |


## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

---

Dimensions

---

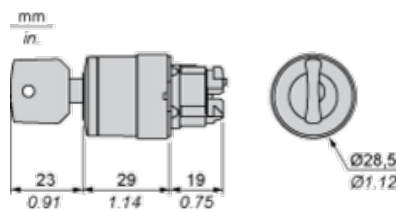


Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

| Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board                                                                                                                                                                                                                                           | Connection by Faston Connectors |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
|                                                                                                                                                                                                                                                                                                                                 |                                 |
| <p>(1) Diameter on finished panel or support</p> <p>(2) 40 mm min. / 1.57 in. min.</p> <p>(3) 30 mm min. / 1.18 in. min.</p> <p>(4) Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm <math>_{0}^{+0.4}</math> / 0.88 in. <math>_{0}^{+0.016}</math>)</p> <p>(5) 45 mm min. / 1.78 in. min.</p> <p>(6) 32 mm min. / 1.26 in. min.</p> |                                 |

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection



Panel Cut-outs (Viewed from Installer's Side)

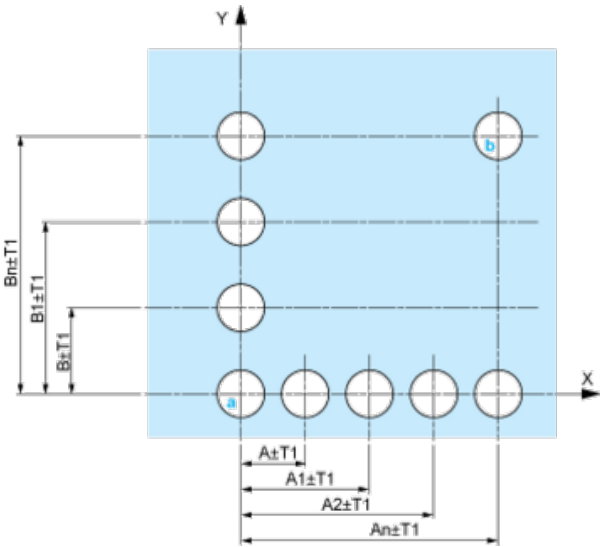


A: 30 mm min. / 1.18 in. min.  
B: 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm



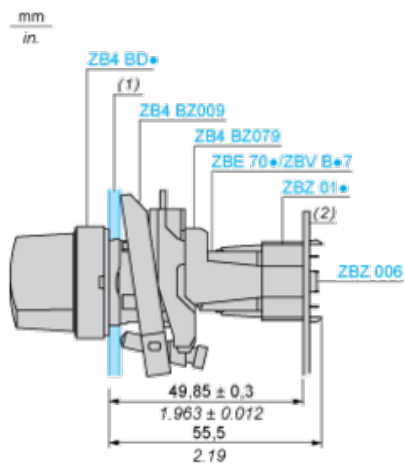

(1) Panel

(2) Printed circuit board

### Mounting of Adapter (Socket) ZBZ 01•

- 1 2 elongated holes for ZBZ 006 screw access
- 2 1 hole  $\varnothing 2.4 \text{ mm} \pm 0.05 / 0.09 \text{ in.} \pm 0.002$  for centring adapter ZBZ 01•
- 3 8 ×  $\varnothing 1.2 \text{ mm} / 0.05 \text{ in.}$  holes
- 4 1 hole  $\varnothing 2.9 \text{ mm} \pm 0.05 / 0.11 \text{ in.} \pm 0.002$ , for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes  $\varnothing 2.4 \text{ mm} / 0.09 \text{ in.}$  for clipping in adapter ZBZ 01•

Dimensions An + 18.1 relate to the  $\varnothing 2.4 \text{ mm} \pm 0.05 / 0.09 \text{ in.} \pm 0.002$  holes for centring adapter ZBZ 01•.

---

Electrical Composition Corresponding to Code C3

---

Electrical Composition Corresponding to Code C4

---

Electrical Composition Corresponding to Code C5

---

Electrical Composition Corresponding to Code C6

---

Electrical Composition Corresponding to Code C7

---

Electrical Composition Corresponding to Code C8

Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1

Legend

Single contact

Double contact

Light block

Possible location



Sequence of Contacts Fitted to 3-position Selector Switch Body

Position 315°



|          |          |      |        |        |      |
|----------|----------|------|--------|--------|------|
| Push     | Position | Top  |        |        |      |
| Bottom   |          |      |        |        |      |
| Location |          | Left | Centre | Right  |      |
| State    |          | 1    | 1      | 0      |      |
| Contacts | N/O      |      | closed | closed | open |
| N/C      |          | open | open   | closed |      |



## Position 0°



|          |          |        |        |        |      |
|----------|----------|--------|--------|--------|------|
| Push     | Position | Top    |        |        |      |
| Bottom   |          |        |        |        |      |
| Location |          | Left   | Centre | Right  |      |
| State    |          | 0      | 0      | 0      |      |
| Contacts | N/O      |        | open   | open   | open |
| N/C      |          | closed | closed | closed |      |

## Position 45°



|          |          |        |        |        |        |
|----------|----------|--------|--------|--------|--------|
| Push     | Position | Top    |        |        |        |
| Bottom   |          |        |        |        |        |
| Location |          | Left   | Centre | Right  |        |
| State    |          | 0      | 1      | 1      |        |
| Contacts | N/O      |        | open   | closed | closed |
| N/C      |          | closed | open   | open   |        |