General Engineering Catalog

Number 17A

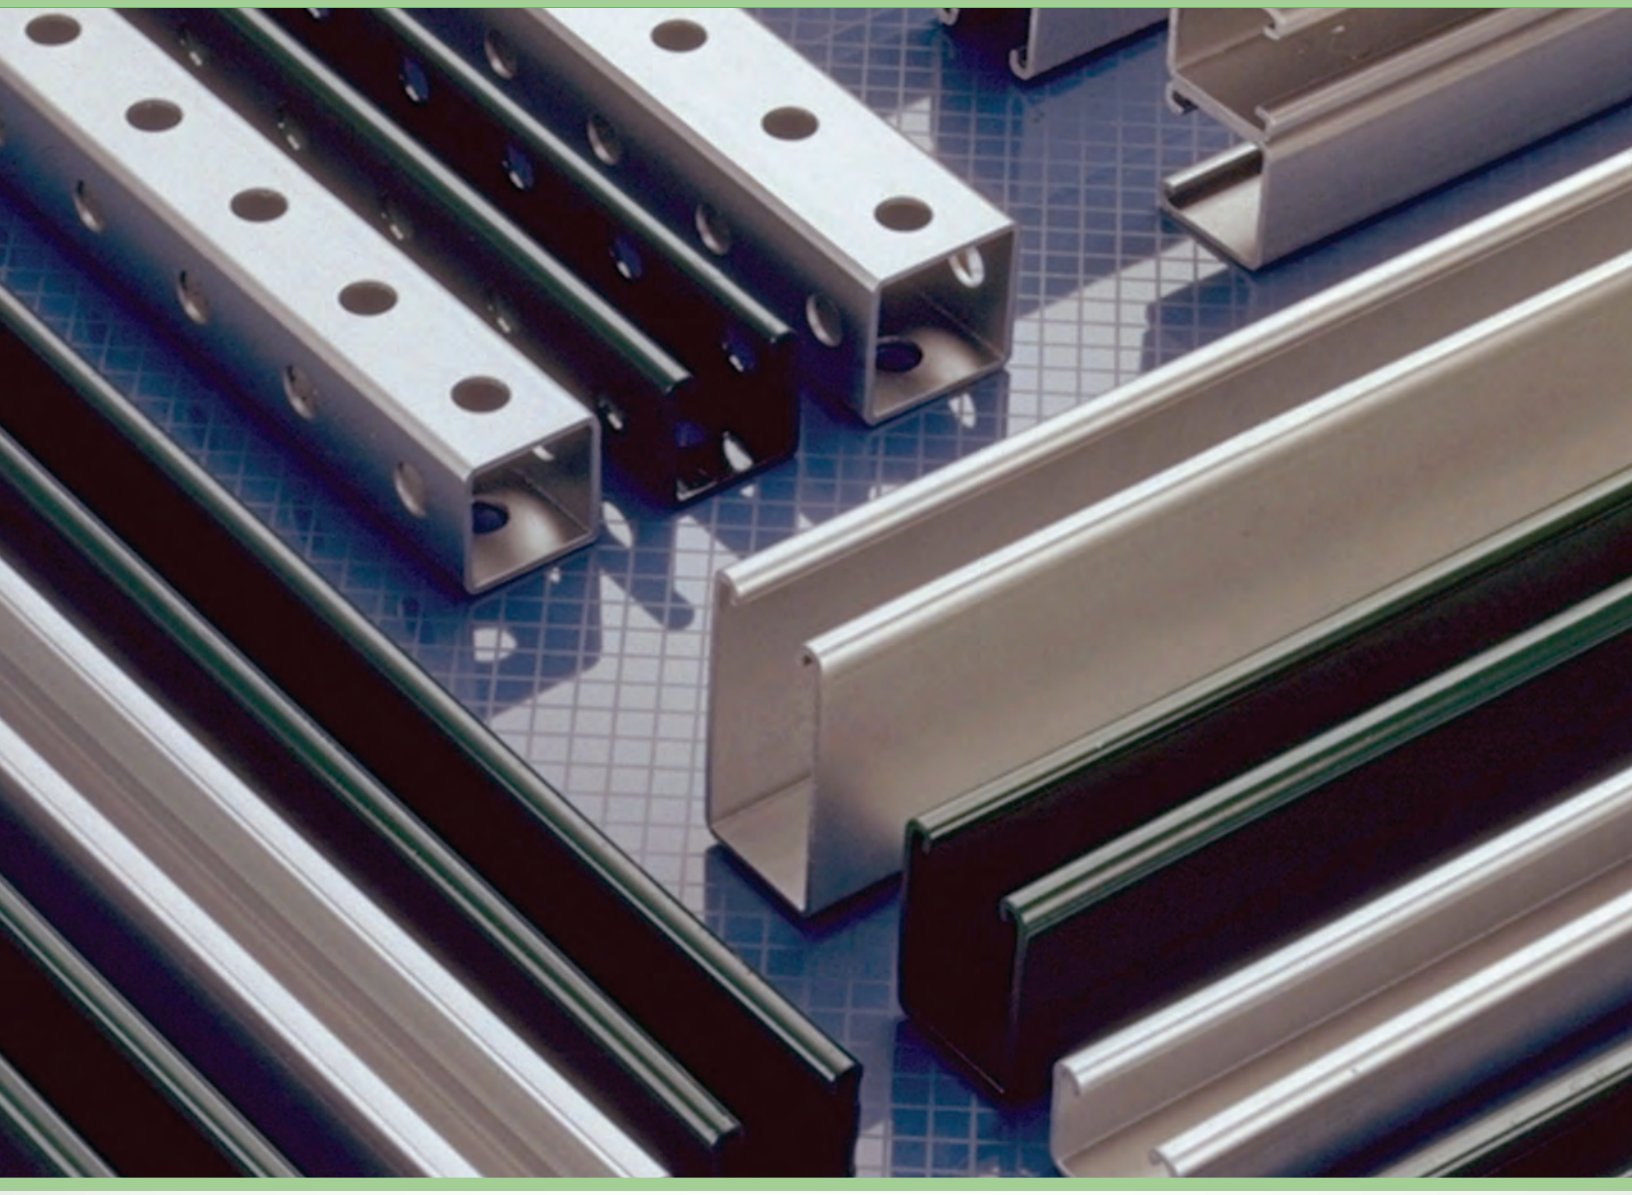

Atkore™

Unistrut

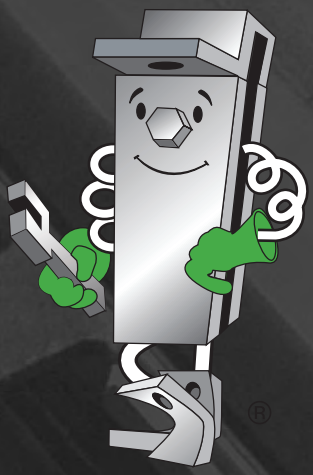

Atkore™ Unistrut

Unistrut is the original metal framing system featuring a unique weldless connection. The Unistrut system eliminates welding and drilling, and is easily adjustable and reusable for infinite configurations. Over time, our brand has evolved from a simple connection concept to a comprehensive engineered building and support system featuring a robust line of channels, fittings, fasteners, hangers, pipe clamps, and accessories. Backed by our worldwide network of engineering and distribution centers, we provide customers with total-resource capability, making Unistrut the brand everyone asks for by name.

UNISTRUT®

The Unistrut World of Support starts with our network of Unistrut Service Centers across the nation.

The Unistrut World of Support starts with our network of Unistrut Service Centers across North America. They go far beyond providing local product inventories... by offering complete application solutions, based on experience gained from thousands of projects worldwide.

It's the kind of knowledgeable assistance that can help save time and cost now, and simplify change in the future.

Technical help? No one knows the engineering side of Unistrut support systems like your local Unistrut team. And if it's special fabrication, cutting or custom finishing you want, the pros at your local Unistrut Service Center will make it happen...quickly, efficiently, economically.

So when it's help you need, call your Unistrut Service Center—the quickest way to unlock Unistrut's World of Support.

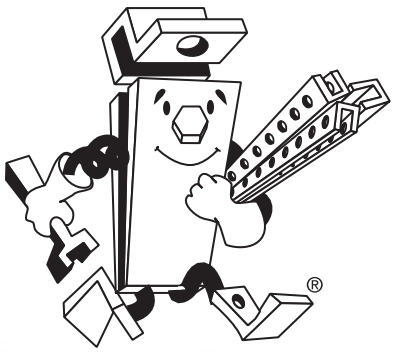

TABLE OF CONTENTS

INTRODUCTION 2-20
Unistrut Introduction 2-3
Table of Contents 4-5
Unistrut Metal Framing Systems 6-9
Quality Assurance 10
Materials and Finishes . . . . . 11 - 13
Design Fundamentals . . . . . 14 - 15
Conversion Factors 16
Reference Tables and Data . . . . . 17 - 18
Guide Specification 19
New Products 20

1⅝" CHANNEL 21-62
Channel Selection Chart 23
P1000 (12 Gauge) . . . . . 24 - 29
P1100 (14 Gauge) . . . . . 30 - 32
P2000 (16 Gauge) . . . . . 33 - 35
P3000 (12 Gauge) . . . . . 36 - 38
P3300 (12 Gauge) . . . . . 39 - 41
P4000 (16 Gauge) . . . . . 42 - 44
P4100 (14 Gauge) . . . . . 45 - 47
P4400 (12 Gauge) . . . . . 48 - 50
P4520 (12 Gauge) . . . . . 51 - 53
P5000 (12 Gauge) . . . . . 54 - 56
P5500 (12 Gauge) . . . . . 57 - 59
Closure Strips 60
End Caps and Frame Caps 61
Lateral Bracing Load Reduction Chart & Bearing Loads 62

TELESTRUT® SYSTEM 63-70
Telescoping Tube . . . . . 65 - 67
Connection Methods 69
Specialized Fittings 68
Post Bases . . . . . 68 - 69
Cutting Chart 70

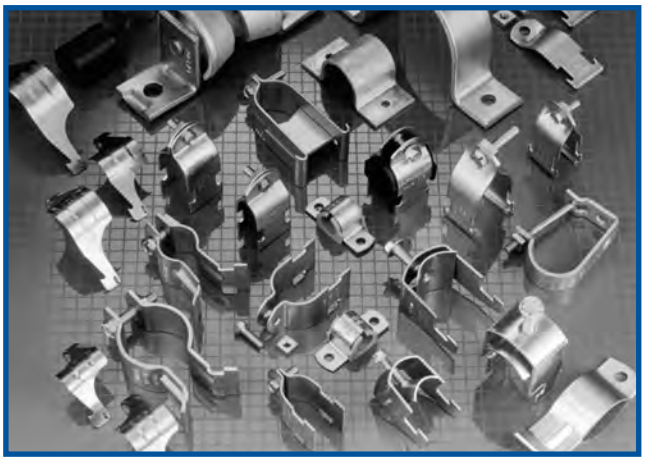

NUTS & HARDWARE 71-76
Channel Nuts . . . . . 72 - 73
Top Retainer Nuts 73
Stud Nuts 74
Hardware . . . . . 74 - 76
Threaded Rod 75

GENERAL FITTINGS 77-106
Flat Plate Fittings . . . . . 81 - 82
Ninety Degree Fittings . . . . . 82 - 85
Angular Fittings 85
"Z" Shape Fittings 86
"U" Shape Fittings . . . . . 87 - 88
Wing Shape Fittings . . . . . 89 - 90
Post Bases 90
Brackets . . . . . 90 - 93
Brace Fittings 94
Beam Clamps . . . . . 95 - 101
Trolleys 102
Special Application Fittings . . . . . 103 - 104
Seismic Retrofit Fittings . . . . . 104 - 106

PIPE/CONDUIT SUPPORTS 107-126
Pipe/Conduit Clamps . . . . . 108 - 111
Unicushion® 112
Pipe & Tubing (Cush-A-Clamp®) Clamps . . . . . 113 - 116
Pipe Hangers 117
Pipe Rollers . . . . . 117 - 119
Pipe Brackets 119
Reference Tables . . . . . 120 - 126

ELECTRICAL FITTINGS 127-138
Electrical Fittings . . . . . 128 - 130
Receptacles 131
Fixture Hangers 131
Accessories and Connectors 132
Junction Boxes 132
In-Channel Joiners 133
Swivel Hangers 133
Cable Entrance Tubing and Accessories . . . . . 134 - 136
Electrical Fittings Technical Data . . . . . 137 - 138

CONCRETE INSERTS 139-146
Heavy-Duty Inserts 141
Standard-Duty Inserts 142, 144
Light-Duty Inserts 143
Spot Inserts 144
Deck Inserts 145
Components 145
Technical Data 146

SOLAR COMPONENTS 147-150
Application Example 148
Solar Connectors 149
Key Advantages 150

UNIPIER® 151-168

Sleeper Support . . . . . 153 - 154
Strut Support . . . . . 155 - 158
Conduit Supports
Mounted Support, Polycarbonate Base 157
Elevated Support, Polycarbonate Base 157
Elevated Support, Steel Base 158
Gas and Mechanical Supports
Mounted Support, Polycarbonate Base 158
Mounted Support, w/Roller Polycarbonate Base 158
Elevated Support, w/Roller, Polycarbonate Base 159
Elevated Support, w/Roller, Steel Base 160
Accessories
Spacer 160
Support Pads, Deck Plates 160
Pipe Hanger Bases, Polycarbonate and Steel 161
Fabricated Supports
Single Base Trapeze 162
Double Base Trapeze 163
Heavy Duty Double Base Trapeze 163
Double Base Duct Support 163
Mechanical Supports 164
Bridge Cross-Over, Walkway, Service Platform or Ramp 164
Installation 165
Pipe Diameters and Loading 166
Technical Data . . . . . 167 – 168

1¼" FRAMING SYSTEM 169-177

A1000 (14 Gauge) . . . . . 171 - 172
A3300 (14 Gauge) . . . . . 173 - 174
Channel Nuts and Closure Strips 175
Flat Plate Fittings . . . . . 175 - 176
Ninety Degree Fittings 176
Angle and Wing Shape Fittings 176
"U" Shape Fittings 177
Pipe / Tubing Clips 177
Brackets 177

13/16" FRAMING SYSTEM 178-187

P6000 (19 Gauge) . . . . . 179 - 181
P7000 (19 Gauge) . . . . . 182 - 183
Channel Nuts, End Caps, and Closure Strips 184
Flat Plate Fittings . . . . . 184 - 185
Ninety Degree Fittings 185
Angular Fittings, Wing Shape Fittings 186
"Z" Shape Fittings 186
"U" Shape Fittings . . . . . 186 - 187
Special Application Fittings 187
Beam Clamps 187
Tubing Clips 187

FIBERGLASS SYSTEM 188-203

Heavy Duty Channel (Flange Profile) 190

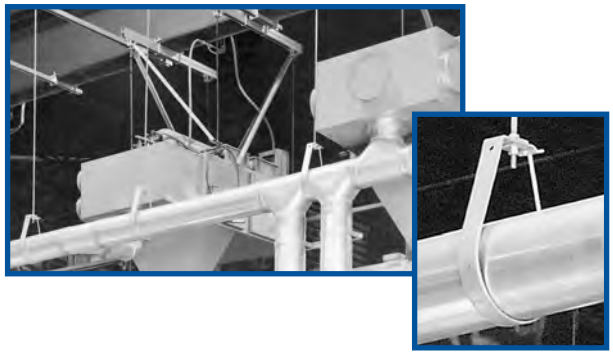

Light Duty Channel (Flange Profile) 191
Heavy Duty Channel (SST Profile) 192
Nuts & Hardware . . . . . 193 - 195
Fittings . . . . . 196 - 197
Pipe Clamps and Straps 198
Clevis Hangers and Channel Inserts 199
Beam Clamps 200
Power Rack Stanchions 200
Chemical Compatibility . . . . . 201 - 202
Specifications 203

SPECIAL METALS 204-209

Stainless Steel Channel 206
Stainless Steel Nuts and Closure Strips 207
Aluminum Channel . . . . . 208 - 209
Aluminum Closure Strips and End Caps 209

PRIMEANGLE™ 210-215

PrimeAngle™ 211
Accessories 212
PrimeAngle™ Technical Data . . . . . 213 - 215

UNITED INTERLOCK® GRATING . . . 216-231

Ease of Installation 217
Plank Grating . . . . . 218 - 219
Accessories . . . . . 220 - 222
Heavy Duty Stair Treads 223
Design and Testing 224
Plank Loads and Deflections . . . . . 225 - 230
Architectural Specifications 231

ROOFWALKS® 232-233

Roofwalk® Grating Planks 233
Hardware for Membrane, Foam or Coated Roof 233
Standing Seam Installation 233

INDEX 234-239

Featuring The Unique Weldless Connection

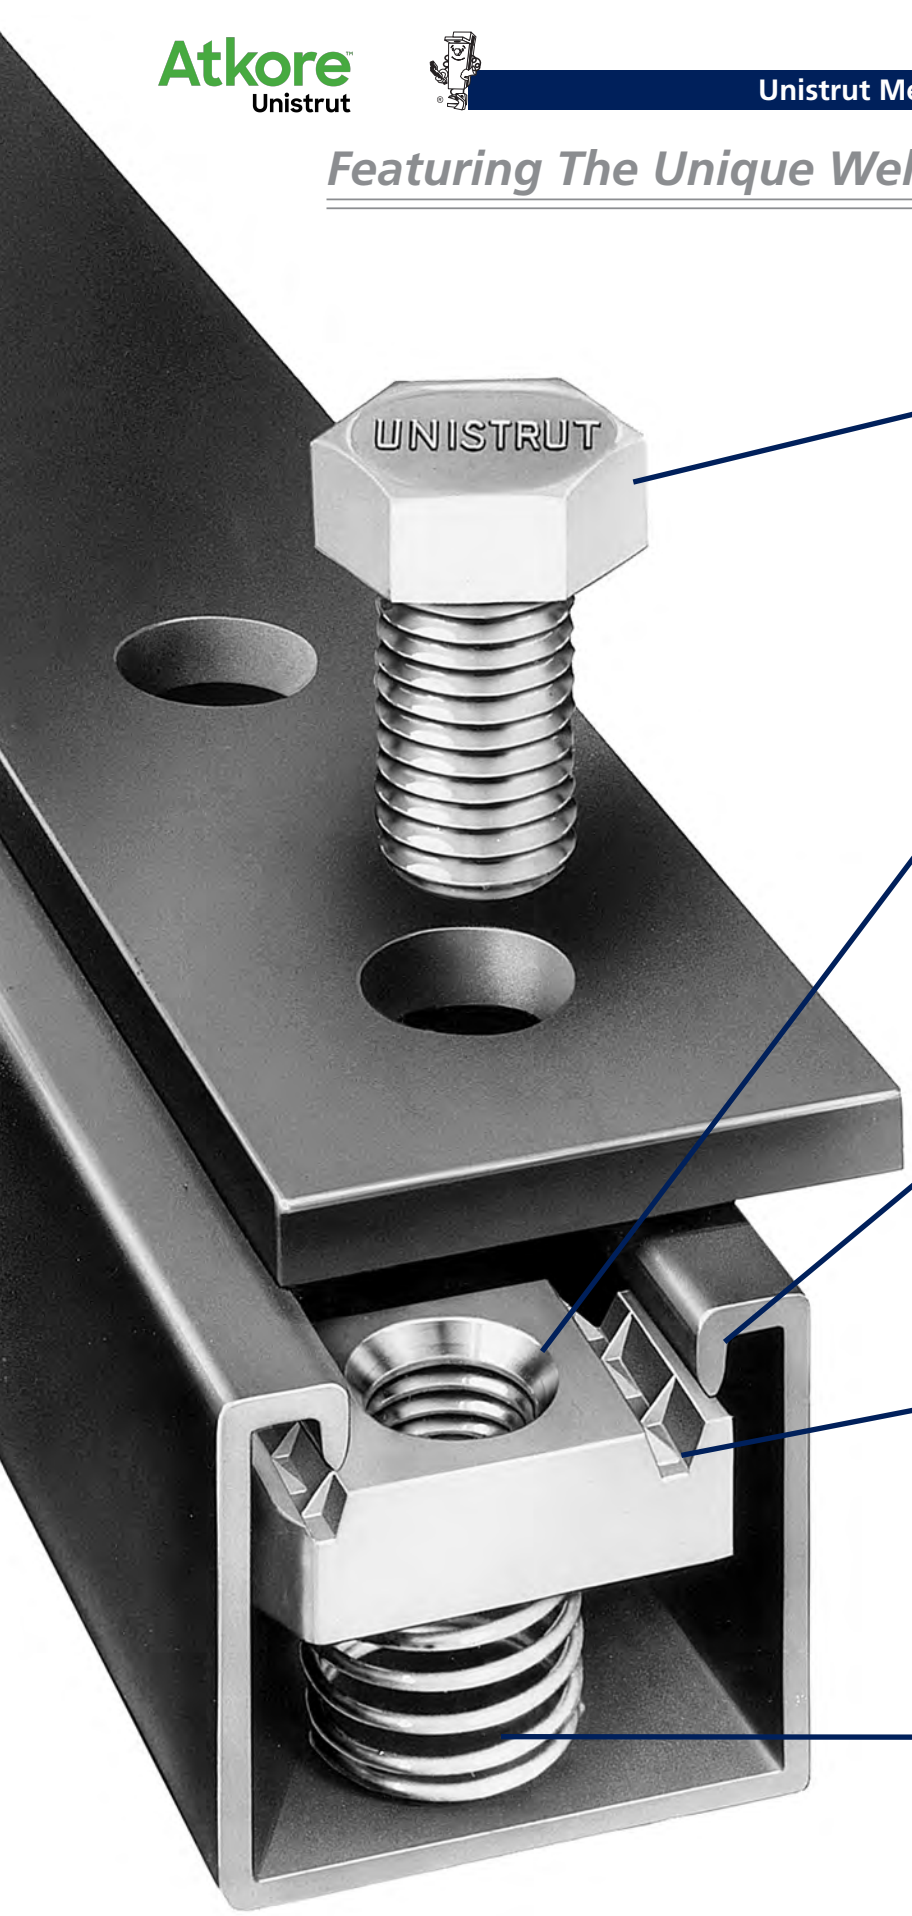

- **Hex-head bolt connects fitting to channel as it is threaded into spring nut.**
- **Chamfer in the nut eases starting of the bolt. Nut teeth create a strong, vise-like grip when tightened against the inturned channel edges.**
- **Channel edges and the nut's tapered grooves act as guides to provide fool-proof alignment of connection.**
- **Nut teeth grip the channel's inturned edges, tying the channel sides together in a "box" configuration for added strength.**
- **Spring allows precision placement anywhere along channel length, then holds the nut in position while the connection is completed.**

Strong, Fast, Economical and Adjustable

Insert the spring nut anywhere along the continuous slotted channel. The rounded nut ends permit easy insertion.

1

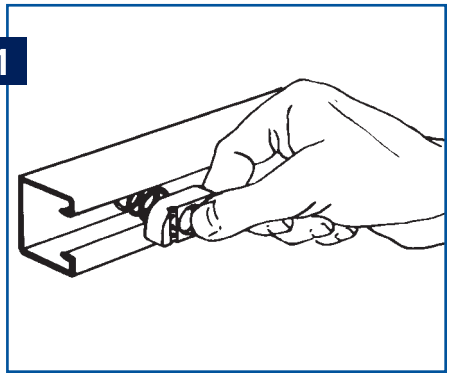

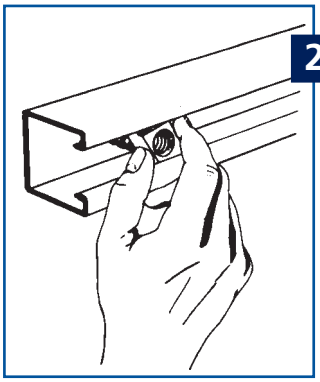

2 A 90° clockwise turn aligns the grooves in the nut with the inturned edges of the channel.

Fittings can be placed anywhere along the channel opening, permitting complete freedom of adjustment. The need for drilling holes is eliminated.

- **100% Adjustable**
- **100% Reusable**
- **No Welding**
- **No Drilling**
- **No Special Tools**

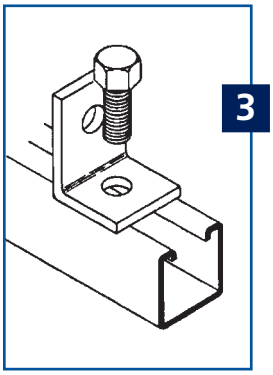

3 Insert the bolt through the fitting and into the spring nut. (See illustration 5 for end view showing the nut in place)

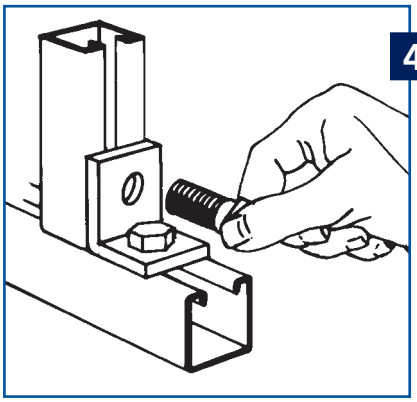

4 Additional channel sections can now be bolted to the fitting already in place by following procedure described in steps 1–3.

Tightening with a wrench locks the serrated teeth of the nut into the inturned edges of the channel, to complete a strong, vise-like connection.

5

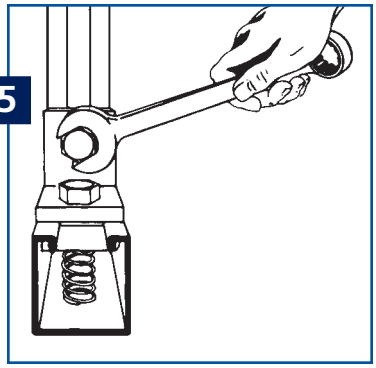

Serving Design Professionals for Over 85 Years

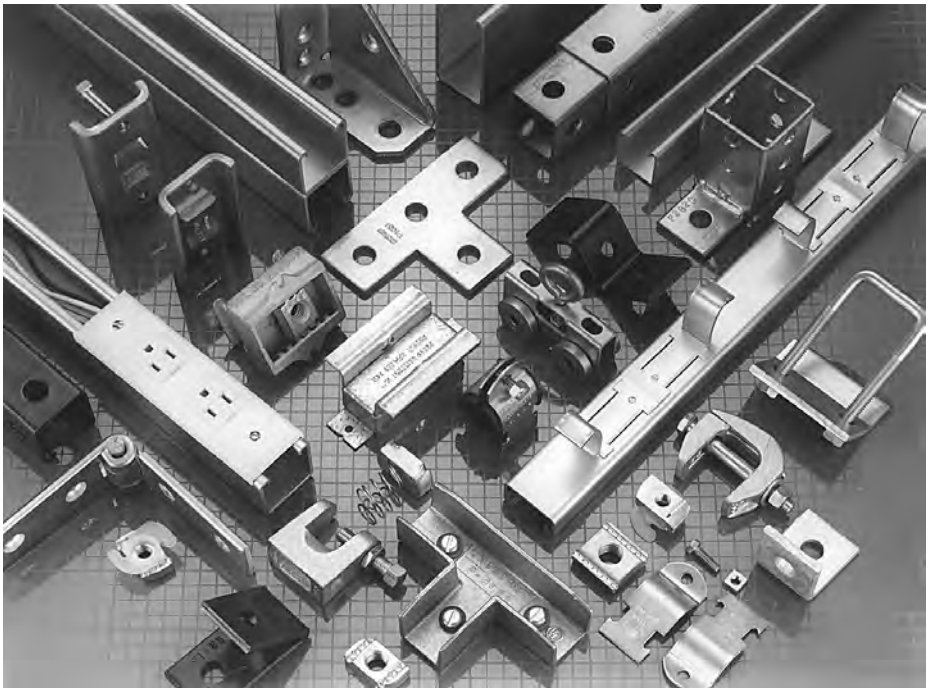

Unistrut products have been helping to build a better world since 1924. Used extensively in nuclear, industrial and commercial construction markets for over 85 years, Unistrut Metal Framing has set the standard for product design, quality and performance.
The initial Unistrut concept — a simple spring nut and bolt connecting a fitting to a continuous slotted channel — has evolved into a comprehensive engineered building and support system.

Unistrut® — The Original Metal Framing System

There is only one Unistrut Metal Framing System. It incorporates the innovative product improvements that our research and development group has created to give you the most complete and flexible support system available. Backed by our worldwide network of engineering and distribution centers, Unistrut provides customers with total-resource capability.

A North American network of Unistrut Service Centers — stocking standard Unistrut components — are located in principal cities to serve you quickly and directly. Many Service Centers are equipped to design and supply drawings for any type of metal framing application and also offer fabrication and installation services.

This catalog is a comprehensive presentation of Unistrut Metal Framing components plus technical data required by design, specification and construction professionals.



The Most Complete Metal Framing System — Four Channel-Width Options

Adjustability, demountability and reusability are engineered into each of the four Unistrut channel series. Each series offers channels of varying depth and gage plus a complete line of fittings and accessories.

1⅝" width Series Channel



1⅝" (41.3 mm) width

Designed to carry the heaviest loads and provide the widest variety of applications, the 1⅝" series has become the accepted standard for use in mechanical, electrical and general construction applications where supports and attachments must meet the highest strength requirements.

1½" width Series Channel



1½" (38.1 mm) width

A framing system designed for medium to heavy loads, the 1½" series offers hole spacing and fittings where all parts fit together, no matter where they're used, or at what angle.

1¼" width Series Channel



1¼" (31.8 mm) width

A framing system designed for medium loads, the 1¼" series is especially suitable for use in the OEM, commercial and display markets. It maintains a lightness in scale and a clean line that makes it aesthetically pleasing as well as functional.

13/16" width Series Channel

13/16" (20.6 mm) width

A unique half-size reduction of the 1⅝" channel-width series, this smaller channel size can be used to carry light loads economically in applications such as instrumentation, retail displays and light-duty laboratory supports. It also provides the flexibility found in all Unistrut framing systems.

Product Load Testing

Product testing is an important part of Unistrut's Quality Assurance Program. We utilize our own testing facilities, as well as those of independent testing laboratories, to determine design loads with proper and adequate safety factors. These design loads are indicated, where applicable, throughout the catalog. Loads are based on AISI Specification For The Design Of Cold-Formed Steel Structural Members, 2007 Edition.

Destructive and non-destructive testing procedures are used to test for variables such as corrosion, conductivity, electro-static dissipation, ultra-violet resistance, wind resistance, dimensional accuracy, material integrity and slip resistance.

In short, if there's a specification to meet, Unistrut will develop a test to quantify and verify it. Using design properties of the Unistrut framing members, load data given in this catalog, and/or design procedures of the American Iron & Steel Institute Specification For The Design Of Cold-Formed Steel Structural Members, 2007 Edition, it is possible to design any type of structure within the capabilities of the system.

Assemblies or connections that cannot be calculated using provisions of the AISI specifications must be established by application-specific tests.

Quality Program

Unistrut is committed to being the "best" in the metal framing industry. In order to meet this goal, Unistrut has adopted the philosophy of "Zero Defects and Continuous Improvement". This means on-going reviews of our manufacturing processes, operating procedures and quality systems to find ways of improving efficiency, productivity and quality. It means establishing process controls and problem-prevention techniques to ensure that superior quality is built into every Unistrut product.

Our drive to be the best includes not just quality products, but on-time delivery and prompt resolution of customer needs and concerns. At Unistrut, quality is number one.

Traceability

Unistrut channel is stamped with a numeric code that allows traceability to the origin of the steel

Atkore Unistrut

Material

Framing Members

Unistrut channels and continuous inserts are accurately and carefully cold-formed to size from low carbon strip steel. One side of the channel has a continuous slot with inturned edges. Secure attachments may be made to the framing member with the use of hardened, toothed, slotted nuts which engage the inturned edges.

Raw steel shall conform to the following ASTM specifications:

GAGE	FINISH	ASTM NO.
12	GR & HG	A1011 SS GR 33
	PG	A653 GR 33
14	GR & HG	A1011 SS GR 33
	PG	A653 GR 33
16	GR & HG	A1011 SS GR 33
	PG	A653 GR 33
19	GR	A1008

Weights and Dimensions

Weights given for all materials are approximate shipping weights. All dimensions are subject to commercial tolerance within published specifications.

Nuts and Bolts

Unistrut nuts are made from steel bars. After all machining operations are complete, they are thoroughly case hardened. Nuts are rectangular with ends shaped to permit a quarter turn clockwise in the framing member after insertion through the slotted opening in the channel. Two toothed grooves in the top of the nut engage the inturned edges of the channel and, after bolting operations are completed, will prevent any movement of the bolt and nut within the framing member.

All bolts and nuts have Unified coarse screw threads. The standard framing nut is ½" and conforms to ASTM A576 GR 1015 modified and A1011 SS GR 45. Screws conform to SAE J429 GR 2.

Fittings

Unistrut fittings, unless noted otherwise, are punch-press made from hot rolled, pickled and oiled steel plates, strip or coil, and conform to ASTM specifications A575, A576, A635 or A36. The fitting steel also meets the physical requirement of ASTM A1011 SS GR 33. The pickling of the steel produces a smooth surface free from scale.

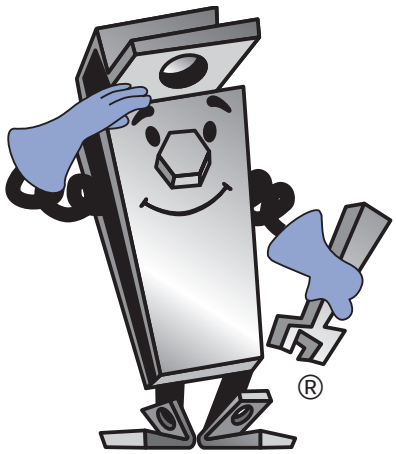

WE RESERVE THE RIGHT TO MAKE SPECIFICATION CHANGES WITHOUT NOTICE.

WHILE EVERY EFFORT HAS BEEN MADE TO ASSURE THE ACCURACY OF INFORMATION CONTAINED IN THIS CATALOG AT THE TIME OF PUBLICATION, WE CANNOT ACCEPT RESPONSIBILITY FOR INACCURACIES RESULTING FROM UNDETECTED ERRORS OR OMISSIONS.

THE BLUE COLOR USED ON UNISTRUT COMPONENTS ILLUSTRATED IN THIS CATALOG IS FOR GRAPHIC ENHANCEMENT ONLY, AND DOES NOT REPRESENT ACTUAL PRODUCT COLOR.

Perma-Green® III

The performance of Unistrut's Perma-Green III far exceeds that of conventional finishes. And compared to competitive "high-performance" coatings, Perma-Green III provides superior resistance to chalking, checking and fading and is far less vulnerable to common acidic atmospheres, solvents and alkalis.

Just as important, Perma-Green III is the result of an environmentally neutral process that virtually eliminates the toxic metals commonly found in competitive paint-based finishes.

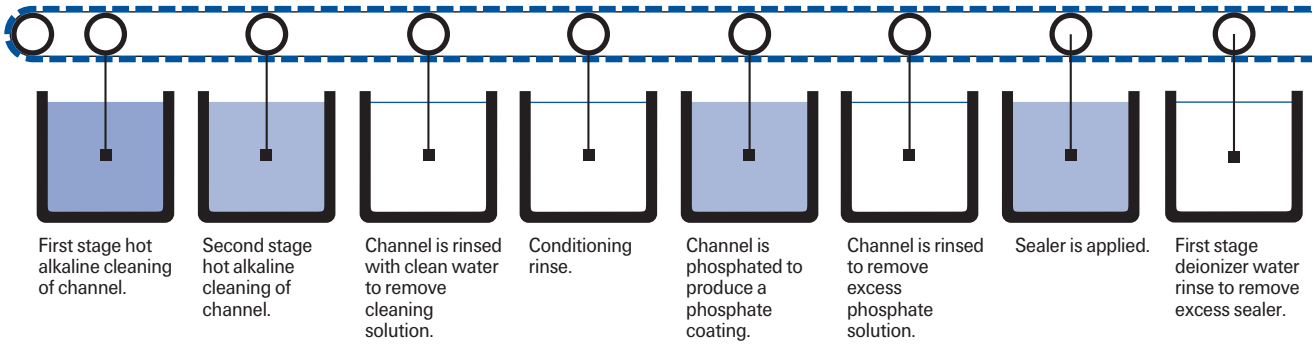

First stage hot alkaline cleaning of channel.
Second stage hot alkaline cleaning of channel.
Channel is rinsed with clean water to remove cleaning solution.
Conditioning rinse.
Channel is phosphated to produce a phosphate coating.
Channel is rinsed to remove excess phosphate solution.
Sealer is applied.
First stage deionizer water rinse to remove excess sealer.

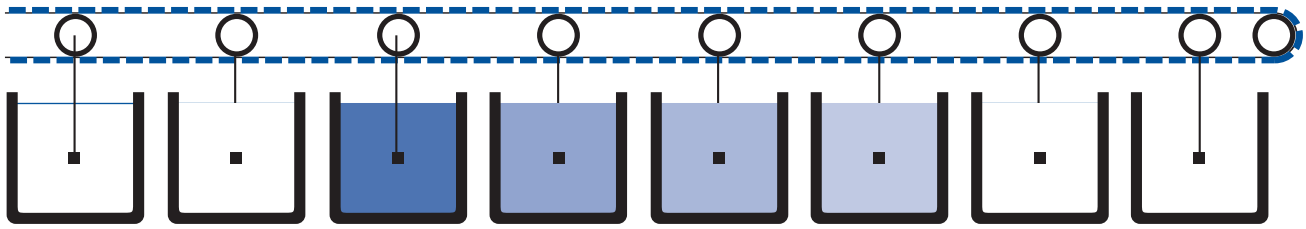

Second stage deionized water rinse to prepare channel for E-Coating.
Final deionizer water rinse.
Electro-deposition tank applies the epoxy Perma-Green III to all surfaces.
Post rinse spray.
Post rinse dip tray.
Post rinse spray.
Virgin deionized water halo rinse.
The oven cure process dries the channel and cross links the epoxy thermoset resins at 375° F.

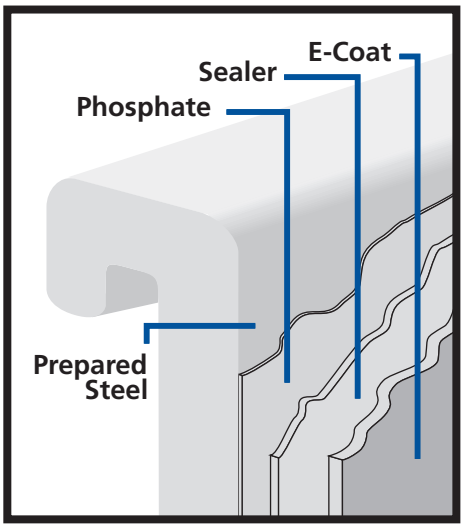

PERMA-GREEN® III (GR) TECHNICAL DATA

STEEL SUBSTRATE PREPARATION

Ten stage continuous cleaning, phosphate process.

Substrate after "prep": sealed phosphate conversion coating.

COATING

Thermoset epoxy

Color:
Federal Highway Green
Color Tolerance Chart
PR Color No. 4

Hardness: 2H.

Coating Process:
Cathodic Electrodeposition.

PERFORMANCE

Salt Spray:
Scribed: exceeds 400 hours per ASTM B117. (⅛" creep)
Unscribed: exceeds 600 hours per ASTM B117. (6% red rust)

Chalk:
Nominal at 1,000 hours per weatherometer G-23 test.

Checking:
None at 1,000 hours per weatherometer G-23 test.

Fade:
Less than 50% compared to standard epoxy E.C. coatings.

ENVIRONMENTAL ISSUES

Formulated as a "heavy metal"-free coating (trace elements only).

Outgassing in service: essentially none at 350°F for 24 hours.

PLAIN (PL)

Plain finish designation means that the channel retains the oiled surface applied to the raw steel during the rolling process.The fittings have the original oiled surface of the coil or strip steel material.

Pregalvanized Zinc (PG) ASTM A653

Pregalvanized steel is zinc coated by a hot dip process. Steel strip from a coil is fed through a continuous zinc coater which cleans, fluxes and coats the steel with molten zinc. After cooling, the steel is recoiled.

The pregalvanized zinc coating conforms to a G-90 thickness designation per ASTM A653. The zinc thickness is .75 MIL or .45 oz./sq. ft. of surface area.

This coating is offered on Unistrut channel and tubing and is a well-proven, time-tested performer for indoor and outdoor applications. For severe corrosion applications, hot dip galvanizing, as described below, is a good alternative.

HOT DIP GALVANIZED (HG) ASTM A123 OR A153

In hot dip galvanizing, the finished part is immersed in a bath of molten zinc. This method results in complete zinc coverage and a thicker coating than pregalvanized or plated zinc.

The zinc coating is typically 2.6 MIL or 1.5 oz./sq. ft. of surface area.

This is the coating of choice for applications where severe corrosion is a design factor.

SPECIAL COATING

When specific applications require other than standard available finishes, special finishes can be supplied per customer requirements.

Electroplated Zinc (EG) ASTM B633, Type III SC1 or SC3

In the electroplating process, the part to be zinc coated is immersed in a solution of zinc ions. An electric current causes the zinc to be deposited on the part.

SC1 (Mild) has a Zinc coating of 0.2 and is recommended for dry indoor use. SC1 is the standard finish thickness.
SC3 (Severe) has a Zinc coating of 0.5 mill and is the standard finish thickness only on UL Listed raceway products.

Perma-Gold (ZD) ASTM B633, Type II SC3

Similar to the EG process except in a yellow color.

Unistrut Defender (DF)

Unistrut® Defender™ is a combination of two proprietary material coatings conforming to ASTM standards A1046 and A1059. Channel, Fittings and Pipe Clamps meet the physical requirements of ASTM A1011 SS GR 33, ASTM A1046 SS GR 33, or ASTM A1011 HSLAS GR 45 Class 2.

3X the corrosion resistance of HG!

Zinc Coating

Unistrut products are available in four types of zinc coatings:

- Electroplated (EG)
- Perma-Gold (ZD)
- Pregalvanized (PG)
- Hot Dip Galvanized (HG).

Zinc offer two types of protection:

- **Barrier:** The zinc coating protects the steel substrate from direct contact with the environment.
- **Sacrificial:** The zinc coating will protect scratches, cut edges, etc. through an anodic sacrificial process.

The service life of zinc coating is directly related to the zinc coating thickness as shown below.

Comparison of Zinc Finishes

Finish	Zinc Thickness
Hot Dip Galvanized	2.6 MIL
Pre-galvanized	0.75 MIL
Electro-Galvanized (SC1)	0.2 MIL
Electro-Galvanized (SC3)	0.5 MIL
Perma-Gold (SC3)	0.5 MIL

Life of Protection vs. Thickness of Zinc and Type of Atmosphere

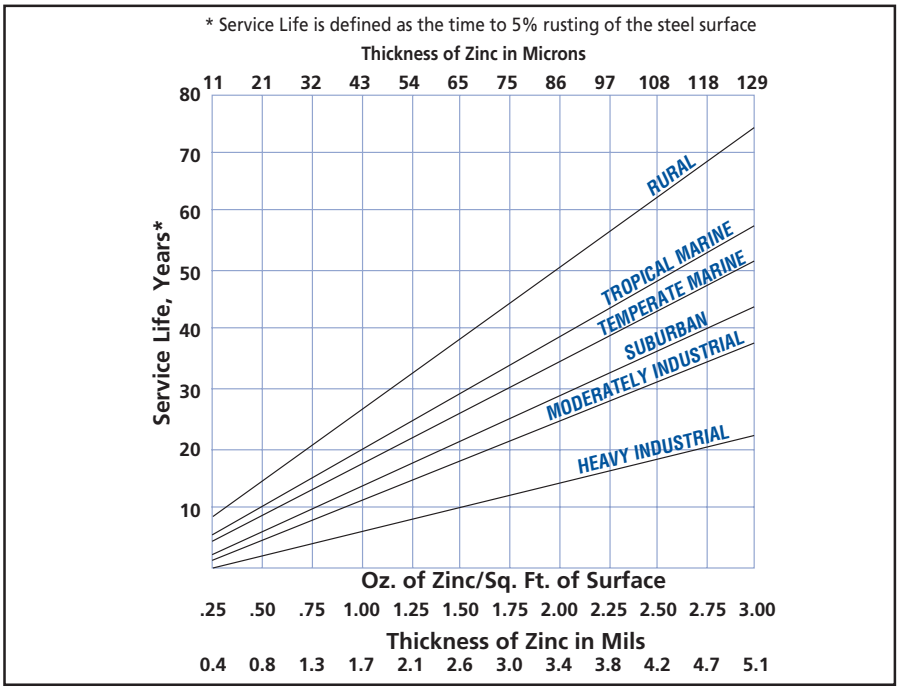

Beams

Beams are structural members loaded at right angles (perpendicular) to their length. Most beams are horizontal and subjected to gravity or vertical loads, e.g. a shelf support. However a vertical member can act as a beam under certain conditions, such as a curtain wall mullion subjected to wind loading. The bending moment developed in a beam is dependent on:

(a) The amount of load applied,
(b) The type of loading applied, and
(c) The support conditions



BEAM LOADING - POINT LOAD

A load concentrated onto a very small length of the beam is a point load.

BEAM LOADING - UNIFORM LOAD



A load spread evenly over a relatively long length of the beam is a uniform load.

Point and uniform loads can be placed on a beam in any combination. A series of point loads can approximate a uniform loading. The load charts and tables are based on a uniform load unless identified otherwise.



SUPPORT CONDITIONS - SIMPLE BEAM

A simple beam has supports that prevent movement left and right, or up and down, but do not restrain the beam from rotating at the supports into a natural deflected curve. Most Unistrut Metal Framing connections produce simple beams. The load charts and tables are based on simple beams unless identified otherwise.

SUPPORT CONDITIONS - CONTINUOUS BEAM



Any simple beam that is supported at one or more intermediate points is a continuous beam. A mezzanine joist that passes over three or more columns is an example of a continuous beam.

SUPPORT CONDITIONS - FIXED-END BEAM



Supports that prevent the beam from rotating into a natural deflected curve produce a fixed-end beam. A welded end connection to very rigid support produces a fixed-end beam.

SUPPORT CONDITIONS - CANTILEVER BEAM



A cantilever beam is a fixed-end beam that is supported at one end only, while the other end is unsupported. Unistrut brackets are examples of cantilever beams.

DEFLECTION



All beams deflect under load. The amount of deflection is dependent on

(a) the amount of load,
(b) the support conditions,
(c) the stiffness of the beam's cross-sectional shape, and
(d) the stiffness of the beam material.

The stiffness of the beam's cross-sectional shape is measured by its "Moment Of Inertia" or "I". The larger a beam's "I", the stiffer it is and the less it will deflect. A beam's "I" can change for each major axis. The "I" of both major axes (I 1-1 and I 2-2) are provided.

The stiffness of a beam's material is measured by its "Modulus of Elasticity" or "E". The larger a material's "E", the stiffer it is and the less it deflects. For example, steel is about three times stiffer than aluminum and as a result, deflects only one-third as much. Do not confuse stiffness with strength. Two materials may have identical strengths yet still have different "E's". A high-strength aluminum may be as strong as steel and still deflect three times as much.

The load charts and tables give calculated deflections for the loads shown. In many cases, a final design will be determined by the maximum deflection, not the maximum load.

BENDING MOMENT

Is it strong enough? This is the final consideration for any beam. A beam must not only hold up the anticipated loads, but must also have sufficient additional capacity to safely hold unforeseen variations in applied loads and material strengths. This additional capacity is called a safety factor and is usually regulated by the various design codes and standards. A beam's strength is usually measured by an allowable bending moment or an allowable stress. The traditional approach is the allowable stress method, where a beam is determined to have a maximum allowable stress (in pounds per square inch) which is not to be exceeded.

The approach of the current AISI "Specification For The Design Of Cold-Formed Steel Structural Members" is to use a maximum allowable bending moment (in inch-pounds) which is not to be exceeded. Bending moment divided by a beam's section modulus or "S" equals stress.

Columns are structural members that are loaded parallel to their length. Most columns are vertical and are used to carry loads from a higher level to a lower level. However any member subjected to compression loads, such as a diagonal or prop brace, is a column.

A column fails by "buckling", which is a sudden loss of straightness and subsequent collapse. Allowable column load is dependent on:

(a) the length of column,
(b) the type of loading,
(c) the support conditions, and
(d) the column's cross-sectional shape and material.

COLUMN LENGTH

The column length is measured from braced point to braced point. A braced point is where the column is restrained from lateral movement (translation) in all directions.

COLUMN LOADING – CONCENTRIC LOADING

Loads applied to the center of gravity of the column cross-section are considered concentric. A beam that passes over and rests on the top of a column is an example of concentric loading.

COLUMN LOADING – ECCENTRIC LOADING

Any load which is not concentric is eccentric. The amount of eccentricity (in inches) has a major effect on the load-carrying capacity of any particular column. A load that is transmitted to a Unistrut Metal Framing column using a standard fitting bolted to the slot face is considered eccentric.

The load tables give allowable loads for both concentric (loaded at C.G.) and certain eccentric (loaded at slot face) loading. Allowable loads for other eccentric loading must be determined by a qualified design professional.

SUPPORT CONDITIONS

Based on the support conditions, an appropriate "K" value is selected. This "K" value, which mathematically describes the column end conditions, is used in the column design equations. The most common support condition combinations are as follows:

SUPPORT CONDITIONS - FIXED TOP – FIXED BOTTOM

Both ends are restrained against rotation and lateral movement (translation).



SUPPORT CONDITIONS - PINNED TOP – FIXED BOTTOM

The top is restrained against lateral movement (translation) but is allowed to rotate. The bottom is restrained against rotation and lateral movement.

This is a common support condition and is used to construct the allowable column load applied at the Slot Face tables.



SUPPORT CONDITIONS - PINNED TOP – PINNED BOTTOM

Both ends are restrained against lateral movement (translation) but, are allowed to rotate.



SUPPORT CONDITIONS - FIXED / FREE TOP – FIXED BOTTOM

The top is restrained against rotation but is allowed to move laterally. The bottom is restrained against rotation and lateral movement (translation).



CROSS-SECTIONAL SHAPE

The cross-sectional shape of a column member determines the value of its "Radius of Gyration" or "r". In general, a member with a large "r" makes a better column than a member with a small "r". Each axis of a column has a different "r". Typically the axis with the smallest "r" determines the final design.

BOLT TORQUE

Bolt torque values are given to ensure the proper connection between Unistrut Metal Framing components. It is important to understand that there is a direct, but not necessarily consistent, relationship between bolt torque and tension in the bolt. Too much tension in the bolt can cause it to break or crush the component parts. Too little tension in the bolt can prevent the connection from developing its full load capacity. The torque values given have been developed over many years of experience and testing.

Bolt Torque						
BOLT SIZE	¼" -20	5/16" -18	⅜" -16	½" -13	⅝" -11	¾" -10
Rec.Torque Ft/Lbs *(N•m)*	6 *(8)*	11 *(15)*	19 *(26)*	50 *(68)*	100 *(136)*	125 *(170)*
Max Torque Ft/Lbs *(N•m)*	7 *(9)*	15 *(20)*	25 *(34)*	70 *(95)*	125 *(170)*	135 *(183)*

These are based on using a properly calibrated torque wrench with a clean dry (non-lubricated) Unistrut fitting, bolt and nut. A lubricated bolt or nut can cause extremely high tension in the connection and may lead to bolt failure. It must be noted that the accuracy of commercial torque wrenches varies widely and it is the responsibility of the installer to ensure that proper bolt torque has been achieved.

Unit Conversions

English To Metric

To Convert From	To	Multiply By
Length		
Inch [in]	Millimeter [mm]	25.400 000
Foot [ft]	Meter [m]	0.304 800
Yard [yd]	Meter [m]	0.914 400
Mile [mi] (U.S. Statute)	Kilometer [km]	1.609 347
Area		
Square Inch [in^2]	Square Millimeter [mm^2]	645.16
Square Foot [ft^2]	Square Meter [m^2]	0.092 903
Square Yard [yd^2]	Square Meter [m^2]	0.836 127
Square Mile [mi^2] (U.S. Statute)	Square Kilometer [km^2]	2.589 998
Acre	Square Meter [m^2]	4046.873
Acre	Hectare	0.404 687
Volume		
Cubic Inch [in^3]	Cubic Millimeter [mm^3]	16387.06
Cubic Foot [ft^3]	Cubic Meter [m^3]	0.028 317
Cubic Yard [yd^3]	Cubic Meter [m^3]	0.764 555
Gallon [gal] (U.S. Liquid)	Litre [l]	3.785 412
Quart [qt] (U.S. Liquid)	Litre [l]	0.946 353
Mass		
Ounce (Avoirdupois) [oz]	Gram [g]	28.349 520
Pound (Avoirdupois) [lb]	Kilogram [kg]	0.453 592
Short Ton	Kilogram [kg]	907.185
Force		
Ounce-Force	Newton [N]	0.278 014
Pound-Force [lbf]	Newton [N]	4.448 222
Bending Moment		
Pound-Force-Inch [lbf-in]	Newton-Meter [N-m]	0.112 985
Pound-Force-Foot [lbf-ft]	Newton-Meter [N-m]	1.355 818
Pressure, Stress		
Pound-Force per Square Inch [lbf/in^2]	Kilopascal [kPa]	6.894 757
Foot of Water (39.2 F)	Kilopascal [kPa]	2.988 980
Inch of Mercury (32 F)	Kilopascal [kPa]	3.386 380
Energy, Work, Heat		
Foot-Pound-Force [ft-lbf]	Joule [J]	1.355 818
British Thermal Unit [Btu]	Joule [J]	1055.056
Calorie [cal]	Joule [J]	4.186 800
Kilowatt Hour [kW-h]	Joule [J]	3,600,000
Power		
Foot-Pound-Force /Second [ft-lbs/s]	Watt [W]	1.355 818
British Thermal Unit /Hour [Btu/h]	Watt [W]	0.293 071
Horsepower [hp] (550 Ft. Lbf/s)	Kilowatt [kW]	0.745 700
Angle		
Degree	Radian [rad]	0.017 453
Temperature		
Degree Fahrenheit [°F]	Degree Celsius [°C]	(F° -32)/1.8

Metric to English

To Convert From	To	Multiply By
Length		
Millimeter [mm]	Inch [in]	0.039 370
Meter [m]	Foot [ft]	3.280 840
Meter [m]	Yard [yd]	1.093 613
Kilometer [km]	Mile [mi] (U.S. Statute)	0.621 370
Area		
Square Millimeter [mm^2]	Square Inch [in^2]	0.001550
Square Meter [m^2]	Square Foot [ft^2]	10.763 915
Square Meter [m^2]	Square Yard [yd^2]	1.195 991
Square Kilometer [km2]	Square Mile [mi^2] (U.S. Statute)	0.386 101
Square Meter [m^2]	Acre	0.000 247
Hectare	Acre	2.471 046
Volume		
Cubic Millimeter [mm^3]	Cubic Inch [in^3]	0.000061
Cubic Meter [m^3]	Cubic Foot [ft^3]	35.314 662
Cubic Meter [m^3]	Cubic Yard [yd^3]	1.307 950
Litre [l]	Gallon [gal] (U.S. Liquid)	0.264 172
Litre [l]	Quart [qt] (U.S. Liquid)	1.056 688
Mass		
Gram [g]	Ounce (Avoirdupois) [oz]	0.035 274
Kilogram [kg]	Pound (Avoirdupois) [lb]	2.204 624
Kilogram [kg]	Short Ton	0.00110
Force		
Newton [N]	Ounce-Force	3.596 941
Newton [N]	Pound-Force [lbf]	0.224 809
Bending Moment		
Newton-Meter [N-m]	Pound-Force-Inch [lbf-in]	8.850 732
Newton-Meter [N-m]	Pound-Force-Foot [lbf-ft]	0.737 562
Pressure, Stress		
Kilopascal [kPa]	Pound-Force per Square Inch [lbf/in^2]	0.145 038
Kilopascal [kPa]	Foot of Water (39.2 F)	0.334 562
Kilopascal [kPa]	Inch of Mercury (32 F)	0.295 301
Energy, Work, Heat		
Joule [J]	Foot-Pound-Force [ft-lbf]	0.737 562
Joule [J]	British Thermal Unit [Btu]	0.000948
Joule [J]	Calorie [cal]	0.238 846
Joule [J]	Kilowatt Hour [kW-h]	2.78^{-7}
Power		
Watt [W] /Second [ft-lbs/s]	Foot-Pound-Force	0.737 562
Watt [W] /Hour [Btu/h]	British Thermal Unit	3.412 142
Kilowatt [kW]	Horsepower (550 Ft. Lbf/s) [hp]	1.341 022
Angle		
Radian [rad]	Degree	57.295 788
Temperature		
Degree Celsius [°C]	Degree Fahrenheit [°F]	1.8xC°+32

Beam Support Conditions

Cantilever Beams



V max. = P

M max. = PL

$\Delta max. = \frac{PL^3}{3EI}$



V max. = W

$M max. = \frac{WL}{2}$

$\Delta max. = \frac{WL^3}{8EI}$



V max. = P

M max. = Pb

$\Delta max. = \frac{Pb^2(3L-b)}{6EI}$

Simple Beams



$R = \frac{P}{2}$

V max. = $\frac{P}{2}$

M max. = $\frac{PL}{4}$

$\Delta max. = \frac{PL^3}{48EI}$



$R = \frac{W}{2}$

V max. = $\frac{W}{2}$

M max. = $\frac{WL}{8}$

$\Delta max. = \frac{5WL^3}{384EI}$



$R_1 = \frac{Pb}{L}$

$R_2 = \frac{Pa}{L}$

V max. = $\frac{Pa}{L}$

M max. = $\frac{Pab}{L}$

$\Delta max. = \frac{Pab(a+2b)\sqrt{3a(a+2b)}}{27EIL}$

Beams Fixed At One End & Supported At The Other



$R_1 = \frac{5P}{16}$

V max. = $\frac{11P}{16}$

M max. = $\frac{3PL}{16}$

$\Delta max.$ at x = 0.447L

$\Delta max. = 0.009317\frac{PL^3}{EI}$



$R_1 = \frac{3W}{8}$

V max. = $\frac{5W}{8}$

M max. = $\frac{WL}{8}$

$\Delta max.$ at x = 0.4215L

$\Delta max. = \frac{WL^3}{185EI}$



$R_1 = \frac{Pb^2}{2L^3}(a+2L)$

$R_2 = \frac{Pa}{2L^3}(3L^2-a^2)$

M at point of load = $R_1 a$

M at fixed end = $\frac{Pab}{2L^3}(a+L)$

Beams Fixed At Both Ends



V max. = $\frac{P}{2}$

M max. = $\frac{PL}{8}$

$\Delta max. = \frac{PL^3}{192EI}$



V max. = $\frac{W}{2}$

M max. = $\frac{WL}{12}$

$\Delta max. = \frac{WL^3}{384EI}$

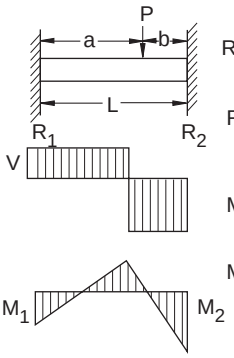

$R_1 = \frac{Pb^2}{L^3}(3a+b)$

$R_2 = \frac{Pa^2}{L^3}(a+3b)$

$M_1 = \frac{Pab^2}{L^2}$

$M_2 = \frac{Pa^2b}{L^2}$

R – Reaction
M – Moment
P – Concentrated Load

W – Total Uniform Load
V – Shear
L – Length

Δ – Deflection
E – Modulus of Elasticity
I – Moment of Inertia

Conversion Factors For Beams With Various Static Loading Conditions

All Beam Load tables are for single-span (simple) beams supported at the ends.These can be used in the majority of the cases. However, there are times when it is necessary to know what happens with other loading and support conditions. Some common arrangements are shown below. Simply multiply the values from the Beam Load tables by factors given below

Load and Support Condition	Load Factor	Deflection Factor
1. Simple Beam, Uniform Load 	**1.00**	**1.00**
2. Simple Beam, Concentrated Load at Center	**.50**	**.80**
3. Simple Beam, Two Equal Concentrated Loadcs at 1/4 pts 	**1.00**	**1.10**
4. Beam Fixed at Both Ends, Uniform Load 	**1.50**	**.30**
5. Beam Fixed at Both Ends, Concentrated Load at Center	**1.00**	**.40**
6. Cantilever Beam, Uniform Load 	**.25**	**2.40**
7. Cantilever Beam, Concentrated Load at End	**.12**	**3.20**
8. Continuous Beam, Two Equal Spans, Uniform Load on One Span 	**1.30**	**.92**
9. Continuous Beam, Two Equal Spans, Uniform Load on Both Ends 	**1.00**	**.42**
10. Continuous Beam, Two Equal Spans, Concentrated Load at Center of One Span	**.62**	**.71**
11. Continuous Beam, Two Equal Spans, Concentrated Load at Center of Each Span	**.67**	**.48**

EXAMPLE I:

Determine load and deflection of a P 1000 beam continuous over one support and loaded uniformly on one span.



SOLUTION:

A. From load table for P1000 on page 25 load for a 5'-0" span is 680# and deflection is .35".
B. Multiply by factors from Table above.
Load = 680# x 1.30 = 884#
Deflection = .35" x .92 = .32"

EXAMPLE II

Determine load and deflection of a P 5500 cantilever beam with a concentrated load on the end.



SOLUTION:

A. From load table P5500 on page 58 load for a 3'-0" span is 2180# and deflection is .09".
B. Multiply by factors from Table above.
Load = 2180# x .12 = 262#
Deflection = .09" x 3.20 = .29"

PART I - GENERAL

1.01 SCOPE OF WORK

A. Provide all Unistrut Metal Framing material, fittings and related accessories (Strut System) as indicated on the Contract Drawings.
B. Provide all labor, supervision, engineering, and fabrication required for installation of the Strut System in accordance with the Contract Drawings and as specified herein.
C. Related work specified elsewhere.

1.02 QUALITY ASSURANCE

A. Manufacturer's qualifications:
   1. The manufacturer shall not have had less than 10 year's experience in manufacturing Strut Systems.
   2. The manufacturer must certify in writing all components supplied have been produced in accordance with an established quality assurance program.
B. Installer's qualifications:
   1. Installer must be a Unistrut trained manufacturer's authorized representative/installer with not less than 5 years experience in the installation of Strut Systems of this size and conformation.
   2. All Strut System components must be supplied by a single manufacturer.
C. Standards:
   1. Work shall meet the requirements of the following standards:
      a. Federal, State and Local codes.
      b. American Iron and Steel Institute (AISI) Specification for the Design of Cold-Formed Steel Structural Members 2007 Edition.
      c. American Society for Testing And Materials (ASTM).

1.03 SUBMITTALS

A. Structural Calculations and Shop Drawings
   1. Submit structural calculations for approval by the project engineer. Calculations may include, but are not limited to:
      a. Description of design criteria.
      b. Stress and deflection analysis.
      c. Selection of Unistrut framing members, fittings, and accessories.
   2. Submit all shop/assembly drawings necessary to completely install the Strut System in compliance with the Contract Drawings.
   3. Submit all pertinent manufacturers published data.

1.04 PRODUCT DELIVERY, STORAGE, AND HANDLING

A. All material is to be delivered to the work site in original factory packaging to avoid damage to the finish.
B. Upon delivery to the work site, all components shall be protected from the elements by a shelter or other covering.

1.05 GUARANTEE

A. Separate guarantees shall be issued from the erector and manufacturer, valid for a period of 1 year, against any defects that may arise from the installation or manufacture of the Strut System components.

PART 2 - PRODUCTS

2.01 ACCEPTABLE MANUFACTURERS

A. All Strut System components shall be as manufactured by UNISTRUT CORPORATION or approved equal as determined by the Architect or Engineer of record in writing 10 days prior to bid date.

2.02 MATERIALS

A. All channel members shall be fabricated from structural grade steel conforming to one of the following ASTM specifications:
A 1011 SS GR 33,A 653 GR 33.
B. All fittings shall be fabricated from steel conforming to one of the following ASTM specifications:
A 575,A 576,A 36 or A 635.
C. Substitutions
Any substitutions of product or manufacturer must be approved in writing ten days prior to bid date, by Architect or Engineer of record.

2.03 FINISHES

A. Strut System components shall be finished in accordance with one of the following standards:

   1. PERMA-GREEN® III (GR)
   Rust inhibiting epoxy enamel paint applied by electro-deposition, after cleaning and phosphating, and thoroughly baked. Color is per Federal Highway Green, Color Tolerance Chart PR Color No. 4. Finish to withstand minimum 400 hours salt spray when tested in accordance with ASTM B117.

   2. ELECTRO-GALVANIZED (EG)
   Electrolytically zinc coated per ASTM B 633 Type III SC 1

   3. PRE-GALVANIZED (PG)
   Zinc coated by hot-dipped process prior to roll forming. The zinc weight shall be G90 conforming to ASTM A 653.

   4. HOT-DIPPED GALVANIZED (HG)
   Zinc coated after all manufacturing operations are complete. Coating shall conform to ASTM A 123 or A 153.

   5. UNISTRUT DEFENDER™ (DF)
   Coating conforming to ASTM A1046 or A1059.

   6. SPECIAL COATING / MATERIAL
   (Describe as applicable)

PART 3 - EXECUTION

3.01 EXAMINATION

A. The installer shall inspect the work area prior to installation. If work area conditions are unsatisfactory, installation shall not proceed until satisfactory corrections are completed.

3.02 INSTALLATION

A. Installation shall be accomplished by a fully trained manufacturer authorized installer.
B. Set Strut System components into final position true to line, level and plumb, in accordance with approved shop drawings.
C. Anchor material firmly in place. Tighten all connections to their recommended torques.

3.03 CLEANUP

A. Upon completion of this section of work, remove all protective wraps and debris. Repair any damage due to installation of this section of work.

3.04 PROTECTION

A. During installation, it shall be the responsibility of the installer to protect this work from damage.
B. Upon completion of this scope of work, it shall become the responsibility of the general contractor to protect this work from damage during the remainder of construction on the project and until substantial completion.

Unipier® Rooftop Pipe Support System

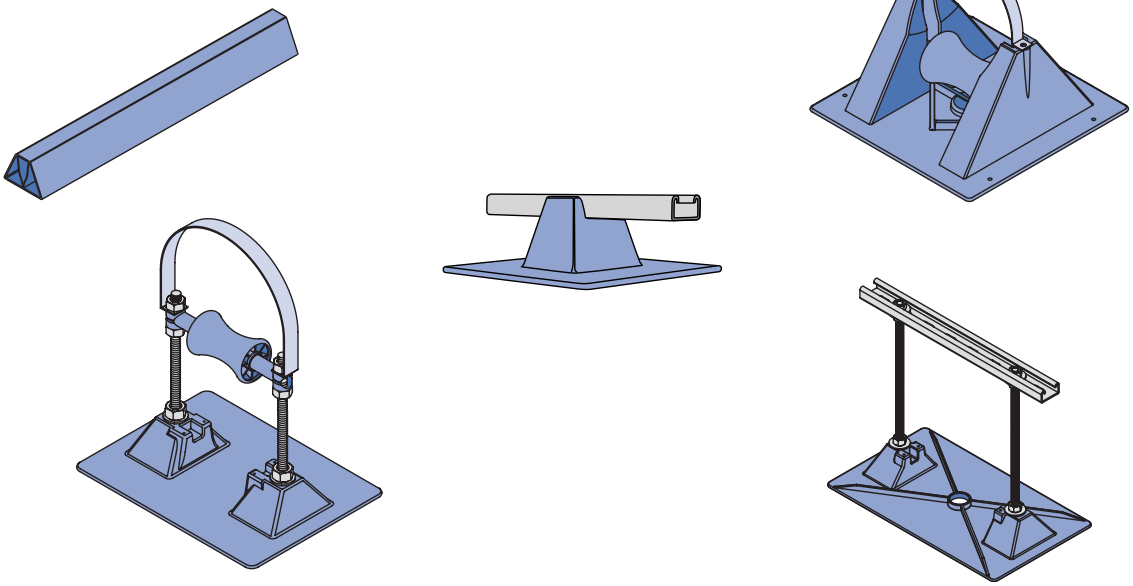

New Channel Section P4520/P4521 (1 5/8" x 13/16")

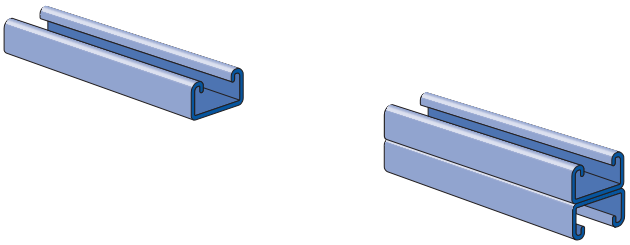

New Channel Section P4400/P4401 (1 5/8" x 1")

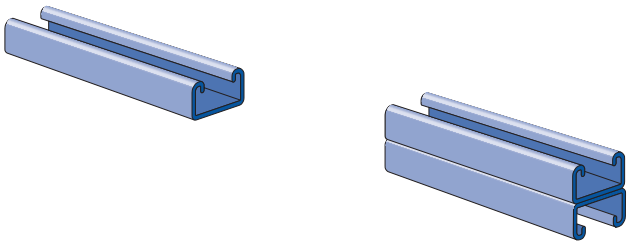

New Beam Clamp P1640



1⅝" CHANNEL

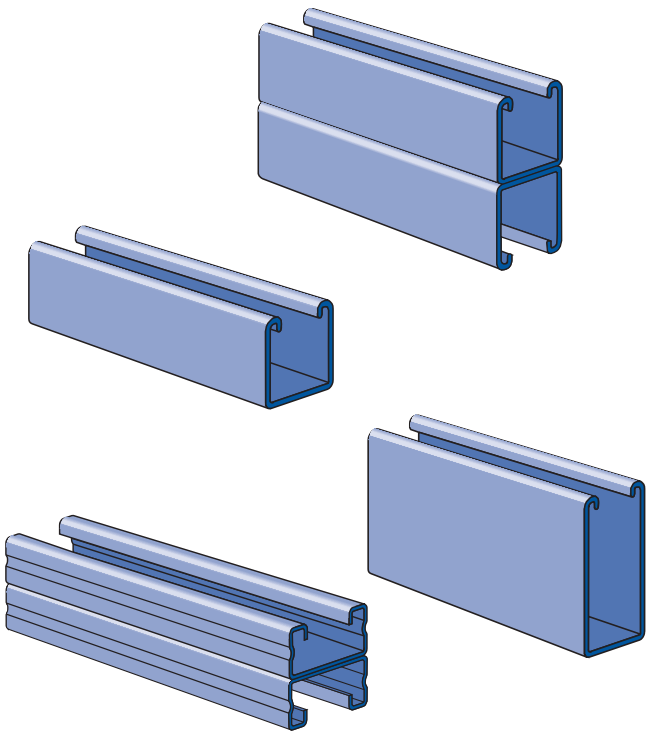

Channel Selection Chart 23

P1000 (12 Gauge) ..... 24 - 29

P1100 (14 Gauge) ..... 30 - 32

P2000 (16 Gauge) ..... 33 - 35

P3000 (12 Gauge) ..... 36 - 38

P3300 (12 Gauge) ..... 39 - 41

P4000 (16 Gauge) ..... 42 - 44

P4100 (14 Gauge) ..... 45 - 47

P4400 (12 Gauge) ..... 48 - 50

P4520 (12 Gauge) ..... 51 - 53

P5000 (12 Gauge) ..... 54 - 56

P5500 (12 Gauge) ..... 57 - 59

Closure Strips 60

End Caps and Frame Caps 61

Lateral Bracing Load Reduction Chart & Bearing Loads 62

MATERIAL

Unistrut channels are accurately and carefully cold formed to size from low-carbon strip steel.

All spot-welded combination members, except P1001T, are welded 3" (76 mm) maximum on center.

STEEL: PLAIN

12 Ga. (2.7 mm), 14 Ga.(1.9 mm) and
16 Ga. (1.5 mm) ASTM A1011 SS GR 33

STEEL: PRE-GALVANIZED

12 Ga. (2.7 mm), 14 Ga. (1.9 mm) and
16 Ga. (1.5mm) ASTM A653 GR 33

For other materials, see Special Metals or Fiberglass sections.

FINISHES

All channels are available in:

- Perma Green III (GR)
- Pre-galvanized (PG), conforming to ASTM A653 G90
- Hot-dipped galvanized (HG), conforming to ASTM A123
- Plain (PL)
- Unistrut Defender™ (DF), conforming to ASTM A1046

DIMENSIONS

Imperial dimensions are illustrated in inches. Metric dimensions are shown in millimeters and rounded to one decimal place.

STANDARD LENGTHS

Standard lengths are 10 feet (3.05m) and 20 feet (6.10m). Tolerances are ±⅛" (3 mm). Special lengths are available for a small cutting charge with a tolerance of ±⅛" (3 mm).

CURVED CHANNEL

Contact your local Unistrut Service Center or Unistrut Corporation for more information.

LOAD DATA

All beam and column load data pertains to carbon steel and stainless steel channels. Load tables and charts are constructed to be in accordance with the SPECIFICATION FOR THE DESIGN OF COLD-FORMED STEEL STRUCTURAL MEMBERS 2007 EDITION published by the AMERICAN IRON AND STEEL INSTITUTE USING ASD METHOD. Loads are based on 33 ksi steel cold formed to 42 ksi.

Type of Load	Safety Factor to Yield Strength
Beam Loads	1.67
Column Load	1.80

P1000 Series (12 ga.)

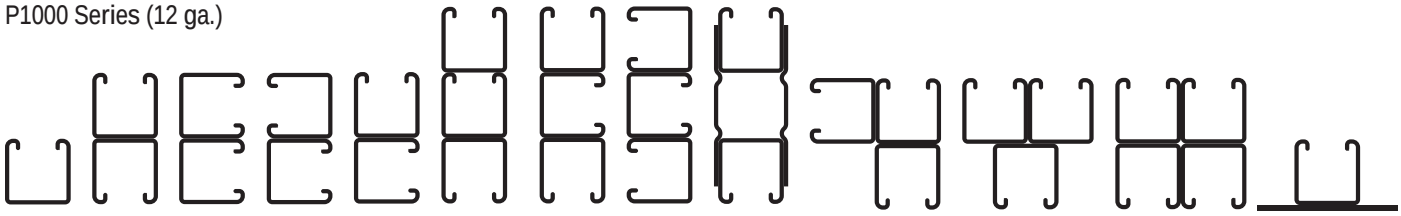

P1000 Pg 24 | P1001 Pg 24 P1001T Pg 27 | P1001A Pg 27 | P1001B Pg 27 | P1001C Pg 27 | P1001 3 Pg 27 | P1001 A3 Pg 27 | P1001 B3 Pg 27 | P1004A Pg 27 | P1001 C3 Pg 27 | P1001 D3 Pg 27 | P1001 C41 Pg 27 | P1003 Pg 27

P1100 Series (14 ga.)

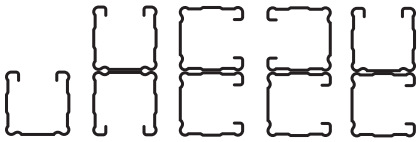

P1100 Pg 30 | P1101 Pg 30 | P1101A Pg 30 | P1101B Pg 30 | P1101C Pg 30

P2000 Series (16 ga.)

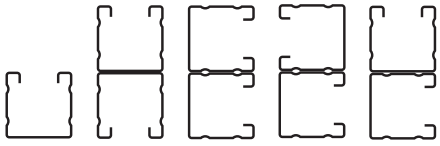

P2000 Pg 33 | P2001 Pg 33 | P2001A Pg 33 | P2001B Pg 33 | P2001C Pg 33

P3000 Series (12 ga.)



P3000 Pg 36 | P3001 Pg 36

P3300 Series (12 ga.)

P3300 Pg 39 | P3301 Pg 39

P4100 Series (14 ga.)



P4100 Pg 45 | P4101 Pg 45

P4000 Series (16 ga.)



P4000 Pg 42 | P4001 Pg 42 | P4003 Pg 42 | P4004 Pg 42

P4400 Series (12 ga.)

P4400 Pg 48 | P4401 Pg 48

P4520 Series (12 ga.)



P4520 Pg 51 | P4521 Pg 51

P5000 Series (12 ga.)



P5000 Pg 54 | P5001 Pg 54

P5500 Series (12 ga.)



P5500 Pg 57 | P5501 Pg 57

P9000 Series (12 ga.) Telestrut Channel

P9200 Pg 65 | P9000 Pg 65

End Caps and Frame Caps



P2860 Series Pg 61 | P2859 Pg 61 | P1280 Pg 61 | P1280 A, P2280 A Pg 61 | P1180, P2280 P4280, P5280, P5580 Pg 61 | P2407 P3280, P3380 Pg 61

1⅝" Channel Closure Strips



P1184P Pg 60 | P3184 Pg 60 | P3184P Pg 60 | P3184F Pg 60 | P3712P Pg 60

Alternate Framing Systems

A1000 Series (14 gauge) – 1¼" Channel

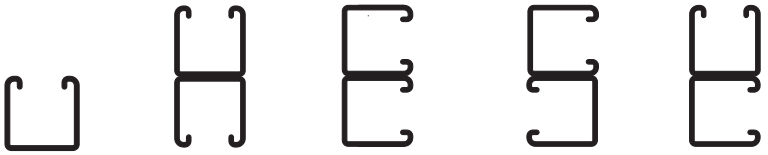

A1000 Pg 171 | A1001 Pg 171 | A1001A Pg 172 | A1001B Pg 172 | A1001C Pg 172

A3300 Series (14 gauge) 1¼" Channel



A3300 Pg 173 | A3301 Pg 173

P6000 Series (19 gauge) – 13/16" Channel

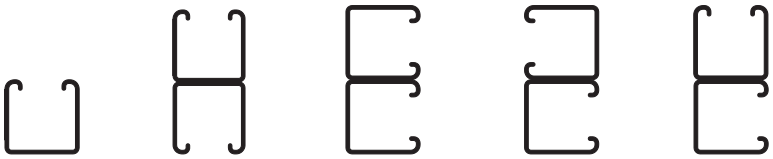

P6000 Pg 180 | P6001 Pg 180 | P6001A Pg 181 | P6001B Pg 181 | P6001C Pg 181

P7000 Series (19 gauge) 13/16" Channel

P7000 Pg 182 | P7001 Pg 182

Channel Selection Chart

Channel	Channel Dimensions		Material & Thickness			Hole Pattern Styles						
	Width	 Height	Steel	Stainless Steel	Alum.	 HS	 T	 WT	 KO	 SL	 DS	 H3
Channel	In (mm)	In (mm)	gauge	gauge	In (mm)				Steel Only			
P1000	1⅝ (41.3)	1⅝ (41.3)	12 ga	12 ga	0.109 (2.8)	■	■	■	■	■	■	■
P1100	1⅝ (41.3)	1⅝ (41.3)	14 ga	14 ga	—	■	■	■	■	■	–	–
P2000	1⅝ (41.3)	1⅝ (41.3)	16 ga	—	—	■	■	■	■	■	–	–
P3000	1⅝ (41.3)	1⅜ (34.9)	12 ga	—	—	■	■	■	■	■	–	–
P3300	1⅝ (41.3)	⅞ (22.2)	12 ga	12 ga	—	■	■	■	–	■	–	–
P4000	1⅝ (41.3)	13/16 (20.6)	16 ga	16 ga	0.078 (2.0)	■	■	■	–	■	–	–
P4100	1⅝ (41.3)	13/16 (20.6)	14 ga	—	—	■	■	■	–	■	–	–
P4400	1⅝ (41.3)	1(25.4)	12 ga	—	—	■	■	■	–	■	–	–
P4520	1⅝ (41.3)	13/16 (20.6)	12 ga	—	—	■	■	■	–	■	–	–
P5000	1⅝ (41.3)	3¼ (82.6)	12 ga	12 ga	—	■	■	■	■	■	–	–
P5500	1⅝ (41.3)	2 7/16 (61.9)	12 ga	—	0.109 (2.8)	■	■	■	■	■	–	–

Channels & Combinations in Descending Order of Strength

Channel	Area In² (cm²)	Weight lbs/ft (kg/m)	I In⁴ (cm⁴)	s In³(cm³)	Allow. Moment In-lbs (N•m)
P5001	1.793	6.10	6.227	1.916	48,180
	11.57	9.1	259.2	31.4	5,440
P1004A	1.965	6.68	4.068	1.669	41,980
	12.68	9.9	169.3	27.4	4,740
P5501	1.452	4.94	2.805	1.151	28,940
	9.37	7.3	116.8	18.9	3,270
P1001C41	2.221	7.55	1.856	1.142	28,720
	14.33	11.2	77.2	18.7	3,250
P5000	0.897	3.05	1.098	0.627	15,770
	5.78	4.5	45.7	10.3	1,780
P1001	1.111	3.78	0.928	0.571	14,360
	7.16	5.6	38.6	9.4	1,620
P1101	0.835	2.84	0.733	0.451	11,340
	5.39	4.2	30.5	7.4	1,280
P3001	1.000	3.40	0.591	0.430	10,810
	6.45	5.1	24.6	7.0	1,220
P5500	0.726	2.47	0.522	0.390	9,820
	4.68	3.7	21.7	6.4	1,110
P2001	0.684	2.32	0.618	0.381	9,570
	4.41	3.5	25.7	6.2	1,080
P9200	0.489	2.23	0.279	0.297	7,480
	3.16	3.3	11.6	4.9	850
P4401	0.849	5.77	0.26	0.26	6,410
	5.48	8.5	10.6	4.2	725
A1001	0.609	2.07	0.302	0.242	6,070
	3.93	3.1	12.6	4.0	690
P9000	0.387	1.88	0.166	0.205	5,150
	2.50	2.8	6.9	3.4	580
P1000	0.555	1.89	0.185	0.202	5,070
	3.58	2.8	7.7	3.3	570
P3301	0.790	2.69	0.176	0.201	5,060
	5.10	4.0	7.3	3.3	570
P4521	0.77	2.62	0.15	0.18	4,538
	4.97	3.9	6.1	2.9	513

Channel	Area In² (cm²)	Weight lbs/ft (kg/m)	I In⁴ (cm⁴)	s In³(cm³)	Allow. Moment In-lbs (N•m)
P1100	0.418	1.42	0.145	0.162	4,060
	2.69	2.1	6.0	2.6	460
P3000	0.500	1.70	0.120	0.153	3,850
	3.23	2.5	5.0	2.5	430
P4101	0.579	1.97	0.117	0.143	3,610
	3.74	2.9	4.9	2.4	410
P2000	0.342	1.16	0.125	0.140	3,520
	2.21	1.7	5.2	2.3	400
P4001	0.478	1.66	0.104	0.128	3,210
	3.14	2.5	4.3	2.1	360
A3301	0.459	1.56	0.077	0.103	2,590
	2.96	2.3	3.2	1.7	290
P4400	0.424	2.89	0.053	0.092	2,300
	2.74	4.3	2.2	1.5	260
A1000	0.305	1.04	0.061	0.086	2,170
	1.96	1.5	2.5	1.4	250
P3300	0.395	1.34	0.037	0.072	1,800
	2.55	2.0	1.5	1.2	200
P4520	0.384	1.31	0.031	0.064	1,615
	2.48	1.9	1.3	1.0	183
A4001	0.264	0.90	0.037	0.058	1,470
	1.70	1.3	1.5	1.0	170
P6001	0.213	0.73	0.045	0.055	1,400
	1.38	1.1	1.9	0.9	160
P4100	0.290	0.98	0.026	0.054	1,360
	1.87	1.5	1.1	0.9	150
P4000	0.244	0.83	0.023	0.049	1,230
	1.57	1.2	0.9	0.8	140
A3300	0.230	0.78	0.017	0.038	950
	1.48	1.2	0.7	0.6	110
P6000	0.107	0.36	0.009	0.020	510
	0.69	0.5	0.4	0.3	60
P7001	0.148	0.50	0.007	0.018	460
	0.96	0.8	0.3	0.3	50
P7000	0.074	0.25	0.002	0.007	170
	0.48	0.4	0.1	0.1	20

Combinations not shown in catalog are available on special order.
Consult factory for more details.

P1000®

DF GR HG PG PL







Wt/100 Ft:189 Lbs (281 kg/100 m)
Allowable Moment 5,070 In-Lbs (570 N•m)
12 Gauge Nominal Thickness .105" (2.7mm)

P1001

DF GR HG PG PL







Wt/100 Ft: 378 Lbs (562 kg/100 m)
Allowable Moment 14,360 In-Lbs (1,620 N•m)
12 Gauge Nominal Thickness .105" (2.7mm)

P1000 DS

Slots are 2 ¾" (69.9) x ⅞" (22.2)
3 ½" (88.9) on Center



Pipe Clamps can be Mounted on Both Sides

Wt/100 Ft: 173 Lbs (257 kg/100 m)

P1000 H3

GR HG PG PL

9/16" (14.3) Dia. Holes
1 ⅞" (47.6) on Center



Wt/100 Ft: 175 Lbs (260 kg/100 m)

P1000 HS

GR HG PG PL

9/16" (14.3) Dia. Holes
1 ⅞" (47.6) on Center



Wt/100 Ft: 190 Lbs (283 kg/100 m)

P1000 KO

GR PG

⅞" (22.2) Knockouts
6" (152.4) on Center



Wt/100 Ft:185 Lbs (275 kg/100 m)

P1000 SL

GR HG PG PL

Slots are
3" (76.2) x 13/32" (10.3)
4" (101.6) on Center



Wt/100 Ft: 185 Lbs (275 kg/100 m)

P1000 T

DF GR HG PG PL

Slots are
1⅛" (28.6) x 9/16" (14.3)
2" (50.8) on Center



Wt/100 Ft: 185 Lbs (275 kg/100 m)

P1000 WT

DF GR HG PG PL

Slots are
2" (50.8) x 11/16" (17.5)
3" (76.2) on Center



Wt/100 Ft: 185 Lbs (275 kg/100 m)

Channel Nuts (Refer to Pages 73,74 for Details)

See Page 73, 74



P1006-0832
P1006-1024
P1006-1420
P1007
P1008
P1009
P1010

P1008T
P1006T1420
P1010T



P1024
P1012S
P1023S

P1012
P1023
P1024S

P3006-0832
P3006-1024
P3006-1420
P3007
P3008
P3009
P3010

P3016-0632
P3016-0832
P3016-1024
P3016-1420

Channel Finishes: DF, PL, GR, HG, PG, ZD; Standard Lengths: 10' & 20'

P1000 - Beam Loading

Span In	Max. Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	1,690	0.06	1,690	1,690	1,690
36	1,130	0.13	1,130	1,130	900
48	850	0.22	850	760	500
60	680	0.35	650	480	320
72	560	0.50	450	340	220
84	480	0.68	330	250	160
96	420	0.89	250	190	130
108	380	1.14	200	150	100
120	340	1.40	160	120	80
144	280	2.00	110	80	60
168	240	2.72	80	60	40
192	210	3.55	60	50	NR
216	190	4.58	50	40	NR
240	170	5.62	40	NR	NR

P1001 - Beam Loading

Span In	Max. Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	3,500*	0.02	3,500*	3,500*	3,500*
36	3,190	0.07	3,190	3,190	3,190
48	2,390	0.13	2,390	2,390	2,390
60	1,910	0.20	1,910	1,910	1,620
72	1,600	0.28	1,600	1,600	1,130
84	1,370	0.39	1,370	1,240	830
96	1,200	0.51	1,200	950	630
108	1,060	0.64	1,000	750	500
120	960	0.79	810	610	410
144	800	1.14	560	420	280
168	680	1.53	410	310	210
192	600	2.02	320	240	160
216	530	2.54	250	190	130
240	480	3.16	200	150	100

P1000 - Column Loading

Unbraced Height In	Max. Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
24	3,550	10,740	9,890	8,770	7,740
36	3,190	8,910	7,740	6,390	5,310
48	2,770	7,260	6,010	4,690	3,800
60	2,380	5,910	4,690	3,630	2,960
72	2,080	4,840	3,800	2,960	2,400
84	1,860	4,040	3,200	2,480	1,980
96	1,670	3,480	2,750	2,110	1,660
108	1,510	3,050	2,400	1,810	**
120	1,380	2,700	2,110	**	**
144	1,150	2,180	1,660	**	**

P1001 - Column Loading

Unbraced Height In	Max. Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
24	6,430	24,280	23,610	22,700	21,820
36	6,290	22,810	21,820	20,650	19,670
48	6,160	21,410	20,300	18,670	16,160
60	6,000	20,210	18,670	15,520	12,390
72	5,620	18,970	16,160	12,390	8,950
84	5,170	16,950	13,630	9,470	6,580
96	4,690	14,890	11,190	7,250	5,040
108	4,170	12,850	8,950	5,730	3,980
120	3,690	10,900	7,250	4,640	**
144	2,930	7,630	5,040	**	**

P1000/P1001 - Elements of Section

Parameter	P1000		P1001	
Area of Section	0.555	In^2	1.111	In^2
Axis 1-1				
Moment of Inertia (I)	0.185	In^4	0.928	In^4
Section Modulus (S)	0.202	In^3	0.571	In^3
Radius of Gyration (r)	0.577	In	0.914	In
Axis 2-2				
Moment of Inertia (I)	0.236	In^4	0.471	In^4
Section Modulus (S)	0.290	In^3	0.580	In^3
Radius of Gyration (r)	0.651	In	0.651	In

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to Page 62 for reduction factors for unbraced lengths.
3. For pierced channel, multiply beam loads by the following factor:

"KO" Series.....95%
"HS" Series 90%
"H3" Series.....90%
"WT" Series.....85%
"T" Series 85%
"SL" Series.....85%
"DS" Series.....70%

4. Deduct channel weight from the beam loads.
5. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
6. All beam loads are for bending about Axis 1-1.

P1000 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
600	7.6	1	7.6	7.6	7.6
750	6.1	2	6.1	6.1	5.9
1,000	4.6	4	4.6	4.6	3.3
1,250	3.6	6	3.6	3.2	2.1
1,500	3.1	9	3.0	2.2	1.5
1,750	2.6	12	2.2	1.6	1.1
2,000	2.3	15	1.6	1.2	0.8
2,500	1.8	24	1.1	0.8	0.5
3,000	1.5	34	0.8	0.5	0.4
3,500	1.3	46	0.5	0.4	0.3
4,000	1.2	62	0.4	0.3	0.2
4,500	1.0	78	0.3	0.3	0.2
5,000	0.9	97	0.3	0.2	NR
6,000	0.8	136	0.2	NR	NR

P1001 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
600	15.6 *	1	15.6 *	15.6 *	15.6 *
750	15.6 *	1	15.6 *	15.6 *	15.6 *
1,000	13.0	2	13.0	13.0	13.0
1,250	10.4	3	10.4	10.4	10.4
1,500	8.7	5	8.7	8.7	7.4
1,750	7.4	7	7.4	7.4	5.5
2,000	6.5	9	6.5	6.3	4.2
2,500	5.2	13	5.2	4.0	2.7
3,000	4.3	19	3.7	2.8	1.9
3,500	3.7	26	2.8	2.0	1.4
4,000	3.2	34	2.1	1.6	1.1
4,500	2.9	44	1.6	1.2	0.8
5,000	2.6	53	1.3	1.0	0.7
6,000	2.2	78	0.9	0.7	0.4

P1000 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
600	15.8	48.0	44.3	39.4	34.8
750	15.2	44.0	39.4	33.8	28.9
1,000	13.7	37.5	32.0	26.1	21.3
1,250	12.1	31.6	26.1	20.3	16.5
1,500	10.7	26.7	21.3	16.5	13.4
1,750	9.6	22.7	17.8	13.8	11.3
2,000	8.7	19.3	15.3	11.9	9.6
2,250	7.9	16.9	13.4	10.4	8.2
2,500	7.2	15.0	11.9	9.1	**
2,750	6.7	13.5	10.6	8.1	**

P1001 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
600	28.6	108.2	105.3	101.3	97.4
750	28.3	105.0	101.3	96.5	92.2
1,000	27.8	99.6	95.0	89.7	83.9
1,250	27.3	94.7	89.7	81.7	70.1
1,500	26.8	90.3	83.9	70.1	56.4
1,750	25.4	86.7	74.8	58.6	43.5
2,000	23.9	79.4	65.5	47.7	33.3
2,250	22.2	71.9	56.4	37.9	26.3
2,500	20.4	64.4	47.7	30.7	21.3
2,750	18.5	56.9	39.6	25.4	17.6

P1000/P1001 - Elements of Section (metric)

Parameter	P1000		P1001	
Area of Section	3.58	cm^2	7.16	cm^2
Axis 1-1				
Moment of Inertia (I)	7.68	cm^4	38.62	cm^4
Section Modulus (S)	3.30	cm^3	9.36	cm^3
Radius of Gyration (r)	1.46	cm	2.32	cm
Axis 2-2				
Moment of Inertia (I)	9.80	cm^4	19.60	cm^4
Section Modulus (S)	4.75	cm^3	9.50	cm^3
Radius of Gyration (r)	1.65	cm	1.65	cm

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to Page 62 for reduction factors for unbraced lengths.
3. For pierced channel, multiply beam loads by the following factor:

"KO" Series.....95%
"HS" Series 90%
"H3" Series.....90%
"WT" Series.....85%
"T" Series 85%
"SL" Series.....85%
"DS" Series.....70%

4. Deduct channel weight from the beam loads.
5. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
6. All beam loads are for bending about Axis 1-1.

Atkore Unistrut

P1001 T

DF GR PG

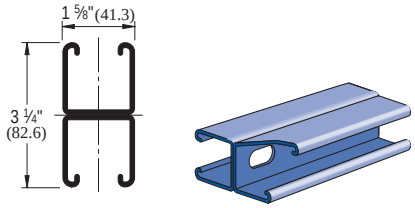

Wt/100 Ft: 321 Lbs (478 kg/100 m)
Allowable Moment 12,200 In-Lbs (1,378 N•m)
12 Gauge Nominal Thickness .105" (2.7mm)

P1001 A

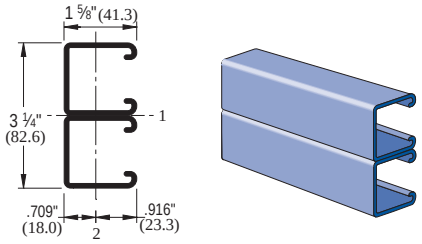

Wt/100 Ft: 378 Lbs (562 kg/100 m)
Allowable Moment 18,640 In-Lbs (2,110 N•m)
12 Gauge Nominal Thickness .105" (2.7mm)

P1001 B

GR PG

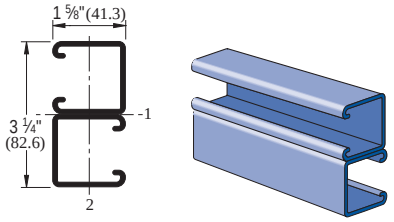

Wt/100 Ft: 378 Lbs (562 kg/100 m)
Allowable Moment 18,640 In-Lbs (2,110 N•m)
12 Gauge Nominal Thickness .105" (2.7mm)

P1001 C

GR PG

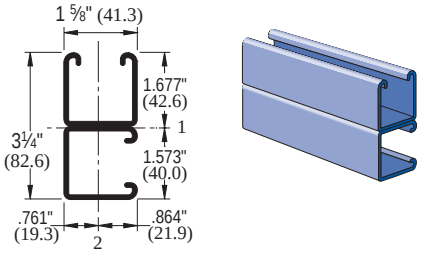

Wt/100 Ft: 378 Lbs (562 kg/100 m)
Allowable Moment 15,950 In-Lbs (1,800 N•m)
12 Gauge Nominal Thickness .105" (2.7mm)

P1001 3

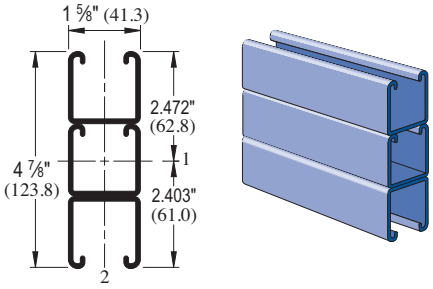

Wt/100 Ft: 566 Lbs (843 kg/100 m)
Allowable Moment 31,840 In-Lbs (3,600 N•m)
12 Gauge Nominal Thickness .105" (2.7mm)

P1001 A3

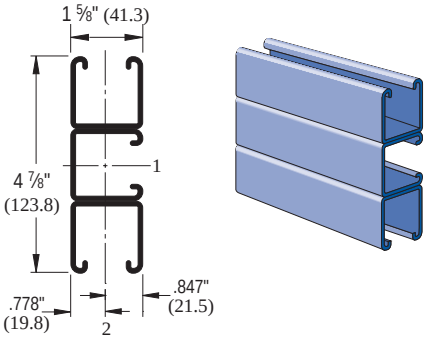

Wt/100 Ft: 566 Lbs (843 kg/100 m)
Allowable Moment 32,770 In-Lbs (3,700 N•m)
12 Gauge Nominal Thickness .105" (2.7mm)

P1001 B3

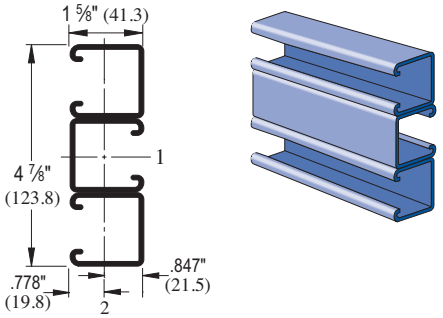

Wt/100 Ft: 566 Lbs (843 kg/100 m)
Allowable Moment 37,550 In-Lbs (4,240 N•m)
12 Gauge Nominal Thickness .105" (2.7mm)

P1001 D3

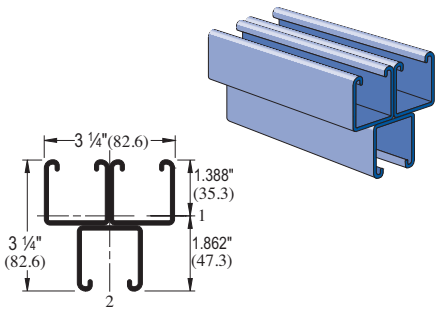

Wt/100 Ft: 566 Lbs (843 kg/100 m)
Allowable Moment 17,550 In-Lbs (1,980 N•m)
12 Gauge Nominal Thickness .105" (2.7mm)

P1003



Wt/100 Ft: 333 Lbs (495 kg/100 m)
Allowable Moment 6,240 In-Lbs (700 N•m)
12 Gauge Nominal Thickness .105" (2.7mm)

P1001 C41

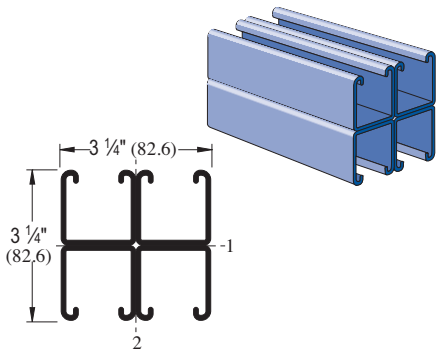

Wt/100 Ft: 755 Lbs (1,124 kg/100 m)
Allowable Moment 28,720 In-Lbs (3,250 N•m)
12 Gauge Nominal Thickness .105" (2.7mm)

P1001 C3

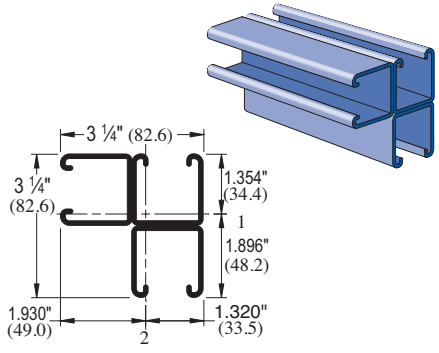

Wt/100 Ft: 566 Lbs (843 kg/100 m)
Allowable Moment 18,680 In-Lbs (2,110 N•m)
12 Gauge Nominal Thickness .105" (2.7mm)

P1004 A

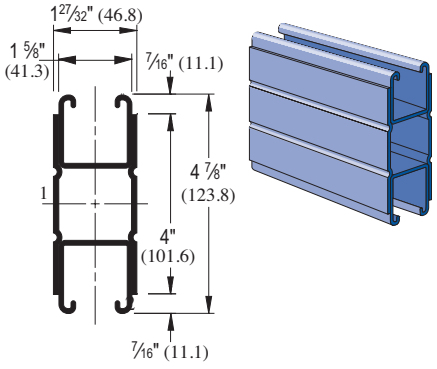

Wt/100 Ft: 668 Lbs (994 kg/100 m)
Allowable Moment 41,970 In-Lbs (4,740 N•m)
12 Gauge Nominal Thickness .105" (2.7mm)

Channel Finishes: DF, PL, GR, HG, PG, ZD; Standard Lengths: 10' & 20'

P1001 C41 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	7,040*	0.02	7,040*	7,040*	7,040*
36	6,380	0.07	6,380	6,380	6,380
48	4,790	0.13	4,790	4,790	4,790
60	3,830	0.20	3,830	3,830	3,240
72	3,190	0.28	3,190	3,190	2,250
84	2,740	0.39	2,740	2,480	1,660
96	2,390	0.50	2,390	1,900	1,270
108	2,130	0.64	2,000	1,500	1,000
120	1,910	0.78	1,620	1,220	810
144	1,600	1.14	1,130	840	560
168	1,370	1.55	830	620	410
192	1,200	2.02	630	480	320
216	1,060	2.54	500	380	250
240	960	3.16	410	300	200

P1004 A - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	9,100*	0.01	9,100*	9,100*	9,100*
36	9,100*	0.05	9,100*	9,100*	9,100*
48	7,000	0.08	7,000	7,000	7,000
60	5,600	0.13	5,600	5,600	5,600
72	4,660	0.19	4,660	4,660	4,660
84	4,000	0.26	4,000	4,000	3,630
96	3,500	0.34	3,500	3,500	2,780
108	3,110	0.43	3,110	3,110	2,200
120	2,800	0.52	2,800	2,670	1,780
144	2,330	0.75	2,330	1,850	1,230
168	2,000	1.03	1,810	1,360	910
192	1,750	1.34	1,390	1,040	690
216	1,550	1.69	1,100	820	550
240	1,400	2.10	890	670	440

P1001 C41 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
24	12,690	46,920	44,980	42,360	39,890
36	12,250	42,680	39,890	36,660	34,050
48	11,820	38,740	35,720	32,640	30,430
60	11,470	35,500	32,640	29,980	28,220
72	11,180	32,970	30,430	28,220	26,820
84	10,900	31,040	28,840	27,010	24,870
96	10,580	29,570	27,680	26,170	19,840
108	10,310	28,440	26,820	22,310	15,670
120	10,070	27,560	26,170	18,280	12,700
144	8,740	26,320	19,840	12,700	8,820
168	7,360	21,890	14,570	9,330	**

P1004 A - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
24	11,420	36,800	33,890	30,440	27,600
36	10,600	30,840	27,600	24,400	22,160
48	9,860	26,400	23,560	21,060	19,470
60	9,160	23,370	21,060	19,160	18,020
72	8,610	21,310	19,470	18,020	17,140
84	8,170	19,890	18,410	17,260	15,240
96	7,790	18,890	17,670	16,760	11,670
108	7,460	18,160	17,140	13,280	9,220
120	7,150	17,590	16,760	10,750	7,470
144	5,660	16,840	11,670	7,470	**
168	4,520	12,990	8,570	**	**

P1001 C41/ P1004 A - Elements of Section

Parameter	P1001 C41		P1004 A	
Area of Section	2.221	In^2	1.965	In^2
Axis 1-1				
Moment of Inertia (I)	1.856	In^4	4.068	In^4
Section Modulus (S)	1.142	In^3	1.669	In^3
Radius of Gyration (r)	0.914	In	1.439	In
Axis 2-2				
Moment of Inertia (I)	2.408	In^4	1.092	In^4
Section Modulus (S)	1.482	In^3	1.190	In^3
Radius of Gyration (r)	1.041	In	0.745	In

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to Page 62 for reduction factors for unbraced lengths.
3. For pierced channel, multiply beam loads by the following factor:

"KO" Series.....95% **"T" Series 85%**
"HS" Series .....90% **"SL" Series.....85%**
"WT" Series.....85%

4. Deduct channel weight from the beam loads.
5. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
6. All beam loads are for bending about Axis 1-1.

P1001 C41 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
600	31.3 *	1	31.3 *	31.3 *	31.3 *
750	31.3 *	1	31.3 *	31.3 *	31.3 *
1,000	26.0	2	26.0	26.0	26.0
1,250	20.8	3	20.8	20.8	20.8
1,500	17.3	5	17.3	17.3	14.9
1,750	14.8	7	14.8	14.8	10.9
2,000	13.0	9	13.0	12.6	8.4
2,500	10.4	13	10.4	8.1	5.4
3,000	8.7	19	7.4	5.6	3.7
3,500	7.4	26	5.5	4.1	2.8
4,000	6.5	34	4.2	3.2	2.1
4,500	5.8	44	3.3	2.5	1.6
5,000	5.2	54	2.7	2.0	1.3
6,000	4.3	77	1.9	1.4	0.9

P1004 A - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kgN	Span/360 kN
600	40.5 *	1	40.5 *	40.5 *	40.5 *
750	40.5 *	1	40.5 *	40.5 *	40.5 *
1,000	37.9	2	37.9	37.9	37.9
1,250	30.3	3	30.3	30.3	30.3
1,500	25.3	4	25.3	25.3	25.3
1,750	21.7	6	21.7	21.7	21.7
2,000	18.9	9	18.9	18.9	18.4
2,500	15.2	13	15.2	15.2	11.7
3,000	12.6	18	12.6	12.2	8.2
3,500	10.9	23	10.9	9.0	6.0
4,000	9.5	29	9.2	6.9	4.6
4,500	8.5	36	7.2	5.4	3.6
5,000	7.6	52	5.9	4.4	2.9
6,000	6.3	77	4.1	3.1	2.0

P1001 C41 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
600	56.5	209.3	200.8	189.3	178.4
750	55.6	200.1	189.3	175.8	164.1
1,000	53.9	184.7	171.7	157.3	146.1
1,250	52.4	170.7	157.3	143.8	134.1
1,500	51.1	158.9	146.1	134.1	126.1
1,750	50.0	149.3	137.6	127.3	120.7
2,000	49.2	141.5	131.1	122.3	116.8
2,250	47.9	135.4	126.1	118.6	101.9
2,500	46.8	130.4	122.3	114.5	83.9
2,750	45.9	126.4	119.2	98.8	69.4

P1004 A - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
600	50.9	164.6	151.8	136.5	123.8
750	49.1	150.8	136.5	121.1	109.5
1,000	46.3	130.9	116.9	103.4	94.3
1,250	43.5	115.8	103.4	92.6	85.8
1,500	40.9	104.8	94.3	85.8	80.6
1,750	38.9	96.8	88.1	81.3	77.0
2,000	37.1	91.0	83.7	78.1	74.8
2,250	35.7	86.6	80.6	75.8	60.9
2,500	34.3	83.3	78.1	71.1	49.4
2,750	33.1	80.7	76.2	58.8	40.8

P1001 C41/ P1004 A - Elements of Section (metric)

Parameter		P1001 C41		P1004 A	
Area of Section		14.33	cm^2	12.68	cm^2
Axis 1-1					
	Moment of Inertia (I)	77.24	cm^4	169.33	cm^4
	Section Modulus (S)	18.71	cm^3	27.35	cm^3
	Radius of Gyration (r)	2.32	cm	3.66	cm
Axis 2-2					
	Moment of Inertia (I)	100.24	cm^4	45.44	cm^4
	Section Modulus (S)	24.29	cm^3	19.50	cm^3
	Radius of Gyration (r)	2.64	cm	1.89	cm

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to Page 62 for reduction factors for unbraced lengths.
3. For pierced channel, multiply beam loads by the following factor:

"KO" Series.....95% **"T" Series 85%**
"HS" Series .....90% **"SL" Series.....85%**
"WT" Series.....85%

4. Deduct channel weight from the beam loads.
5. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
6. All beam loads are for bending about Axis 1-1.

P1100

GR PG

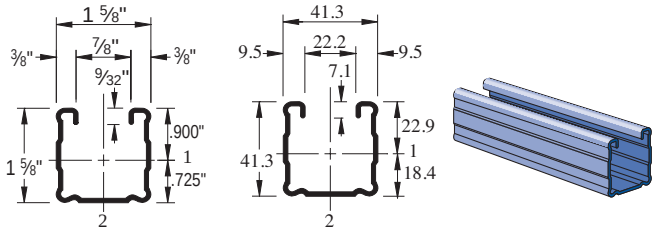

Wt/100 Ft: 142 Lbs (211 kg/100 m)
Allowable Moment 4,060 In-Lbs (460 N•m)
14 Gauge Nominal Thickness .075" (1.9mm)

P1101

GR PG

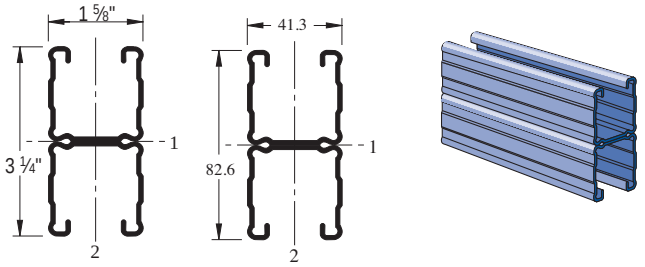

Wt/100 Ft: 284 Lbs (423 kg/100 m)
Allowable Moment 11,340 In-Lbs (1,280 N•m)
14 Gauge Nominal Thickness .075" (1.9mm)

P1101 A

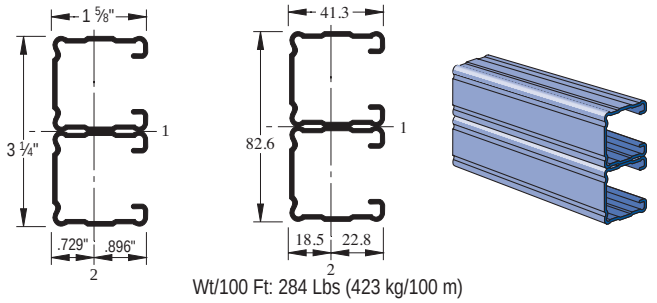

Wt/100 Ft: 284 Lbs (423 kg/100 m)
Allowable Moment 14,000 In-Lbs (1,580 N•m)
14 Gauge Nominal Thickness .075" (1.9mm)

P1101 B

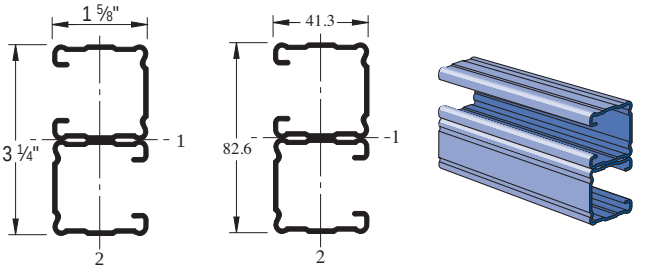

Wt/100 Ft: 284 Lbs (423 kg/100 m)
Allowable Moment 14,000 In-Lbs (1,580 N•m)
14 Gauge Nominal Thickness .075" (1.9mm)

P1101 C

GR PG

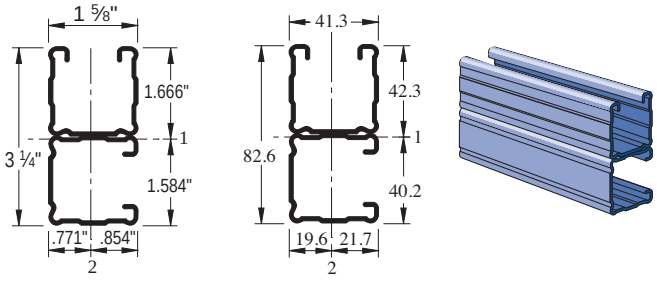

Wt/100 Ft: 284 Lbs (423 kg/100 m)
Allowable Moment 12,330 In-Lbs (1,390 N•m)
14 Gauge Nominal Thickness .075" (1.9mm)

P1100 HS

GR PG

9/16" (14.3) Dia. Holes
1 7/8" (47.6) on Center



Wt/100 Ft: 136 Lbs (202 kg/100 m)

P1100 KO

GR PG

7/8" (22.2) Knockouts
6" (152.4) on Center



Wt/100 Ft: 140 Lbs (208 kg/100 m)

P1100 SL

GR PG

Slots are
3" (76.2) x 13/32" (10.3)
4" (101.6) on Center



Wt/100 Ft: 136 Lbs (202 kg/100 m)

P1100 T

GR PG

Slots are
1 1/8" (28.6) x 9/16" (14.3)
2" (50.8) on Center



Wt/100 Ft: 136 Lbs (202 kg/100 m)

P1100 WT

DF GR HG PG PL

Slots are
2" (50.8) x 11/16" (17.5)
3" (76.2) on Center



Wt/100 Ft: 136 Lbs (202 kg/100 m)

Channel Nuts (Refer to Pages 73,74 for Details)

See Page 73, 74



P1006-0832
P1006-1024
P1006-1420
P1007
P1008
P1009
P1010

P1008T
P1006T1420
P1010T

P1024
P1012S
P1023S

P1012
P1023
P1024S

P3006-0832
P3006-1024
P3006-1420
P3007
P3008
P3009
P3010

P3016-0632
P3016-0832
P3016-1024
P3016-1420

Channel Finishes: DF, PL, GR, HG, PG, ZD; Standard Lengths: 10' & 20'

Atkore Unistrut

P1100 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	1,350	0.06	1,350	1,350	1,350
36	900	0.13	900	900	700
48	680	0.23	680	590	400
60	540	0.36	510	380	250
72	450	0.51	350	260	180
84	390	0.70	260	190	130
96	340	0.92	200	150	100
108	300	1.15	160	120	80
120	270	1.42	130	90	60
144	230	2.09	90	70	40
168	190	2.75	60	50	30
192	170	3.67	50	40	NR
216	150	4.61	40	30	NR
240	140	5.90	30	NR	NR

P1101 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	2,180*	0.02	2,180*	2,180*	2,180*
36	2,180*	0.06	2,180*	2,180*	2,180*
48	1,890	0.13	1,890	1,890	1,890
60	1,510	0.20	1,510	1,510	1,280
72	1,260	0.28	1,260	1,260	890
84	1,080	0.39	1,080	980	650
96	950	0.51	950	750	500
108	840	0.64	790	590	400
120	760	0.79	640	480	320
144	630	1.13	440	330	220
168	540	1.54	330	250	160
192	470	2.00	250	190	130
216	420	2.55	200	150	100
240	380	3.16	160	120	80

P1100 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
24	2,800	8,040	7,330	6,360	5,430
36	2,410	6,480	5,430	4,190	3,210
48	1,940	4,990	3,830	2,760	2,160
60	1,550	3,740	2,760	2,050	1,640
72	1,290	2,860	2,160	1,640	1,320
84	1,100	2,310	1,780	1,370	1,110
96	950	1,950	1,520	1,180	950
108	840	1,690	1,320	1,030	**
120	760	1,490	1,180	**	**
144	630	1,210	950	**	**

P1101 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
24	5,010	18,250	17,700	16,880	16,030
36	4,860	16,990	16,030	14,770	13,620
48	4,700	15,610	14,380	12,930	11,750
60	4,480	14,280	12,930	11,490	9,290
72	4,210	13,100	11,750	9,290	6,700
84	3,880	12,090	10,220	7,090	4,930
96	3,480	11,170	8,390	5,430	3,770
108	3,060	9,640	6,700	4,290	2,980
120	2,680	8,170	5,430	3,480	**
144	2,090	5,710	3,770	**	**

P1100/P1101 - Elements of Section

Parameter		P1100		P1101	
Area of Section		0.418	In^2	0.835	In^2
Axis 1-1					
	Moment of Inertia (I)	0.145	In^4	0.733	In^4
	Section Modulus (S)	0.162	In^3	0.451	In^3
	Radius of Gyration (r)	0.589	In	0.937	In
Axis 2-2					
	Moment of Inertia (I)	0.176	In^4	0.353	In^4
	Section Modulus (S)	0.217	In^3	0.434	In^3
	Radius of Gyration (r)	0.650	In	0.650	In

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to Page 62 for reduction factors for unbraced lengths.
3. For pierced channel, multiply beam loads by the following factor:

"KO" Series.....95% **"T" Series 85%**
"HS" Series .....90% **"SL" Series.....85%**
"WT" Series.....85%

4. Deduct channel weight from the beam loads.
5. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
6. All beam loads are for bending about Axis 1-1.

P1100 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
600	6.1	1	6.1	6.1	6.1
750	4.9	2	4.9	4.9	4.7
1,000	3.7	4	3.7	3.7	2.6
1,250	2.9	6	2.9	2.5	1.7
1,500	2.4	9	2.3	1.7	1.2
1,750	2.1	12	1.7	1.3	0.8
2,000	1.8	15	1.3	1.0	0.7
2,500	1.5	24	0.8	0.6	0.4
3,000	1.2	36	0.6	0.4	0.3
3,500	1.1	49	0.4	0.3	0.2
4,000	0.9	64	0.3	0.3	0.2
4,500	0.8	77	0.3	0.2	0.1
5,000	0.8	100	0.2	0.2	NR
6,000	0.6	143	0.1	NR	NR

P1101 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
600	9.7 *	0	9.7 *	9.7 *	9.7 *
750	9.7 *	1	9.7 *	9.7 *	9.7 *
1,000	9.7 *	2	9.7 *	9.7 *	9.7 *
1,250	8.2	3	8.2	8.2	8.2
1,500	6.9	5	6.9	6.9	5.9
1,750	5.9	7	5.9	5.9	4.3
2,000	5.1	9	5.1	5.0	3.3
2,500	4.1	13	4.1	3.2	2.1
3,000	3.4	19	2.9	2.2	1.5
3,500	2.9	26	2.2	1.6	1.1
4,000	2.6	35	1.6	1.2	0.8
4,500	2.3	43	1.3	1.0	0.7
5,000	2.0	54	1.1	0.8	0.5
6,000	1.7	77	0.8	0.5	0.4

P1100 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
600	12.5	35.9	32.9	28.6	24.5
750	11.8	32.6	28.6	23.5	19.0
1,000	10.1	26.9	22.0	16.4	12.5
1,250	8.5	21.6	16.4	11.8	9.3
1,500	7.0	17.0	12.5	9.3	7.4
1,750	6.0	13.5	10.1	7.7	6.2
2,000	5.2	11.2	8.6	6.5	5.3
2,250	4.6	9.6	7.4	5.7	4.7
2,500	4.1	8.4	6.5	5.1	**
2,750	3.7	7.5	5.9	4.5	**

P1101 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
600	22.3	81.4	79.0	75.4	71.7
750	22.0	78.7	75.4	70.7	66.1
1,000	21.4	73.8	69.2	63.3	58.0
1,250	20.8	68.8	63.3	56.8	51.6
1,500	20.0	64.0	58.0	51.6	42.3
1,750	19.0	59.5	53.5	44.0	32.6
2,000	18.0	55.6	49.2	35.7	25.0
2,250	16.6	52.3	42.3	28.4	19.7
2,500	15.1	48.3	35.7	23.0	16.0
2,750	13.6	42.7	29.7	19.0	13.2

P1100/P1101 - Elements of Section *(metric)*

Parameter		P1100		P1101	
Area of Section		2.69	cm^2	5.39	cm^2
Axis 1-1					
	Moment of Inertia (I)	6.03	cm^4	30.51	cm^4
	Section Modulus (S)	2.65	cm^3	7.39	cm^3
	Radius of Gyration (r)	1.50	cm	2.38	cm
Axis 2-2					
	Moment of Inertia (I)	7.34	cm^4	14.69	cm^4
	Section Modulus (S)	3.56	cm^3	7.12	cm^3
	Radius of Gyration (r)	1.65	cm	1.65	cm

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to Page 62 for reduction factors for unbraced lengths.
3. For pierced channel, multiply beam loads by the following factor:

"KO" Series.....95% **"T" Series 85%**
"HS" Series .....90% **"SL" Series.....85%**
"WT" Series.....85%

4. Deduct channel weight from the beam loads.
5. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
6. All beam loads are for bending about Axis 1-1.

Atkore Unistrut

P2000

GR PG

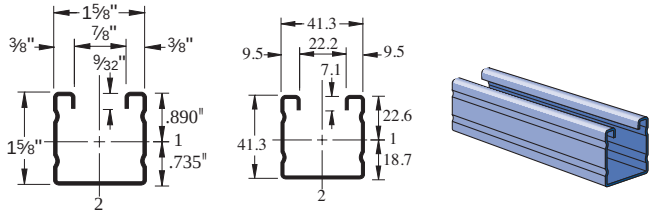

Wt/100 Ft: 116 Lbs (173 kg/100 m)
Allowable Moment 3,520 In-Lbs (400 N•m)
16 Gauge Nominal Thickness .060" (1.5mm)

P2001

GR PG

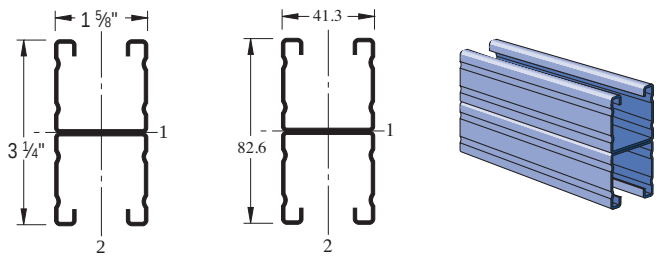

Wt/100 Ft: 232 Lbs (346 kg/100 m)
Allowable Moment 9,570 In-Lbs (1,080 N•m)
16 Gauge Nominal Thickness .060" (1.5mm)

P2001 A

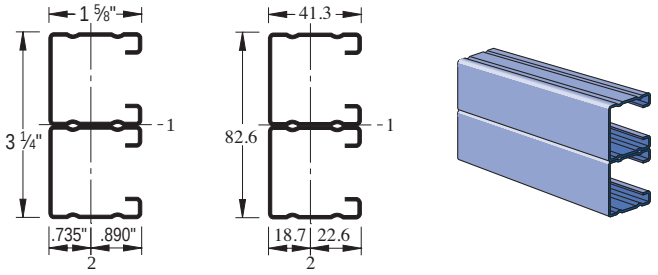

Wt/100 Ft: 232 Lbs (346 kg/100 m)
Allowable Moment 11,660 In-Lbs (1,320 N•m)
16 Gauge Nominal Thickness .060" (1.5mm)

P2001 B

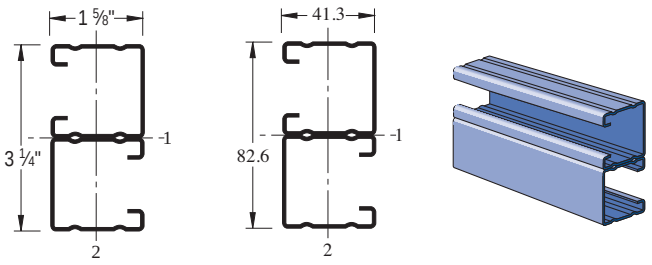

Wt/100 Ft: 232 Lbs (346 kg/100 m)
Allowable Moment 11,660 In-Lbs (1,320 N•m)
16 Gauge Nominal Thickness .060" (1.5mm)

P2001 C

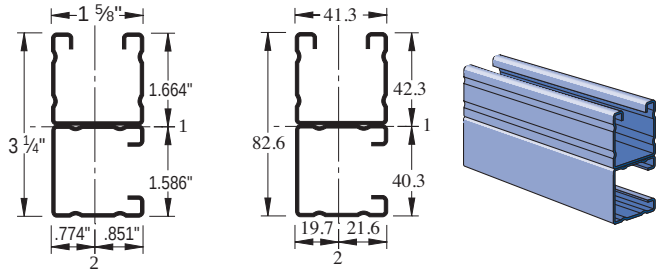

Wt/100 Ft: 232 Lbs (346 kg/100 m)
Allowable Moment 10,350 In-Lbs (1,170 N•m)
16 Gauge Nominal Thickness .060" (1.5mm)

P2000 HS

GR PG

9/16" (14.3) Dia. Holes
1 ⅞" (47.6) on Center



Wt/100 Ft: 113 Lbs (168 kg/100 m)

P2000 KO

GR PG

⅞" (22.2) Knockouts
6" (152.4) on Center



Wt/100 Ft: 117 Lbs (174 kg/100 m)

P2000 SL

GR PG

Slots are
3" (76.2) x 13/32" (10.3)
4" (101.6) on Center



Wt/100 Ft: 113 Lbs (168 kg/100 m)

P2000 T

GR PG

Slots are
1⅛" (28.6) x 9/16" (14.3)
2" (50.8) on Center



Wt/100 Ft: 113 Lbs (168 kg/100 m)

P2000 WT

DF GR HG PG PL

Slots are
1⅛" (28.6) x 9/16" (14.3)
2" (50.8) on Center



Wt/100 Ft: 113 Lbs (168 kg/100 m)

Channel Nuts (Refer to Pages 73,74 for Details)

See Page 73, 74



P1006-0832
P1006-1024
P1006-1420
P1007
P1008
P1009
P1010

P1008T
P1006T1420
P1010T



P1024
P1012S
P1023S

P1012
P1023
P1024S

P3006-0832
P3006-1024
P3006-1420
P3007
P3008
P3009
P3010

P3016-0632
P3016-0832
P3016-1024
P3016-1420

Channel Finishes: PL, GR, HG, PG, ZD; Standard Lengths: 10' & 20'

P2000 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	1,170	0.06	1,170	1,170	1,170
36	780	0.13	780	780	610
48	590	0.23	590	510	340
60	470	0.36	440	330	220
72	390	0.52	300	230	150
84	340	0.71	220	170	110
96	290	0.91	170	130	90
108	260	1.16	130	100	70
120	230	1.41	110	80	50
144	200	2.12	80	60	40
168	170	2.86	60	40	30
192	150	3.76	40	30	20
216	130	4.64	30	30	NR
240	120	5.88	30	NR	NR

P2001 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	1,610*	0.02	1,610*	1,610*	1,610*
36	1,610*	0.05	1,610*	1,610*	1,610*
48	1,600	0.13	1,600	1,600	1,600
60	1,280	0.20	1,280	1,280	1,080
72	1,060	0.28	1,060	1,060	750
84	910	0.38	910	830	550
96	800	0.51	800	630	420
108	710	0.64	670	500	330
120	640	0.79	540	410	270
144	530	1.13	380	280	190
168	460	1.56	280	210	140
192	400	2.02	210	160	110
216	350	2.52	170	130	80
240	320	3.16	140	100	70

P2000 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
24	2,400	6,650	6,080	5,280	4,470
36	2,050	5,380	4,470	3,370	2,500
48	1,600	4,090	3,040	2,100	1,590
60	1,230	2,960	2,100	1,500	1,160
72	970	2,190	1,590	1,160	910
84	790	1,720	1,270	950	760
96	660	1,410	1,060	800	650
108	570	1,200	910	700	**
120	510	1,040	800	620	**
144	420	830	650	**	**

P2001 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
24	4,200	15,030	14,600	13,940	13,220
36	4,070	14,030	13,220	12,090	10,990
48	3,920	12,850	11,720	10,290	9,040
60	3,700	11,630	10,290	8,760	7,530
72	3,410	10,460	9,040	7,530	5,740
84	3,140	9,410	7,990	6,080	4,220
96	2,890	8,490	7,120	4,650	3,230
108	2,530	7,700	5,740	3,680	2,550
120	2,210	6,950	4,650	2,980	**
144	1,690	4,890	3,230	**	**

P2000/P2001 - Elements of Section

Parameter		P2000		P2001	
Area of Section		0.342	In^2	0.684	In^2
Axis 1-1					
	Moment of Inertia (I)	0.125	In^4	0.618	In^4
	Section Modulus (S)	0.140	In^3	0.381	In^3
	Radius of Gyration (r)	0.604	In	0.951	In
Axis 2-2					
	Moment of Inertia (I)	0.151	In^4	0.302	In^4
	Section Modulus (S)	0.186	In^3	0.372	In^3
	Radius of Gyration (r)	0.665	In	0.665	In

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to Page 62 for reduction factors for unbraced lengths.
3. For pierced channel, multiply beam loads by the following factor:

"KO" Series.....95% **"T" Series 85%**
"HS" Series .....90% **"SL" Series.....85%**
"WT" Series.....85%

4. Deduct channel weight from the beam loads.
5. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
6. All beam loads are for bending about Axis 1-1.

P2000 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
600	5.3	1	5.3	5.3	5.3
750	4.2	2	4.2	4.2	4.0
1,000	3.2	4	3.2	3.2	2.3
1,250	2.5	6	2.5	2.2	1.4
1,500	2.1	9	2.0	1.5	1.0
1,750	1.8	12	1.5	1.1	0.8
2,000	1.6	16	1.1	0.8	0.6
2,500	1.3	25	0.7	0.5	0.4
3,000	1.1	36	0.5	0.4	0.3
3,500	0.9	47	0.4	0.3	0.2
4,000	0.8	63	0.3	0.2	0.1
4,500	0.7	80	0.2	0.2	0.1
5,000	0.6	96	0.2	0.1	0.1
6,000	0.5	142	0.1	NR	NR

P2001 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
600	7.2 *	0	7.2 *	7.2 *	7.2 *
750	7.2 *	1	7.2 *	7.2 *	7.2 *
1,000	7.2 *	2	7.2 *	7.2 *	7.2 *
1,250	6.9	3	6.9	6.9	6.9
1,500	5.8	5	5.8	5.8	5.0
1,750	4.9	7	4.9	4.9	3.6
2,000	4.3	9	4.3	4.2	2.8
2,500	3.5	13	3.5	2.7	1.8
3,000	2.9	19	2.5	1.9	1.2
3,500	2.5	27	1.8	1.4	0.9
4,000	2.2	35	1.4	1.1	0.7
4,500	1.9	43	1.1	0.8	0.5
5,000	1.7	54	0.9	0.7	0.4
6,000	1.4	76	0.6	0.4	0.3

P2000 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
600	10.7	29.8	27.3	23.8	20.2
750	10.1	27.0	23.8	19.3	15.3
1,000	8.5	22.3	18.0	12.9	9.6
1,250	6.9	17.6	12.9	9.0	6.8
1,500	5.6	13.5	9.6	6.8	5.2
1,750	4.6	10.5	7.6	5.5	4.3
2,000	3.8	8.5	6.2	4.6	3.6
2,250	3.3	7.1	5.2	4.0	3.2
2,500	2.8	6.1	4.6	3.5	2.8
2,750	2.5	5.3	4.1	3.1	**

P2001 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
600	18.7	67.0	65.1	62.2	59.1
750	18.4	64.9	62.2	58.3	54.2
1,000	17.9	61.0	56.9	51.5	46.3
1,250	17.3	56.6	51.5	45.0	39.5
1,500	16.5	52.1	46.3	39.5	34.0
1,750	15.5	47.9	41.6	34.8	27.9
2,000	14.5	43.9	37.5	30.4	21.3
2,250	13.6	40.2	34.0	24.3	16.9
2,500	12.5	37.0	30.4	19.7	13.7
2,750	11.3	34.2	25.4	16.3	11.3

P2000/P2001 - Elements of Section (metric)

Parameter		P2000		P2001	
Area of Section		2.21	cm^2	4.41	cm^2
Axis 1-1					
	Moment of Inertia (I)	5.19	cm^4	25.74	cm^4
	Section Modulus (S)	2.29	cm^3	6.24	cm^3
	Radius of Gyration (r)	1.53	cm	2.42	cm
Axis 2-2					
	Moment of Inertia (I)	6.29	cm^4	12.58	cm^4
	Section Modulus (S)	3.05	cm^3	6.10	cm^3
	Radius of Gyration (r)	1.69	cm	1.69	cm

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to page 62 for reduction factors for unbraced lengths.
3. For pierced channel, multiply beam loads by the following factor:

"KO" Series.....95% **"T" Series 85%**
"HS" Series .....90% **"SL" Series.....85%**
"WT" Series.....85%

4. Deduct channel weight from the beam loads.
5. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
6. All beam loads are for bending about Axis 1-1.

P3000

GR PG







Wt/100 Ft: 170 Lbs (253 kg/100 m)
Allowable Moment 3,840 In-Lbs (430 N•m)
12 Gauge Nominal Thickness .105" (2.7mm)

P3001

GR PG







Wt/100 Ft: 340 Lbs (506 kg/100 m)
Allowable Moment 10,810 In-Lbs (1,220 N•m)
12 Gauge Nominal Thickness .105" (2.7mm)

P3000 HS

GR PG

9/16" (14.3) Dia. Holes
1 7/8" (47.6) on Center



Wt/100 Ft: 165 Lbs (246 kg/100 m)

P3000 KO

GR PG

7/8" (22.2) Knockouts
6" (152.4) on Center



Wt/100 Ft: 170 Lbs (253 kg/100 m)

P3000 SL

GR PG

Slots are
3" (76.2) x 13/32" (10.3)
4" (101.6) on Center



Wt/100 Ft: 165 Lbs (246 kg/100 m)

P3000 T

GR PG

Slots are
1⅛" (28.6) x 9/16" (14.3)
2" (50.8) on Center



Wt/100 Ft: 165 Lbs (246 kg/100 m)

P3000 WT

DF GR HG PG PL

Slots are
2" (50.8) x 11/16" (17.5)
3" (76.2) on Center



Wt/100 Ft: 165 Lbs (246 kg/100 m)

Channel Nuts (Refer to Pages 73,74 for Details)

See Page 73, 74

P1006-0832
P1006-1024
P1006-1420
P1007
P1008
P1009
P1010

P1008T
P1006T1420
P1010T

P1024
P1012S
P1023S

P1012
P1023
P1024S

P3006-0832
P3006-1024
P3006-1420
P3007
P3008
P3009
P3010

P3016-0632
P3016-0832
P3016-1024
P3016-1420

Channel Finishes: PL, GR, HG, PG, ZD; Standard Lengths: 10' & 20'

Atkore Unistrut

P3000 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	1,280	0.07	1,280	1,280	1,280
36	850	0.15	850	850	580
48	640	0.26	640	490	330
60	510	0.41	420	310	210
72	430	0.59	290	220	150
84	370	0.81	210	160	110
96	320	1.05	160	120	80
108	280	1.30	130	100	60
120	260	1.66	100	80	50
144	210	2.32	70	50	40
168	180	3.15	50	40	30
192	160	4.18	40	30	NR
216	140	5.21	NR	NR	NR
240	130	6.64	NR	NR	NR

P3001 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	2,960*	0.03	2,960*	2,960*	2,960*
36	2,400	0.08	2,400	2,400	2,400
48	1,800	0.15	1,800	1,800	1,610
60	1,440	0.23	1,440	1,440	1,030
72	1,200	0.33	1,200	1,080	720
84	1,030	0.46	1,030	790	530
96	900	0.59	810	610	400
108	800	0.75	640	480	320
120	720	0.93	520	390	260
144	600	1.34	360	270	180
168	510	1.81	260	200	130
192	450	2.38	200	150	100
216	400	3.01	160	120	80
240	360	3.72	130	100	NR

P3000 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
24	3,180	9,690	8,980	8,050	7,210
36	2,920	8,160	7,210	6,130	5,240
48	2,590	6,820	5,810	4,730	3,860
60	2,300	5,740	4,730	3,690	2,990
72	2,040	4,850	3,860	2,990	2,270
84	1,830	4,100	3,240	2,400	**
96	1,650	3,530	2,770	1,840	**
108	1,450	3,080	2,270	**	**
120	1,250	2,710	1,840	**	**

P3001 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
24	5,740	21,780	21,200	20,430	19,720
36	5,620	20,520	19,720	18,830	17,680
48	5,520	19,400	18,570	16,570	14,260
60	5,330	18,510	16,570	13,670	10,810
72	5,030	16,850	14,260	10,810	7,730
84	4,630	14,990	11,930	8,180	5,680
96	4,190	13,090	9,720	6,260	4,350
108	3,720	11,230	7,730	4,950	**
120	3,300	9,460	6,260	4,010	**
144	2,620	6,590	4,350	**	**

P3000/P3001 - Elements of Section

Parameter		P3000		P3001	
Area of Section		0.500	In^2	1.000	In^2
Axis 1-1					
	Moment of Inertia (I)	0.120	In^4	0.591	In^4
	Section Modulus (S)	0.153	In^3	0.430	In^3
	Radius of Gyration (r)	0.489	In	0.769	In
Axis 2-2					
	Moment of Inertia (I)	0.203	In^4	0.407	In^4
	Section Modulus (S)	0.250	In^3	0.501	In^3
	Radius of Gyration (r)	0.638	In	0.638	In

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to Page 62 for reduction factors for unbraced lengths.
3. For pierced channel, multiply beam loads by the following factor:

"KO" Series.....95% **"T" Series 85%**
"HS" Series .....90% **"SL" Series.....85%**
"WT" Series.....85%

4. Deduct channel weight from the beam loads.
5. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
6. All beam loads are for bending about Axis 1-1.

P3000 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
600	5.8	2	5.8	5.8	5.8
750	4.6	3	4.6	4.6	3.8
1,000	3.5	4	3.5	3.2	2.2
1,250	2.8	7	2.8	2.1	1.4
1,500	2.3	10	1.9	1.4	1.0
1,750	2.0	14	1.4	1.1	0.7
2,000	1.7	18	1.1	0.8	0.5
2,500	1.4	28	0.7	0.5	0.4
3,000	1.2	40	0.5	0.4	0.2
3,500	1.0	54	0.4	0.3	0.2
4,000	0.9	73	0.3	0.2	0.1
4,500	0.8	89	0.2	0.2	NR
5,000	0.7	115	0.2	0.1	NR
6,000	0.6	161	NR	NR	NR

P3001 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
600	13.2 *	1	13.2 *	13.2 *	13.2 *
750	13.0	1	13.0	13.0	13.0
1,000	9.8	3	9.8	9.8	9.8
1,250	7.8	4	7.8	7.8	6.9
1,500	6.5	6	6.5	6.5	4.8
1,750	5.6	8	5.6	5.2	3.5
2,000	4.9	10	4.9	4.0	2.7
2,500	3.9	16	3.4	2.6	1.7
3,000	3.2	23	2.4	1.8	1.2
3,500	2.8	31	1.7	1.3	0.9
4,000	2.4	41	1.3	1.0	0.7
4,500	2.2	52	1.1	0.8	0.5
5,000	2.0	64	0.8	0.6	0.4
6,000	1.6	92	0.6	0.4	0.3

P3000 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
600	14.2	43.3	40.2	36.1	32.4
750	13.6	39.9	36.1	31.5	27.6
1,000	12.5	34.5	30.2	25.3	21.3
1,250	11.4	29.8	25.3	20.5	16.7
1,500	10.3	25.8	21.3	16.7	13.6
1,750	9.4	22.5	18.1	14.0	11.0
2,000	8.5	19.6	15.5	11.9	8.5
2,250	7.8	17.2	13.6	9.6	**
2,500	7.2	15.3	11.9	**	**
2,750	6.4	13.7	10.1	**	**

P3001 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
600	25.5	97.1	94.5	91.1	88.0
750	25.3	94.3	91.1	87.3	84.0
1,000	24.9	89.8	86.1	82.2	74.5
1,250	24.6	85.8	82.2	72.4	61.8
1,500	23.8	82.6	74.5	61.8	49.2
1,750	22.8	77.0	66.1	51.3	37.5
2,000	21.4	70.3	57.6	41.3	28.7
2,250	19.9	63.4	49.2	32.7	22.7
2,500	18.2	56.5	41.3	26.5	18.4
2,750	16.5	49.8	34.2	21.9	**

P3000/P3001 - Elements of Section (metric)

Parameter		P3000		P3001	
Area of Section		3.23	cm^2	6.45	cm^2
Axis 1-1					
	Moment of Inertia (I)	4.97	cm^4	24.61	cm^4
	Section Modulus (S)	2.51	cm^3	7.05	cm^3
	Radius of Gyration (r)	1.24	cm	1.95	cm
Axis 2-2					
	Moment of Inertia (I)	8.47	cm^4	16.93	cm^4
	Section Modulus (S)	4.10	cm^3	8.20	cm^3
	Radius of Gyration (r)	1.62	cm	1.62	cm

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to Page 62 for reduction factors for unbraced lengths.
3. For pierced channel, multiply beam loads by the following factor:

"KO" Series.....95% **"T" Series 85%**
"HS" Series .....90% **"SL" Series.....85%**
"WT" Series.....85%

4. Deduct channel weight from the beam loads.
5. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
6. All beam loads are for bending about Axis 1-1.

Atkore Unistrut

P3300

DF GR PG PL







Wt/100 Ft: 134 Lbs (200 kg/100 m)
Allowable Moment 1,800 In-Lbs (200 N•m)
12 Gauge Nominal Thickness .105" (2.7mm)

P3301

DF GR PG







Wt/100 Ft: 269 Lbs (400 kg/100 m)
Allowable Moment 5,060 In-Lbs (570 N•m)
12 Gauge Nominal Thickness .105" (2.7mm)

P3300 HS

GR PG

9/16" (14.3) Dia. Holes
1 7/8" (47.6) on Center



Wt/100 Ft: 130 Lbs (193 kg/100 m)

P3300 T

DF GR PG

Slots are
1 1/8" (28.6) x 9/16" (14.3)
2" (50.8) on Center



Wt/100 Ft: 130 Lbs (193 kg/100 m)

P3300 SL

GR PG

Slots are
3" (76.2) x 13/32" (10.3)
4" (101.6) on Center



Wt/100 Ft: 130 Lbs (193 kg/100 m)

P3300 WT

DF GR HG PG PL

Slots are
2" (50.8) x 11/16" (17.5)
3" (76.2) on Center



Wt/100 Ft: 130 Lbs (193 kg/100 m)

Channel Nuts (Refer to Pages 73,74 for Details)

See Page 73, 74

P4006-0832
P4006-1024
P4006-1420
P4007
P4008
P4009
P4010

P4010T

P4012
P4023

P3006-0832
P3006-1024
P3006-1420
P3007
P3008
P3009
P3013

P3016-0632
P3016-0832
P3016-1024
P3016-1420

Channel Finishes: DF, PL, GR, HG, PG, ZD; Standard Lengths: 10' & 20'

P3300 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	600	0.10	600	600	400
36	400	0.22	360	270	180
48	300	0.40	200	150	100
60	240	0.62	130	100	60
72	200	0.89	90	70	40
84	170	1.20	70	50	30
96	150	1.59	50	40	30
108	130	1.96	40	30	20
120	120	2.48	30	20	20

P3301 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	1,690	0.06	1,690	1,690	1,690
36	1,130	0.13	1,130	1,130	860
48	840	0.23	840	720	480
60	680	0.37	620	460	310
72	560	0.52	430	320	210
84	480	0.71	310	240	160
96	420	0.93	240	180	120
108	380	1.20	190	140	100
120	340	1.47	150	120	80
144	280	2.09	110	80	50

P3300 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
24	2,360	7,740	7,260	6,350	5,390
36	2,120	6,470	5,390	3,990	2,810
48	1,760	4,910	3,550	2,270	1,580
60	1,380	3,440	2,270	1,460	**
72	1,080	2,390	1,580	**	**

P3301 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
24	4,290	16,990	16,580	15,770	14,720
36	4,150	15,890	14,720	12,980	11,120
48	3,940	14,160	12,360	9,880	7,510
60	3,650	12,210	9,880	6,940	4,820
72	3,270	10,190	7,510	4,820	3,350
84	2,800	8,220	5,530	3,540	**
96	2,410	6,420	4,240	**	**
108	2,080	5,070	3,350	**	**

P3300/P3301 - Elements of Section

Parameter		P3300		P3301	
Area of Section		0.395	In^2	0.790	In^2
Axis 1-1					
	Moment of Inertia (I)	0.037	In^4	0.176	In^4
	Section Modulus (S)	0.072	In^3	0.201	In^3
	Radius of Gyration (r)	0.306	In	0.472	In
Axis 2-2					
	Moment of Inertia (I)	0.143	In^4	0.285	In^4
	Section Modulus (S)	0.176	In^3	0.351	In^3
	Radius of Gyration (r)	0.601	In	0.601	In

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to Page 62 for reduction factors for unbraced lengths.
3. For pierced channel, multiply beam loads by the following factor:

"KO" Series.....95% **"T" Series 85%**
"HS" Series .....90% **"SL" Series.....85%**
"WT" Series.....85%

4. Deduct channel weight from the beam loads.
5. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
6. All beam loads are for bending about Axis 1-1.

P3300 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
600	2.7	2	2.7	2.7	1.9
750	2.2	4	2.2	1.8	1.2
1,000	1.6	7	1.3	1.0	0.7
1,250	1.3	10	0.8	0.6	0.4
1,500	1.1	15	0.6	0.4	0.3
1,750	0.9	21	0.4	0.3	0.2
2,000	0.8	27	0.3	0.3	0.2
2,500	0.7	43	0.2	0.2	0.1
3,000	0.5	60	0.1	0.1	0.1
3,500	0.4	79	0.1	0.1	NR

P3301 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
600	7.6	1	7.6	7.6	7.6
750	6.1	2	6.1	6.1	5.6
1,000	4.6	4	4.6	4.6	3.2
1,250	3.6	6	3.6	3.1	2.0
1,500	3.1	9	2.8	2.1	1.4
1,750	2.6	12	2.1	1.6	1.0
2,000	2.3	16	1.6	1.2	0.8
2,500	1.8	25	1.0	0.8	0.5
3,000	1.5	36	0.7	0.5	0.4
3,500	1.3	48	0.5	0.4	0.3
4,000	1.2	65	0.4	0.3	0.2

P3300 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
600	10.5	34.6	32.6	28.6	24.4
750	10.1	32.3	28.6	23.3	18.2
1,000	9.1	26.9	21.6	15.0	10.5
1,250	7.6	21.2	15.0	9.6	6.7
1,500	6.3	15.8	10.5	6.7	**
1,750	5.1	11.6	7.6	**	**

P3301 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kg
600	19.1	75.7	73.9	70.5	66.0
750	18.9	73.8	70.5	64.7	58.4
1,000	18.2	68.6	62.7	53.9	44.8
1,250	17.4	62.1	53.9	42.6	31.9
1,500	16.4	55.0	44.8	31.9	22.2
1,750	15.0	47.6	36.0	23.4	16.3
2,000	13.3	40.3	28.0	17.9	**
2,250	11.8	33.4	22.2	14.1	**
2,500	10.4	27.2	17.9	**	**
2,750	9.2	22.5	14.8	**	**

P3300/P3301 - Elements of Section (metric)

Parameter	P3300		P3301	
Area of Section	2.55	cm^2	5.10	cm^2
Axis 1-1				
Moment of Inertia (I)	1.54	cm^4	7.33	cm^4
Section Modulus (S)	1.18	cm^3	3.30	cm^3
Radius of Gyration (r)	0.78	cm	1.20	cm
Axis 2-2				
Moment of Inertia (I)	5.94	cm^4	11.87	cm^4
Section Modulus (S)	2.88	cm^3	5.75	cm^3
Radius of Gyration (r)	1.53	cm	1.53	cm

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to Page 62 for reduction factors for unbraced lengths.
3. For pierced channel, multiply beam loads by the following factor:

"KO" Series.....95% **"T" Series 85%**
"HS" Series .....90% **"SL" Series.....85%**
"WT" Series.....85%

4. Deduct channel weight from the beam loads.
5. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
6. All beam loads are for bending about Axis 1-1.

P4000

HG PG GR

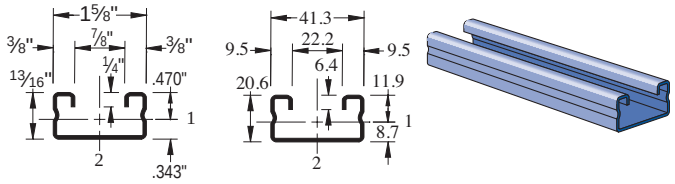

Wt/100 Ft: 83 Lbs (123 kg/100 m)
Allowable Moment 1,230 In-Lbs (140 N•m)
16 Gauge Nominal Thickness .060" (1.5mm)

P4001

GR PG

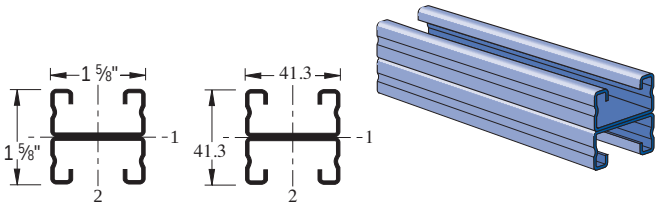

Wt/100 Ft: 166 Lbs (246 kg/100 m)
Allowable Moment 3,210 In-Lbs (360 N•m)
16 Gauge Nominal Thickness .060" (1.5mm)

P4003

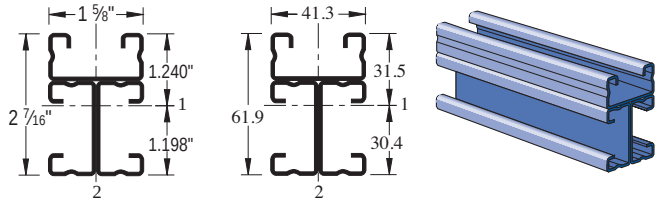

Wt/100 Ft: 248 Lbs (370 kg/100 m)
Allowable Moment 8,600 In-Lbs (970 N•m)
16 Gauge Nominal Thickness .060" (1.5mm)

P4004

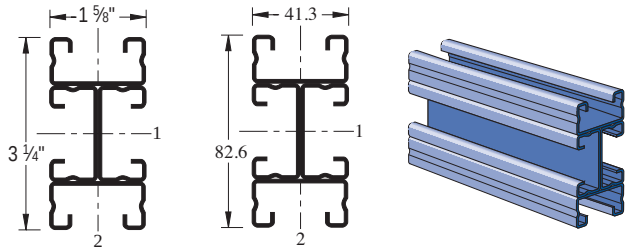

Wt/100 Ft: 331 Lbs (493 kg/100 m)
Allowable Moment 13,650 In-Lbs (1,540 N•m)
16 Gauge Nominal Thickness .060" (1.5mm)

P4000 HS

GR PG



Wt/100 Ft: 79 Lbs (118 kg/100 m)

P4000 T

GR PG



Wt/100 Ft: 79 Lbs (118 kg/100 m)

P4000 SL

GR PG



Wt/100 Ft: 79 Lbs (118 kg/100 m)

P4000 WT

DF GR HG PG PL



Wt/100 Ft: 79 Lbs (118 kg/100 m)

Channel Nuts (Refer to Pages 73,74 for Details)

See Page 73, 74

P4006-0832
P4006-1024
P4006-1420
P4007
P4008
P4009
P4010

P4010T

P4012
P4023

P3006-0832
P3006-1024
P3006-1420
P3007
P3008
P3009
P3013

P3016-0632
P3016-0832
P3016-1024
P3016-1420

Channel Finishes: PL, GR, HG, PG, ZD; Standard Lengths: 10' & 20'

P4000 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	410	0.11	410	370	250
36	270	0.24	220	170	110
48	200	0.43	120	90	60
60	160	0.67	80	60	40
72	140	1.01	60	40	30
84	120	1.38	40	30	20
96	100	1.72	30	20	20
108	90	2.20	20	20	10
120	80	2.68	20	10	10

P4001 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	810*	0.05	810*	810*	810*
36	710	0.14	710	710	500
48	540	0.25	540	430	280
60	430	0.40	360	270	180
72	360	0.57	250	190	130
84	310	0.78	190	140	90
96	270	1.02	140	110	70
108	240	1.29	110	80	60
120	210	1.54	90	70	50
144	180	2.29	60	50	30

P4000 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
24	1,630	4,670	4,290	3,780	3,310
36	1,450	3,840	3,310	2,460	1,730
48	1,160	3,030	2,190	1,400	970
60	870	2,120	1,400	900	**
72	670	1,470	970	**	**

P4001 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
24	2,830	10,390	10,000	9,470	8,960
36	2,740	9,530	8,960	7,870	6,700
48	2,590	8,620	7,480	5,910	4,440
60	2,340	7,380	5,910	4,090	2,840
72	2,020	6,110	4,440	2,840	1,970
84	1,700	4,880	3,260	2,090	**
96	1,440	3,780	2,500	**	**
108	1,230	2,990	1,970	**	**

P4000/P4001 - Elements of Section

Parameter		P4000		P4001	
Area of Section		0.244	In^2	0.487	In^2
Axis 1-1					
	Moment of Inertia (I)	0.023	In^4	0.104	In^4
	Section Modulus (S)	0.049	In^3	0.128	In^3
	Radius of Gyration (r)	0.306	In	0.462	In
Axis 2-2					
	Moment of Inertia (I)	0.092	In^4	0.183	In^4
	Section Modulus (S)	0.113	In^3	0.225	In^3
	Radius of Gyration (r)	0.613	In	0.613	In

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to Page 62 for reduction factors for unbraced lengths.
3. For pierced channel, multiply beam loads by the following factor:

"KO" Series.....95% **"T" Series 85%**
"HS" Series .....90% **"SL" Series.....85%**
"WT" Series.....85%

4. Deduct channel weight from the beam loads.
5. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
6. All beam loads are for bending about Axis 1-1.

P4000 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
600	1.9	3	1.9	1.7	1.2
750	1.5	4	1.5	1.1	0.7
1,000	1.1	8	0.8	0.6	0.4
1,250	0.9	12	0.5	0.4	0.3
1,500	0.8	17	0.4	0.3	0.2
1,750	0.6	23	0.3	0.2	0.1
2,000	0.5	29	0.2	0.1	0.1
2,500	0.4	47	0.1	0.1	NR
3,000	0.4	65	0.1	0.1	NR

P4001 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
600	3.6 *	1	3.6 *	3.6 *	3.6 *
750	3.6 *	2	3.6 *	3.6 *	3.3
1,000	2.9	4	2.9	2.8	1.9
1,250	2.3	7	2.3	1.8	1.2
1,500	2.0	10	1.6	1.2	0.8
1,750	1.6	13	1.2	0.9	0.6
2,000	1.5	17	0.9	0.7	0.5
2,500	1.2	27	0.6	0.4	0.3
3,000	1.0	39	0.4	0.3	0.2
3,500	0.8	54	0.3	0.2	0.1

P4000 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
600	7.2	20.9	19.2	17.0	14.9
750	6.9	19.1	17.0	14.4	11.3
1,000	6.1	16.1	13.3	9.2	6.5
1,250	5.0	13.0	9.2	5.9	4.1
1,500	4.0	9.7	6.5	4.1	**
1,750	3.2	7.2	4.7	**	**

P4001 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
600	12.6	46.3	44.6	42.3	40.0
750	12.4	44.5	42.3	39.5	35.4
1,000	12.1	41.3	38.2	32.6	26.9
1,250	11.4	37.8	32.6	25.4	18.8
1,500	10.5	33.3	26.9	18.8	13.0
1,750	9.4	28.6	21.3	13.8	9.6
2,000	8.1	24.1	16.5	10.5	**
2,250	7.1	19.8	13.0	8.4	**
2,500	6.2	16.0	10.5	**	**
2,750	5.4	13.2	8.7	**	**

P4000/P4001 - Elements of Section (metric)

Parameter		P4000		P4001	
Area of Section		1.57	cm^2	3.14	cm^2
Axis 1-1					
	Moment of Inertia (I)	0.95	cm^4	4.32	cm^4
	Section Modulus (S)	0.80	cm^3	2.09	cm^3
	Radius of Gyration (r)	0.78	cm	1.17	cm
Axis 2-2					
	Moment of Inertia (I)	3.81	cm^4	7.62	cm^4
	Section Modulus (S)	1.85	cm^3	3.69	cm^3
	Radius of Gyration (r)	1.56	cm	1.56	cm

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to Page 62 for reduction factors for unbraced lengths.
3. For pierced channel, multiply beam loads by the following factor:

"KO" Series.....95% **"T" Series 85%**
"HS" Series .....90% **"SL" Series.....85%**
"WT" Series.....85%

4. Deduct channel weight from the beam loads.
5. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
6. All beam loads are for bending about Axis 1-1.

Atkore Unistrut

P4100

DF GR PG

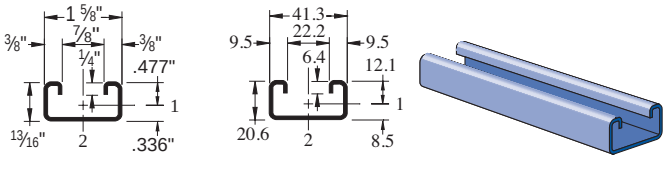

Wt/100 Ft: 98 Lbs (147 kg/100 m)
Allowable Moment 1,360 In-Lbs (150 N•m)
14 Gauge Nominal Thickness .075" (1.9mm)

P4101

DF GR PG

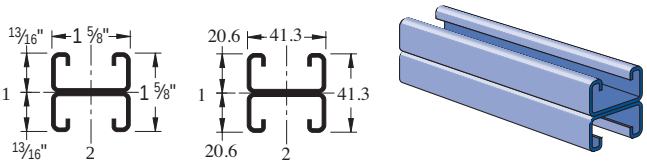

Wt/100 Ft: 197 Lbs (293 kg/100 m)
Allowable Moment 3,610 In-Lbs (410 N•m)
14 Gauge Nominal Thickness .075" (1.9mm)

P4100 HS

GR PG

9/16" (14.3) Dia. Holes
1 7/8" (47.6) on Center



Wt/100 Ft: 87 Lbs (129 kg/100 m)

P4100 T

DF GR PG

Slots are
1⅛" (28.6) x 9/16" (14.3)
2" (50.8) on Center



Wt/100 Ft: 87 Lbs (129 kg/100 m)

P4100 SL

GR PG

Slots are
3" (76.2) x 13/32" (10.3)
4" (101.6) on Center



Wt/100 Ft: 87 Lbs (129 kg/100 m)

P4100 WT

DF GR HG PG PL

Slots are
2" (50.8) x 11/16" (17.5)
3" (76.2) on Center



Wt/100 Ft: 87 Lbs (129 kg/100 m)

P4101 T

Slots are
1⅛" (28.6) x 9/16" (14.3)
2" (50.8) on Center



Wt/100 Ft: 174 Lbs (259 kg/100 m)

P4101 WT

DF GR HG PG PL

Slots are
2" (50.8) x 11/16" (17.5)
3" (76.2) on Center



Wt/100 Ft: 174 Lbs (259 kg/100 m)

Channel Nuts (Refer to Pages 73,74 for Details)

See Page 73, 74

P4006-0832
P4006-1024
P4006-1420
P4007
P4008
P4009
P4010

P4010T

P4012
P4023

P3006-0832
P3006-1024
P3006-1420
P3007
P3008
P3009
P3013

P3016-0632
P3016-0832
P3016-1024
P3016-1420

Channel Finishes: DF, PL, GR, HG, PG, ZD; Standard Lengths: 10' & 20'

P4100 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	450	0.11	450	420	280
36	300	0.24	250	190	130
48	230	0.44	140	110	70
60	180	0.67	90	70	50
72	150	0.96	60	50	30
84	130	1.32	50	30	20
96	110	1.67	40	30	20
108	100	2.16	30	20	10
120	90	2.67	20	20	10
144	80	4.09	20	NR	NR
168	60	4.88	NR	NR	NR
192	60	7.28	NR	NR	NR
216	50	8.64	NR	NR	NR
240	50	11.85	NR	NR	NR

P4101 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	1,090*	0.06	1,090*	1,090*	1,090*
36	800	0.14	800	800	570
48	600	0.25	600	480	320
60	480	0.39	410	310	200
72	400	0.57	280	210	140
84	340	0.76	210	160	100
96	300	1.00	160	120	80
108	270	1.29	130	90	60
120	240	1.57	100	80	50
144	200	2.26	70	50	40
168	170	3.05	50	40	30
192	150	4.02	40	NR	NR
216	130	4.96	NR	NR	NR
240	120	6.28	NR	NR	NR

P4100 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
24	1,840	5,610	5,210	4,570	3,850
36	1,640	4,660	3,850	2,800	1,960
48	1,310	3,490	2,480	1,590	1,100
60	1,000	2,400	1,590	**	**
72	770	1,670	1,100	**	**

P4101 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
24	3,240	12,370	11,950	11,370	10,540
36	3,120	11,470	10,540	9,160	7,720
48	2,940	10,090	8,680	6,770	4,980
60	2,680	8,560	6,770	4,590	3,190
72	2,310	7,010	4,980	3,190	2,220
84	1,950	5,530	3,660	2,340	**
96	1,650	4,250	2,800	**	**
108	1,410	3,360	2,220	**	**

P4100/P4101 - Elements of Section

Parameter		P4100		P4101	
Area of Section		0.290	In^2	0.579	In^2
Axis 1-1					
	Moment of Inertia (I)	0.026	In^4	0.117	In^4
	Section Modulus (S)	0.054	In^3	0.143	In^3
	Radius of Gyration (r)	0.298	In	0.449	In
Axis 2-2					
	Moment of Inertia (I)	0.107	In^4	0.214	In^4
	Section Modulus (S)	0.132	In^3	0.264	In^3
	Radius of Gyration (r)	0.609	In	0.608	In

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to Page 62 for reduction factors for unbraced lengths.
3. For pierced channel, multiply beam loads by the following factor:

"KO" Series.....95% **"T" Series 85%**
"HS" Series .....90% **"SL" Series.....85%**
"WT" Series.....85%

4. Deduct channel weight from the beam loads.
5. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
6. All beam loads are for bending about Axis 1-1.

P4100 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
600	2.0	3	2.0	2.0	1.3
750	1.6	4	1.6	1.2	0.8
1,000	1.2	7	0.9	0.7	0.4
1,250	1.0	11	0.6	0.4	0.3
1,500	0.8	16	0.4	0.3	0.2
1,750	0.7	23	0.3	0.2	0.1
2,000	0.6	30	0.2	0.2	0.1
2,500	0.5	46	0.1	0.1	0.1
3,000	0.4	65	0.1	0.1	NR

P4101 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
600	4.8 *	1	4.8 *	4.8 *	4.8 *
750	4.4	2	4.4	4.4	3.7
1,000	3.2	4	3.2	3.2	2.1
1,250	2.6	7	2.6	2.0	1.3
1,500	2.2	10	1.9	1.4	0.9
1,750	1.9	13	1.4	1.0	0.7
2,000	1.6	17	1.1	0.8	0.5
2,500	1.3	27	0.7	0.5	0.4
3,000	1.1	38	0.5	0.4	0.2
3,500	0.9	53	0.4	0.3	0.2

P4100 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
600	8.2	25.1	23.3	20.6	17.4
750	7.8	23.2	20.6	16.6	12.8
1,000	6.9	19.3	15.3	10.5	7.3
1,250	5.6	15.0	10.5	6.7	4.7
1,500	4.5	11.0	7.3	4.7	**
1,750	3.6	8.1	5.3	**	**

P4101 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
600	14.4	55.1	53.3	50.8	47.2
750	14.2	53.2	50.8	46.3	41.2
1,000	13.7	49.4	44.7	37.8	30.8
1,250	13.0	44.2	37.8	29.1	21.1
1,500	12.0	38.7	30.8	21.1	14.6
1,750	10.7	33.0	24.2	15.5	10.8
2,000	9.3	27.4	18.5	11.9	**
2,250	8.1	22.2	14.6	9.4	**

P4100/P4101 - Elements of Section (metric)

Parameter		P4100		P4101	
Area of Section		1.87	cm^2	3.74	cm^2
Axis 1-1					
	Moment of Inertia (I)	1.07	cm^4	4.85	cm^4
	Section Modulus (S)	0.88	cm^3	2.35	cm^3
	Radius of Gyration (r)	0.76	cm	1.14	cm
Axis 2-2					
	Moment of Inertia (I)	4.46	cm^4	8.93	cm^4
	Section Modulus (S)	2.16	cm^3	4.32	cm^3
	Radius of Gyration (r)	1.55	cm	1.55	cm

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to Page 62 for reduction factors for unbraced lengths.
3. For pierced channel, multiply beam loads by the following factor:

"KO" Series.....95% **"T" Series 85%**
"HS" Series .....90% **"SL" Series.....85%**
"WT" Series.....85%

4. Deduct channel weight from the beam loads.
5. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
6. All beam loads are for bending about Axis 1-1.

P4400

GR PG



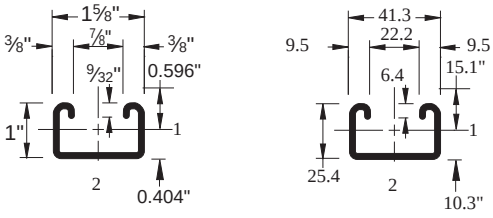

Wt/100 Ft: 144 Lbs (210 kg/100 m)
Allowable Moment 2,300 In-Lbs (260 N•m)
12 Gauge Nominal Thickness .105" (2.7mm)

P4401

GR PG



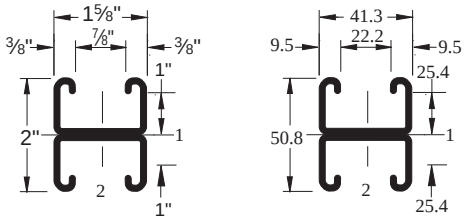

Wt/100 Ft: 289 Lbs (430 kg/100 m)
Allowable Moment 6,410 In-Lbs (725 N•m)
12 Gauge Nominal Thickness .105" (2.7mm)

P4400 HS

GR PG

9/16" (14.3) Dia. Holes
1 ⅞" (47.6) on Center



Wt/100 Ft: 136 Lbs (201 kg/100 m)

P4400 T

GR PG

Slots are
1⅛" (28.6) x 9/16" (14.3)
2" (50.8) on Center



Wt/100 Ft: 136 Lbs (201 kg/100 m)

P4400 SL

GR PG

Slots are
3" (76.2) x 13/32" (10.3)
4" (101.6) on Center



Wt/100 Ft: 136 Lbs (201 kg/100 m)

P4400 WT

DF GR HG PG PL

Slots are
2" (50.8) x 11/16" (17.5)
3" (76.2) on Center



Wt/100 Ft: 136 Lbs (201 kg/100 m)

Channel Nuts (Refer to Pages 73,74 for Details)

See Page 73, 74

P4006-0832
P4006-1024
P4006-1420
P4007
P4008
P4009
P4010

P4010T

P4012
P4023

P3006-0832
P3006-1024
P3006-1420
P3007
P3008
P3009
P3013

P3016-0632
P3016-0832
P3016-1024
P3016-1420

Channel Finishes: PL, GR, HG, PG, ZD; Standard Lengths: 10' & 20'

P4400 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	770	0.09	770	770	580
36	510	0.20	510	390	260
48	380	0.35	290	220	150
60	310	0.56	190	140	90
72	260	0.80	130	100	60
84	220	1.08	90	70	50
96	190	1.39	70	50	40
108	170	1.78	60	40	30
120	150	2.15	50	30	20
144	130	3.22	30	20	20

P4401 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	2,140*	0.05	2,140*	2,140*	2,140*
36	1,420	0.11	1,420	1,420	1,240
48	1,070	0.20	1,070	1,040	700
60	850	0.32	850	670	450
72	710	0.46	620	460	310
84	610	0.63	450	340	230
96	530	0.81	350	260	170
108	470	1.03	280	210	140
120	430	1.29	220	170	110
144	360	1.86	150	120	80
168	310	2.54	110	90	60
192	270	3.31	90	70	NR
216	240	4.19	70	NR	NR
240	210	5.03	60	NR	NR

P4400 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
24	2,620	8,280	7,760	7,140	6,580
36	2,470	7,210	6,580	5,310	4,030
48	2,180	6,200	4,870	3,280	2,280
60	1,770	4,760	3,280	2,100	**
72	1,420	3,450	2,280	**	**
84	1,150	2,530	1,670	**	**
96	**	1,940	**	**	**

P4401 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
24	4,720	18,310	17,840	17,300	16,760
36	4,640	17,360	16,760	15,260	13,610
48	4,470	16,280	14,720	12,460	10,170
60	4,230	14,590	12,460	9,610	6,980
72	3,930	12,750	10,170	6,980	4,840
84	3,520	10,880	7,990	5,130	3,560
96	3,070	9,050	6,130	3,920	**
108	2,690	7,340	4,840	3,100	**
120	2,360	5,940	3,920	**	**

P4400/P4401 - Elements of Section

Parameter		P4400		P4401	
Area of Section		0.424	In^2	0.849	In^2
Axis 1-1					
	Moment of Inertia (I)	0.053	In^4	0.255	In^4
	Section Modulus (S)	0.092	In^3	0.255	In^3
	Radius of Gyration (r)	0.354	In	0.548	In
Axis 2-2					
	Moment of Inertia (I)	0.161	In^4	0.322	In^4
	Section Modulus (S)	0.198	In^3	0.396	In^3
	Radius of Gyration (r)	0.616	In	0.616	In

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to Page 62 for reduction factors for unbraced lengths.
3. For pierced channel, multiply beam loads by the following factor:

"KO" Series.....95% **"T" Series 85%**
"HS" Series .....90% **"SL" Series.....85%**
"WT" Series.....85%

4. Deduct channel weight from the beam loads.
5. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
6. All beam loads are for bending about Axis 1-1.

P4400 - Beam Loading (metric)

Span	Max Allowable Uniform Load	Defl. at Uniform Load	Uniform Loading at Deflection		
			Span/180	Span/240	Span/360
mm	kN	mm	kN	kN	kN
600	3.5	2.2	3.5	3.5	2.7
750	2.8	3.4	2.8	2.6	1.7
1000	2.1	6.0	2.0	1.5	1.0
1250	1.7	9.3	1.3	1.0	0.6
1500	1.4	13.4	0.9	0.6	0.5
1750	1.2	18.6	0.6	0.5	0.3
2000	1.0	23.6	0.5	0.4	0.2
2500	0.9	38.1	0.3	0.2	0.1
3000	0.7	55.5	0.2	0.2	0.1
3500	0.6	71.6	0.2	0.1	0.1

P4401 - Beam Loading (metric)

Span	Max Allowable Uniform Load	Defl. at Uniform Load	Uniform Loading at Deflection		
			Span/180	Span/240	Span/360
mm	kN	mm	kN	kN	kN
600	9.7	1.2	9.7	9.7	9.7
750	7.9	2.0	7.9	7.9	7.9
1000	5.9	3.5	5.9	5.9	4.7
1250	4.7	5.5	4.7	4.5	3.0
1500	3.9	7.9	3.9	3.1	2.1
1750	3.4	10.6	3.1	2.3	1.5
2000	2.9	14.0	2.4	1.8	1.2
2500	2.4	21.8	1.5	1.1	0.8
3000	2.0	31.2	1.0	0.8	0.5
3500	1.7	42.6	0.8	0.6	0.4
4000	1.5	56.7	0.6	0.5	0.3
4500	1.3	70.9	0.5	0.4	0.2
5000	1.2	87.2	0.4	0.3	NR
6000	1.0	127.5	0.3	NR	NR

P4400 - Column Loading (metric)

Unbraced Height	Maximum Allowable Load at Slot Face	Maximum Column Load Applied at C.G.			
		K = 0.65	K = 0.80	K =1.0	K = 1.2
mm	*kN*	*kN*	*kN*	*kN*	*kN*
600	11.9	37.7	35.4	32.6	30.1
750	11.6	35.2	32.6	29.5	24.5
1000	10.9	31.5	27.9	21.3	15.3
1250	9.7	27.4	21.3	14.2	9.8
1500	8.2	22.1	15.3	9.8	**
1750	6.8	17.1	11.3	7.2	**
2000	5.7	13.1	8.6	**	**
2500	**	8.4	**	**	**

P4401 - Column Loading (metric)

Unbraced Height	Maximum Allowable Load at Slot Face	Maximum Column Load Applied at C.G.			
		K = 0.65	K = 0.80	K =1.0	K = 1.2
mm	*kN*	*kN*	*kN*	*kN*	*kN*
600	21.4	83.2	81.1	78.7	76.4
750	21.2	81.0	78.7	75.4	69.8
1000	20.9	77.7	73.6	65.8	57.3
1250	20.2	73.1	65.8	55.2	44.5
1500	19.3	66.8	57.3	44.5	32.7
1750	18.2	60.0	48.8	34.6	24.0
2000	16.8	53.1	40.5	26.4	18.4
2500	13.6	39.5	26.4	16.9	**
3000	10.9	27.9	18.4	**	**

P4400/P4401 - Elements of Section (metric)

Parameter		P4100		P4101	
Area of Section		2.74	cm^2	5.48	cm^2
Axis 1-1					
	Moment of Inertia (I)	2.21	cm^4	10.61	cm^4
	Section Modulus (S)	1.51	cm^3	4.18	cm^3
	Radius of Gyration (r)	0.90	cm	1.39	cm
Axis 2-2					
	Moment of Inertia (I)	6.70	cm^4	13.40	cm^4
	Section Modulus (S)	3.24	cm^3	6.49	cm^3
	Radius of Gyration (r)	1.57	cm	1.57	cm

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to Page 62 for reduction factors for unbraced lengths.
3. For pierced channel, multiply beam loads by the following factor:

"KO" Series.....95% **"T" Series 85%**
"HS" Series .....90% **"SL" Series.....85%**
"WT" Series.....85%

4. Deduct channel weight from the beam loads.
5. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
6. All beam loads are for bending about Axis 1-1.

Atkore Unistrut

P4520

GR PG



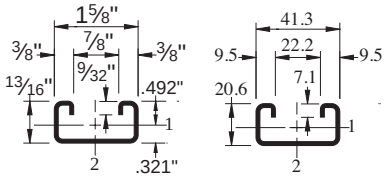

Wt/100 Ft: 131 Lbs (190 kg/100 m)
Allowable Moment 1,615 In-Lbs (183 N•m)
12 Gauge Nominal Thickness .105" (2.7mm)

P4521

GR PG



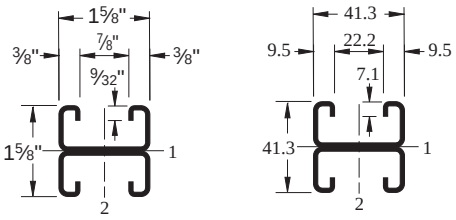

Wt/100 Ft: 262 Lbs (390 kg/100 m)
Allowable Moment 4,540 In-Lbs (513 N•m)
12 Gauge Nominal Thickness .105" (2.7mm)

P4520 HS

GR PG



Wt/100 Ft: 120 Lbs (177 kg/100 m)

P4520 T

GR PG



Wt/100 Ft: 120 Lbs (177 kg/100 m)

P4520 SL

GR PG



Wt/100 Ft: 118 Lbs (175 kg/100 m)

P4520 WT

DF GR HG PG PL



Wt/100 Ft: 120 Lbs (177 kg/100 m)

Channel Nuts (Refer to Pages 73,74 for Details)

See Page 73, 74

P4006-0832
P4006-1024
P4006-1420
P4007
P4008
P4009
P4010

P4010T

P4012
P4023

P3006-0832
P3006-1024
P3006-1420
P3007
P3008
P3009
P3013

P3016-0632
P3016-0832
P3016-1024
P3016-1420

Channel Finishes: PL, GR, HG, PG, ZD; Standard Lengths: 10' & 20'

P4520 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	540	0.11	540	510	340
36	360	0.24	300	220	150
48	270	0.43	170	130	80
60	220	0.68	110	80	50
72	180	0.96	70	60	40
84	150	1.27	60	40	30
96	130	1.65	40	30	20
108	120	2.16	30	20	20
120	110	2.72	30	20	NR
144	90	3.84	20	NR	NR

P4521 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	1,510	0.06	1,510	1,510	1,510
36	1,010	0.14	1,010	1,010	710
48	760	0.25	760	600	400
60	610	0.40	510	380	260
72	500	0.56	360	270	180
84	430	0.77	260	200	130
96	380	1.01	200	150	100
108	340	1.29	160	120	80
120	300	1.56	130	100	60
144	250	2.25	90	70	40
168	220	3.14	70	50	NR
192	190	4.05	50	NR	NR
216	170	5.16	NR	NR	NR
240	150	6.24	NR	NR	NR

P4520 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
24	2,250	7,480	6,800	5,820	4,810
36	1,980	5,950	4,810	3,380	2,350
48	1,580	4,310	2,970	1,900	**
60	1,210	2,880	1,900	**	**
72	950	2,000	**	**	**

P4521 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
24	4,140	16,490	15,980	14,970	13,810
36	3,980	15,100	13,810	11,910	9,940
48	3,730	13,190	11,260	8,650	6,270
60	3,390	11,090	8,650	5,780	4,010
72	2,950	8,970	6,270	4,010	2,790
84	2,510	6,980	4,610	2,950	**
96	2,130	5,340	3,530	**	**
108	1,820	4,220	2,790	**	**
120	**	3,420	**	**	**

P4520/P4521 - Elements of Section

Parameter		P4400		P4401	
Area of Section		0.384	In^2	0.770	In^2
Axis 1-1					
	Moment of Inertia (I)	0.031	In^4	0.146	In^4
	Section Modulus (S)	0.064	In^3	0.180	In^3
	Radius of Gyration (r)	0.283	In	0.436	In
Axis 2-2					
	Moment of Inertia (I)	0.138	In^4	0.277	In^4
	Section Modulus (S)	0.170	In^3	0.340	In^3
	Radius of Gyration (r)	0.599	In	0.599	In

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to Page 62 for reduction factors for unbraced lengths.
3. For pierced channel, multiply beam loads by the following factor:

"KO" Series.....95% **"T" Series 85%**
"HS" Series .....90% **"SL" Series.....85%**
"WT" Series.....85%

4. Deduct channel weight from the beam loads.
5. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
6. All beam loads are for bending about Axis 1-1.

Atkore Unistrut

P4520 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
600	2.5	2.6	2.5	2.4	1.6
750	2.0	4.1	2.0	1.5	1.0
1000	1.5	7.3	1.1	0.9	0.6
1250	1.2	11.3	0.7	0.5	0.4
1500	1.0	16.5	0.5	0.4	0.3
1750	0.9	22.6	0.4	0.3	0.2
2000	0.7	28.4	0.3	0.2	0.1
2500	0.6	45.0	0.2	0.1	0.1
3000	0.5	65.8	0.1	0.1	NR
3500	0.4	85.5	0.1	0.1	NR

P4521 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
600	7.0	1.6	7.0	7.0	7.0
750	5.6	2.4	5.6	5.6	4.8
1000	4.2	4.3	4.2	4.0	2.7
1250	3.4	6.7	3.4	2.6	1.7
1500	2.8	9.6	2.4	1.8	1.2
1750	2.4	13.3	1.8	1.3	0.9
2000	2.1	17.2	1.4	1.0	0.7
2500	1.7	27.0	0.9	0.6	0.5
3000	1.4	39.1	0.6	0.5	0.3
3500	1.2	52.0	0.5	0.3	0.2
4000	1.0	68.7	0.3	0.3	0.2
4500	0.9	85.1	0.3	0.2	NR
5000	0.8	105.0	0.2	NR	NR
6000	0.7	151.2	NR	NR	NR

P4520 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
600	10.3	34.1	31.1	26.8	22.2
750	9.7	30.9	26.8	21.1	15.8
1000	8.5	24.9	19.3	12.8	8.9
1250	6.9	18.9	12.8	8.2	**
1500	5.6	13.5	8.9	**	**
1750	4.6	9.9	6.5	**	**

P4521 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
600	18.8	74.9	72.8	68.3	63.1
750	18.5	72.5	68.3	61.8	54.7
1000	17.8	66.2	59.5	49.8	40.1
1250	16.8	58.9	49.8	37.8	27.0
1500	15.5	51.1	40.1	27.0	18.8
1750	14.0	43.1	31.1	19.9	13.8
2000	12.2	35.5	23.8	15.2	**
2500	9.3	23.0	15.2	**	**
3000	**	16.0	**	**	**

P4520/P4521 - Elements of Section (metric)

Parameter		P4100		P4101	
Area of Section		2.48	cm^2	4.97	cm^2
Axis 1-1					
	Moment of Inertia (I)	1.29	cm^4	6.08	cm^4
	Section Modulus (S)	1.05	cm^3	2.95	cm^3
	Radius of Gyration (r)	0.72	cm	1.11	cm
Axis 2-2					
	Moment of Inertia (I)	5.74	cm^4	11.53	cm^4
	Section Modulus (S)	2.79	cm^3	5.57	cm^3
	Radius of Gyration (r)	1.52	cm	1.53	cm

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to Page 62 for reduction factors for unbraced lengths.
3. For pierced channel, multiply beam loads by the following factor:

"KO" Series.....95% **"T" Series 85%**
"HS" Series .....90% **"SL" Series.....85%**
"WT" Series.....85%

4. Deduct channel weight from the beam loads.
5. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
6. All beam loads are for bending about Axis 1-1.

P5000

DF GR PL PG







Wt/100 Ft: 305 Lbs (454 kg/100 m)
Allowable Moment 15,770 In-Lbs (1,780 N•m)
12 Gauge Nominal Thickness .105" (2.7mm)

P5001

DF GR PG

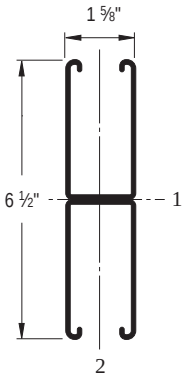





Wt/100 Ft: 610 Lbs (907 kg/100 m)
Allowable Moment 48,180 In-Lbs (5,440 N•m)
12 Gauge Nominal Thickness .105" (2.7mm)

P5000 HS

GR PG

9/16" (14.3) Dia. Holes
1 7/8" (47.6) on Center



Wt/100 Ft: 300 Lbs (446 kg/100 m)

P5000 KO

GR PG

7/8" (22.2) Knockouts
6" (152.4) on Center



Wt/100 Ft: 305 Lbs (454 kg/100 m)

P5000 SL

GR PG

Slots are
3" (76.2) x 13/32" (10.3)
4" (101.6) on Center



Wt/100 Ft: 300 Lbs (446 kg/100 m)

P5000 T

DF GR PG

Slots are
1 1/8" (28.6) x 9/16" (14.3)
2" (50.8) on Center



Wt/100 Ft: 300 Lbs (446 kg/100 m)

P5000 WT

DF GR HG PG PL

Slots are
2" (50.8) x 11/16" (17.5)
3" (76.2) on Center



Wt/100 Ft: 300 Lbs (446 kg/100 m)

Channel Nuts (Refer to Pages 73,74 for Details)

See Page 73, 74



P5506-0832
P5506-1024
P5506-1420
P5507
P5508
P5509
P5510

P1006T1420
P1008T
P1010T

P1012
P1023
P1024

P3006-0832
P3006-1024
P3006-1420
P3007
P3008
P3009
P3010

P3016-0632
P3016-0832
P3016-1024
P3016-1420

Channel Finishes: DF, PL, GR, HG, PG, ZD; Standard Lengths: 10' & 20'

P5000 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	5,260	0.03	5,260	5,260	5,260
36	3,500	0.07	3,500	3,500	3,500
48	2,630	0.12	2,630	2,630	2,630
60	2,100	0.18	2,100	2,100	1,920
72	1,750	0.26	1,750	1,750	1,330
84	1,500	0.36	1,500	1,470	980
96	1,310	0.47	1,310	1,120	750
108	1,170	0.59	1,170	890	590
120	1,050	0.73	960	720	480
144	880	1.06	670	500	330
168	750	1.43	490	370	240
192	660	1.88	370	280	190
216	580	2.35	300	220	150
240	530	2.95	240	180	120

P5001 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	6,890*	0.01	6,890*	6,890*	6,890*
36	6,890*	0.02	6,890*	6,890*	6,890*
48	6,890*	0.05	6,890*	6,890*	6,890*
60	6,420	0.10	6,420	6,420	6,420
72	5,350	0.14	5,350	5,350	5,350
84	4,590	0.19	4,590	4,590	4,590
96	4,020	0.25	4,020	4,020	4,020
108	3,570	0.32	3,570	3,570	3,360
120	3,210	0.39	3,210	3,210	2,720
144	2,680	0.57	2,680	2,680	1,890
168	2,290	0.77	2,290	2,080	1,390
192	2,010	1.01	2,010	1,590	1,060
216	1,780	1.27	1,680	1,260	840
240	1,610	1.58	1,360	1,020	680

P5000 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
24	5,650	16,870	15,180	12,850	10,600
36	4,690	13,140	10,600	7,650	5,660
48	3,560	9,550	6,860	4,790	3,660
60	2,730	6,680	4,790	3,450	2,710
72	2,160	4,980	3,660	2,710	2,170
84	1,760	3,950	2,960	2,240	1,820
96	1,500	3,270	2,500	1,930	1,580
108	1,310	2,800	2,170	1,690	1,390
120	1,170	2,450	1,930	1,510	**
144	980	1,980	1,580	**	**
168	850	1,670	1,340	**	**

P5001 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
24	10,670	39,230	38,030	36,210	34,240
36	10,350	36,450	34,240	31,200	28,260
48	9,940	33,220	30,200	26,430	23,190
60	9,290	29,950	26,430	22,470	19,380
72	8,560	26,880	23,190	19,380	16,450
84	7,860	24,140	20,520	17,040	12,090
96	7,220	21,790	18,370	13,330	9,250
108	6,600	19,790	16,450	10,530	7,310
120	5,760	18,130	13,330	8,530	**
144	4,390	14,020	9,250	**	**
168	3,420	10,300	6,800	**	**

P5000/P5001 - Elements of Section

Parameter		P5000		P5001	
Area of Section		0.897	In^2	1.793	In^2
Axis 1-1					
	Moment of Inertia (I)	1.098	In^4	6.227	In^4
	Section Modulus (S)	0.627	In^3	1.916	In^3
	Radius of Gyration (r)	1.107	In	1.864	In
Axis 2-2					
	Moment of Inertia (I)	0.433	In^4	0.866	In^4
	Section Modulus (S)	0.533	In^3	1.066	In^3
	Radius of Gyration (r)	0.695	In	0.695	In

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to Page 62 for reduction factors for unbraced lengths.
3. For pierced channel, multiply beam loads by the following factor:

"KO" Series.....95% **"T" Series 85%**
"HS" Series .....90% **"SL" Series.....85%**
"WT" Series.....85%

4. Deduct channel weight from the beam loads.
5. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
6. All beam loads are for bending about Axis 1-1.

P5000 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
600	23.8	1	23.8	23.8	23.8
750	19.0	1	19.0	19.0	19.0
1,000	14.2	2	14.2	14.2	14.2
1,250	11.4	3	11.4	11.4	11.4
1,500	9.5	5	9.5	9.5	8.8
1,750	8.1	6	8.1	8.1	6.5
2,000	7.1	8	7.1	7.1	4.9
2,500	5.7	12	5.7	4.8	3.2
3,000	4.8	18	4.4	3.3	2.2
3,500	4.1	25	3.2	2.4	1.6
4,000	3.6	32	2.5	1.9	1.2
4,500	3.2	40	2.0	1.5	1.0
5,000	2.8	50	1.6	1.2	0.8
6,000	2.4	71	1.1	0.8	0.5

P5001 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
600	30.6 *	0	30.6 *	30.6 *	30.6 *
750	30.6 *	0	30.6 *	30.6 *	30.6 *
1,000	30.6 *	1	30.6 *	30.6 *	30.6 *
1,250	30.6 *	1	30.6 *	30.6 *	30.6 *
1,500	29.0	2	29.0	29.0	29.0
1,750	24.9	3	24.9	24.9	24.9
2,000	21.8	4	21.8	21.8	21.8
2,500	17.4	7	17.4	17.4	17.4
3,000	14.5	10	14.5	14.5	12.5
3,500	12.5	13	12.5	12.5	9.2
4,000	10.9	17	10.9	10.5	7.0
4,500	9.7	22	9.7	8.3	5.6
5,000	8.7	27	8.7	6.8	4.5
6,000	7.2	39	6.2	4.7	3.1

P5000 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
600	25.2	75.5	68.1	58.0	48.0
750	23.5	67.5	58.0	45.7	35.0
1,000	19.4	53.7	41.9	29.3	21.8
1,250	15.4	41.0	29.3	20.5	15.7
1,500	12.4	30.5	21.8	15.7	12.3
1,750	10.2	23.8	17.3	12.8	10.2
2,000	8.5	19.3	14.4	10.8	8.7
2,250	7.3	16.3	12.3	9.4	7.6
2,500	6.5	14.1	10.8	8.3	6.9
2,750	5.8	12.4	9.6	7.5	6.2

P5001 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
600	47.5	174.9	169.7	161.7	153.2
750	46.8	169.2	161.7	150.9	139.8
1,000	45.6	158.2	147.2	132.6	118.8
1,250	44.0	146.3	132.6	115.6	101.2
1,500	41.6	134.3	118.8	101.2	87.4
1,750	38.9	122.9	106.6	89.4	76.8
2,000	36.3	112.5	96.2	80.0	61.2
2,250	33.9	103.2	87.4	69.6	48.4
2,500	31.6	95.0	80.0	56.4	39.1
2,750	29.3	87.8	72.9	46.6	32.4

P5000/P5001 - Elements of Section (metric)

Parameter		P5000		P5001	
Area of Section		5.78	cm^2	11.57	cm^2
Axis 1-1					
	Moment of Inertia (I)	45.70	cm^4	259.17	cm^4
	Section Modulus (S)	10.28	cm^3	31.40	cm^3
	Radius of Gyration (r)	2.81	cm	4.73	cm
Axis 2-2					
	Moment of Inertia (I)	18.02	cm^4	36.04	cm^4
	Section Modulus (S)	8.73	cm^3	17.46	cm^3
	Radius of Gyration (r)	1.77	cm	1.77	cm

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to Page 62 for reduction factors for unbraced lengths.
3. For pierced channel, multiply beam loads by the following factor:

"KO" Series.....95% **"T" Series 85%**
"HS" Series .....90% **"SL" Series.....85%**
"WT" Series.....85%

4. Deduct channel weight from the beam loads.
5. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
6. All beam loads are for bending about Axis 1-1.

Atkore Unistrut

P5500

GR PG







Wt/100 Ft: 247 Lbs (367 kg/100 m)
Allowable Moment 9,820 In-Lbs (1,110 N•m)
12 Gauge Nominal Thickness .105" (2.7mm)

P5501

GR PG







Wt/100 Ft: 494 Lbs (734 kg/100 m)
Allowable Moment 28,940 In-Lbs (3,270 N•m)
12 Gauge Nominal Thickness .105" (2.7mm)

P5500 HS

GR PG

9/16" (14.3) Dia. Holes
1 7/8" (47.6) on Center



Wt/100 Ft: 242 Lbs (360 kg/100 m)

P5500 KO

GR PG

7/8" (22.2) Knockouts
6" (152.4) on Center



Wt/100 Ft: 247 Lbs (368 kg/100 m)

P5500 SL

GR PG

Slots are
3" (76.2) x 13/32" (10.3)
4" (101.6) on Center



Wt/100 Ft: 242 Lbs (360 kg/100 m)

P5500 T

GR PG

Slots are
1 1/8" (28.6) x 9/16" (14.3)
2" (50.8) on Center



Wt/100 Ft: 242 Lbs (360 kg/100 m)

P5500 WT

DF GR HG PG PL

Slots are
2" (50.8) x 11/16" (17.5)
3" (76.2) on Center



Wt/100 Ft: 242 Lbs (360 kg/100 m)

Channel Nuts (Refer to Pages 73,74 for Details)

See Page 73, 74



P5506-0832
P5506-1024
P5506-1420
P5507
P5508
P5509
P5510

P1006T1420
P1008T
P1010T

P1012
P1023
P1024

P3006-0832
P3006-1024
P3006-1420
P3007
P3008
P3009
P3010

P3016-0632
P3016-0832
P3016-1024
P3016-1420

Channel Finishes: PL, GR, HG, PG, ZD; Standard Lengths: 10' & 20'

P5500 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	3,270	0.04	3,270	3,270	3,270
36	2,180	0.09	2,180	2,180	2,180
48	1,640	0.15	1,640	1,640	1,420
60	1,310	0.24	1,310	1,310	910
72	1,090	0.34	1,090	950	630
84	940	0.47	930	700	470
96	820	0.61	710	530	360
108	730	0.78	560	420	280
120	650	0.95	460	340	230
144	550	1.39	320	240	160
168	470	1.89	230	170	120
192	410	2.46	180	130	90
216	360	3.07	140	110	70
240	330	3.86	110	90	60

P5501 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	5,220*	0.01	5,220*	5,220*	5,220*
36	5,220*	0.04	5,220*	5,220*	5,220*
48	4,820	0.08	4,820	4,820	4,820
60	3,860	0.13	3,860	3,860	3,860
72	3,220	0.19	3,220	3,220	3,220
84	2,760	0.26	2,760	2,760	2,500
96	2,410	0.34	2,410	2,410	1,920
108	2,140	0.42	2,140	2,140	1,510
120	1,930	0.52	1,930	1,840	1,230
144	1,610	0.76	1,610	1,280	850
168	1,380	1.03	1,250	940	630
192	1,210	1.35	960	720	480
216	1,070	1.70	760	570	380
240	960	2.09	610	460	310

P5500 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
24	4,640	13,840	12,570	10,840	9,190
36	3,970	11,050	9,190	7,030	5,370
48	3,180	8,420	6,390	4,620	3,630
60	2,550	6,250	4,620	3,450	2,780
72	2,120	4,790	3,630	2,780	2,260
84	1,810	3,890	3,010	2,330	1,910
96	1,580	3,290	2,580	2,020	1,650
108	1,400	2,860	2,260	1,770	1,440
120	1,270	2,530	2,020	1,580	**
144	1,060	2,070	1,650	**	**
168	920	1,750	1,380	**	**

P5501 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
24	8,580	31,810	30,880	29,520	28,100
36	8,350	29,700	28,100	26,000	24,070
48	8,080	27,390	25,330	22,910	20,940
60	7,720	25,170	22,910	20,510	17,170
72	7,270	23,190	20,940	17,170	12,700
84	6,780	21,510	18,740	13,430	9,330
96	6,130	20,110	15,630	10,290	7,150
108	5,450	17,750	12,700	8,130	5,650
120	4,800	15,260	10,290	6,590	**
144	3,760	10,830	7,150	**	**
168	2,970	7,950	5,250	**	**

P5500/P5501 - Elements of Section

Parameter		P5500		P5501	
Area of Section		0.726	In^2	1.452	In^2
Axis 1-1					
	Moment of Inertia (I)	0.522	In^4	2.805	In^4
	Section Modulus (S)	0.390	In^3	1.151	In^3
	Radius of Gyration (r)	0.848	In	1.390	In
Axis 2-2					
	Moment of Inertia (I)	0.334	In^4	0.669	In^4
	Section Modulus (S)	0.411	In^3	0.823	In^3
	Radius of Gyration (r)	0.679	In	0.679	In

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to Page 62 for reduction factors for unbraced lengths.
3. For pierced channel, multiply beam loads by the following factor:

"KO" Series.....95% **"T" Series 85%**
"HS" Series .....90% **"SL" Series.....85%**
"WT" Series.....85%

4. Deduct channel weight from the beam loads.
5. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
6. All beam loads are for bending about Axis 1-1.

P5500 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
600	14.8	1	14.8	14.8	14.8
750	11.8	1	11.8	11.8	11.8
1,000	8.9	3	8.9	8.9	8.9
1,250	7.1	4	7.1	7.1	6.1
1,500	5.9	6	5.9	5.9	4.2
1,750	5.1	8	5.1	4.6	3.1
2,000	4.5	10	4.5	3.5	2.4
2,500	3.6	16	3.0	2.3	1.5
3,000	3.0	24	2.1	1.6	1.1
3,500	2.5	32	1.6	1.2	0.8
4,000	2.2	42	1.2	0.9	0.6
4,500	2.0	53	0.9	0.7	0.4
5,000	1.8	66	0.8	0.6	0.4
6,000	1.5	94	0.5	0.4	0.3

P5501 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
600	23.2 *	0	23.2 *	23.2 *	23.2 *
750	23.2 *	1	23.2 *	23.2 *	23.2 *
1,000	23.2 *	1	23.2 *	23.2 *	23.2 *
1,250	20.9	2	20.9	20.9	20.9
1,500	17.4	3	17.4	17.4	17.4
1,750	14.9	4	14.9	14.9	14.9
2,000	13.1	6	13.1	13.1	12.7
2,500	10.5	9	10.5	10.5	8.1
3,000	8.7	13	8.7	8.5	5.6
3,500	7.5	18	7.5	6.2	4.1
4,000	6.5	23	6.3	4.8	3.2
4,500	5.8	29	5.0	3.7	2.5
5,000	5.2	36	4.1	3.0	2.0
6,000	4.4	52	2.8	2.1	1.4

P5500 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
600	20.7	61.9	56.4	48.8	41.6
750	19.6	55.9	48.8	39.8	31.9
1,000	16.7	45.7	37.0	27.4	21.0
1,250	13.8	36.4	27.4	19.9	15.7
1,500	11.5	28.5	21.0	15.7	12.6
1,750	9.8	22.6	17.1	13.0	10.6
2,000	8.6	18.9	14.5	11.2	9.1
2,250	7.6	16.2	12.6	9.8	8.0
2,500	6.9	14.2	11.2	8.7	7.2
2,750	6.2	12.7	10.1	7.9	6.4

P5501 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
600	38.2	141.5	137.4	131.3	125.0
750	37.1	132.1	125.0	115.6	107.1
1,000	35.9	121.8	112.7	101.9	93.1
1,250	34.3	112.0	101.9	91.2	76.4
1,500	32.3	103.2	93.1	76.4	56.5
1,750	30.2	95.7	83.4	59.7	41.5
2,000	27.3	89.5	69.5	45.8	31.8
2,500	24.2	79.0	56.5	36.2	25.1
3,000	21.3	67.9	45.8	29.3	**
3,500	16.7	48.2	31.8	**	**
4,000	13.2	35.4	23.3	**	**

P5500/P5501 - Elements of Section (metric)

Parameter		P5500		P5501	
Area of Section		4.68	cm^2	9.37	cm^2
Axis 1-1					
	Moment of Inertia (I)	21.71	cm^4	116.76	cm^4
	Section Modulus (S)	6.40	cm^3	18.86	cm^3
	Radius of Gyration (r)	2.15	cm	3.53	cm
Axis 2-2					
	Moment of Inertia (I)	13.91	cm^4	27.83	cm^4
	Section Modulus (S)	6.74	cm^3	13.48	cm^3
	Radius of Gyration (r)	1.72	cm	1.72	cm

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to Page 62 for reduction factors for unbraced lengths.
3. For pierced channel, multiply beam loads by the following factor:

"KO" Series.....95% **"T" Series 85%**
"HS" Series .....90% **"SL" Series.....85%**
"WT" Series.....85%

4. Deduct channel weight from the beam loads.
5. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
6. All beam loads are for bending about Axis 1-1.

P1184 P





Material: Paintable PVC
Color: Green, Grey
Standard length: 10' (3m)

Wt/100 Ft: 11 Lbs (16.5 kg/100 m)

P3184





Finish: GR, PG, PL
Standard length: 10' (3m)

Wt/100 Ft: 47 Lbs (69.9 kg/100 m)

P3184 P





Material : G.E. Noryl® Plastic
Color: Green, Grey and White
Standard length: 10' (3m)

Wt/100 Ft: 9.4 Lbs (14.0 kg/100 m)

P3184 F

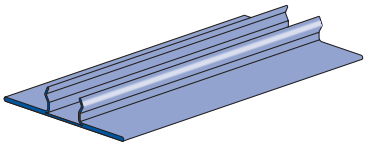



Finish: GR, PG, PL
Standard length: 16' (4.9m)

Wt/100 Ft: 90 Lbs (134 kg/100 m)

P3712 P





Material: Plastic
Color: Black
Standard length: 10' (3m)
Note: Use with P3170, P3270, and P3370 series concrete insert.

Wt/100 Ft: 5.4 Lbs (8.0 kg/100 m)

Atkore Unistrut

P1280 EG



Use with P1000
Material: .060" (1.5)

Wt/100 pcs: 11 Lbs (5.0 Kg.)

P2407, P3280, P3380 End Caps EG



Part Number	Fits Channel	Wt/100 pcs Lbs *(kg)*
P2407	P1000	10 *4.5*
P3280	P3000	8 *3.6*
P3380*	P3300	5 *2.3*

P1280 A, P2280 A



Part Number	Use With Channel	Wt/100 pcs Lbs *(kg)*
P1280A	P1000	11 *5.0*
P2280A	P2000	11 *5.0*

Material: .075" (1.9)

P1180, P2280,P4280, P5280, P5580 EG



Part Number	Use With Channel	Wt/100 pcs Lbs (kg)
P1180	P1100	12 *5.4*
P2280	P2000	11 *5.0*
P4280	P4000	5 *2.3*
P5280	P5000	22 *10.0*
P5580	P5500	17 *7.7*

Material: .075" (1.9)

P2859 Frame Caps GY WH



Part Number*	Use With Channel	Wt/100 pcs Lbs *(kg)*
P2859-10	P1000	12 *5.4*
P2859-11	P1001	12 *5.4*
P2859-12	P3300	5 *2.3*
P2859-13	P5000	22 *10.0*
P2859-14	P5500	17 *7.7*

** Add color suffix:*
GR - Green
WH - White
GY - Grey
"A" series frame caps available

P2860 Plastic White End Caps VY



P2860-10
Use with P1000, P1100, P2000 channels & P9000 Telestrut.
Wt/100 pcs 3.4 Lbs (1.5 kg)



P2860-33
Use with P3300 channel.
Wt/100 pcs 2.5 Lbs (1.1 kg)



P2860-50
Use with P5000 & P1001 channels.
Wt/100 pcs 5 Lbs (2.3 kg)



P2860-55
Use with P5500 channel.
Wt/100 pcs 4.7 Lbs (2.1 kg)

Lateral Bracing Load Reduction Charts

Span		Single Channel											Double Channel										
Ft. *(m)*	In. *(cm)*	P1000	P1100	P2000	P3000	P3300	P4000	P4100	P4400	P4520	P5000	P5500	P1001	P1101	P2001	P3001	P3301	P4001	P4101	P4401	P4521	P5001	P5501
2 *(0.61)*	24 *(61)*	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.98	0.99	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
3 *(0.91)*	36 *(91)*	0.94	0.89	0.88	0.96	1.00	0.94	0.98	1.00	1.00	0.85	0.89	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
4 *(1.22)*	48 *(122)*	0.88	0.78	0.75	0.91	1.00	0.88	0.94	0.98	1.00	0.70	0.77	1.00	0.98	0.98	1.00	1.00	0.98	1.00	1.00	1.00	0.97	0.98
5 *(1.52)*	60 *(152)*	0.82	0.68	0.61	0.88	0.98	0.83	0.91	0.96	1.00	0.55	0.67	0.97	0.93	0.92	0.98	1.00	0.93	0.96	1.00	1.00	0.90	0.93
6 *(1.83)*	72 *(183)*	0.78	0.59	0.48	0.84	0.97	0.79	0.89	0.94	0.98	0.44	0.58	0.93	0.87	0.85	0.95	0.97	0.88	0.92	0.97	0.97	0.83	0.87
7 *(2.13)*	84 *(213)*	0.75	0.52	0.41	0.82	0.96	0.75	0.86	0.92	0.97	0.38	0.51	0.89	0.82	0.78	0.92	0.95	0.83	0.89	0.95	0.95	0.76	0.81
8 *(2.44)*	96 *(244)*	0.71	0.47	0.35	0.79	0.94	0.72	0.84	0.91	0.96	0.33	0.46	0.85	0.76	0.71	0.88	0.92	0.79	0.85	0.92	0.92	0.68	0.76
9 *(2.74)*	108 *(274)*	0.69	0.43	0.32	0.77	0.93	0.69	0.82	0.89	0.95	0.30	0.42	0.81	0.70	0.64	0.85	0.90	0.74	0.81	0.90	0.90	0.61	0.70
10 *(3.05)*	120 *(305)*	0.66	0.40	0.29	0.75	0.92	0.66	0.80	0.87	0.94	0.28	0.40	0.78	0.65	0.57	0.82	0.87	0.69	0.78	0.87	0.87	0.54	0.64
12 *(3.66)*	144 *(366)*	0.61	0.36	0.25	0.70	0.89	0.60	0.76	0.84	0.91	0.24	0.36	0.70	0.54	0.45	0.76	0.82	0.60	0.71	0.82	0.83	0.43	0.53
14 *(4.27)*	168 *(427)*	0.55	0.32	0.23	0.66	0.86	0.55	0.73	0.81	0.89	0.22	0.32	0.63	0.45	0.38	0.70	0.78	0.51	0.64	0.77	0.78	0.35	0.45
16 *(4.88)*	192 *(488)*	0.51	0.30	0.21	0.62	0.84	0.50	0.69	0.78	0.87	0.21	0.30	0.56	0.39	0.32	0.64	0.73	0.44	0.57	0.72	0.73	0.30	0.39
18 *(5.49)*	216 *(549)*	0.47	0.28	0.19	0.58	0.81	0.47	0.65	0.75	0.84	0.19	0.28	0.49	0.34	0.28	0.58	0.68	0.39	0.50	0.67	0.68	0.27	0.34
20 *(6.10)*	240 *(610)*	0.44	0.26	0.18	0.54	0.78	0.43	0.61	0.72	0.82	0.18	0.26	0.44	0.31	0.25	0.52	0.63	0.35	0.45	0.62	0.63	0.24	0.30

Bearing Loads on Unistrut Channel

Loads are calculated based on 2007 Specification For The Design Of Cold Formed Steel Structural Members published by AISI







Channel	Bearing Length 1⅝" (41 mm) Maximum Allowable Loads Lbs *(kN)*	Bearing Length 1⅝" (41 mm) Maximum Allowable Loads Lbs *(kN)*	Bearing Length 3¼" (82 mm) Maximum Allowable Loads Lbs *(kN)*
P1000	6,700 *29.80*	3,100 *13.79*	7,700 *34.25*
P1100	3,500 *15.57*	1,700 *7.56*	4,000 *17.79*
P2000	2,500 *11.12*	1,200 *5.34*	3,000 *13.34*
P3000	6,700 *29.80*	3,200 *14.23*	7,700 *34.25*
P3300	6,800 *30.25*	3,200 *14.23*	7,800 *34.70*
P4000	2,600 *11.57*	1,200 *5.34*	3,000 *13.34*
P4100	3,500 *15.57*	1,800 *8.01*	4,100 *18.24*
P4400	7,300 *32.47*	3,400 *15.12*	8,400 *37.37*
P4520	7,300 *32.47*	3,400 *15.12*	8,400 *37.37*
P5000	6,500 *28.91*	3,000 *13.34*	7,500 *33.36*
P5500	6,600 *29.36*	3,100 *13.79*	7,600 *33.81*

Telescoping Tube 65-67
Specialized Fittings 68
Connection Methods 69
Post Bases 68-69
Cutting Chart 70

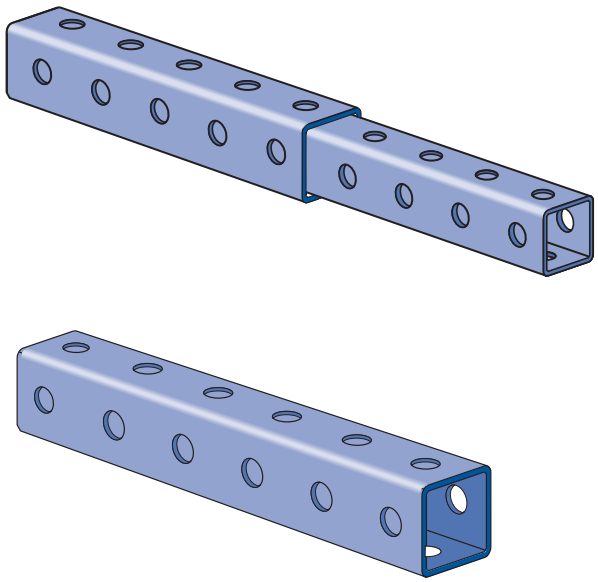

MATERIAL

TELESTRUT is accurately and carefully cold formed to size from low-carbon strip steel.

STEEL: PLAIN

12 Ga. (2.7 mm), ASTM A1011 SS GR 33.

STEEL: PRE-GALVANIZED

12 Ga. (2.7 mm), ASTM A653 GR 33.

FINISHES

Telestrut is available in:

Plain (PL)

Pre-Galvanized (PG)

Green powder coat (GR)

Fittings are available in:

Green Powder Coat (GR), conforming to commercial standards for Powder Coating

Electro-galvanized (EG), conforming to ASTM B633 Type III SC1

Hot-dipped Galvanized (HG), conforming to ASTM A153

Plain (PL)

DIMENSIONS

Imperial dimensions are illustrated in inches. Metric dimensions are shown in parenthesis or as noted. Unless noted, all metric dimensions are in millimeters and rounded to one decimal place.

DESIGN BOLT TORQUE

BOLT SIZE	¼"-20	5⁄16"-18	⅜"-16	½"-13	⅝"-11	¾"-10
Rec.Torque Ft/Lbs *(N•m)*	6 *(8)*	11 *(15)*	19 *(26)*	50 *(68)*	100 *(136)*	125 *(170)*
Max Torque Ft/Lbs *(N•m)*	7 *(9)*	15 *(20)*	25 *(34)*	70 *(95)*	125 *(170)*	135 *(183)*

DESIGN LOAD

Load tables and charts are constructed to be in accordance with the SPECIFICATION FOR THE DESIGN OF COLD-FORMED STEEL STRUCTURAL MEMBERS 2007 EDITION published by the AMERICAN IRON AND STEEL INSTITUTE USING ASD METHOD.

Type of Load	Safety Factor to Yield Strength
Beam Loads	1.67
Column Load	1.80

Telestrut Telescoping Tubing

1⅝" x 1⅝" 12 Ga.



P9000-Pg 65

1⅞" x 1⅞" 12 Ga.



P9200-Pg 65

Special Fittings and Post Bases for Telestrut Telescoping Tubing



P9324-Pg 68



P9011-Pg 68



P9012-Pg 68



P9013-Pg 69



P9014-Pg 69

P9207-Pg 68

Standard 1⅝" – Flat Plate Fittings

P9209-Pg 68

P9010-Pg 68

P1065-Pg 81



P1924-Pg 81



P1066-Pg 81



P1925-Pg 81



P1067-Pg 81



P2079-Pg 81



P1941-Pg 81



P1036-Pg 81

P1380A-Pg 81

P1334-Pg 81

P1380-Pg 81



P1873-Pg 82



P1031-Pg 82



P1028-Pg 82



P1356-Pg 82



P1358-Pg 82



P1726-Pg 82



P1953-Pg 82

Standard 1⅝" – Ninety Degree Fittings



P1950-Pg 82



P2325-Pg 81



P2324-Pg 81



P1026-Pg 82



P1068-Pg 82



P1750-Pg 83



P1281-Pg 82



P1538A-Pg 83

P1498-Pg 83



P1747-Pg 83



P1458-Pg 82



P1326-Pg 83



P1346-Pg 83



P1325-Pg 83



P1822-Pg 83



P1823-Pg 83



P1821-Pg 83



P1934-Pg 84



P1033-Pg 83



P1037-Pg 83



P1038-Pg 83



P1034-Pg 83



P1035-Pg 84



P1029-Pg 84



P1357-Pg 84



P1359-Pg 84



P1381-Pg 84



P1290-Pg 84



P1291-Pg 84



P1579-Pg 84



P1727-Pg 84

Standard 1⅝" – "Z" and "U" Shape Fittings



P1728-Pg 84



P2235-Pg 84



P1713-Pg 84

P1130-Pg 85



P1956-Pg 84



P1957-Pg 84



P1045-Pg 86



P1347-Pg 86



P1479A-Pg 86



P1047-Pg 87

Standard 1⅝" – Wing Shape Fittings

P1048-Pg 88



P2326-Pg 88



P2343 R-L-Pg 89



P2223-Pg 89



P2224-Pg 89



P2225-Pg 89



P2227-Pg 89



P2228-Pg 89



P2229-Pg 89



P2345-Pg 89



P2346-Pg 89

Atkore Unistrut

Standard 1⅝" Metal Framing – Wing Shape Fittings


P2347-Pg 89


P2344 R-L-Pg 89


P2226-Pg 89


P2230-Pg 89


P2245-Pg 89


P2348-Pg 90


P2341 R-L-Pg 89


P2472 R-L-Pg 89

P1843-Pg 104

P1354A-Pg 104

P1201-Pg 103


P1204-Pg 103


P1944-Pg 103


P2655-Pg 103


P2354L-Pg 103


P2354R-Pg 103


P2231-Pg 93


P2233-Pg 93

P1271S-Pg 98

P1796S-Pg 98


P2785-Pg 98


P2867-Pg 98


P2868-Pg 99

P1887-Pg 90


P2072A-Pg 90

P2072-Pg 90


P2860-10-Pg 61

Many of the standard metal framing components are compatible with the Telestrut telescoping tubing.
Refer to the appropriate page in other sections of the catalog for information on the particular fittings shown here.

P9000

GR PG







Wt/100 Ft: 188 Lbs (279 kg/100 m)
Allowable Moment 5,140 In-Lbs (580 N•m)
12 Gauge Nominal Thickness .105" (2.7mm)

P9200

GR PG







Wt/100 Ft: 223 Lbs (331 kg/100 m)
Allowable Moment 7,480 In-Lbs (850 N•m)
12 Gauge Nominal Thickness .105" (2.7mm)

Telestrut's Telescoping Power



Telestrut can be combined with metal framing channel


P1000 Series


P1100 Series


P4001 Series


P4101 Series

Note: Will not telescope with GR or HG finish

P9000 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	1,710	0.06	1,710	1,710	1,710
36	1,140	0.14	1,140	1,140	810
48	860	0.25	860	680	450
60	690	0.40	580	440	290
72	570	0.57	400	300	200
84	490	0.77	300	220	150
96	430	1.01	230	170	110
108	380	1.27	180	130	90
120	340	1.56	150	110	70
144	290	2.30	100	80	50
168	240	3.02	70	60	40
192	210	3.95	60	40	NR
216	190	5.09	40	NR	NR
240	170	6.24	40	NR	NR

P9200 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	2,490	0.05	2,490	2,490	2,490
36	1,660	0.12	1,660	1,660	1,350
48	1,250	0.22	1,250	1,140	760
60	1,000	0.34	980	730	490
72	830	0.49	680	510	340
84	710	0.67	500	370	250
96	620	0.87	380	290	190
108	550	1.10	300	230	150
120	500	1.37	240	180	120
144	420	1.98	170	130	80
168	360	2.70	120	90	60
192	310	3.47	100	70	50
216	280	4.47	80	60	NR
240	250	5.47	60	50	NR

P9000 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
24	3,640	8,730	8,570	8,330	8,040
36	3,540	8,360	8,040	7,530	6,950
48	3,400	7,880	7,340	6,530	5,660
60	3,210	7,290	6,530	5,440	4,360
72	2,990	6,640	5,660	4,360	3,160
84	2,730	5,940	4,790	3,340	2,320
96	2,430	5,220	3,940	2,560	1,780
108	2,110	4,520	3,160	2,020	1,400
120	1,820	3,840	2,560	1,640	**
144	1,390	2,690	1,780	**	**

P9200 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
24	4,620	11,120	10,980	10,740	10,460
36	4,530	10,770	10,460	9,950	9,370
48	4,390	10,300	9,760	8,940	8,030
60	4,220	9,720	8,940	7,800	6,590
72	4,000	9,050	8,030	6,590	5,180
84	3,750	8,320	7,080	5,410	3,890
96	3,460	7,560	6,110	4,290	2,980
108	3,140	6,770	5,180	3,390	2,360
120	2,790	5,990	4,290	2,750	1,910
144	2,170	4,510	2,980	1,910	**
168	1,720	3,320	2,190	**	**

P9000/P9200 - Elements of Section

Parameter		P9000		P9200	
Area of Section		0.387	In^2	0.489	In^2
Axis 1-1					
	Moment of Inertia (I)	0.166	In^4	0.279	In^4
	Section Modulus (S)	0.205	In^3	0.297	In^3
	Radius of Gyration (r)	0.655	In	0.755	In
Axis 2-2					
	Moment of Inertia (I)	0.166	In^4	0.279	In^4
	Section Modulus (S)	0.205	In^3	0.297	In^3
	Radius of Gyration (r)	0.655	In	0.755	In

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
4. Deduct Telestrut weight from the beam loads.
5. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.

P9000 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/z0 kN	Span/360 kN
600	7.7	2	7.7	7.7	7.7
750	6.2	2	6.2	6.2	5.3
1,000	4.7	4	4.7	4.5	3.0
1,250	3.7	7	3.7	2.9	1.9
1,500	3.1	10	2.7	2.0	1.3
1,750	2.7	13	2.0	1.5	1.0
2,000	2.3	17	1.5	1.1	0.8
2,500	1.9	27	1.0	0.7	0.5
3,000	1.6	39	0.7	0.5	0.3
3,500	1.3	53	0.5	0.4	0.3
4,000	1.2	68	0.4	0.3	0.2
4,500	1.0	86	0.3	0.2	0.1
5,000	0.9	108	0.2	0.2	NR
6,000	0.8	151	0.2	NR	NR

P9200 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
600	11.3	1	11.3	11.3	11.3
750	9.0	2	9.0	9.0	8.9
1,000	6.8	4	6.8	6.8	5.0
1,250	5.4	6	5.4	4.8	3.2
1,500	4.5	8	4.5	3.3	2.2
1,750	3.9	11	3.3	2.4	1.6
2,000	3.4	15	2.5	1.9	1.2
2,500	2.7	23	1.6	1.2	0.8
3,000	2.3	34	1.1	0.8	0.6
3,500	1.9	45	0.8	0.6	0.4
4,000	1.7	60	0.6	0.5	0.3
4,500	1.5	76	0.5	0.4	0.3
5,000	1.3	92	0.4	0.3	0.2
6,000	1.1	132	0.3	0.2	NR

P9000 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
600	16.2	38.9	38.2	37.1	35.9
750	16.0	38.2	37.1	35.5	33.7
1,000	15.6	36.7	35.0	32.3	29.4
1,250	15.0	34.8	32.3	28.6	24.6
1,500	14.4	32.6	29.4	24.6	19.8
1,750	13.6	30.3	26.2	20.6	15.3
2,000	12.7	27.8	23.0	16.8	11.7
2,250	11.7	25.2	19.8	13.3	9.3
2,500	10.5	22.6	16.8	10.8	7.5
2,750	9.3	20.0	14.0	8.9	6.2

P9200 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
600	20.6	49.5	48.9	47.9	46.6
750	20.4	48.8	47.9	46.3	44.4
1,000	20.0	47.4	45.7	43.1	40.1
1,250	19.5	45.6	43.1	39.3	35.1
1,500	18.8	43.5	40.1	35.1	29.9
1,750	18.1	41.1	36.8	30.7	24.6
2,000	17.2	38.5	33.4	26.3	19.7
2,250	16.2	35.7	29.9	22.1	15.6
2,500	15.1	32.9	26.3	18.2	12.6
2,750	13.9	30.1	23.0	15.0	10.4

P9000/P9200 - Elements of Section (metric)

Parameter		P9000		P9200	
Area of Section		2.50	cm^2	3.16	cm^2
Axis 1-1					
	Moment of Inertia (I)	6.92	cm^4	11.61	cm^4
	Section Modulus (S)	3.35	cm^3	4.87	cm^3
	Radius of Gyration (r)	1.66	cm	1.92	cm
Axis 2-2					
	Moment of Inertia (I)	6.92	cm^4	11.61	cm^4
	Section Modulus (S)	3.35	cm^3	4.87	cm^3
	Radius of Gyration (r)	1.66	cm	1.92	cm

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
4. Deduct Telestrut weight from the beam loads.
5. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.

P9010 Multi-Grip Rivet

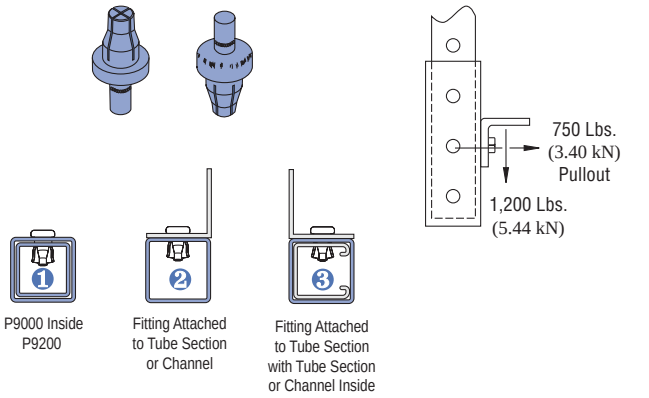

Wt/100 pcs: 10 Lbs (4.5 kg)

P9209 Gravity Pin



Wt/100 pcs: 47 Lbs (21.3 kg)

P9207 Cutting Alignment Gauge

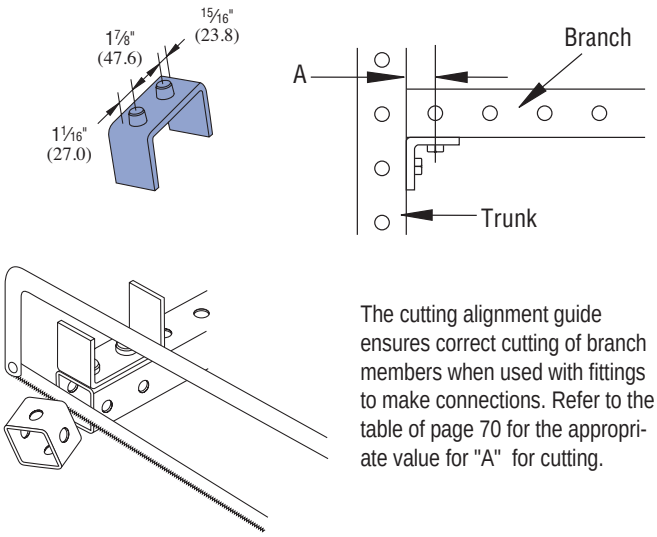

The cutting alignment guide ensures correct cutting of branch members when used with fittings to make connections. Refer to the table of page 70 for the appropriate value for "A" for cutting.

P9324 EG, GR



Wt/100 pcs: 78 Lbs (35.0 kg)

P9011 EG, GR

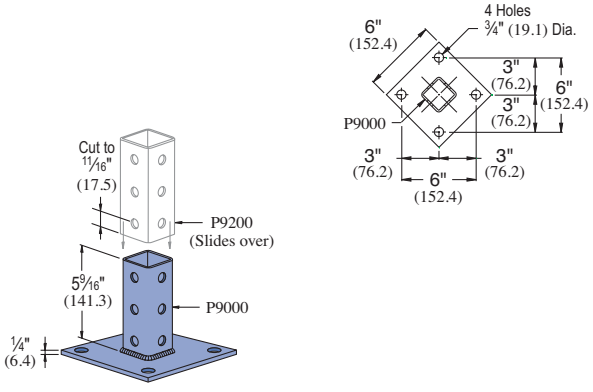

Wt/100 pcs: 332 Lbs (150.7 kg)

P9012 EG, GR

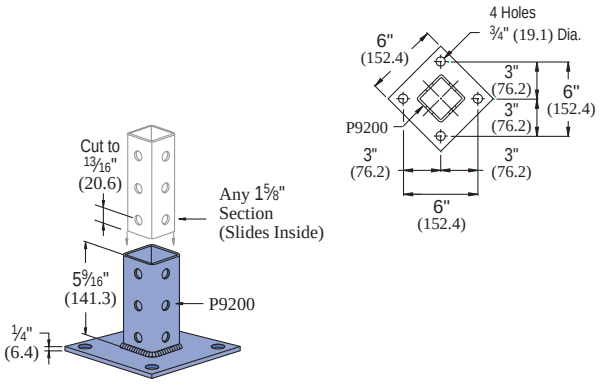

Wt/100 pcs: 340 Lbs (154 kg)

Standard Dimensions for 1⅝" (41.3mm) width series channel fittings *(Unless Otherwise Shown on Drawing)*
Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1⅞" (48mm); Width: 1⅝"(41.3mm); Thickness: ¼" (6mm)

Atkore Unistrut

P9014

EG, GR

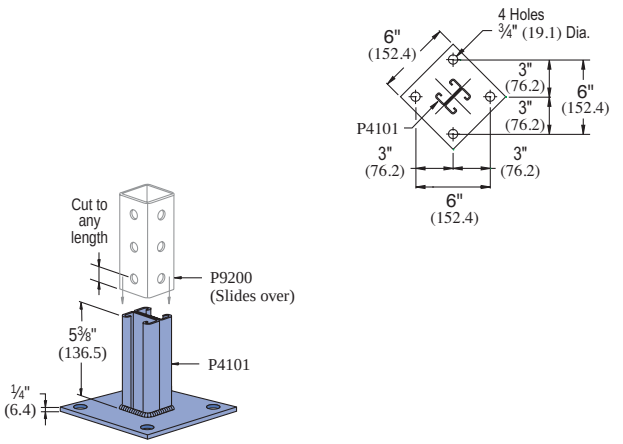

Wt/100 pcs: 303 Lbs (137.5 kg)

P9013

EG, GR

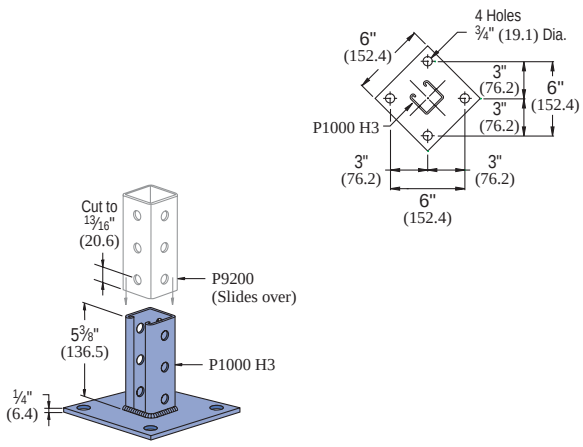

Wt/100 pcs: 318 Lbs (144.7 kg)

Preferred Three-Piece Assembly



In most applications, telescoping assemblies should be made from three sections of Telestrut material. The simplest construction utilizes a center section of 1⅞" material (P9200) into which a 1⅝" member (P9000) is telescoped from each end. In this way, all intersecting verticals and horizontals are formed from 1⅝" members assuring maximum compatibility and ease of assembly

Alternate Three-Piece Assembly



A similar technique is to use a center 1⅝" center member (P9000) which can be telescoped into 1⅞" members used at both ends. With this method, all intersecting connections should be formed from compatible 1⅞" members.

Two-Piece Assembly



Two-piece telescoping assemblies can be used, but special cutting of one or both telescoping members is needed to achieve proper alignment of fittings at the intersecting connections.

In addition, the right-angle members to which telescoping pieces are attached must be cut according to the illustration at right to insure smooth movement of telescoping members.

Channel Nut Connection – Infinite Adjustment



Any of the 1⅝" (41.3 mm) channel can be connected to the P9000 using standard channel nuts.

Through-Bolt Connection – Incremental Adjustment

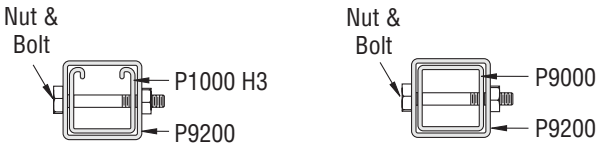

Standard Dimensions for 1⅝" (41.3mm) width series channel fittings (Unless Otherwise Shown on Drawing)
Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1⅞" (48mm); Width: 1⅝"(41.3mm); Thickness: ¼" (6mm)

Cutting Chart

Fitting	1⅝" (41.3) Branch Trunk 1⅝" (41.3)	1⅝" (41.3) Branch Trunk 1⅞" (47.6)	1⅞" (47.6) Branch Trunk 1⅝" (41.3)	1⅞" (47.6) Branch Trunk 1⅞" (47.6)
P1026	A	A	A	B
P1028	A	A	A	B
P1029	†	†	†	†
P1031	A	A	A	B
P1033	B	A	A	B
P1034	†	†	†	†
P1035	A	†	†	†
P1036	A	A	A	B
P1037	†	†	†	†
P1038	†	†	†	†
P1045	†	†	†	†
P1047	†	†	†	†
P1048	†	†	†	†
P1049	†	†	†	†
P1050	†	†	†	†
P1065	A	A	A	B
P1066	A	A	A	B
P1068	C	NR	NR	NR
P1130	A	A	A	C
P1131	A	A	A	C
P1290	A	NR	NR	NR
P1291	A	NR	NR	NR
P1325	A	NR	NR	NR
P1326	C	NR	NR	NR
P1334	A	A	A	B
P1346	A	A	A	B
P1347	C	NR	NR	NR
P1354	D	D	D	D
P1356	A	A	A	B
P1357	A	NR	NR	NR
P1358	A	A	A	B
P1359	A	NR	NR	NR
P1380	A	A	A	B
P1380 A	A	A	A	B
P1381	†	†	†	†
P1382	†	†	†	†
P1458	A	NR	NR	NR
P1498	†	†	†	†
P1499	†	†	†	†
P1538 A	C	A	A	C
P1538 B	C	A	A	C
P1538 C	C	A	A	C
P1538 D	C	A	A	C
P1579	A	NR	NR	NR
P1713	†	†	†	†
P1726	A	A	A	B
P1727	B	NR	NR	NR
P1728	†	†	†	†
P1747	†	†	†	†
P1750	†	†	†	†
P1821	†	†	†	†
P1822	†	†	†	†
P1823	†	†	†	†
P1843	D	D	D	D
P1873	†	†	†	†
P1834	†	NR	NR	NR
P1941	A	A	A	B
P1950	A	A	A	B
P1953	A	A	A	B
P1956	†	†	†	†
P1957	†	†	†	†
P2223	A	NR	A	NR
P2224	A	NR	A	NR
P2225	A	NR	A	NR
P2226	A	NR	A	NR
P2227	A	NR	A	NR
P2228	A	NR	A	NR
P2229	A	NR	A	NR
P2230	A	NR	A	NR
P2235	A	NR	NR	NR
P2245	A	NR	A	NR
P2324	E	NR	NR	F
P2325	E	A	A	F
P2326	E	NR	NR	F
P2341 R-L	A	NR	A	NR
P2343 R-L	A	NR	A	NR
P2344 R-L	A	NR	A	NR
P2345	A	NR	A	NR
P2346	A	NR	A	NR
P2347	A	NR	A	NR
P2348	A	NR	A	NR
P2472 R-L	C	NR	A	NR
P2815	C	NR	NR	NR
P2815 D	C	NR	NR	NR
P9324	G	G	G	G
P9325	A	A	A	A
P9484	A	A	A	A

This table shows the value for "A" when using the specified fitting to connect the branch and trunk. Sizes "A" and "B" can be cut with the cutting alignment gauge (P9207). Other sizes require special cutting. Those marked NR are not recommended.

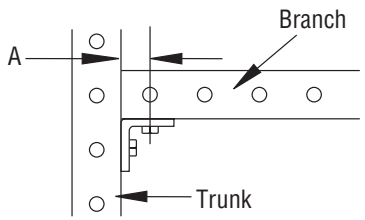

Legend

Designator	"A" In (mm)
A	1 1/16" 27.0
B	15/16" 23.8
C	13/16" 20.6
D	1¼" 31.8
E	⅝" * 15.9
F	7/16" * 11.1
G	1 5/32" 29.4
NR	Not Recommended
†	Special Cutting Req'd (See part dwg)

NUTS & HARDWARE

Channel Nuts With Springs 73

Channel Nuts Without Springs 73

Top Retainer Nuts 73

Stud Nuts 74

Hardware 74-76

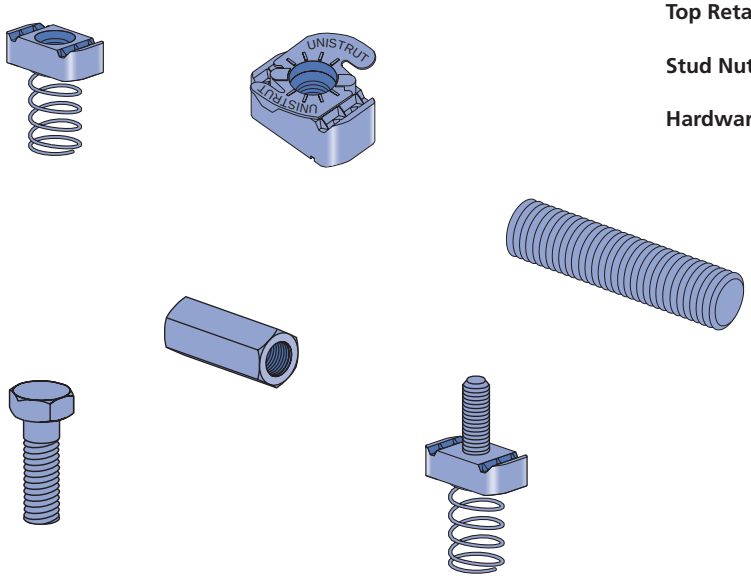

MATERIAL

Unistrut channel nuts are manufactured from mild steel cold rolled coil, and after stamping and machining operations are completed, they are case hardened, assuring positive biting action into the inturned edge of the Unistrut channel.

Screws conform to SAE J429 GR 2 (exceeds ASTM A307). Proof Load 55KSI, Tensile Load 74 KSI

Bolt Size	Channel Nut ASTM
¼" & 5/16"	A1011 SS GR33
⅜", 7/16" & ½"	A576 GR1015 Modified
⅝" & ¾"	A36 or A675 GR60
⅞"	A36

FINISHES

All Channel nuts are available in:

Electro-galvanized (EG), conforming to ASTM B633 type III SC1

Hot-dipped galvanized (HG), conforming to ASTM A153

Plain (PL)

Unistrut Defender™ (DF), conforming to ASTM A1059

Hardware items such as Hex Nuts bolts and washers are Electro-Galvanized (EG), ASTM B633 Type III SC1 finish, unless otherwise noted.

Many hardware items are also available in stainless steel. Consult factory for ordering information.

THREADS

Unistrut nuts and bolts are manufactured to meet the Unified Screw Thread standard, ANSI B1.1, coarse series (UNC) class 2.

DESIGN BOLT TORQUE

BOLT SIZE	¼"-20	5/16"-18	⅜"-16	½"-13	⅝"-11	¾"-10
Rec.Torque Ft/Lbs *(N•m)*	6 *(8)*	11 *(15)*	19 *(26)*	50 *(68)*	100 *(136)*	125 *(170)*
Max Torque Ft/Lbs *(N•m)*	7 *(9)*	15 *(20)*	25 *(34)*	70 *(95)*	125 *(170)*	135 *(183)*

DIMENSIONS

Imperial dimensions are illustrated in inches. Metric dimensions are shown in parenthesis or as noted. Unless noted, all metric dimensions are in millimeters and rounded to one decimal place.

Many Unistrut nuts, bolts and hardware items are also available in standard metric dimensions. Consult factory for ordering information.

Channel Nuts With Spring


P1006 - P1010
Pg 73


P1012S - P1024S
Pg 73

P4006 - P4010
Pg 73


P5506 - P5510
Pg 73


P2378 - P2382
Pg 74

Channel Nuts Without Spring

P3016
Pg 73

P3006 - P3013
Pg 73

P1012 - P1024
Pg 73

P4012 - P4023
Pg 73

P1006T - P1010T, P4010T
Pg 73


P4908
Pg 73

P1016
Pg 73

Hardware

HHCS
Pg 74

HFMS
Pg 74

HRMS
Pg 74

HSHS
Pg 74

HCSS
Pg 74

HSQN
Pg 75

HHXN
Pg 75

HFLW
Pg 75

HLKW
Pg 75


HOCW
Pg 76


HTHR
Pg 75

HRCN
Pg 75

P2486
Pg 76


P2485
Pg 76


P2485K
Pg 76


K1062 - K1064
Pg 76

Maximum Allowable Pull-out And Slip Loads

Channel	Channel Nut Size-Thread	Gauge	Allowable Pull-Out Strength Lbs *(kN)*	Resistance to Slip Lbs *(kN)*	Torque Ft-Lbs *(N•m)*
P1000 P3000 P4400 P4526 P5000 P5500	⅞" - 9	12	2,500 *11.12*	1,700 *7.56*	*125 *170*
	¾" - 10	12	2,500 *11.12*	1,700 *7.56*	*125 *170*
	⅝" - 11	12	2,500 *11.12*	1,500 *6.67*	*100 *135*
	½" - 13	12	2,000 *8.90*	1,500 *6.67*	50 *70*
	7⁄16" - 14	12	1,400 *6.23*	1,000 *4.45*	35 *50*
	⅜" - 16	12	1,000 *4.45*	800 *3.56*	19 *25*
	5⁄16" - 18	12	800 *3.56*	500 *2.22*	11 *15*
	¼" - 20	12	600 *2.67*	300 *1.33*	6 *8*
P3300	½" - 13	12	1,500 *6.67*	1,500 *6.67*	50 *70*
	⅜" - 16	12	1,000 *4.45*	800 *3.56*	19 *25*
	5⁄16" - 18	12	800 *3.56*	500 *2.22*	11 *15*
	¼" - 20	12	600 *2.67*	300 *1.33*	6 *8*

Channel	Channel Nut Size-Thread	Gauge	Allowable Pull-Out Strength Lbs *(kN)*	Resistance to Slip Lbs *(kN)*	Torque Ft-Lbs *(N•m)*
P1100 & P4100	½" - 13	14	1,400 *6.23*	1,000 *4.45*	50 *70*
	⅜" - 16	14	1,000 *4.45*	750 *3.34*	19 *25*
	5⁄16" - 18	14	800 *3.56*	400 *1.78*	11 *15*
	¼" - 20	14	600 *2.67*	300 *1.33*	6 *8*
P2000 & P4000	½" - 13	16	1,000 *4.45*	1,000 *4.54*	50 *70*
	⅜" - 16	16	1,000 *4.45*	750 *3.34*	19 *25*
	5⁄16" - 18	16	800 *3.56*	400 *1.78*	11 *15*
	¼" - 20	16	600 *2.67*	300 *1.33*	6 *8*

* May require ⅜" or ½" thick fitting.

Nut design loads include a minimum safety factor of 3.

Note: Refer to the Channel Nut Selection Chart on the following two pages for the part number.

Channel Nut With Spring

EG, HG

	Part Number	Nut Size Thread	Wt/100 pcs Lbs *(kg)*	Use With
	P1006-0832	#8 -32	7 *(3.2)*	P1000, P1100, P2000, P3000
	P1006-1024	#10 -24	7 *(3.2)*	
	P1006-1420	¼" -20	7 *(3.2)*	
	P1007	5/16" -18	6 *(2.7)*	
	P1008	⅜" -16	10 *(4.5)*	
	P1009	7/16" -14	9 *(4.1)*	
	P1010	½" -13	12 *(5.4)*	
	Part Number	Nut Size Thread	Wt/100 pcs Lbs *(kg)*	Use With
	P1012S	⅝" -11	21 *(9.5)*	P1000, P1100, P2000, P3000
	P1023S	¾" -10	21 *(9.5)*	
	P1024S	⅞" -9	21 *(9.5)*	
	Part Number	Nut Size Thread	Wt/100 pcs Lbs *(kg)*	Use With
	P4006-0832	# 8 -32	7 *(3.2)*	P3300, P4000, P4400, P4520, P4100
	P4006-1024	#10 -24	7 *(3.2)*	
	P4006-1420	¼" -20	7 *(3.2)*	
	P4007	5/16" -18	6 *(2.7)*	
	P4008	⅜" -16	9 *(4.1)*	
	P4009	7/16" -14	9 *(4.1)*	
	P4010	½" -13	8 *(3.6)*	
	Part Number	Nut Size Thread	Wt/100 pcs Lbs *(kg)*	Use With
	P5506-0832	#8 -32	7 *(3.2)*	P5000, P5500
	P5506-1024	#10 -24	7 *(3.2)*	
	P5506-1420	¼" -20	7 *(3.2)*	
	P5507	5/16" -18	6 *(2.7)*	
	P5508	⅜" -16	10 *(4.5)*	
	P5509	7/16" -14	10 *(4.5)*	
	P5510	½" -13	12 *(5.4)*	

Channel Nut Without Spring

EG, HG

	Part Number	Nut Size Thread	Wt/100 pcs Lbs *(kg)*	Use With
	P3016-0632	#6 -32	2 *(0.9)*	Any Channel
	P3016-0832	#8 -32	2 *(0.9)*	
	P3016-1024	#10 -24	4 *(1.8)*	
	P3016-1420	¼" -20	4 *(1.8)*	
	Part Number	Nut Size Thread	Wt/100 pcs Lbs *(kg)*	Use With
	P3006-0832	#8 -32	6 *(2.7)*	Any Channel
	P3006-1024	#10 -24	6 *(2.7)*	
	P3006-1420	¼" -20	6 *(2.7)*	
	P3007	5/16" -18	6 *(2.7)*	
	P3008	⅜" -16	9 *(4.1)*	
	P3009	7/16" -14	9 *(4.1)*	
	P3010	½" -13	11 *(5.0)*	Any Channel Except P3300, P4000, P4400, P4520,P4100
	P3013	½" -13	8 *(3.6)*	P3300, P4000,P4400, P4520,P4100
	Part Number	Nut Size Thread	Wt/100 pcs Lbs *(kg)*	Use With
	P1012	⅝" -11	20 *(9.1)*	Any Channel Except P3300, P4000, P4400, P4520,P4100
	P1023	¾" -10	20 *(9.1)*	
	P1024	⅞" -9	20 *(9.1)*	
	Part Number	Nut Size Thread	Wt/100 pcs Lbs *(kg)*	Use With
	P4012	⅝" -11	11 *(5.0)*	P3300, P4000, P4400,P4520, P4100
	P4023	¾" -10	11 *(5.0)*	
	Part Number	Nut Size Thread	Wt/100 pcs Lbs *(kg)*	Use With
	P1006T1420	¼" -20	7 *(3.2)*	Any Channel
	P1008T	⅜" -16	10 *(4.5)*	
	P1010T	½" -13	12 *(5.4)*	Any Channel Except P3300, P4000, P4400, P4520, P4100
	P4010T	½" -13	8 *(3.6)*	P3300, P4000, P4400, P4520, P4100
	Part Number	Nut Size Thread	Wt/100 pcs Lbs *(kg)*	Use With
	P4908	⅜" -16	17.5 *(7.9)*	Any Channel
	Double Conveyor Adjusting Nut			
	Part Number	Nut Size Thread	Wt/100 pcs Lbs *(kg)*	Use With
	P1016	⅜" -16	17.5 *(7.9)*	Any "T" Slotted Channel
	Missing Link Multi-Purpose Strut Fastener			

Channel Stud Nut With Spring

EG



All Stud Nut grooves are serrated.

Part No.	Thread	"A" Stud In *(mm)*	Wt/100 pcs Lbs *(kg)*	
P2378-1	¼" - 20	1 *(25.4)*	8 *(3.6)*	Use With P1000, P1100, P2000, P3000
P2378-2		1¼ *(31.8)*	9 *(4.1)*	
P2378-3		1½ *(38.1)*	9 *(4.1)*	
P2379-1	5/16" - 18	1 *(25.4)*	12 *(5.4)*	
P2379-2		1¼ *(31.8)*	12 *(5.4)*	
P2379-3		1½ *(38.1)*	13 *(5.9)*	
P2380-1	⅜" - 16	1 *(25.4)*	13 *(5.9)*	
P2380-2		1¼ *(31.8)*	13 *(5.9)*	
P2380-3		1½ *(38.1)*	13 *(5.9)*	
P2380-4		1¾ *(44.5)*	15 *(6.8)*	

Part No.	Thread	"A" Stud In *(mm)*	Wt/100 pcs Lbs *(kg)*	
P2380-5	⅜" - 16	2 *(50.8)*	16 *(7.3)*	Use With P1000, P1100, P2000, P3000
P2380-6		2¼ *(57.2)*	16 *(7.3)*	
P2381-2	½" - 13	1 *(25.4)*	14 *(6.4)*	
P2381-3		1¼ *(31.8)*	15 *(6.8)*	
P2381-4		1½ *(38.1)*	17 *(7.7)*	
P2381-5		1¾ *(44.5)*	18 *(8.2)*	
P2381-6		2 *(50.8)*	19 *(8.6)*	
P2381-7		2¼ *(57.2)*	20 *(9.1)*	
P2382-2	5/8" - 11	1¼ *(31.8)*	18 *(8.2)*	
P2382-3		1½ *(38.1)*	20 *(9.1)*	

Hex Head Cap Screws

DF EG



Part No.	Size	Wt/ 100 pcs Lbs *(kg)*
HHCS025044EG	¼" x 7/16"	1.0 *(0.5)*
HHCS025075EG	¼" x ¾"	1.3 *(0.6)*
HHCS025150EG	¼" x 1½"	2.6 *(1.2)*
HHCS031125EG	5/16" x 1¼"	3.6 *(1.6)*
HHCS037075EG	⅜" x ¾"	4.0 *(1.8)*
HHCS037087EG	⅜" x ⅞"	4.4 *(2.0)*
HHCS037100EG	⅜" x 1"	4.5 *(2.0)*
HHCS037125EG	⅜" x 1¼"	5.3 *(2.4)*
HHCS037150EG	⅜" x 1½"	6.0 *(2.7)*
HHCS037200EG	⅜" x 2"	7.6 *(3.4)*
HHCS037225EG	⅜" x 2¼"	8.4 *(3.8)*
HHCS037250EG	⅜" x 2½"	9.2 *(4.2)*
HHCS050094EG	½" x 15/16"	9.1 *(4.1)*
HHCS050119EG	½" x 1 3/16"	10.2 *(4.6)*
HHCS050125EG	½" x 1¼"	11.0 *(5.0)*
HHCS050150EG	½" x 1½"	11.6 *(5.3)*
HHCS050175EG	½" x 1¾"	13.1 *(5.9)*
HHCS050200EG	½" x 2"	14.6 *(6.6)*
HHCS050225EG	½" x 2¼"	16 *(7.3)*
HHCS050250EG	½" x 2½"	17.5 *(7.9)*

Hex Slotted Machine Screws



Part No.	Size	Wt/ 100 pcs Lbs *(kg)*
HSHS025050EG	¼" x ½"	1.4 *(0.6)*
HSHS025062EG	¼" x 5/8"	1.5 *(0.7)*
HSHS025075EG	¼" x ¾"	1.7 *(0.8)*
HSHS031100EG	5/16" x 1"	2.6 *(1.2)*
HSHS031125EG	5/16" x 1¼"	3.0 *(1.4)*
HSHS031150EG	5/16" x 1½"	3.4 *(1.5)*
HSHS037125EG	⅜" x 1¼"	5.3 *(2.4)*

Flat Head Machine Screws

Part No.	Size	Wt/ 100 pcs Lbs *(kg)*
HFMS025062EG	¼" x 5/8"	1.2 *(0.5)*
HFMS031100EG	5/16" x 1"	2.6 *(1.2)*
HFMS050100EG	½" x 1"	9.3 *(4.2)*

Cone Point Set Screws



Part No.	Size	Wt/ 100 pcs Lbs *(kg)*
HCSS025100EG	¼" x 1"	2.8 *(1.3)*
HCSS031150EG	5/16" x 1½"	3.9 *(1.8)*
HCSS037150EG	⅜" x 1½"	4.5 *(2.0)*
HCSS037200EG	⅜" x 2"	6.1 *(2.8)*
HCSS050150EG	½" x 1½"	8.5 *(3.9)*
HCSS050200EG	½" x 2"	11.4 *(5.2)*
HCSS062150EG	⅝" x 1½"	14.5 *(6.6)*
HCSS062200EG	⅝" x 2"	23.0 *(10.4)*

Round Head Machine Screws

Part No.	Size	Wt/ 100 pcs Lbs *(kg)*
HRMS025050EG	¼" x ½"	1 *(0.5)*
HRMS025075EG	¼" x ¾"	1.2 *(0.5)*
HRMS025100EG	¼" x 1"	1.5 *(0.7)*
HRMS031100EG	5/16" x 1"	2.6 *(1.2)*
HRMS031125EG	5/16" x 1¼"	3.0 *(1.4)*
HRMS037100EG	⅜" x 1"	4.1 *(1.9)*
HRMS037125EG	⅜" x 1¼"	4.7 *(2.1)*
HRMS037150EG	⅜" x 1½"	5.3 *(2.4)*

Square Nuts

Part No.	Size	Wt/100 pcs Lbs *(kg)*
HSQN025EG	¼"	0.9 *(0.4)*
HSQN031EG	5⁄16"	1.6 *(0.7)*
HSQN037EG	⅜"	2.7 *(1.2)*
HSQN050EG	½"	5.8 *(2.6)*
HSQN062EG	⅝"	10.7 *(4.9)*
HSQN075EG	¾"	15.4 *(6.9)*
HSQN087EG	⅞"	24.9 *(11.3)*
HSQN100EG	1"	36.3 *(16.5)*

Hexagon Nuts

DF EG

Part No.	Size	Wt/100 pcs Lbs*(kg)*
HHXN025EG	¼"	0.6 *(0.3)*
HHXN031EG	5⁄16"	1.2 *(0.5)*
HHXN037EG	⅜"	1.6 *(0.7)*
HHXN050EG	½"	4.8 *(2.2)*
HHXN062EG	⅝"	7.3 *(3.3)*
HHXN075EG	¾"	11.9 *(5.4)*
HHXN087EG	⅞"	19.0 *(8.6)*
HHXN100EG	1"	28.3 *(12.8)*

Flat Washers

DF EG

Part No.	Size	Wt/100 pcs Lbs*(kg)*
HFLW025EG	¼"	0.8 *(0.4)*
HFLW031EG	5⁄16"	1.0 *(0.5)*
HFLW037EG	⅜"	1.5 *(0.7)*
HFLW050EG	½"	3.5 *(1.6)*
HFLW062EG	⅝"	7.7 *(3.5)*
HFLW075EG	¾"	11.0 *(5.0)*
HFLW087EG	⅞"	15.3 *(6.9)*
HFLW100EG	1"	18.8 *(8.5)*

Steel Threaded Rod

DF EG



Standard Length 12' (3.7m)

Low Carbon Steel Grade 1006 - 1010
F_y = 36,000 psi minimum
F_t = 58,000 psi minimum

Part No.	Size	Wt/100 Ft. Lbs *(kg)*
HTHR025	¼" x 20	13 *(5.9)*
HTHR031	5⁄16" x 18	20 *(9.1)*
HTHR037	⅜" x 16	30 *(13.6)*
HTHR044	7⁄16" x 14	30 *(13.6)*
HTHR050	½" x 13	53 *(24.0)*
HTHR062	⅝" x 11	84 *(38.1)*
HTHR075	¾" x 10	124 *(56.2)*
HTHR087	⅞" x 9	170 *(77.1)*
HTHR100	1" x 8	223 *(101.2)*

Lock Washers

DF EG

Part No.	Size	Wt/100 pcs Lbs *(kg)*
HLKW025EG	¼"	0.25 *(0.1)*
HLKW031EG	5⁄16"	0.41 *(0.2)*
HLKW037EG	⅜"	0.63 *(0.3)*
HLKW050EG	½"	1.32 *(0.60)*
HLKW062EG	⅝"	2.20 *(1.0)*
HLKW075EG	¾"	3.80 *(1.7)*
HLKW087EG	⅞"	6.00 *(2.7)*
HLKW100EG	1"	8.80 *(4.0)*

Load Carrying Capacity Of Threaded Hot Rolled Steel Conforming To ASTM A575 And A576

Threaded Rod Loads for Piping Applications (based on MSS SP-58)		
Nominal Dia.	Root Area In^2 *(mm^2)*	Max. Safe Load at 650°F (343°C) Lbs *(kN)*
⅜	0.068 *(43.9)*	730 *(3.25)*
½	0.126 *(81.3)*	1,350 *(6.01)*
⅝	0.202 *(130.3)*	2,160 *(9.61)*
¾	0.302 *(194.8)*	3,230 *(14.37)*
⅞	0.419 *(270.3)*	4,480 *(19.93)*
1	0.552 *(356.1)*	5,900 *(26.24)*

Threaded Rod Loads for Structural Applications (Based on AISC, Steel Construction Manual, ASD, 14th Edition. Per AISC, Allowed Tensile Stress = 0.33 * F_u)		
Nominal Dia.	Nominal Area In^2 *(mm^2)*	Allowed Tension Load Lbs *(kN)*
¼	0.049 *(31.6)*	930 *(4.14)*
⅜	0.110 *(71.0)*	2,110 *(9.39)*
7⁄16	0.150 *(96.8)*	2,870 *(12.77)*
½	0.196 *(126.5)*	3,750 *(16.68)*
⅝	0.307 *(198.2)*	5,870 *(26.11)*
¾	0.442 *(285.4)*	8,450 *(37.59)*
⅞	0.601 *(388.0)*	11,500 *(51.15)*
1	0.785 *(506.8)*	15,030 *(66.86)*

Steel Coupler Nuts

DF EG



Part Number	Size	**Length** In (mm)	**Wt/100 pcs** Lbs (kg)
HRCN025	¼" - 20	⅞" *(22.2)*	1.9 *(0.9)*
HRCN031	5⁄16" - 18	1¾" *(44.5)*	7.5 *(3.4)*
HRCN037	⅜" - 16	1¾" *(44.5)*	9.0 *(4.1)*
HRCN044	7⁄16" - 14	1¾" *(44.5)*	10.4 *(4.7)*
HRCN050	½" - 13	1¾" *(44.5)*	10.0 *(4.5)*
HRCN062	⅝" - 11	2⅛" *(54.0)*	18.0 *(8.2)*
HRCN075	¾" - 10	2¼" *(57.2)*	28.0 *(12.7)*
HRCN087	⅞" - 9	2½" *(63.5)*	55.0 *(24.9)*
HRCN100	1" - 8	2¾" *(69.9)*	73.0 *(33.1)*

Slot Adapter™ EG





Part No.	Bolt Size	Wt/100 pcs Lbs (kg)
HOCW025	¼" (6.4)	1 (0.5)
HOCW037	⅜" (9.5)	1.5 (0.7)

Kwik Washer™ EG



Overhead installation with one hand.
Available in zinc plated and hot dip galvanized

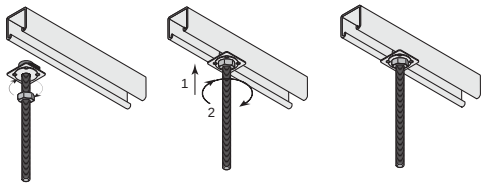

Part No.	Size In (mm)	Load Lbs (kN)	Wt/100 pcs Lbs (kg)
K1062	¼" (6.4)	250 (1.11)	1.2 (0.5)
K1063	⅜" (9.5)	610 (2.71)	2.6 (1.2)
K1064	½" (12.7)	1,130 (5.03)	9.3 (4.2)

P2486 Seismic Rod Stiffener EG



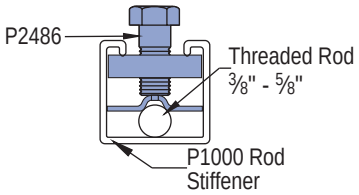

Wt/100 pcs: 16 Lbs (7.3 kg)

P2485 Cradle Clip EG



Cradle clip only, order other items seperately.



P2485K Seismic Cradle Clip Assembly

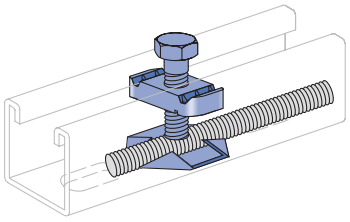

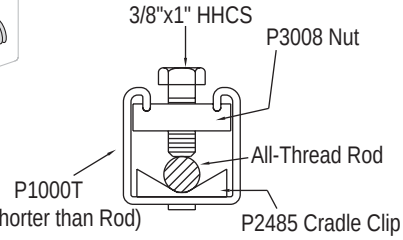

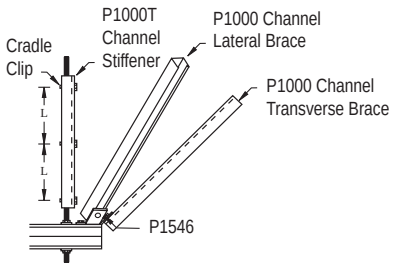

Wt/100 pcs: 3.0 Lbs (1.4 kg)

P2485 & P2486 – Spacing Chart

Rod Size In (mm)	Root Area In2 (mm2)	Radius of Gyration In (mm)	Design Load Lbs (kN)	.....Rod Stiffener Clip Spacing (L)..... Rod Stress @100% 10,700 PSI In (mm)	Rod Stress @75% 8,025 PSI In (mm)	Rod Stress @50% 5,350 PSI In (mm)	Rod Stress @35% 3,745 PSI In (mm)
⅜	0.068	0.074	730	9	11	13	15
9.5	49.5	1.99	3.25	228.6	279.4	330.2	381.0
½	0.126	0.100	1,350	12	14	17	21
12.7	72.4	2.40	6.01	304.8	355.6	431.8	533.4
⅝	0.202	0.127	2,160	15	18	22	26
15.9	138.3	3.32	9.61	381.0	457.2	558.8	660.4

Notes:
1. Minimum Tensile Stress is 50,000 psi (345MPa)
2. Working Stress is 10,700 psi (73.9 MPa) – Same as for Tension
3. Compression Will Only Occur During a Seismic Event
4. Compression Requires the Use of Rod Stiffeners
5. KL/r = 200 When Rod Stress is at 35%

Refer to seismic bracing systems catalog for more detailed information.

GENERAL FITTINGS

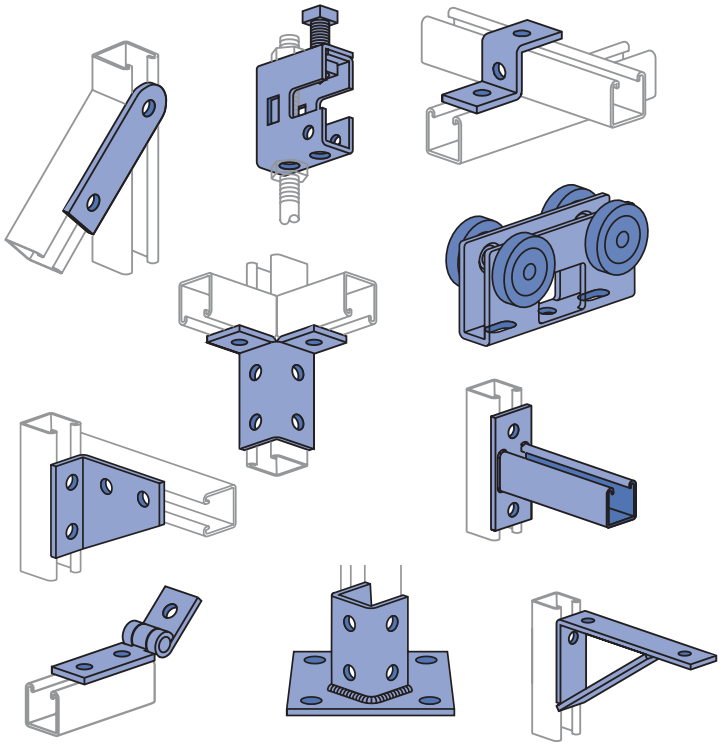

Flat Plate Fittings ..... 81 - 82

Ninety Degree Fittings ..... 82 - 85

Angular Fittings 85

"Z" Shape Fittings 86

"U" Shape Fittings ..... 87 - 88

Wing Shape Fittings ..... 89 - 90

Post Bases 90

Brackets ..... 90 - 93

Brace Fittings 94

Beam Clamps ..... 95 - 101

Trolleys 102

Special Application Fittings ..... 103 - 104

Seismic Retrofit Fittings ..... 104 - 106

MATERIAL

Fittings, unless noted, are made from hot-rolled, pickled and oiled steel plates, bar, strip or coil, and conform to one or more of the following specifications: ASTM specifications A575, A576, A635, A1011 SS GR 33, A1011 HSLAS GR 45 or A36. All fittings meet or exceed physical properties of ASTM A1011 GR 33. The pickling of the steel produces a smooth surface free from scale.

Many fittings are also available in stainless steel, aluminum and fiberglass. Consult factory for ordering information.

FINISHES

Fittings are available in:

Green Powder Coat (GR), conforming to commercial standards for Powder Coating

Electro-galvanized (EG), conforming to ASTM B633 Type III SC1;

Hot-dipped galvanized (HG), conforming to ASTM A123 or A153 and

Plain (PL)

Unistrut Defender (DF), conforming to ASTM A1059 or A1046

APPLICATION

All parts drawings illustrate only one application of each fitting. In most cases many other applications are possible. The channels shown in the illustrations are P1000, 1⅝" square, except where noted otherwise.

All 9⁄16" diameter holes use ½" x 15⁄16" hex head cap screws and ½" nuts – P1010, P3010, P4010 or P5510 – depending on the channel used. Nuts and bolts are not included with the fitting and must be ordered separately.

DESIGN BOLT TORQUE

BOLT SIZE	¼"-20	5⁄16"-18	⅜"-16	½"-13	⅝"-11	¾"-10
Rec. Torque Ft/Lbs (N•m)	6 *(8)*	11 *(15)*	19 *(26)*	50 *(68)*	100 *(136)*	125 *(170)*
Max Torque Ft/Lbs (N•m)	7 *(9)*	15 *(20)*	25 *(34)*	70 *(95)*	125 *(170)*	135 *(183)*

SET SCREW TORQUE

BOLT SIZE	¼"-20	⅜"-16	½"-13	⅝"-11	¾"-10	⅞"-9
Set Screw Torque In/Lbs (N•m)	40 *(4)*	60 *(7)*	125 *(14)*	250 *(28)*	400 *(44.5)*	665 *(75)*

Note: Caution should be taken not to overtighten the set screw

DIMENSIONS

Imperial dimensions are illustrated in inches. Metric dimensions are shown in parenthesis or as noted. Unless noted, all metric dimensions are in millimeters and rounded to one decimal place.

DESIGN LOAD

Design load data, where shown, is based on the ultimate strength of the connection with a safety factor of 2.5, unless otherwise noted.

BEAM CLAMPS

Clamps are designed to be used with W, M, S and HP Shape beams, Standard C and Miscellaneous MC Channels, Angles and Structural Tees. Clamps must be used in pairs mounted in opposite directions where indicated. For beam clamps with HG finish, standard hardware is EG finish. For optional stainless steel hardware, please contact the factory for availability.

Flat Plate Fittings



P1062-Pg 81 P1959-Pg 81 P2862-Pg 81 P1065-Pg 81 P1924-Pg 81 P2325-Pg 81 P2324-Pg 81 P1066-Pg 81 P1925-Pg 81 P1067-Pg 81 P2079-Pg 81 P1941-Pg 81 P1036-Pg 81



P1380 A-Pg 81 P1334-Pg 81 P1380-Pg 81 P1873-Pg 82 P1031-Pg 82 P1028-Pg 82 P1356-Pg 82 P1358-Pg 82 P1726-Pg 82 P1953-Pg 82 P1950-Pg 82 P1962-Pg 82

Angle Fittings



P2626-Pg 82 P1026-Pg 82 P1723-Pg 82 P1068-Pg 82 P1281-Pg 82 P1315-Pg 82 P1458-Pg 82 P1538A-Pg 83 P1750-Pg 83 P1498-Pg 83 P1747-Pg 83 P1326-Pg 83 P1821-Pg 83



P1346-Pg 83 P1325-Pg 83 P1822-Pg 83 P1823-Pg 83 P1033-Pg 83 P1037-Pg 83 P1038- Pg 83 P1034-Pg 83 P1029-Pg 84 P1035-Pg 84 P1290-Pg 84 P1291-Pg 84

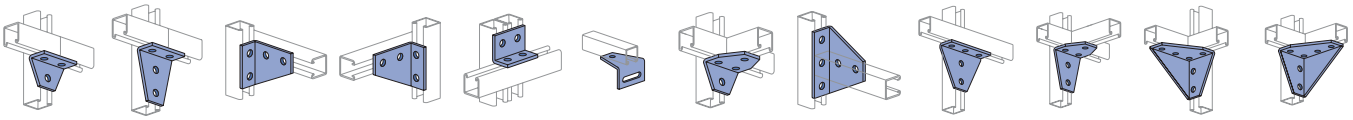

P1357-Pg 84 P1359-Pg 84 P1381-Pg 84 P1382- Pg 84 P1934-Pg 84 P1713-Pg 84 P1579-Pg 84 P1727-Pg 84 P1728-Pg 84 P2235-Pg 84 P1956-Pg 84 P1957-Pg 84

"Z" Shape Fittings

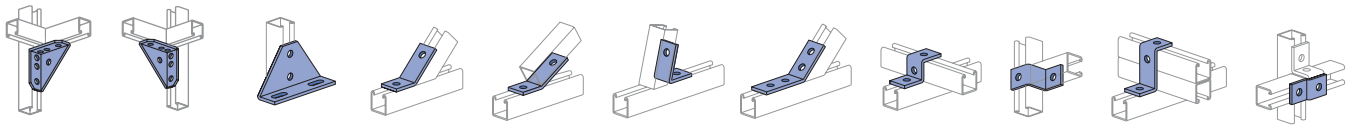

P2484-Pg 85 P2484W-Pg 85 P1130-Pg 85 P1546-Pg 85 P2101-Pg 85 P1186-Pg 85 P2260-Pg 85 P1045-Pg 86 P1347-Pg 86 P1453-Pg 86 P1454-Pg 86



P1479A-Pg 86 P1730-Pg 86 P1734-Pg 86 P1736-Pg 86 P2360-Pg 86 P5560-Pg 86 P3045-Pg 86 P3345, P612-Pg 86 P4045-Pg 86 P5545-Pg 86 P2469-Pg 86

"U" Shape Fittings

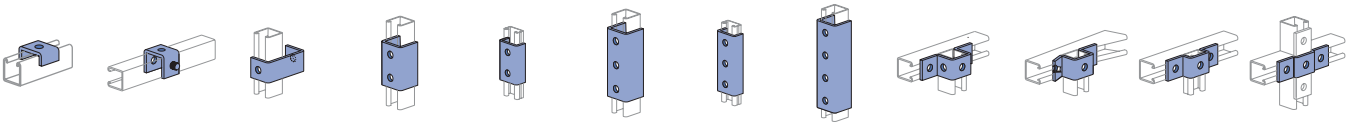

P2800-Pg 87 P1320-Pg 87 P1363A-Pg 87 P1376-Pg 87 P4376-Pg 87 P1376A-Pg 87 P4376A-Pg 87 P1377-Pg 87 P1047-Pg 87 P3047, P976-Pg 87 P4047-Pg 87 P1455-Pg 87

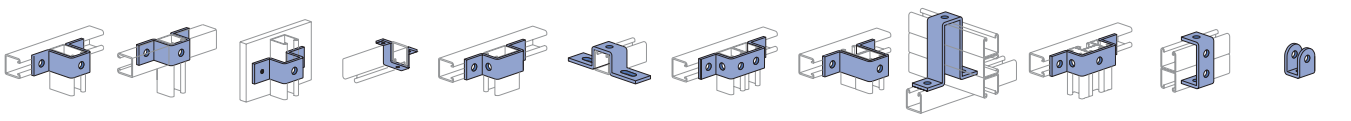

P5547-Pg 87 P1383-Pg 88 P1732-Pg 88 P2237-Pg 88 P5543-Pg 88 P1048-Pg 88 P1043A-Pg 88 P1737-Pg 88 P2473-Pg 88 P4043-Pg 88 P1044-Pg 88 P1973-Pg 88



P2326-Pg 88 P2328-Pg 88 P2329-Pg 88

General Fittings Pictorial Index

Wing Shape Fittings



P1046A-Pg 88 P2341-Pg 89 P2472-Pg 89 P2343-Pg 89 P2223-Pg 89 P2224-Pg 89 P2225-Pg 89 P2227-Pg 89 P2228-Pg 89 P2229-Pg 89 P2345-Pg 89

Post Bases



P2346-Pg 89 P2347-Pg 89 P2344-Pg 89 P2226-Pg 89 P2230-Pg 89 P2245-Pg 89 P2348-Pg 90 P1887-Pg 90 P2453-Pg 90 P2941-Pg 90 P2072-Pg 90

Brackets and Brace Fittings



P2072A-Pg 90 P2073-Pg 90 P2073A-Pg 90 P1769-Pg 90 P1771-Pg 90 P1773-Pg 91 P1775-Pg 91 P1777-Pg 91 P1075-Pg 91 P1593-Pg 91 P2491-Pg 91



P2494-Pg 92 P2500-Pg 92 P2547-Pg 91 P2944-Pg 92 P2542-Pg 92 P2231-Pg 93 P2233-Pg 93 P2513-Pg 93 P2231A-Pg 93 P2233A-Pg 93

Beam Clamps



P2513A-Pg 93 P2452-Pg 94 P2458-Pg 94 P2459-Pg 94 P2815-Pg 94 P2815D-Pg 94 P2897-Pg 95 P2784-Pg 95 PFL2-Pg 95 P2675-Pg 95 P2898-Pg 96



P2899-Pg 96 P2676-Pg 96 P1640-Pg 97 P2682-Pg 96 P2677-Pg 96 P2674-Pg 97 P2679-Pg 96 P1648S-Pg 97 P2398S-Pg 97 P1654A-Pg 97 P1271S-Pg 98 P1796S-Pg 98



P2785-Pg 98 P2786-Pg 98 P2787-Pg 98 P2824-Pg 98 P2867-Pg 98 P2867A-Pg 98 P2867B-Pg 98 P2868-Pg 99 P2868A-Pg 99 P2868B-Pg 99 P2893-Pg 99



P2894-Pg 99 P2895-Pg 99 P2896-Pg 99 P1386-Pg 100 P1379S-Pg 100 P1272S-Pg 100 P3087-Pg 100 P3088-Pg 100

Trolley Assemblies

Special Applications Fittings

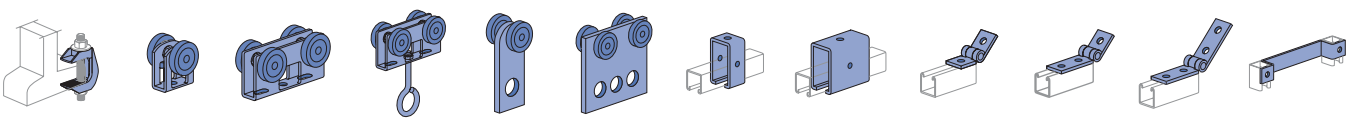

PLF9037-Pg 101 P2749-Pg 102 P2750-Pg 102 P2751-Pg 102 P2949-Pg 102 P2950-Pg 102 P1834-Pg 102 P1834A-Pg 102 P1843-Pg 104 P1354A-Pg 104 P1354-Pg 104 P1201-Pg 103

Seismic Retrofit Fittings

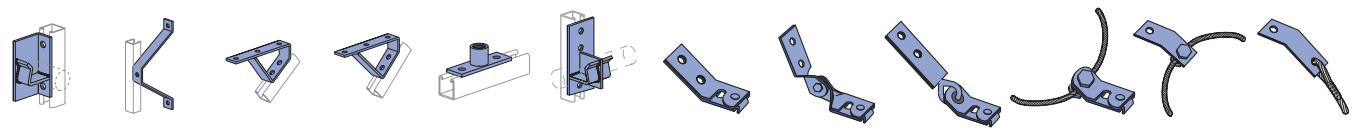

P2354-Pg 103 P1204-Pg 103 P2655-Pg 103 P1944-Pg 103 P2470-Pg 103 P2454-Pg 103 SPF 100-Pg 104 SPF 200-Pg 104 SPF 300-Pg 105 SPF 400-Pg 105 LS 410-Pg 106 LS500-Pg 106

DESIGN LOAD DATA FOR TYPICAL UNISTRUT CHANNEL CONNECTIONS

90° Fittings (When used in position shown)

Load – P1026		Channel Thickness 12 ga.	14 ga.	16 ga.
	Lbs	1,500	1,000	750
	kN	*6.67*	*4.45*	*3.34*



Load – P2484		Channel Thickness 12 ga.	14 ga.	16 ga.
	Lbs	3,000	2,000	1,500
	kN	*13.34*	*8.90*	*6.67*



Load – P1026		Channel Thickness 12 ga.	14 ga.	16 ga.
	Lbs	1,000	650	500
	kN	*4.45*	*2.89*	*2.22*



Load – P1068		Channel Thickness 12 ga.	14 ga.	16 ga.
	Lbs	500	500	500
	kN	*2.22*	*2.22*	*2.22*



Load – P1325, P2235		Channel Thickness 12 ga.	14 ga.	16 ga.
	Lbs	2,000	2,000	1,500
	kN	*8.90*	*8.90*	*6.67*



Load – P1326		Channel Thickness 12 ga.	14 ga.	16 ga.
	Lbs	500	500	500
	kN	*2.22*	*2.22*	*2.22*



Load – P1458, P1579		Channel Thickness 12 ga.	14 ga.	16 ga.
	Lbs	1,500	1,000	1,000
	kN	*6.67*	*4.45*	*4.45*



Load – P1346		Channel Thickness 12 ga.	14 ga.	16 ga.
	Lbs	1,200	1,200	1,000
	kN	*5.34*	*5.34*	*4.45*



Load – P1346		Channel Thickness 12 ga.	14 ga.	16 ga.
	Lbs	2,000	1,500	900
	kN	*8.90*	*6.67*	*4.00*



Load – P1065		Channel Thickness 12 ga.	14 ga.	16 ga.
	Lbs	1,000	800	600
	kN	*4.45*	*3.56*	*2.67*



Note:
(1) Both ends of beams supported.
(2) Load data is based on P1010 nut and ½" bolt.
(3) Safety factor = 2½ based on ultimate strength of connection.

Atkore Unistrut

P1062, P1063, P1064,P1964, P2471, P2490 DF, EG, GR, HG



Part No.	Bolt Size	Hole Size	Wt/100 pcs Lbs (kg)
P1062	5/16"	11/32"	18 (8.2)
P1063	3/8"	7/16"	18 (8.2)
P1064	1/2"	9/16"	17 (7.7)
P1964	5/8"	11/16"	16 (7.3)
P2471	3/4"	13/16"	15 (6.8)
P2490	7/8"	15/16"	14 (6.4)

P1959, P1960, P1961 EG, GR, HG



Part Number	U.S. Std. Thd Size	Wt/100 pcs Lbs (kg)
P1959	3/8" - 16	21 (9.5)
P1960	1/2" - 13	20 (9.1)
P1961	5/8" - 11	19 (8.6)

Material: 3/8" (9.5 mm) thick

P2862, 2863, 2864 DF, EG, GR, HG



Part Number	Bolt Size	Hole Size	Wt/100 pcs Lbs (kg)
P2862	5/16"	11/32"	18 (8.2)
P2863	3/8"	7/16"	18 (8.2)
P2864	1/2"	9/16"	17 (7.7)

P1065 DF, EG, GR, HG



Wt/100 pcs: 38 Lbs (17.2 kg)

P1924 EG, GR, HG



Wt/100 pcs: 35 Lbs (15.9 kg)

P2325 EG, GR, HG



Wt/100 pcs: 55 Lbs (24.9 kg)

P2324 DF, EG, GR, HG



Wt/100 pcs: 75 Lbs (34.0 kg)

P1066 DF, EG, GR, HG



Wt/100 pcs: 56 Lbs (25.4 kg)

P1925 EG, GR, HG



Wt/100 pcs: 50 Lbs (22.7 kg)

P1067 EG, GR, HG



Wt/100 pcs: 78 Lbs (35.4 kg)

P2079 EG, GR, HG



Wt/100 pcs: 73 Lbs (33.1 kg)

P1941 EG, GR, HG



Wt/100 pcs: 94 Lbs (42.6 kg)

P1036 DF, EG, GR, HG



Wt/100 pcs: 58 Lbs (26.3 kg)

P1380 A DF, EG, GR, HG



Wt/100 pcs: 80 Lbs (36.3 kg)

P1334 EG, GR, HG



Wt/100 pcs: 70 Lbs (31.8 kg)

P1380 EG, GR, HG



Wt/100 pcs: 105 Lbs (47.6 kg)

Standard Dimensions for 1⅝" (41.3mm) width series channel fittings *(Unless Otherwise Shown on Drawing)*

Hole Diameter: 9/16" (14.3mm); Hole Spacing - From End: 13/16" (20.6mm); Hole Spacing - On Center: 1⅛" (47.6mm); Width: 1⅝"(41.3mm); Thickness: ¼" (6.4mm) with steel meeting or exceeding ASTM A1011 SS GR 33, or 0.220" (5.6mm) with steel meeting or exceeding ASTM A1011 HSLAS GR 45

P1873 EG, GR, HG



Wt/100 pcs: 150 Lbs (68.0 kg)

P1031 DF, EG, GR, HG



Wt/100 pcs: 80 Lbs (36.3 kg)

P1028 DF, EG, GR, HG



Wt/100 pcs: 105 Lbs (47.6 kg)

P1356 EG, GR, HG



Wt/100 pcs: 70 Lbs (31.8 kg)

P1358 EG, GR, HG



Wt/100 pcs: 105 Lbs (47.6 kg)

P1726 EG, GR, HG



Wt/100 pcs: 148 Lbs (67.1 kg)

P1953 EG, GR, HG



Wt/100 pcs: 176 Lbs (79.8 kg)

P1950 EG, GR, HG



Wt/100 pcs: 240 Lbs (108.9 kg)

P1962 EG, GR, HG



Wt/100 pcs: 112 Lbs (50.8 kg)

P2626 EG, GR, HG



Wt/100 pcs: 40 Lbs (18.1 kg)

P1026 DF, EG, GR, HG



Wt/100 pcs: 38 Lbs (17.2 kg)

P1723 EG, GR, HG



Wt/100 pcs: 34 Lbs (15.4 kg)

P1068 DF, EG, GR, HG



Wt/100 pcs: 38 Lbs (17.2 kg)

P1281, P1282, P1283 EG, GR, HG



Part No.	"A" In *(mm)*	Wt/100 pcs Lbs *(kg)*
P1281	3 *76.2*	49 *22.2*
P1282	3½ *88.9*	54 *24.5*
P1283	4 *101.6*	61 *27.7*

P1315 EG, GR, HG



Wt/100 pcs: 45 Lbs (20.4 kg)

P1458 EG, GR, HG



Wt/100 pcs: 58 Lbs (26.3 kg)

Standard Dimensions for 1⅝" (41.3mm) width series channel fittings *(Unless Otherwise Shown on Drawing)*

Hole Diameter: 9⁄16" (14.3mm); Hole Spacing - From End: 13⁄16" (20.6mm); Hole Spacing - On Center: 1⅞" (47.6mm); Width: 1⅝"(41.3mm); Thickness: ¼" (6.4mm) with steel meeting or exceeding ASTM A1011 SS GR 33, or 0.220" (5.6mm) with steel meeting or exceeding ASTM A1011 HSLAS GR 45

P1538A THRU P1538D

EG, GR, HG



Part Number	"A" In (mm)	Wt/100 pcs Lbs (kg)
P1538A	3⅞ *98.4*	61 *27.7*
P1538B	5⅞ *149.2*	84 *38.1*
P1538C	7⅞ *200.0*	107 *48.5*
P1538D	9⅞ *250.8*	130 *59.0*

P1498, P1499

DF, EG, GR, HG



Part Number	"A" In (mm)	"B" In (mm)	Wt/100 pcs Lbs (kg)
P1498	4⅞ *123.8*	2½ *63.5*	65 *29.5*
P1499	6⅞ *174.6*	4½ *114.3*	85 *38.6*

P1750

EG, GR, HG



Wt/100 pcs: 38 Lbs (17.2 kg)

P1747

EG, GR, HG



Wt/100 pcs: 66 Lbs (29.9 kg)

P1326

EG, GR, HG



Wt/100 pcs: 58 Lbs (26.3 kg)

P1821

EG, GR, HG



Wt/100 pcs: 71 Lbs (32.2 kg)

P1346

EG, GR, HG



Wt/100 pcs: 58 Lbs (26.3 kg)

P1325

EG, GR, HG



Wt/100 pcs: 78 Lbs (35.4 kg)

P1822

EG, GR, HG



Wt/100 pcs: 55 Lbs (24.9 kg)

P1823

EG, GR, HG



Wt/100 pcs: 55 Lbs (24.9 kg)

P1033

EG, GR, HG



Wt/100 pcs: 80 Lbs (36.3 kg)

P1037

EG, GR, HG



Wt/100 pcs: 58 Lbs (26.3 kg)

P1038

EG, GR, HG



Wt/100 pcs: 58 Lbs (26.3 kg)

P1034

EG, GR, HG



Wt/100 pcs: 80 Lbs (36.3 kg)

Standard Dimensions for 1⅝" (41.3mm) width series channel fittings *(Unless Otherwise Shown on Drawing)*

Hole Diameter: 9/16" (14.3mm); Hole Spacing - From End: 13/16" (20.6mm); Hole Spacing - On Center: 1⅞" (47.6mm); Width: 1⅝"(41.3mm); Thickness: ¼" (6.4mm) with steel meeting or exceeding ASTM A1011 SS GR 33, or 0.220" (5.6mm) with steel meeting or exceeding ASTM A1011 HSLAS GR 45

P1029 EG, GR, HG



Wt/100 pcs: 105 Lbs (47.6 kg)

P1035 EG, GR, HG



Wt/100 pcs: 80 Lbs (36.3 kg)

P1290 EG, GR, HG



Wt/100 pcs: 101 Lbs (45.8 kg)

P1291 EG, GR, HG



Wt/100 pcs: 101 Lbs (45.8 kg)

P1357 EG, GR, HG



Wt/100 pcs: 70 Lbs (31.8 kg)

P1359 EG, GR, HG



Wt/100 pcs: 105 Lbs (47.6 kg)

P1381 EG, GR, HG



Wt/100 pcs: 105 Lbs (47.6 kg)

P1382 EG, GR, HG



Wt/100 pcs: 105 Lbs (47.6 kg)

P1934



Wt/100 pcs: 75 Lbs (34.0 kg)

P1713



Wt/100 pcs: 97 Lbs (44.0 kg)

P1579



Wt/100 pcs: 103 Lbs (46.7 kg)

P1727



Wt/100 pcs: 154 Lbs (69.9 kg)

P1728



Wt/100 pcs: 154 Lbs (69.9 kg)

P2235



Wt/100 pcs: 135 Lbs (61.2 kg)

P1956



Wt/100 pcs: 230 Lbs (104.3 kg)

P1957 EG, GR, HG



Wt/100 pcs: 230 Lbs (104.3 kg)

Standard Dimensions for 1⅝" (41.3mm) width series channel fittings *(Unless Otherwise Shown on Drawing)*

Hole Diameter: 9⁄16" (14.3mm); Hole Spacing - From End: 13⁄16" (20.6mm); Hole Spacing - On Center: 1⅞" (47.6mm); Width: 1⅝"(41.3mm); Thickness: ¼" (6.4mm) with steel meeting or exceeding ASTM A1011 SS GR 33, or 0.220" (5.6mm) with steel meeting or exceeding ASTM A1011 HSLAS GR 45

P2484 DF, EG, GR, HG



Wt/100 pcs: 134 Lbs (60.8 kg)

P2484W EG, GR, HG



Wt/100 pcs: 134 Lbs (60.8 kg)

P1130, P1131 EG, GR, HG



Part Number	"A" In (mm)	"B" In (mm)	Wt/100 pcs Lbs (kg)
P1130	6⅝ 168.3	4 101.6	190 86.2
P1131	8⅝ 219.1	6 152.4	242 109.8

P1546, P2094 THRU P2100 DF, EG, GR, HG



Part No.	"A" Degree (rad)	"B" In (mm)	"C" In (mm)
P2094	82½° 1.44	3⁹⁄₁₆ 90.5	1¹¹⁄₁₆ 42.9
P2095	75° 1.31	3⁹⁄₁₆ 90.5	1¹¹⁄₁₆ 42.9
P2096	67½° 1.18	3½ 88.9	1¾ 44.5
P2097	60° 1.05	3⅜ 85.7	1⅞ 47.6
P2098	52½° 0.92	3¼ 82.6	2¹⁄₁₆ 52.4
P1546	45° 0.79	3 76.2	2⁵⁄₁₆ 58.7
P2099	37½° 0.65	3½ 88.9	1¹³⁄₁₆ 46.0
P2100	37½° 0.65	2¹¹⁄₁₆ 68.3	2⅝ 66.7

Wt/100 pcs: 58 Lbs (26.3 kg)

P2101 THRU P2104 EG, GR, HG



Part No.	"A" Degree (rad)	"B" In (mm)
P2101	30° 0.52	3¼ 82.6
P2102	22½° 0.39	3⁵⁄₁₆ 84.1
P2103	15° 0.26	3⁵⁄₁₆ 84.1
P2104	7½° 0.13	3⁵⁄₁₆ 84.1

Wt/100 pcs: 58 Lbs (26.3 kg)

P1186, P2105 THRU P2110 DF, EG, GR, HG



Part Number	"A" Degree (rad)	"B" In (mm)
P2105	82½° 1.44	3¼ 82.6
P2106	75° 1.31	3¼ 82.6
P2107	67½° 1.18	3⁵⁄₁₆ 81.0
P2108	60° 1.05	3⁵⁄₁₆ 81.0
P2109	52½° 0.92	3⅛ 79.4
P1186	45° 0.79	3⅛ 79.4
P2110	37½° 0.65	3¹⁄₁₆ 77.8

Wt/100 pcs: 58 Lbs (26.3 kg)

P2260 THRU P2270 DF, EG, GR, HG



Part Number	"A" Degree (rad)	"B" In (mm)
P2270	82½° 1.44	3⅝ 92.1
P2269	75° 1.31	3⅝ 92.1
P2268	67½° 1.18	3⅝ 92.1
P2267	60° 1.05	3¹¹⁄₁₆ 93.7
P2266	52½° 0.92	3¹¹⁄₁₆ 93.7
P2265	45° 0.79	3¹¹⁄₁₆ 93.7
P2264	37½° 0.65	3¹¹⁄₁₆ 93.7
P2263	30° 0.52	3¹¹⁄₁₆ 93.7
P2262	22½° 0.39	3¾ 95.3
P2261	15° 0.26	3¾ 95.3
P2260	7½° 0.13	3¾ 95.3

Wt/100 pcs: 78 Lbs (35.4 kg)

Standard Dimensions for 1⅝" (41.3mm) width series channel fittings *(Unless Otherwise Shown on Drawing)*

Hole Diameter: ⁹⁄₁₆" (14.3mm); Hole Spacing - From End: ¹³⁄₁₆" (20.6mm); Hole Spacing - On Center: 1⅞" (47.6mm); Width: 1⅝"(41.3mm); Thickness: ¼" (6.4mm) with steel meeting or exceeding ASTM A1011 SS GR 33, or 0.220" (5.6mm) with steel meeting or exceeding ASTM A1011 HSLAS GR 45

P1045 DF, EG, GR, HG



Wt/100 pcs: 55 Lbs (24.9 kg)

P1347 EG, GR, HG



Wt/100 pcs: 55 Lbs (24.9 kg)

P1453 EG, GR, HG



Wt/100 pcs: 70 Lbs (31.8 kg)

P1454 EG, GR, HG



Wt/100 pcs: 38 Lbs (17.2 kg)

P1479A THRU P1479E



Part Number	"A" In (mm)	Wt/100 pcs Lbs (kg)
P1479A	4 (101.6)	81 (36.7)
P1479B	5 (127.0)	92 (41.7)
P1479C	6 (152.4)	104 (47.2)
P1479D	7 (177.8)	115 (52.2)
P1479E	8 (203.2)	127 (57.6)

P1730



Wt/100 pcs: 54 Lbs (24.5 kg)

P1734



Wt/100 pcs: 70 Lbs (31.8 kg)

P1736



Wt/100 pcs: 70 Lbs (31.8 Kg)

P2360



Wt/100 pcs: 9 Lbs (4.1 kg)

P5560



Wt/100 pcs: 11 Lbs (5.0 kg)

P3045 EG, GR, HG



Wt/100 pcs: 53 Lbs (24.0 kg)

P612 EG, GR, HG



Wt/100 pcs: 47 Lbs (21.3 kg)

P3345 EG, GR, HG



Wt/100 pcs: 47 Lbs (21.3 kg)

P4045 EG, GR, HG



Wt/100 pcs: 47 Lbs (21.3 kg)

P5545 EG, GR, HG



Wt/100 pcs: 67 Lbs (30.4 kg)

P2469



Wt/100 pcs: 93 Lbs (42.2 kg)

Standard Dimensions for 1⅝" (41.3mm) width series channel fittings *(Unless Otherwise Shown on Drawing)*

Hole Diameter: 9⁄16" (14.3mm); Hole Spacing - From End: 13⁄16" (20.6mm); Hole Spacing - On Center: 1⅞" (47.6mm); Width: 1⅝"(41.3mm); Thickness: ¼" (6.4mm) with steel meeting or exceeding ASTM A1011 SS GR 33, or 0.220" (5.6mm) with steel meeting or exceeding ASTM A1011 HSLAS GR 45

P2800

EG, GR, HG



Part Number	Bolt Size (in)	Hole Size (in)	Wt/100 pcs Lbs (kg)
P2800-25	1/4"	9/32"	14 6.4
P2800-37	3/8"	7/16"	14 6.4
P2800-50	1/2"	9/16"	13 5.9
P2800-62	5/8"	11/16"	13 5.9
P2800-75	3/4"	13/16"	13 5.9

P1363A THRU P1363E



Part Number	"A" In (mm)	Wt/100 pcs Lbs (kg)
P1363A	4 101.6	78 35.4
P1363B	5 127.0	89 40.4
P1363C	6 152.4	101 45.8
P1363D	7 177.8	112 50.8
P1363E	8 203.2	124 56.2

P1320



Wt/100 pcs: 63 Lbs (28.6 kg)

P1376

EG, GR, HG



Wt/100 pcs: 128 Lbs (58.1 kg)

P4376

EG, GR, HG



Wt/100 pcs: 85 Lbs (38.6 kg)

P1376A

EG, GR, HG



Wt/100 pcs: 197 Lbs (89.4 kg)

P4376A

EG, GR, HG



Wt/100 pcs: 130 Lbs (59.0 kg)

P1377, P4377, P5077, P5577

EG, GR, HG



Part Number	For Use With	"A" in (mm)	Wt/100 pcs Lbs (kg)
P1377	P1000, P1100, P2000	1 9/16 39.7	265 120
P4377	P3300, P4000, P4100	15/16 23.8	176 80
P5077	P5000	3 3/16 81.0	390 177
P5577	P5500	2 3/8 60.3	310 141

P1047

DF, EG, GR, HG



Wt/100 pcs: 88 Lbs (39.9 kg)

P3047

EG, GR, HG



Wt/100 pcs: 84 Lbs (38.1 kg)

P976



Wt/100 pcs: 71 Lbs (32.2 kg)

P4047

EG, GR, HG



Wt/100 pcs: 71 Lbs (32.2 kg)

P1455

EG, GR, HG



Wt/100 pcs: 58 Lbs (26.3 kg)

P5547

EG, GR, HG



Wt/100 pcs: 108 Lbs (49.0 kg)

Standard Dimensions for 1⅝" (41.3mm) width series channel fittings *(Unless Otherwise Shown on Drawing)*

Hole Diameter: 9/16" (14.3mm); Hole Spacing - From End: 13/16" (20.6mm); Hole Spacing - On Center: 1⅞" (47.6mm); Width: 1⅝"(41.3mm); Thickness: ¼" (6.4mm) with steel meeting or exceeding ASTM A1011 SS GR 33, or 0.220" (5.6mm) with steel meeting or exceeding ASTM A1011 HSLAS GR 45

P1383 EG, GR, HG



Wt/100 pcs: 95 Lbs (43.1 kg)

P1732 EG, GR, HG



Wt/100 pcs: 88 Lbs (39.9 kg)

P2237 EG, GR, HG



Material: ⅛" (3.2) thick.

Wt/100 pcs: 18 Lbs (8.2 kg)

P5543 EG, GR, HG



Wt/100 pcs: 97 Lbs (44.0 kg)

P1048, P1049, P1050 DF, EG, GR, HG



Part Number	"A" In *(mm)*	"B" In *(mm)*	Wt/100 pcs Lbs *(kg)*
P1048	7¼ *184.2*	4⅛ *104.8*	105 *47.6*
P1049	8½ *215.9*	5⅜ *136.5*	120 *54.4*
P1050	10⅜ *263.5*	7¼ *184.2*	130 *59.0*

P1043A EG, GR, HG



Wt/100 pcs: 105 Lbs (47.6 kg)

P1737 EG, GR, HG



P1001(shown), P1101, P2001, P4004 or P5000

Wt/100 pcs: 128 Lbs (58.1 kg)

P2473 EG, GR, HG



Wt/100 pcs: 197 Lbs (89.4 kg)

P4043 EG, GR, HG



P4004 (shown), P1001, P1101, P2001, or P5000

Wt/100 pcs: 106 Lbs (48.1 kg)

P1044 EG, GR, HG



Wt/100 pcs: 70 Lbs (31.8 kg)

P1973 EG, GR, HG



Wt/100 pcs: 53 Lbs (24.0 kg)

P2326 EG, GR, HG



Wt/100 pcs: 171 Lbs (77.6 kg)

P2328



Wt/100 pcs: 209 Lbs (94.8 kg)

P2329



Wt/100 pcs: 257 Lbs (116.6 kg)

P1046A EG, GR, HG



Wt/100 pcs: 76 Lbs (34.5 kg)

Standard Dimensions for 1⅝" (41.3mm) width series channel fittings *(Unless Otherwise Shown on Drawing)*

Hole Diameter: 9/16" (14.3mm); Hole Spacing - From End: 13/16" (20.6mm); Hole Spacing - On Center: 1⅞" (47.6mm); Width: 1⅝"(41.3mm); Thickness: ¼" (6.4mm) with steel meeting or exceeding ASTM A1011 SS GR 33, or 0.220" (5.6mm) with steel meeting or exceeding ASTM A1011 HSLAS GR 45

Atkore Unistrut

P2341 R-L — EG, GR, HG



R - As shown
L - Opposite hand

Wt/100 pcs: 60 Lbs (27.2 kg)

P2472 R-L — EG, GR, HG



R - As shown
L - Opposite hand

Wt/100 pcs: 75 Lbs (34.0 kg)

P2343 R-L — EG, GR, HG



R - As shown
L - Opposite hand

Wt/100 pcs: 119 Lbs (54.0 kg)

P2223 — EG, GR, HG



Wt/100 pcs: 76 Lbs (34.5 kg)

P2224 — EG, GR, HG



Wt/100 pcs: 115 Lbs (52.2 kg)

P2225 — EG, GR, HG



Wt/100 pcs: 155 Lbs (70.3 kg)

P2227 — EG, GR, HG



Wt/100 pcs: 113 Lbs (51.3 kg)

P2228 — EG, GR, HG



Wt/100 pcs: 177 Lbs (80.3 kg)

P2229 — EG, GR, HG



Wt/100 pcs: 230 Lbs (104.3 kg)

P2345 — EG, GR, HG



Wt/100 pcs: 93 Lbs (42.2 kg)

P2346 — EG, GR, HG



Wt/100 pcs: 150 Lbs (68.0 kg)

P2347 — EG, GR, HG



Wt/100 pcs: 193 Lbs (87.5 kg)

P2344 R-L — EG, GR, HG



R - As shown
L - Opposite hand

Wt/100 pcs: 176 Lbs (79.8 kg)

P2226 — EG, GR, HG



Wt/100 pcs: 217 Lbs (98.4 kg)

P2230 — EG, GR, HG



Wt/100 pcs: 310 Lbs (140.6 kg)

P2245 — EG, GR, HG

Fitting notched for continuous vertical.



Wt/100 pcs: 315 Lbs (142.9 kg)

Standard Dimensions for 1⅝" (41.3mm) width series channel fittings *(Unless Otherwise Shown on Drawing)*

Hole Diameter: 9/16" (14.3mm); Hole Spacing - From End: 13/16" (20.6mm); Hole Spacing - On Center: 1⅞" (47.6mm); Width: 1⅝"(41.3mm); Thickness: ¼" (6.4mm) with steel meeting or exceeding ASTM A1011 SS GR 33, or 0.220" (5.6mm) with steel meeting or exceeding ASTM A1011 HSLAS GR 45

P2348 EG, GR, HG



Wt/100 pcs: 274 Lbs (124.3 kg)

P2453 EG, GR, HG



Wt/100 pcs: 116 Lbs (52.6 kg)

P1887 EG, GR, HG



Wt/100 pcs: 297 Lbs (134.8 kg)

P2941, P2942 EG, GR, HG

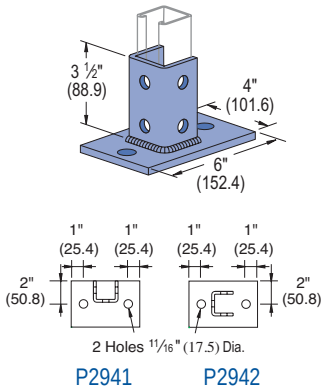

Wt/100 pcs: 358 Lbs (162.4 kg)

P2072, P2072 SQ EG, GR, HG

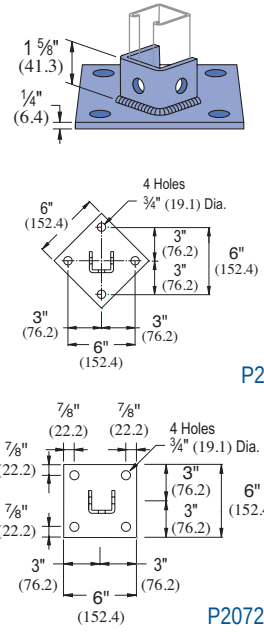

Wt/100 pcs: 307 Lbs (139.3 kg)

P2072A, P2072A SQ DF, EG, GR, HG

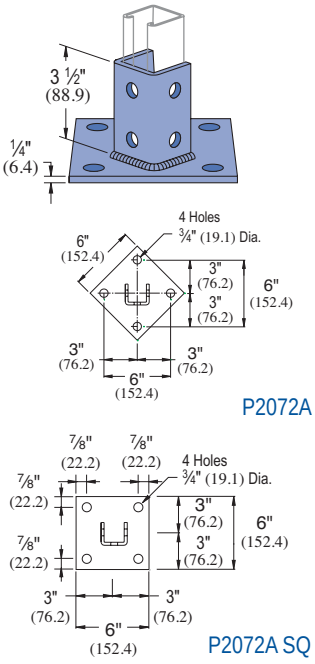

Wt/100 pcs: 373 Lbs (169.2 kg)

P2073, P2073 SQ EG, GR, HG

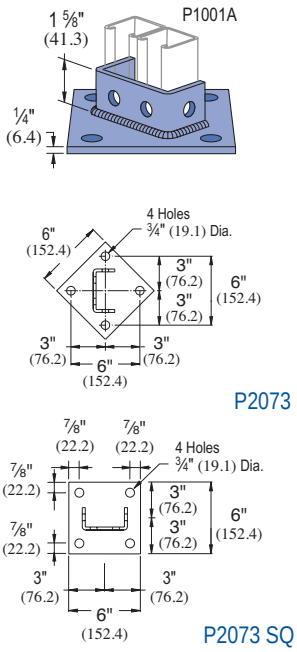

Wt/100 pcs: 325 Lbs (147.4 kg)

P2073A, P2073A SQ EG, GR, HG

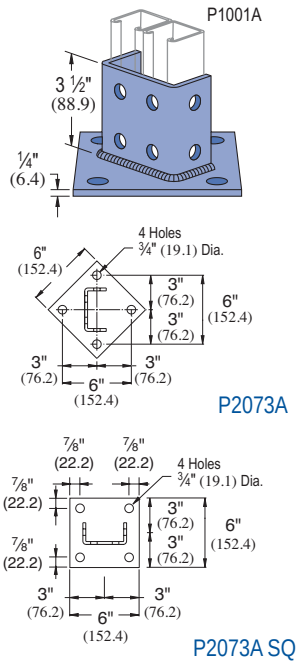

Wt/100 pcs: 408 Lbs (185.1 kg)

P1769 EG, GR

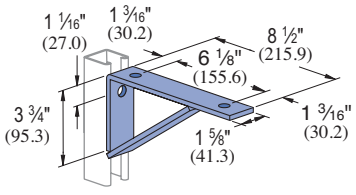

Material: ¼" (6.4) thick steel.

Vertical Channel Part No.	Gauge	Uniform Design Load Lbs *(kN)*
P1000	12	800 *3.56*
P1100	14	600 *2.67*
P2000	16	400 *1.81*

Safety Factor 2½

Wt/100 pcs: 174 Lbs (78.9 kg)

P1771 EG, GR

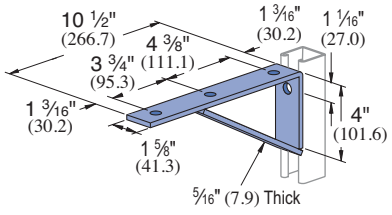

Material: ¼" (6.4) thick steel.

Vertical Channel Part No.	Gauge	Uniform Design Load Lbs *(kN)*
P1000	12	800 *3.56*
P1100	14	600 *2.67*
P2000	16	400 *1.81*

Safety Factor 2½

Wt/100 pcs: 206 Lbs (93.4 kg)

Standard Dimensions for 1⅝" (41.3mm) width series channel fittings *(Unless Otherwise Shown on Drawing)*

Hole Diameter: 9⁄16" (14.3mm); Hole Spacing - From End: 13⁄16" (20.6mm); Hole Spacing - On Center: 1⅞" (47.6mm); Width: 1⅝"(41.3mm); Thickness: ¼" (6.4mm) with steel meeting or exceeding ASTM A1011 SS GR 33, or 0.220" (5.6mm) with steel meeting or exceeding ASTM A1011 HSLAS GR 45

Atkore Unistrut

P1773

EG, GR

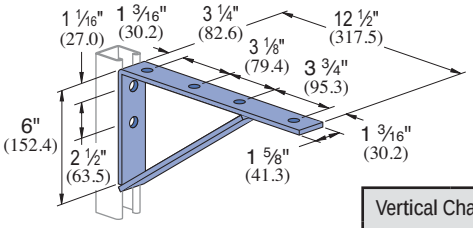

Vertical Channel Part No.	Gauge	Uniform Design Load Lbs *(kN)*
P1000	12	900 *(4.00)*
P1100	14	800 *(3.56)*
P2000	16	450 *(2.04)*

Material: ¼" (6.4) thick steel.

Safety Factor 2½

Wt/100 pcs: 264 Lbs (119.7 kg)

P1775

EG, GR

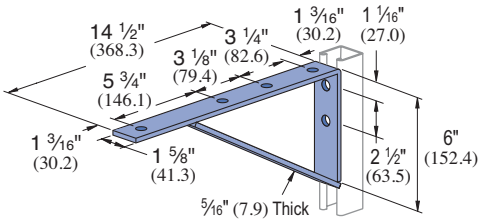

Vertical Channel Part No.	Gauge	Uniform Design Load Lbs *(kN)*
P1000	12	900 *(4.00)*
P1100	14	800 *(3.56)*
P2000	16	450 *(2.04)*

Material: ¼" (6.4) thick steel.

Safety Factor 2½

Wt/100 pcs: 295 Lbs (133.8 kg)

P1075

EG, GR



P1000
P1100
P2000
P4001

Vertical Channel Part No.	Gauge	Allowable Moment* In-Lbs *(N•M)*
P1000	12	5,100 *(576)*
P1100	14	4,400 *(497)*
P2000	16	3,200 *(362)*

Material: ¼" (6.4) thick steel.

Safety Factor 2½

* Allowable moment for fitting only. Channel may determine overall capacity.

Wt/100 pcs: 229 Lbs (103.9 kg)

P1593

EG, GR



P1001
P1101
P5000
P2001

Vertical Channel Part No.	Gauge	Allowable Moment* In-Lbs *(N•M)*
P1000	12	13,000 *1,469*
P1100	14	9,100 *1,028*
P2000	16	6,500 *734*

Material: ¼" (6.4) thick steel.

Safety Factor 2½

* Allowable moment for fitting only. Channel may determine overall capacity.

Wt/100 pcs: 272 Lbs (123.4 kg)

P1777

EG, GR

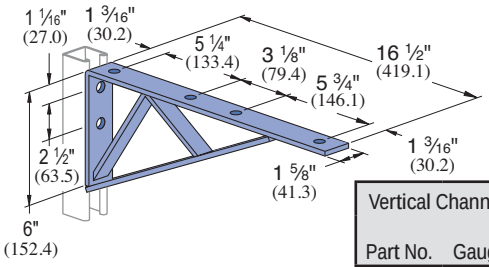

Vertical Channel Part No.	Gauge	Uniform Design Load Lbs *(kN)*
P1000	12	1,200 *(5.44)*
P1100	14	900 *(4.00)*
P2000	16	600 *(2.67)*

Material: ¼" (6.4) thick steel.

Safety Factor 2½

Wt/100 pcs: 385 Lbs (174.6 kg)

P2547 THRU P2551 CABLE TRAY BRACKET



Part Number	"A" In *(mm)*	"B" In *(mm)*	Wt/100 pcs Lbs *(kg)*	Uniform Load* Lbs *(kN)*
P2547	15 *381.0*	8¾ *222*	420 *190.5*	1,000 *4.45*
P2548	21 *533.4*	8¾ *222*	628 *284.9*	1,000 *4.45*
P2549	27 *685.8*	11¼ *286*	860 *390.1*	900 *4.00*
P2550	33 *838.2*	11¼ *286*	1010 *458.1*	900 *4.00*
P2551	39 *990.6*	16 *406.4*	1257 *683.3*	800 *3.56*

P2491 R-L THRU P2493 R-L

EG, GR



R - As shown; L - Opposite hand

Material : 12 Gauge Steel.

Vertical Channel Part No.	Gauge	Uniform Design Load Lbs *(kN)*
P1000	12	300 *(1.33)*
P1100	14	250 *(1.11)*
P2000	16	200 *(.89)*

Safety Factor - 2½

Part Number	Stamped Ident. No.	"A" In *(mm)*	"B" In *(mm)*	Wt/100 pcs Lbs *(kg)*
P2491 R-L	121892 R-L	6 *152.4*	1 15/16 *49.2*	67 *30.4*
P2492 R-L	121893 R-L	8 *203.2*	2 7/16 *61.9*	92 *41.7*
P2493 R-L	121894 R-L	10 *254.0*	2 15/16 *74.6*	120 *54.4*

Standard Dimensions for 1⅝" (41.3mm) width series channel fittings *(Unless Otherwise Shown on Drawing)*

Hole Diameter: 9/16" (14.3mm); Hole Spacing - From End: 13/16" (20.6mm); Hole Spacing - On Center: 1⅞" (47.6mm); Width: 1⅝"(41.3mm); Thickness: ¼" (6.4mm) with steel meeting or exceeding ASTM A1011 SS GR 33, or 0.220" (5.6mm) with steel meeting or exceeding ASTM A1011 HSLAS GR 45

P2494 R-L THRU P2499 R-L

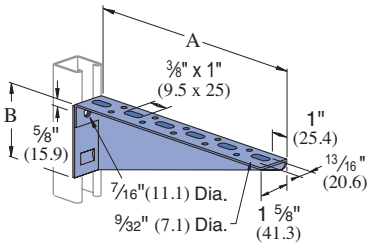

Vertical Channel		Uniform Design Load
Part No.	Gauge	Lbs *(kN)*
P1000	12	300 *(1.33)*
P1100	14	250 *(1.11)*
P2000	16	200 *(.89)*

Safety Factor - 2½

Part Number	Stamped Ident. No.	"A" In *(mm)*	"B" In *(mm)*	Wt/100 pcs Lbs *(kg)*
P2494 R-L	121895 R-L	12 *304.8*	3 7/16 *87.3*	152 *68.9*
P2495 R-L	121896 R-L	14 *355.6*	3 15/16 *100.0*	173 *78.5*
P2496 R-L	121897 R-L	16 *406.4*	4 7/16 *112.7*	223 *101.2*
P2497 R-L	121898 R-L	18 *457.2*	4 15/16 *125.4*	266 *120.7*
P2498 R-L	121899 R-L	20 *508.0*	5 7/16 *138.1*	308 *139.7*
P2499 R-L	121900 R-L	22 *558.8*	5 15/16 *150.8*	355 *161.0*

Material : 12 Gauge Steel.
R - As shown; L - Opposite hand

P2500 R-L THRU P2503 R-L

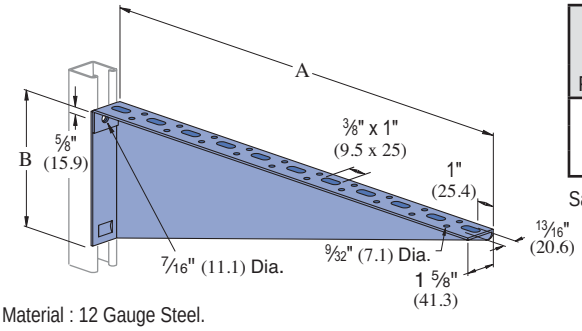

Vertical Channel		Uniform Design Load
Part No.	Gauge	Lbs *(kN)*
P1000	12	300 *(1.33)*
P1100	14	250 *(1.11)*
P2000	16	200 *(.89)*

Safety Factor - 2½

Part Number	Stamped Ident. No.	"A" In *(mm)*	"B" In *(mm)*	Wt/100 pcs Lbs *(kg)*
P2500 R-L	121901 R-L	24 *609.6*	6 7/16 *164*	400 *181.4*
P2501 R-L	121902 R-L	26 *660*	6 15/16 *176*	445 *201.8*
P2502 R-L	121903 R-L	28 *711*	7 7/16 *189*	493 *223.6*
P2503 R-L	121904 R-L	30 *762.0*	7 15/16 *202*	545 *247.2*

Material : 12 Gauge Steel.
R - As shown; L - Opposite hand

P2944, P2945, P2946, P2947

EG, GR, HG



Part Number	"A" In *(mm)*	Wt/100 pcs Lbs *(kg)*	Uniform Load* Lbs *(kN)*
P2944	6 *152.4*	185 *84*	1200 *5.34*
P2945	12 *304.8*	293 *133*	600 *2.67*
P2946	18 *457.2*	401 *182*	400 *1.78*
P2947	24 *609.6*	509 *231*	300 *1.33*

Safety Factor 2½
* Mounted on 12 Ga. Channel

P2542 THRU P2546

EG, GR, HG



Safety Factor - 2½

Part Number	"A" In *(mm)*	Wt/100 pcs Lbs *(kg)*	Vertical Channel Part No.	Gauge	Uniform Design Load Lbs *(kN)*
P2542	12 *304.8*	502 *228*	P1000	12	2,000 *(8.90)*
			P1100	14	1,400 *(6.23)*
			P2000	16	1,000 *(4.45)*
P2543	18 *457.2*	692 *314*	P1000	12	1,300 *(5.78)*
			P1100	14	900 *(4.00)*
			P2000	16	650 *(2.89)*
P2544	24 *609.6*	882 *400*	P1000	12	1,000 *(4.45)*
			P1100	14	700 *(3.11)*
			P2000	16	500 *(2.22)*
P2545	30 *762.0*	1,072 *486*	P1000	12	800 *(3.56)*
			P1100	14	560 *(2.49)*
			P2000	16	400 *(1.78)*
P2546	36 *914.4*	1,262 *572*	P1000	12	650 *(2.89)*
			P1100	14	450 *(2.00)*
			P2000	16	320 *(1.42)*

Standard Dimensions for 1⅝" (41.3mm) width series channel fittings *(Unless Otherwise Shown on Drawing)*

Hole Diameter: 9/16" (14.3mm); Hole Spacing - From End: 13/16" (20.6mm); Hole Spacing - On Center: 1⅞" (47.6mm); Width: 1⅝"(41.3mm); Thickness: ¼" (6.4mm) with steel meeting or exceeding ASTM A1011 SS GR 33, or 0.220" (5.6mm) with steel meeting or exceeding ASTM A1011 HSLAS GR 45

P2231, P2232



Part Number	"A" In *(mm)*	Wt/100 pcs Lbs *(kg)*	Vertical Channel Part No.	Gauge	Uniform Design Load Lbs *(kN)*
P2231	6 *152.4*	191 *86.6*	P1000	12	1,600 *(7.12)*
			P1100	14	1,200 *(5.34)*
			P2000	16	800 *(3.56)*
P2232	12 *304.8*	292 *132.4*	P1000	12	800 *(3.56)*
			P1100	14	600 *(2.67)*
			P2000	16	400 *(1.78)*

Safety Factor - 2½

P2231A, P2232A



Part Number	"A" In *(mm)*	Wt/100 pcs Lbs *(kg)*	Vertical Channel Part No.	Gauge	Uniform Design Load Lbs *(kN)*
P2231A	6 *152.4*	191 *86.6*	P1000	12	1,600 *(7.12)*
			P1100	14	1,200 *(5.34)*
			P2000	16	800 *(3.56)*
P2232A	12 *304.8*	292 *132.4*	P1000	12	800 *(3.56)*
			P1100	14	600 *(2.67)*
			P2000	16	400 *(1.78)*

Safety Factor - 2½

P2233, P2234



Part Number	"A" In *(mm)*	Wt/100 pcs Lbs *(kg)*	Vertical Channel Part No.	Gauge	Uniform Design Load Lbs *(kN)*
P2233	18 *457.2*	436 *197.8*	P1000	12	600 *(2.67)*
			P1100	14	450 *(2.00)*
			P2000	16	300 *(1.33)*
P2234	24 *609.6*	536 *243.1*	P1000	12	450 *(2.00)*
			P1100	14	330 *(1.47)*
			P2000	16	220 *(.98)*

Safety Factor - 2½

P2233A, P2234A

GR, HG



Part Number	"A" In *(mm)*	Wt/100 pcs Lbs *(kg)*	Vertical Channel Part No.	Gauge	Uniform Design Load Lbs *(kN)*
P2233A	18 *457.2*	436 *197.8*	P1000	12	600 *(2.67)*
			P1100	14	450 *(2.00)*
			P2000	16	300 *(1.33)*
P2234A	24 *609.6*	536 *243.1*	P1000	12	450 *(2.00)*
			P1100	14	330 *(1.47)*
			P2000	16	220 *(.98)*

Safety Factor - 2½

P2513 THRU P2516



When installed in inverted position use 60% of loads shown.

Safety Factor 2½

Part Number	"A" In *(mm)*	Wt/100 pcs Lbs *(kg)*	Vertical Channel Part No.	Gauge	Uniform Design Load Lbs *(kN)*
P2513	6 *152.4*	161 *73.0*	P1000	12	1,200 *(5.34)*
			P1100	14	800 *(3.56)*
			P2000	16	600 *(2.67)*
P2514	12 *304.8*	261 *118.4*	P1000	12	600 *(2.67)*
			P1100	14	400 *(1.78)*
			P2000	16	300 *(1.33)*
P2515	18 *457.2*	361 *163.7*	P1000	12	400 *(1.78)*
			P1100	14	270 *(1.20)*
			P2000	16	200 *(.89)*
P2516	24 *609.6*	461 *209.1*	P1000	12	300 *(1.33)*
			P1100	14	200 *(.89)*
			P2000	16	150 *(.67)*

P2513A THRU P2516A



When installed in inverted position use 60% of loads shown.

Safety Factor 2½

Part Number	"A" In *(mm)*	Wt/100 pcs Lbs *(kg)*	Vertical Channel Part No.	Gauge	Uniform Design Lbs *(kN)*
P2513A	6 *152.4*	161 *73.0*	P1000	12	1,200 *(5.34)*
			P1100	14	800 *(3.56)*
			P2000	16	600 *(2.67)*
P2514A	12 *304.8*	261 *118.4*	P1000	12	600 *(2.67)*
			P1100	14	400 *(1.78)*
			P2000	16	300 *(1.33)*
P2515A	18 *457.2*	361 *163.7*	P1000	12	400 *(1.78)*
			P1100	14	270 *(1.20)*
			P2000	16	200 *(.89)*
P2516A	24 *609.6*	461 *209.1*	P1000	12	300 *(1.33)*
			P1100	14	200 *(.89)*
			P2000	16	150 *(.67)*

Standard Dimensions for 1⅝" (41.3mm) width series channel fittings *(Unless Otherwise Shown on Drawing)*

Hole Diameter: 9⁄16" (14.3mm); Hole Spacing - From End: 13⁄16" (20.6mm); Hole Spacing - On Center: 1⅛" (47.6mm); Width: 1⅝"(41.3mm); Thickness: ¼" (6.4mm)

P2815 Adjustable Brace Fitting EG HG





Wt/100 pcs: 307 Lbs (139.3 kg)

P2815D Adjustable Brace Fitting



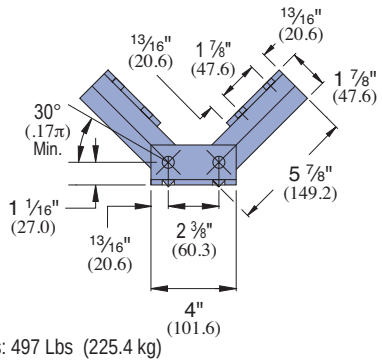

Wt/100 pcs: 497 Lbs (225.4 kg)

P2452 Knee Brace EG GR



Design Axial Load
1200 Lbs (5.34 kN)

Material: ¼" (6.4) thick steel.

Wt/100 pcs: 277 Lbs (125.6 kg)

P2458-18 thru P2458-36 Tubular Knee Braces







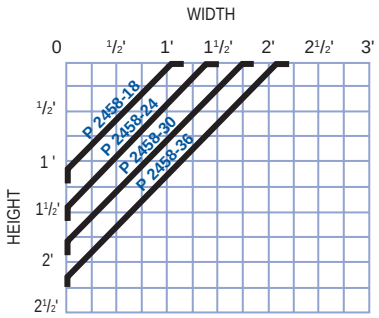

Part Number	"A" In *(mm)*	Wt/100 pcs Lbs *(kg)*
P2458-18	18 *457.2*	146 *66.2*
P2458-24	24 *609.6*	186 *84.4*
P2458-30	30 *762.0*	227 *103.0*
P2458-36	36 *914.4*	267 *121.1*

Design Loads
Compression = 1500 Lbs (6.67 kN)
Tension = 300 Lbs (1.33 kN)

P2459-36 thru P2459-96 Tubular Back Braces EG GR





1. The vertical lines of the graph correspond to the center to center line dimension of the uprights.
2. Along this vertical line locate the (maximum usable) horizontal bracing height line.
3. The arc line that intersects the point formed by the intersection of the two lines, indicates the brace required.
4. 30° - 60° maximum, minimum brace angles are indicated for maximum effect.





Part Number	"A" In *(mm)*	Wt/100 pcs Lbs *(kg)*
P2459-36	36 *914.4*	255 *115.7*
P2459-42	42 *1,066.8*	296 *134.3*
P2459-48	48 *1,219.2*	336 *152.4*
P2459-54	54 *1,371.6*	377 *171.0*
P2459-60	60 *1,524.0*	418 *189.6*
P2459-72	72 *1,828.8*	499 *226.3*
P2459-84	84 *2,133.6*	580 *263.1*
P2459-96	96 *2,438.4*	661 *299.8*

Standard Dimensions for 1⅝" (41.3mm) width series channel fittings *(Unless Otherwise Shown on Drawing)*

Hole Diameter: 9/16" (14.3mm); Hole Spacing - From End: 13/16" (20.6mm); Hole Spacing - On Center: 1⅞" (47.6mm); Width: 1⅝"(41.3mm); Thickness: ¼" (6.4mm) with steel meeting or exceeding ASTM A1011 SS GR 33, or 0.220" (5.6mm) with steel meeting or exceeding ASTM A1011 HSLAS GR 45

Atkore Unistrut

P2897

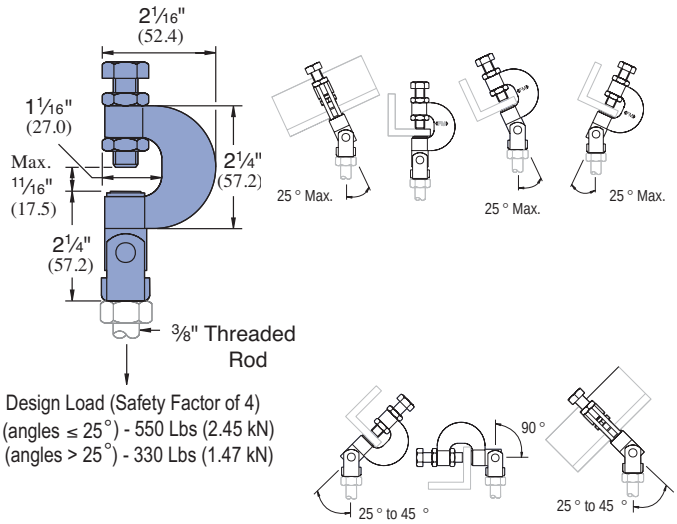

Design Load (Safety Factor of 4)
(angles ≤ 25°) - 550 Lbs (2.45 kN)
(angles > 25°) - 330 Lbs (1.47 kN)

Safety Factor 4
Torque: 13 Ft-Lbs *(18 N•m)*

Wt/100 pcs: 33 Lbs (15.0 kg)

P2784

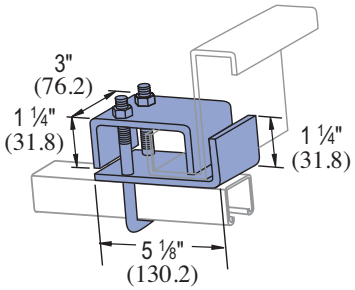

Part Number	For Use With	Load Lbs (kN)	Wt/100 pcs Lbs (kg)
P2784-1	P1000, P1100, P2000	1,200 *5.34*	175 *79.3*
P2784-2	P1001, P1101, P2001	1,200 *5.34*	179 *81.1*
P2784-3	P5001, P5501	1,200 *5.34*	180 *81.5*

P2675

EG GR

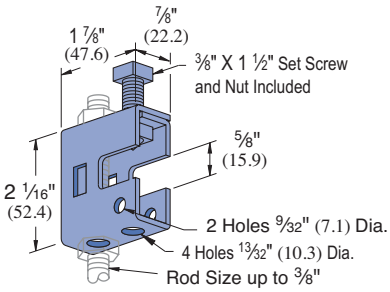



Design Load
250 Lbs (1.11 kN)

Design Load
150 Lbs (.67 kN)

Clamp Materials: .105" (2.7) thick steel.
Clamp P2675 is designed for light duty rod suspension. It also may be used with P3016-1024 or P3016-1420 nut as illustrated above for mounting insulators, etc.

Wt/100 pcs: 33 Lbs (15.0 kg)



P8000, P8001 – Junior Ductile Iron Top Beam Clamp

Material: 3/8" and 1/2" rod sizes
Finish: Plain (PL) and Electro-Galvanized (EG)
Function: Structural attachment to top or bottom of metal beams, purlins, channel, or angle iron

Features:
- Set screw made of hardened steel
- Complies with Federal Specification A-A192A (Type 19) and MSS SP-69 (Type 19)

Part No. Plain & EG	Rod Size	Max Load Top Lbs*	Max Load Bottom Lbs*	Weight Lbs	W
P8000	3/8	500	250	0.33	7/8
P8001	1/2	950	760	0.34	1 1/16

NOTE: *Max load may exceed allowable load for threaded rod size shown.

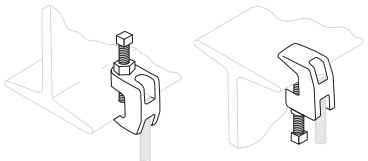

Typical Applications



Note: When used for mechanical supports, load capacities of brackets, fittings and other supporting elements should be in compliance with the American Standard Code for Pressure Piping. Clamps are designed to be used with W, M, S & HP Shape beams, Standard C & Misc. MC Channels, Angles & Structural Tees. Clamps must be used in pairs where indicated. For beam clamps with HG finish, standard hardware is EG finish. For optional stainless steel hardware, please contact the factory for availability.

P2676

EG GR

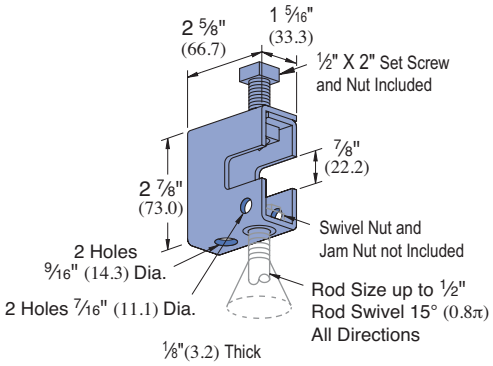

Wt/100 pcs: 72 Lbs (32.7 kg)



Design Load
300 Lbs (1.33 kN)



Design Load
500 Lbs (2.22 kN)

Clamp P2676 provides a means of rod suspension where a free swing of up to 15° (0.8π) is required. Clamp will accommodate ¼" (6.4), ⅜" (9.5), or ½" (12.7) rods. Order swivel nuts P2679-4,-6, or -8 as required. Clamp may also be used with P2677 as illustrated in application drawings.

Clamp Materials: ⅛" (3.2) thick steel. Not available in SS or ST.

P2898

Universal Beam Clamp EG

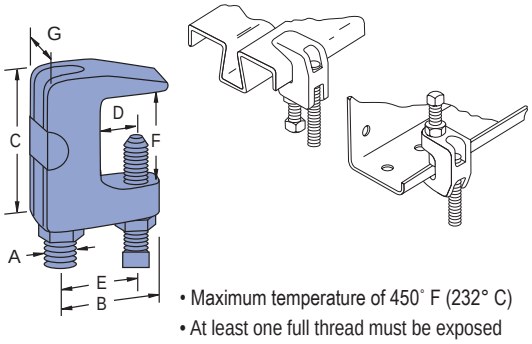

- Maximum temperature of 450° F (232° C)
- At least one full thread must be exposed

	A In	B In *(mm)*	C In *(mm)*	D In *(mm)*	E In *(mm)*	F In *(mm)*	G In *(mm)*	Max Load Lbs *(kN)*	Wt/100 pcs Lbs *(kg)*
P2898-37	⅜	1	1½	½	1	¾	⅞	400	33
		25.4	*38.1*	*12.7*	*25.4*	*19.1*	*22.2*	*1.78*	*15.0*
P2898-50	½	1 5/16	1½	½	1	¾	⅞	500	33
		25.4	*38.1*	*12.7*	*25.4*	*19.1*	*22.2*	*2.22*	*15.0*
P2898-62	⅝	1½	1½	½	1	¾	1	600	22
		38.1	*38.1*	*12.7*	*25.4*	*19.1*	*25.4*	*2.67*	*10.0*
P2898-75	¾	1⅞	1¾	⅝	1⅜	1	1¼	800	88
		47.6	*44.5*	*15.9*	*34.9*	*25.4*	*31.8*	*3.56*	*40.0*
P2898-87	⅞	2	1¾	⅝	1½	1	1¼	1,200	79
		50.8	*44.5*	*15.9*	*38.1*	*25.4*	*31.8*	*5.34*	*35.9*

P2899

Wide Throat Beam Clamp EG





- Maximum temperature of 450° F (232° C)

	Rod Size A in	B In *(mm)*	C In *(mm)*	D In *(mm)*	E In *(mm)*	Max. Load Lbs *(kN)*	Wt/100 pcs Lbs *(kg)*
P2899-37	⅜	1⅝	2	1	⅞	400	28
		41.3	*50.8*	*25.4*	*22.2*	*1.78*	*12.7*
P2899-50	½	1⅝	2	1	⅞	500	34
		41.3	*50.8*	*25.4*	*22.2*	*2.22*	*15.4*
P2899-62	⅝	1¾	2¼	1¼	1	600	66
		44.5	*57.2*	*31.8*	*25.4*	*2.67*	*30.0*
P2899-75	¾	1⅞	2⅜	1⅜	1¼	800	83
		47.6	*60.3*	*34.9*	*31.8*	*3.56*	*37.7*

P2682

EG





Rod Swivel 15° (0.08π) All Directions

Hanger clevis for up to ½" (12.7) rod suspension from wood ceilings. May also be used with P2677 as illustrated in application drawings.

Wt/100 pcs: 55 Lbs (24.9 kg)

P2677

EG





Rod Swivel 15° (0.08π) All Directions

Clevis hanger to be used with P2676 or P2682 to provide angle adjustment and 15° (0.08 π) free swing for up to ½" (12.7) rod suspension. Order swivel nuts P2679-4, -6, or -8 as required.

Design Load
500 Lbs (2.22 kN)

Wt/100 pcs: 30 Lbs (13.6 kg)

P2679-4, -6 & -8

Swivel Nut EG



- Use w/P2676 and P2677.
- Order size as required.

Part No.	Thread Size	Wt/100 pcs Lbs (kg)
P2679-4	¼"-20	4 (*1.8*)
P2679-6	⅜"-16	5 (*2.3*)
P2679-8	½"-13	6 (*2.7*)

Note: When used for mechanical supports, load capacities of brackets, fittings and other supporting elements should be in compliance with the American Standard Code for Pressure Piping. Clamps are designed to be used with W, M, S & HP Shape beams, Standard C & Misc. MC Channels, Angles & Structural Tees. Clamps must be used in pairs where indicated. For beam clamps with HG finish, standard hardware is EG finish. For optional stainless steel hardware, please contact the factory for availability.

P2674

EG GR





Clevis hanger to be used with P2675 to provide angle adjustment for up to ⅜" rod suspension as illustrated.

Design Load
250 Lbs (1.11 kN)

Wt/100 pcs: 17 Lbs (7.7 kg)

P1640

EG GR



Part Number	Thread Size
P1640-025	¼"-20
P1640-037	⅜"-16
P1640-050	½"-13

P2398S, P2401S, P2403S, P2405S

EG GR





Weld is not continuous it is either 1¼" (31.8) - 1¾" (44) long or 2 spot welds. All welds are on the top and bottom.

For beams between ¾" (19.1) to 1⅝" (41.3) thick flanges.

Part Number	"A" In	"B" In *(mm)*	"C" In	"D" In *(mm)*	"E" In *(mm)*	Wt/100 pcs Lbs *(kg)*	Design Load Lbs *(kN)*
P2398S	¼ - 20	⅛ *3.2*	⅜ x 2	1 21⁄32 *42.1*	⅞ *22.2*	109 *49.4*	800 *3.56*
P2401S	⅜ - 16	3⁄16 *4.8*	½ x 2	1 11⁄16 *42.9*	29⁄32 *23.0*	156 *70.8*	1,300 *5.78*
P2403S	½ - 13	¼ *6.4*	½ x 2	1 11⁄16 *42.9*	15⁄16 *23.8*	201 *91.2*	1,900 *8.45*
P2405S	⅝ - 11	5⁄16 *7.9*	⅝ x 2	1 11⁄16 *42.9*	1 5⁄16 *33.3*	311 *141.1*	2,400 *10.68*

P1648S THRU P1653S

EG GR



For beams under ⅞" (22.2) thick flange.



Weld is not continuous it is either 1¼" (31.8) - 1¾" (44.5) long or 2 spot welds. All welds are on the top and bottom.

Part Number	"A" In	"B" In *(mm)*	"C" In	"D" In *(mm)*	Wt/100 pcs Lbs *(kg)*	Design Load Lbs *(kN)*
P1648S	¼ - 20	⅛ *3.2*	⅜ x 1½	⅞ *22.2*	67 *30.4*	650 *2.89*
P1649S	5⁄16 - 18	⅛ *3.2*	⅜ x 1½	⅞ *22.2*	67 *30.4*	650 *2.89*
P1650S	⅜ - 16	3⁄16 *4.8*	½ x 1½	15⁄16 *23.8*	100 *45.4*	1,100 *4.89*
P1651S	½ - 13	¼ *6.4*	½ x 1½	15⁄16 *23.8*	130 *59.0*	1,600 *7.12*
P1652S	⅝ - 11	5⁄16 *7.9*	⅝ x 1½	1 5⁄16 *33.3*	160 *72.6*	2,400 *10.68*
P1653S	¾ - 10	5⁄16 *7.9*	⅝ x 1½	1 5⁄16 *33.3*	160 *72.6*	2,400 *10.68*

P1654A THRU P1661A RETAINER STRAP

EG GR



For beams under ⅞" (22.2) thick flange.

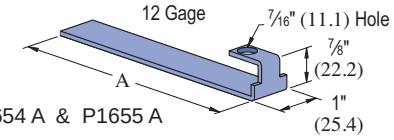

P1654 A & P1655 A

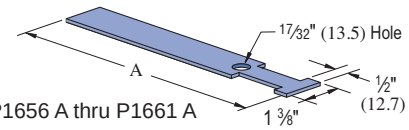

P1656 A thru P1661 A

Strap Part Number	Flange Width In *(mm)*	"A" In *(mm)*	Wt/100 pcs Lbs *(kg)*	Beam Clamp Used With
P1654 A	6 *152.4*	7 *177.8*	25 *11.3*	P2675
P1655 A	9 *228.6*	10 *254.0*	34 *15.4*	P2675
P1656 A	6 *152.4*	9 *228.6*	35 *15.9*	P1648 S Thru P1651 S, P2398S, P2401S & P2403S
P1657 A	9 *228.6*	12 *304.8*	47 *21.3*	
P1658 A	12 *304.8*	15 *381.0*	59 *26.8*	
P1659 A	6 *152.4*	9 *228.6*	33 *15.0*	P2676
P1660 A	9 *228.6*	12 *304.8*	45 *20.4*	P2676
P1661 A	12 *304.8*	15 *381.0*	57 *25.9*	P2676

Note: When used for mechanical supports, load capacities of brackets, fittings and other supporting elements should be in compliance with the American Standard Code for Pressure Piping. Clamps are designed to be used with W, M, S & HP Shape beams, Standard C & Misc. MC Channels, Angles & Structural Tees. Clamps must be used in pairs where indicated. For beam clamps with HG finish, standard hardware is EG finish. For optional stainless steel hardware, please contact the factory for availability.

P1271S

DF, EG, GR, HG



Note: Requires P1010 Channel Nut and bolt.

Design Load Each 500 Lbs (2.22 kN) Use in Pairs Only

Wt/100 pcs: 95 Lbs (43.1 kg)

P1796S

EG GR HG



Design Load Each 500 Lbs (2.22 kN) Use in Pairs Only

Wt/100 pcs: 91 Lbs (41.3 kg)

P2824-6,-9,-12

EG GR HG



For use with Beams up to ¾" (19.1) max flange thickness



Clamp Requires ½" Diameter Rod and 2 Hex Nuts (Sold Seperately)

Part Number	"A" In *(mm)*	Wt/100 pcs Lbs *(kg)*	Design Load Lbs *(kN)*
P2824-6	2½ - 6 *63.5 - 152.4*	125 *56.7*	500 *2.22*
P2824-9	5½ - 9 *139.7 - 228.6*	140 *63.5*	500 *2.22*
P2824-12	8½ - 12 *215.9- 304.8*	171 *77.6*	500 *2.22*

P2785

DF, EG, GR, HG



- For use with Beams up to ¾" (19.1) Flanges and with Channels P1000, P1100, P2000, P3000, P3300, P3301, P4000, P4001, P4100, and P4101.

Design Load Each 1000 Lbs (4.45 kN) Use in Pairs Only

Wt/100 pcs: 83 Lbs (37.6 kg)

P2786

DF, EG, GR, HG



- For use with Beams up to ¾" (19.1) Flanges and with Channels P1001, P1101, P2001, P3001, P5000, and P5500.

Design Load Each 1000 Lbs (4.45 kN) Use in Pairs Only

Wt/100 pcs: 92 Lbs (41.7 kg)

P2787

DF, EG, HG



- For use with Beams up to ¾" (19.1) Flanges and with Channels P5001 and P5501.

Design Load Each 1000 Lbs (4.45 kN) Use in Pairs Only

Wt/100 pcs: 112 Lbs (50.8 kg)

P2867

EG GR HG



Part Number	Beam Size "A"	Wt/100 pcs Lbs (kg)
P2867	4"-6"	142 *(64.4)*
P2867-9	6"-9"	151 *(68.5)*
P2867-12	9"-12"	160 *(72.6)*
P2867-15	12"-15"	170 *(77.1)*
P2867-18	15"-18"	179 *(81.2)*

- Includes: "J" Bolt, "U" Bolt and Hex Nuts.
- For use with Channels P1000, P1100, P2000, P3000, P3300, P3301, P4000, P4001, P4100, and P4101.

P2867A

EG GR HG



Part Number	Beam Size "A"	Wt/100 pcs Lbs (kg)
P2867A	4"-6"	151 *(68.5)*
P2867A-9	6"-9"	157 *(71.2)*
P2867A-12	9"-12"	166 *(75.3)*
P2867A-15	12"-15"	176 *(79.8)*
P2867A-18	15"-18"	185 *(83.9)*

- Includes: "J" Bolt, "U" Bolt and Hex Nuts.
- For use with Channel P1001, P1101, P2001, P3001, P5000, and P5500.

P2867B

EG GR HG



Part Number	Beam Size "A"	Wt/100 pcs Lbs (kg)
P2867B	4"-6"	161 *(73.0)*
P2867B-9	6"-9"	167 *(75.7)*
P2867B-12	9"-12"	176 *(79.8)*
P2867B-15	12"-15"	186 *(84.4)*
P2867B-18	15"-18"	195 *(88.5)*

- Includes: "J" Bolt, "U" Bolt and Hex Nuts.
- For use with Channel P5001, and P5501.

Note: When used for mechanical supports, load capacities of brackets and fittings should be in compliance with the American Standard Code for Pressure Piping. Clamps are designed to be used with W, M, S & HP Shape beams, Standard C & Misc. MC Channels, Angles & Structural Tees. Clamps must be used in pairs where indicated. For beam clamps with HG finish, standard hardware is EG finish. For optional stainless steel hardware, please contact the factory for availability.

P2868

EG GR HG



Part Number	Beam Size "A"	Wt/100 pcs Lbs (kg)
P2868	4"-6"	282 *(127.9)*
P2868-9	6"-9"	289 *(131.1)*
P2868-12	9"-12"	296 *(134.3)*
P2868-15	12"-15"	304 *(137.9)*
P2868-18	15"-18"	311 *(141.1)*

- Includes: Center Rod, "U" Bolts and Hex Nuts.
- For use with Channels P1000, P1100, P2000, P3000, P3300, P3301, P4000, P4001, P4100, and P4101.

P2868A

EG GR HG



Part Number	Beam Size "A"	Wt/100 pcs Lbs (kg)
P2868A	4"-6"	300 *(136.1)*
P2868A-9	6"-9"	307 *(139.3)*
P2868A-12	9"-12"	314 *(142.2)*
P2868A-15	12"-15"	322 *(146.1)*
P2868A-18	15"-18"	329 *(149.2)*

- Includes: Center Rod, "U" Bolts and Hex Nuts.
- For use with Channels P1001, P1101, P2001, P3001, P5000, and P5500.

P2868B

EG GR HG

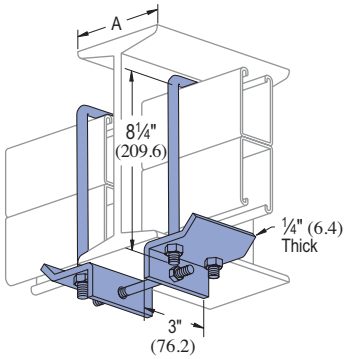

Part Number	Beam Size "A"	Wt/100 pcs Lbs (kg)
P2868B	4"-6"	320 *(145.1)*
P2868B-9	6"-9"	327 *(148.3)*
P2868B-12	9"-12"	334 *(151.5)*
P2868B-15	12"-15"	342 *(155.1)*
P2868B-18	15"-18"	349 *(153.3)*

- Includes: Center Rod, "U" Bolts and Hex Nuts.
- For use with Channels P5001, and P5501.

P2894

EG



Material: Malleable Iron
⅞" Maximum Flange Thickness
Note: Tapped Hole on Top and Bottom

Part Number	Rod Size In	"A" In *(mm)*	"B" In *(mm)*	Load Ratings Lbs *(kN)*	Wt/100 pcs Lbs *(kg)*
P2894-25	¼	1⅛ *28.6*	1¼ *31.8*	150 *.67*	23 *10.4*
P2894-37	⅜	2 *50.8*	2 *50.8*	350 *1.56*	95 *43.1*
P2894-50	½	2⅝ *66.7*	2½ *63.5*	400 *1.78*	195 *88.5*

P2893

EG



Material: Steel
Use With: ¼" rod
Load Rating: 75 lbs. (.33 kN)

Wt/100 pcs: 14 lbs. (6.4 kg)

P2895

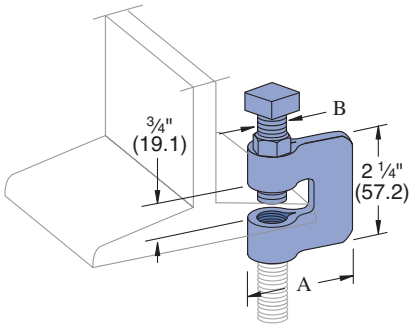

Material: Steel

Part Number	Rod Size In	"A" In *(mm)*	"B" In *(mm)*	Load Ratings Lbs *(kN)*	Wt/100 pcs Lbs *(kg)*
P2895-37	⅜	2 5/16 *58.7*	⅜ *9.5*	330 *1.47*	35 *15.9*
P2895-50	½	2¼ *57.2*	½ *12.7*	380 *1.69*	41 *18.6*
P2895-62	⅝	2⅜ *60.3*	⅝ *15.9*	450 *2.00*	67 *30.4*
P2895-75	¾	2¼ *57.2*	½ *12.7*	500 *2.22*	72 *32.7*

P2896

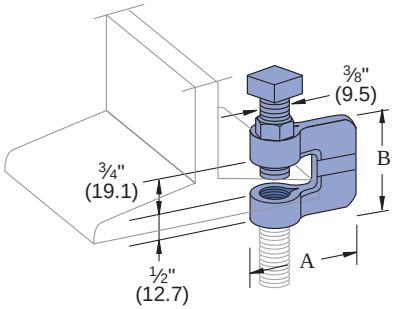

Material: Malleable Iron,
Steel Set Screw

Part Number	Rod Size In	"A" In *(mm)*	"B" In *(mm)*	Load Ratings Lbs *(kN)*	Wt/100 pcs Lbs *(kg)*
P2896-37	⅜	1 11/16 *42.9*	1¾ *44.5*	400 *1.78*	38 *17.2*
P2896-50	½	1 23/32 *43.7*	1¾ *44.5*	400 *1.78*	52 *23.6*
P2896-62	⅝	1 15/16 *49.2*	2 *50.8*	450 *2.00*	68 *30.8*
P2896-75	¾	2 1/32 *51.6*	2 *50.8*	600 *2.67*	128 *58.1*

Note: When used for mechanical supports, load capacities of brackets, fittings and other supporting elements should be in compliance with the American Standard Code for Pressure Piping. Clamps are designed to be used with W, M, S & HP Shape beams, Standard C & Misc. MC Channels, Angles & Structural Tees. Clamps must be used in pairs where indicated. For beam clamps with HG finish, standard hardware is EG finish. For optional stainless steel hardware, please contact the factory for availability.

P1386

DF, EG, GR, HG



Clamp Requires ½" - 13 X 1½" Hex Head Cap Screw and ½" Channel Nut Not Included.

Channel Style	Design Load Each (Use in Pairs Only) Lbs (kN)
P1000	600 *2.67*
P1100	500 *2.22*
P2000	450 *2.00*

Wt/100 pcs: 27 Lbs (12.2 kg)

P1379S

EG GR HG



Clamp Requires ½" x 1 3⁄16" Hex Head Cap Screw and ½" Channel Nut Not Included.

Channel Style	Design Load Each (Use in Pairs Only) Lbs *(kN)*
P1000	600 *2.67*
P1100	500 *2.22*
P2000	450 *2.00*

Wt/100 pcs: 75 Lbs (34.0kg)

P1272S, P1985S, P1986S

EG GR HG



Part Number	"A" In *(mm)*	Flange Thickness In *(mm)*	"D" Set Screw Included	Wt/100 pcs Lbs *(kg)*	Design Load Per Pair (Use in Pairs Only) Lbs *(kN)*
P1272S	¼ *6.4*	Up to ¾ *Up to 19.1*	⅜-16 x 1½	39 *17.7*	450 *2.00*
P1985S	⅜ *9.5*	Up to ¾ *Up to 19.1*	½-13 x 1½	62 *28.1*	1,000 *4.45*
P1986S	⅜ *9.5*	⅞ to 2 *22.2 - 50.8*	½-13 x 1½	74 *33.6*	900 *4.00*

P3087

Column Insert

EG



Channel Part Number	Design Pull Out Load Lbs *(kN)*	Design Slip Load Lbs *(kN)*
P1000	1,000 *4.45*	800 *3.56*
P1100	700 *3.34*	500 *2.22*
P2000	500 *2.22*	300 *1.33*

Safety factor of 3.

- Adjusting Screws Included.
- Unistrut channel not included.
- Part number P3087 consists of:
  (1) piece P3087A,
  (1) piece P3087B and
  (2) set screws, ⅜" Dia.



Wt/100 pcs: 136 Lbs (61.7 kg)

P3088

Column Insert



Channel Part Number	Design Pull Out Load Lbs *(kN)*	Design Slip Load Lbs *(kN)*
P3300	1,000 *4.45*	800 *3.56*
P4100	700 *3.11*	500 *2.22*
P4000	500 *2.22*	300 *1.33*

Safety factor of 3.

- Adjusting Screws Included.
- Unistrut channel not included.
- Part number P3088 consists of:
  (1) piece P3088A,
  (1) piece P3088B and
  (2) set screws, ⅜" Dia.



Wt/100 pcs: 120 Lbs (54.4 kg)

Note: When used for mechanical supports, load capacities of brackets, fittings and other supporting elements should be in compliance with the American Standard Code for Pressure Piping. Clamps are designed to be used with W, M, S & HP Shape beams, Standard C & Misc. MC Channels, Angles & Structural Tees. Clamps must be used in pairs where indicated. For beam clamps with HG finish, standard hardware is EG finish. For optional stainless steel hardware, please contact the factory for availability.

PFL050T — Flange Clamp

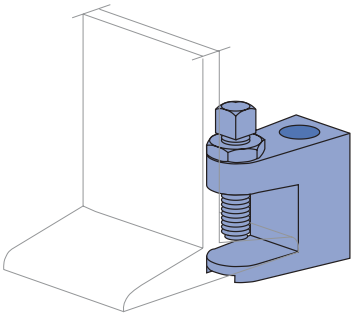





Material: Malleable Iron.

Cup point set screw and lock nut included.

Set Screw Torque = 6 Ft-Lb
Lock Nut Torque = 16 Ft-Lb

Safety Factor: 4

Part Number	Type of Hole	Rod Size	"Z" Set Screw Size	Wt/100 pcs Lbs *(kg)*	Max. Allowable Load Lbs *(kN)*
PFL050	Clear	½"	⅜"	40 *(18.1)*	700 *(3.11)*
PFL050T	Tapped	½"	⅜"	40 *(18.1)*	700 *(3.11)*

Part Number	Dimensions "T" In *(mm)*	"U" In *(mm)*	"V" In *(mm)*	"W" In*(mm)*	"X" In *(mm)*	"Y" In *(mm)*	
PFL050	2 *50.8*	1 23/32 *43.7*	1 *25.4*	29/32 *23.0*	1 3/32 *27.8*	9/16 *14.3*	
PFL050T	2 *50.8*	1 23/32 *43.7*	1 *25.4*	29/32 *23.0*	1 3/32 *27.8*	½	Tapped Hole

PLF3075 — Flange Clamp







Material: Malleable Iron.

Safety Factor: 4

Part Number	Rod Size	Wt/100 pcs Lbs *(kg)*	Max. Allowable Load Lbs *(kN)*	Torque Ft-Lbs
PLF3050	½"	91 *41*	450 *2.00*	29
PLF3062	⅝"	186 *84*	900 *4.00*	69
PLF3075	¾"	334 *152*	1,350 *6.01*	130

Part Number	Dimensions "X" In *(mm)*	"W" In *(mm)*	"V" In *(mm)*	"T" In *(mm)*	"R" In *(mm)*	"S" In *(mm)*
PLF3050	1⅜ *34.9*	0 - 1 1/16 *0 - 39.7*	½ *12.7*	11/32 *8.7*	1 15/16 *49.2*	1 5/32 *29.4*
PLF3062	1 13/16 *46.0*	0 - 2 3/16 *0 - 55.6*	⅝ *15.9*	½ *12.7*	2 11/32 *59.5*	1 7/16 *36.5*
PLF3075	2 3/16 *55.6*	0 - 1¾ *0 - 44.5*	¾ *19.1*	⅝ *15.9*	3 *76.2*	1¾ *44.5*

PLF9037 thru PLF9100 — Flange Clamp

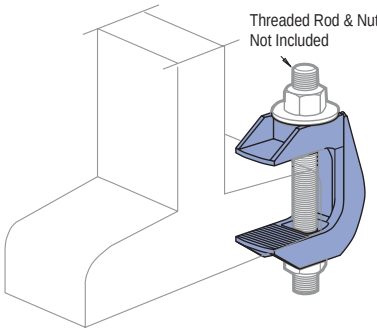



Material: Malleable Iron.

Safety Factor: 4

Part Number	Rod Size	Wt/100 pcs Lbs *(kg)*	Max. Allowable Load Lbs *(kN)*	Torque Ft-Lbs	"X" In *(mm)*	"W" In *(mm)*	"V" In *(mm)*	"T" In *(mm)*	"S" In *(mm)*
PLF9037	⅜"	55 *24.9*	440 *1.96*	15	1 *25.4*	¾ - 1 1/16 *19.1 - 42.9*	½ *12.7*	¾ *19.1*	1 *25.4*
PLF9050	½"	122 *55.3*	630 *2.80*	29	1⅜ *34.9*	1 - 2⅜ *25.4 - 60.3*	21/32 *16.7*	15/16 *23.8*	1 3/16 *30.2*
PLF9062	⅝"	200 *90.7*	1,260 *5.60*	69	1 11/16 *42.9*	1⅛ - 2¾ *28.6 - 69.9*	13/16 *20.6*	1⅛ *28.6*	1⅜ *34.9*
PLF9075	¾"	367 *166.5*	1,880 *8.36*	131	2 *50.8*	1¼ - 3¼ *31.8 - 82.6*	1 *25.4*	1⅜ *34.9*	1¾ *44.5*
PLF9100	1"	1,101 *499.4*	3,150 *14.01*	173	3 *76.2*	1¾ - 3¾ *44.9 - 95.3*	1½ *38.1*	2 3/16 *55.6*	2½ *63.5*

Note: When used for mechanical supports, load capacities of brackets, fittings and other supporting elements should be in compliance with the American Standard Code for Pressure Piping. Clamps are designed to be used with W, M, S & HP Shape beams, Standard C & Misc. MC Channels, Angles & Structural Tees. Clamps must be used in pairs where indicated. For beam clamps with HG finish, standard hardware is EG finish. For optional stainless steel hardware, please contact the factory for availability.

P1834 Channel Trolley Support EG



Requires ⅜" x 2½" Bolt and ⅜" Nut (not included)

Design Load 1200 Lbs (5.34 kN)

Wt/100 pcs: 102 Lbs (46.3 kg)

P1834A Channel Trolley Support EG



Requires ⅜" x 2½" Bolt and ⅜" Nut (not included)

Design Load 2500 Lbs (11.12 kN)

Wt/100 pcs: 220 Lbs (99.8 kg)

P2749, P2749N† EG



Clevis Material: 12 gauge.

*Wheel bearings are stainless steel, and should not be lubricated.

† "N" indicates acetal wheels.

Part Number	Design Load Lbs *(kN)*	Wt/100 pcs Lbs *(kg)*
P2749	50 *.22*	21 *9.5*
P2749N	10 *.04*	13 *5.9*

P2751, P2751 N† EG





Clevis Material: 12 gauge.

*Wheel bearings are stainless steel, and should not be lubricated.

† "N" indicates acetal wheels.

Part Number	Design Load Lbs *(kN)*	Wt/100 pcs Lbs *(kg)*
P2751	100 *.44*	63 *28.6*
P2751N	20 *.09*	40 *18.1*

P2750, P2750N† EG

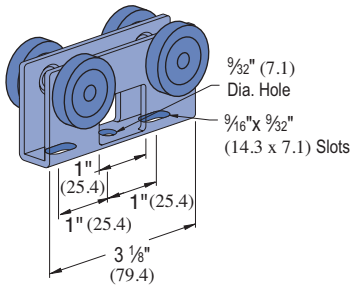



Clevis Material: 12 gauge.

*Wheel bearings are stainless steel, and should not be lubricated.

† "N" indicates acetal wheels.

Part Number	Design Load Lbs *(kN)*	Wt/100 pcs Lbs *(kg)*
P2750	100 *.44*	55 *24.9*
P2750N	20 *.09*	32 *14.5*

P2950 EG

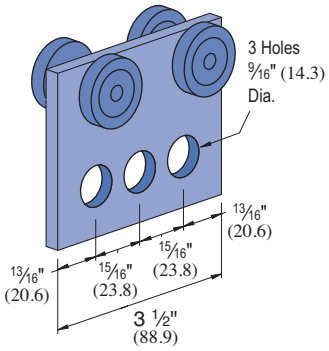



Wheel bearings are stainless steel. Do not lubricate.

FPM	RPM	Design Load In P1000 Lbs *(kN)*
180	600	300 *1.33*
90	300	450 *2.00*
30	100	600 *2.67*

P2949 EG

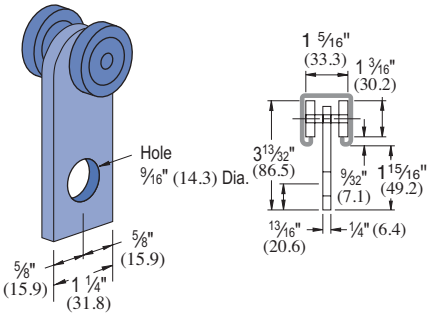

FPM	RPM	Design Load In P1000 Lbs *(kN)*
180	600	150 *.67*
90	300	225 *1.00*
30	100	437 *1.94*

Wheel bearings are stainless steel. Do not lubricate.

Wt/100 pcs: 46 Lbs (20.9 kg)

Wt/100 pcs: 110 Lbs (49.9 kg)

Standard Dimensions for 1⅝" (41.3mm) width series channel fittings *(Unless Otherwise Shown on Drawing)*

Hole Diameter: 9⁄16" (14.3mm); Hole Spacing - From End: 13⁄16" (20.6mm); Hole Spacing - On Center: 1⅞" (47.6mm); Width: 1⅝"(41.3mm); Thickness: ¼" (6.4mm) with steel meeting or exceeding ASTM A1011 SS GR 33, or 0.220" (5.6mm) with steel meeting or exceeding ASTM A1011 HSLAS GR 45

Atkore Unistrut

P2354 R-L, P2355 R-L — Reel Rack Supports for 1¼" & 2" Pipe

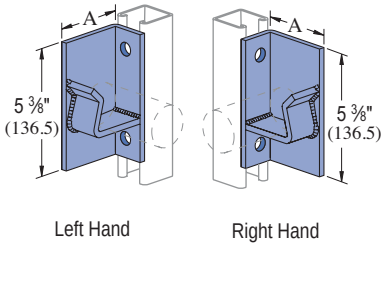

Vertical Channel Part No.	Gauge	Max. Allowable Load Lbs *(kN)*
P1000	12	3,000 *(13.34)*
P1100	14	2,000 *(8.90)*
P2000	16	2,000 *(8.90)*

Part Number	"A" In *(mm)*	Std. Pipe Size In *(mm)*	Wt/100 pcs Lbs *(kg)*
P2354 R-L	3 *76.2*	1¼ *31.8*	220 *99.8*
P2355 R-L	3⅝ *92.1*	2 *50.8*	252 *114.3*

P1204 thru P1208 — Wall Ladder Bracket EG



Part Number	"A" In *(mm)*	"B" In *(mm)*	Wt/100 pcs Lbs *(kg)*
P1204	2⅜ *60.3*	6 *152.4*	113 *51.3*
P1205	4⅜ *111.1*	8 *203.2*	164 *74.4*
P1206	6⅜ *161.9*	10 *254.0*	216 *98.0*
P1207	8⅜ *212.7*	12 *304.8*	267 *121.1*
P1208	10⅜ *263.5*	14 *355.6*	318 *144.2*

P2454 — Double Pipe Axle Support



Load Rating 4,000 Lbs (17.79 kN)

For 1¼" (31.8) Standard Pipe

Wt/100 pcs: 310 Lbs (140.6 kg)

P1201, P1202, P1203 — Ladder Rung



Part Number	"A" In *(mm)*	Wt/100 pcs Lbs *(kg)*
P1201	12 *304.8*	186 *84.4*
P1202	15 *381.0*	221 *100.2*
P1203	18 *457.2*	254 *115.2*

P2470-50, -75, -100 — Pipe Coupling Fitting



Pipe Coupling Part Number	Size In	Wt/100 pcs Lbs *(kg)*
P2470-50	½	77 *(34.9)*
P2470-75	¾	93 *(42.2)*
P2470-100	1	103 *(46.7)*

P1944 — 45° (.25π) Stair Tread Support

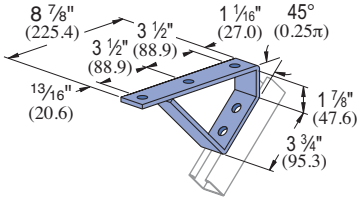

Wt/100 pcs: 220 Lbs (99.8 kg)

P2655 — 37½° (.21π) Stair Tread Support

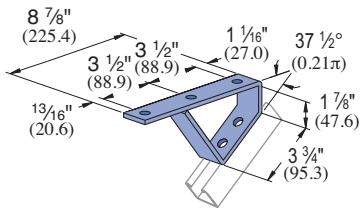

Wt/100 pcs: 213 Lbs (96.6 kg)

Standard Dimensions for 1⅝" (41.3mm) width series channel fittings *(Unless Otherwise Shown on Drawing)*

Hole Diameter: 9/16" (14.3mm); Hole Spacing - From End: 13/16" (20.6mm); Hole Spacing - On Center: 1⅞" (47.6mm); Width: 1⅝"(41.3mm); Thickness: ¼" (6.4mm) with steel meeting or exceeding ASTM A1011 SS GR 33, or 0.220" (5.6mm) with steel meeting or exceeding ASTM A1011 HSLAS GR 45

P1843 Adj. Hinge Connection EG GR



Wt/100 pcs: 68 Lbs (30.8 kg)

P1354A Adj. Hinge Connection EG GR



Wt/100 pcs: 89 Lbs (40.4 kg)

P1354 Adj. Hinge Connection EG GR



Wt/100 pcs: 109 Lbs (49.4 kg)

SPF® 100 Seismic Pivot Fittings

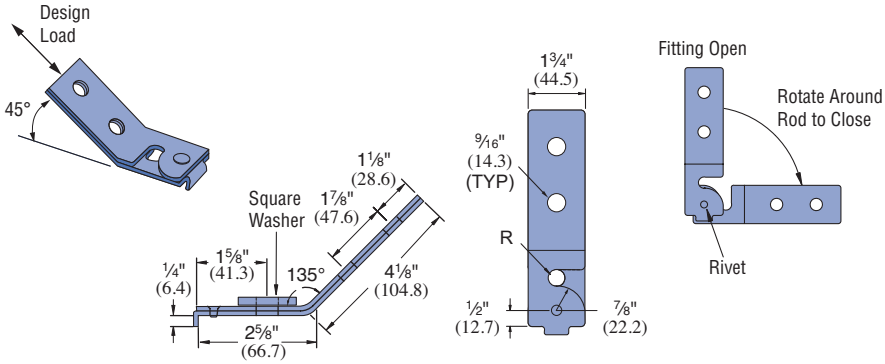

Part Number	Rod Size In *(mm)*	"R" - Hole Diameter In *(mm)*	Design Load Lbs *(KN)*
SPF 100-037	⅜ *9.5*	7/16 *11.1*	1,400 *6.23*
SPF 100-050	½ *12.7*	9/16 *14.3*	2,100 *9.34*
SPF 100-062	⅝ *15.9*	11/16 *17.5*	2,100 *9.34*
SPF 100-075	¾ *19.1*	13/16 *20.6*	2,400 *10.68*

Safety Factor = 3
FINISH
Electro-galvanized (EG), conforming to ASTM B633 Type III SC1.

Notes:
1. Design load is limited to slip capacity of a channel nut at hole "R".
2. Allowable loads have been determined by the manufacturers testing, analysis and technical specifications.
3. For retrofit application, engineer of record must verify.
4. Square washer provided with fitting.
5. When a hanger rod is thru-bolted (in lieu of channel nut installation), higher transverse loads may be transmitted due to the higher allowed rod shear loads compared to channel nut slip values. This higher load may be used with verification through engineering calculations.

SPF® 200 Adjustable Seismic Pivot Fittings



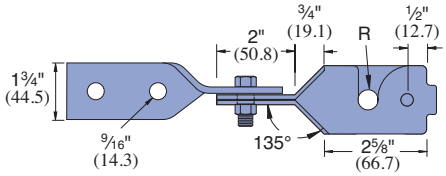

FINISH
Electro-galvanized (EG), conforming to ASTM B633 Type III SC1.

Part Number	Rod Size In *(mm)*	"R" - Hole Diameter In *(mm)*	Design Load Lbs *(KN)*
SPF 200-037	⅜ *9.5*	7/16 *11.1*	1,400 *6.23*
SPF 200-050	½ *12.7*	9/16 *14.3*	2,100 *9.34*
SPF 200-062	⅝ *15.9*	11/16 *17.5*	2,100 *9.34*
SPF 200-075	¾ *19.1*	13/16 *20.6*	2,400 *10.68*

Safety Factor = 3.0

Notes:
1. Design load is limited to slip capacity of a channel nut at hole "R"..
2. Allowable loads have been determined by the manufacturers testing, analysis and technical specifications at 45° from horizontal.
3. For retrofit application, engineer of record must verify.
4. Square washer provided with fitting.
5. When a hanger rod is thru-bolted (in lieu of channel nut installation), higher transverse loads may be transmitted due to the higher allowed rod shear loads compared to channel nut slip values. This higher load may be used with verification through engineering calculations.





SPF® 300

Seismic Pivot Fittings



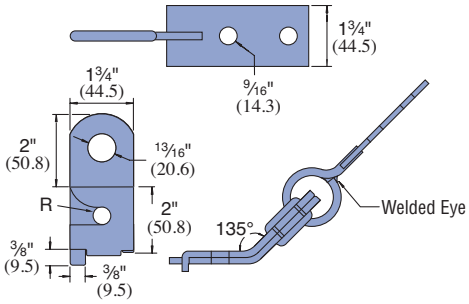

Part Number	Rod Size In *(mm)*	"R" - Hole Diameter In *(mm)*	Design Load Lbs *(KN)*
SPF 300-037	3⁄8 *9.5*	7⁄16 *11.1*	1,400 *6.23*
SPF 300-050	1⁄2 *12.7*	9⁄16 *14.3*	2,100 *9.34*
SPF 300-062	5⁄8 *15.9*	11⁄16 *17.5*	2,100 *9.34*
SPF 300-075	3⁄4 *19.1*	13⁄16 *20.6*	2,400 *10.68*

Safety Factor = 3.0
FINISH
Electro-galvanized (EG), conforming to ASTM B633 Type III SC1.

Notes:
1. Design load is limited to slip capacity of a channel nut at hole "R".
2. Allowable loads have been determined by the manufacturers testing, analysis and technical specifications at 45° from horizontal.
3. For retrofit application, engineer of record must verify.
4. Square washer provided with fitting.
5. When a hanger rod is thru-bolted (in lieu of channel nut installation), higher transverse loads may be transmitted due to the higher allowed rod shear loads compared to channel nut slip values. This higher load may be used with verification through engineering calculations.

SPF® 400

Seismic Pivot Fittings

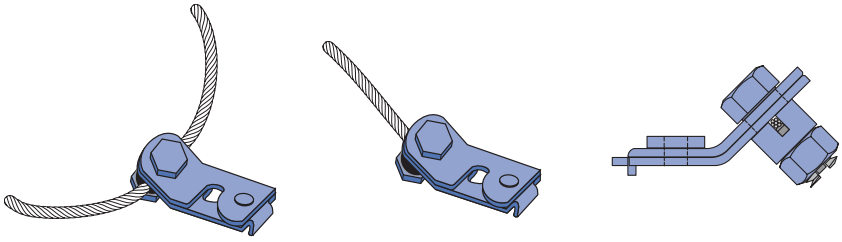

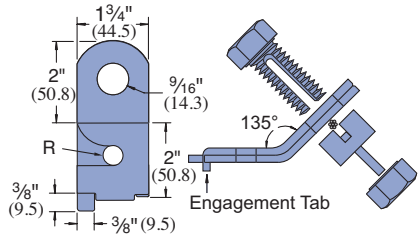

Part Number	Rod Size In *(mm)*	"R" - Hole Diameter In *(mm)*
SPF 400-037	3⁄8 *9.5*	7⁄16 *11.1*
SPF 400-050	1⁄2 *12.7*	9⁄16 *14.3*
SPF 400-062	5⁄8 *15.9*	11⁄16 *17.5*
SPF 400-075	3⁄4 *19.1*	13⁄16 *20.6*

FINISH
Electro-galvanized (EG), conforming to ASTM B633 Type III SC1.

Horizontal Design Load			
Wire Rope Diameter In *(mm)*	4-Way Splayed Transverse lbs *(kN)*	4-Way Splayed Longitudinal lbs *(kN)*	Single Cable Transverse lbs *(kN)*
3⁄16 *4.8*	1050 *4.67*	1116 *4.96*	650 *2.89*

Notes:
1. Allowable loads have been determined by the manufacturers testing, analysis and technical specifications.
2. Galvanized wire rope, 7 x 19 IWSC, RHRL (Prestretched).
3. Torque on nut/spacer: 50 ft-lbs.
4. Safety Factor of 3 for prestreched cable..

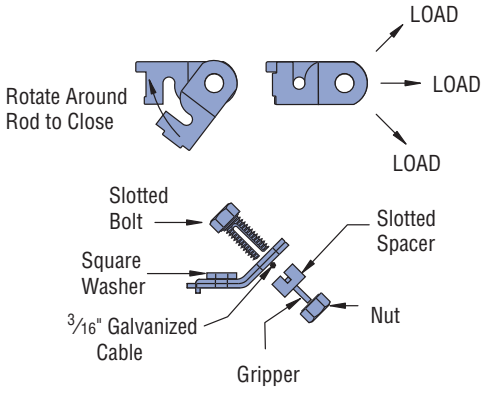

LS 410

Seismic Pivot Fittings



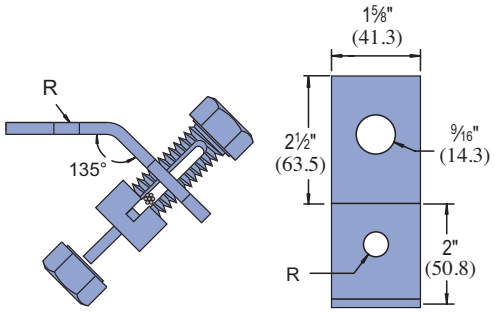

Part Number	Anchor Size In *(mm)*	"R" - Hole Diameter In *(mm)*
LS 410-037	⅜ *9.5*	7⁄16 *11.1*
LS 410-050	½ *12.7*	9⁄16 *14.3*
LS 410-062	⅝ *15.9*	11⁄16 *17.5*
LS 410-075	¾ *19.1*	13⁄16 *20.6*

FINISH
Electro-galvanized (EG), conforming to ASTM B633 Type III SC1.

Note:
1. Allowable loads have been determined by the manufacturers testing, analysis and technical specifications.
2. For retrofit application, engineer of record must verify.
3. Torque on nut/spacer: 50 ft-lbs.
4. Square washer provided with fitting.
5. Loads are the same as the SPF 400

LS 500

Seismic Pivot Fittings



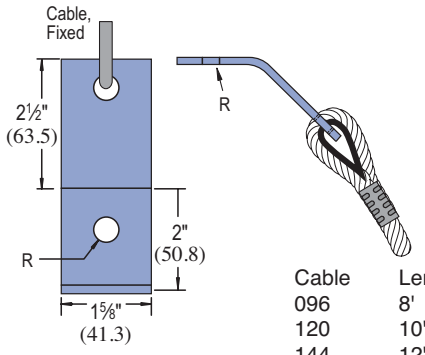

Example
LS500-037-096
- **Cable Length**
- **Anchor Size**
- **Fitting Number**

Cable	Length
096	8' *(2.4M)*
120	10' *(3.0M)*
144	12' *(3.6M)*
180	15' *(4.5M)*
240	20' *(6.1M)*
300	25' *(7.6M)*
360	30' *(9.1M)*
480	40' *(12.2M)*

Part Number	Anchor Size In *(mm)*	"R" - Hole Diameter In *(mm)*
LS 500-037	⅜ *9.5*	7⁄16 *11.1*
LS 500-050	½ *12.7*	9⁄16 *14.3*
LS 500-062	⅝ *15.9*	11⁄16 *17.5*
LS 500-075	¾ *19.1*	13⁄16 *20.6*

FINISH
Electro-galvanized (EG), conforming to ASTM B633 Type III SC1.

Note:
1. Allowable loads have been determined by the manufacturers testing, analysis and technical specifications.
2. For retrofit application, engineer of record must verify.
3. Square washer provided with fitting.
4. Loads are the same as the SPF 400

PIPE/CONDUIT SUPPORTS

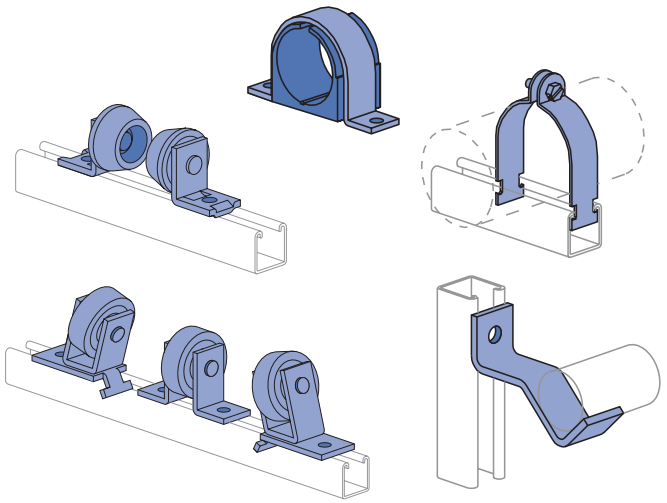

Pipe/Conduit Clamps ..... 108 - 111

Unicushion® 112

Pipe & Tubing (Cush-A-Clamp®) Clamps ..... 113 - 115

Pipe & Tubing (Cush-A-Grip® & Cush-A-Therm™) Clamps..... 116

Pipe Hangers 117

Pipe Rollers ..... 117 - 119

Pipe Brackets 119

Reference Tables ..... 120 - 126

MATERIAL

Unistrut pipe clamps, unless noted, are punch-press made from hot-rolled, pickled and oiled steel plates, strip, bar or coil, and conform to one or more of the following specifications: ASTM A1008, A575, A576, A635, A1011 SS GR 33, A1011 HSLAS GR 45, A1046 or A36. The fitting steel also meets the or exceeds the physical properties of ASTM A1011 GR 33. The pickling of the steel produces a smooth surface free from scale.

Many items are also available in stainless steel, aluminum and fiberglass.

Consult factory for ordering information.

FINISHES

Pipe supports are available in:

- Electro-galvanized (EG), conforming to ASTM B633 Type III SC1
- Hot-dipped galvanized (HG), conforming to ASTM A123 or A153 (hardware)
- Green Powder Coat (GR), conforming to commercial standards for Powder Coating, and plain (PL)
- Unistrut Defender (DF), conforming to ASTM A1059 or A1046

APPLICATION

Unistrut pipe clamps, pipe hangers, brackets and rollers are designed for the support of electrical and mechanical services. Supports to meet nearly every requirement can be attained using Unistrut Metal Framing components.

DIMENSIONS

Imperial dimensions are illustrated in inches. Metric dimensions are shown in parenthesis or as noted. Unless noted, all metric dimensions are in millimeters and rounded to one decimal place.

DESIGN BOLT TORQUE

BOLT SIZE	¼"-20	5⁄16"-18	⅜"-16	½"-13	⅝"-11	¾"-10
Rec.Torque Ft/Lbs *(N•m)*	6 *(8)*	11 *(15)*	19 *(26)*	50 *(68)*	100 *(136)*	125 *(170)*
Max Torque Ft/Lbs *(N•m)*	7 *(9)*	15 *(20)*	25 *(34)*	70 *(95)*	125 *(170)*	135 *(183)*

Note: When tightening ¼" screws used with a two piece pipe clamp, a torque of 5 foot pounds (60 inch-pounds) should be used.

DESIGN LOAD

Design load data, where shown, is based on the ultimate strength of the connection with a safety factor of 5.0, unless otherwise noted.

When used for mechanical supports, load capacities of brackets, fittings and other supporting elements should be in compliance with the American Standard Code for Pressure Piping.

Pipe Clamps In Special Materials (P1109, P1211, P1425, P2024 Series)

Material/Finish	Part Number Suffix	Pipe Clamp Material / Finish	Fasteners (Screw & Nut) Material / Finish	Example
Electro-galvanized	EG	EG	EG	P1109 EG
Hot-dipped galvanized	HG	HG	SS	P1109 HG
Unistrut Defender	DF	DF	DF	P1109 DF
Stainless Steel Type 304	SS	SS	SS	P1109 SS
Stainless Steel Type 316	ST	ST	SS	P1109 ST
Aluminum	AL	AL	AL	P1109 AL
Copper Coated	CC	CC	CC	P1109 CC
Everdur	E EG	EG	E	P1109E EG

Pipe & Conduit Clamps


P1109 - Pg 108


P1211 - Pg 109


P1425 - Pg 109


P2024 - Pg 110


P1563 - Pg 109


P2008 - Pg 109


P2558 - Pg 110


P3409 - Pg 111


MU025 - Pg 111


P2600 - Pg 112


004T008 - Pg 113

004M007 - Pg 114


UB½PA - Pg 115


CG-10 - Pg 116


PUX3834 - Pg 116

Pipe Rollers


J1205 - Pg 117


P2474 - Pg 117


P2474-1 - Pg 118


P2475 - Pg 118


P2476 - Pg 119

Pipe Brackets


P2481 - Pg 119


P2482 - Pg 119


P2243 - Pg 119

P1109 thru P1126 — Pipe Clamps for Rigid Steel Conduit

EG HG





Part No.	Conduit Size In	O.D. Size In *(mm)*	Thickness Gauge *(mm)*	Wt/100 pcs Lbs *(kg)*	Design Load Lbs *(kN)*
P1109	⅜	0.675 *17.1*	16 *1.5*	10 *4.5*	400 *1.78*
P1111	½	0.840 *21.3*	16 *1.5*	11 *5.0*	400 *1.78*
P1112	¾	1.050 *26.7*	14 *1.9*	15 *6.8*	600 *2.67*
P1113	1	1.315 *33.4*	14 *1.9*	17 *7.7*	600 *2.67*
P1114	1¼	1.660 *42.2*	14 *1.9*	19 *8.6*	600 *2.67*
P1115	1½	1.900 *48.3*	12 *2.7*	29 *13.2*	800 *3.56*
P1117	2	2.375 *60.3*	12 *2.7*	34 *15.4*	800 *3.56*

Part No.	Conduit Size In	O.D. Size In *(mm)*	Thickness Gauge *(mm)*	Wt/100 pcs Lbs *(kg)*	Design Load Lbs *(kN)*
P1118	2½	2.875 *73.0*	12 *2.7*	40 *18.1*	800 *3.56*
P1119	3	3.500 *88.9*	12 *2.7*	47 *21.3*	800 *3.56*
P1120	3½	4.000 *101.6*	11 *3.0*	62 *28.1*	1,000 *4.45*
P1121	4	4.500 *114.3*	11 *3.0*	67 *30.4*	1,000 *4.45*
P1123	5	5.563 *141.3*	11 *3.0*	80 *36.3*	1,000 *4.45*
P1124	6	6.625 *168.3*	10 *3.4*	102 *46.3*	1,000 *4.45*
P1126	8	8.625 *219.1*	10 *3.4*	130 *59.0*	1,000 *4.45*

Slotted hex head screw and nut included

P1425 thru P1431
Pipe Clamps for Thin Wall Conduit (E.M.T.)

DF EG HG

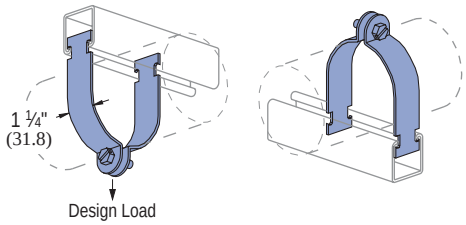

Slotted hex head screw and nut included

Part No.	Conduit Size In *(mm)*	O.D. Size In *(mm)*	Thickness Gauge *(mm)*	Wt/100 pcs Lbs *(kg)*	Design Load Lbs *(kN)*
P1425	⅜ *9.5*	0.577 *14.7*	16 *1.5*	9 *4.1*	400 *1.78*
P1426	½ *12.7*	0.706 *17.9*	16 *1.5*	11 *5.0*	400 *1.78*
P1427	¾ *19.1*	0.922 *23.4*	16 *1.5*	12 *5.4*	400 *1.78*
P1428	1 *25.4*	1.163 *29.5*	14 *1.9*	15 *6.8*	600 *2.67*
P1429	1¼ *31.8*	1.510 *38.4*	14 *1.9*	18 *8.2*	600 *2.67*
P1430	1½ *38.1*	1.740 *44.2*	12 *2.7*	29 *13.2*	800 *3.56*
P1431	2 *50.8*	2.197 *55.8*	12 *2.7*	33 *15.0*	800 *3.56*
P1118	2½ *63.5*	2.875 *73.0*	12 *2.7*	40 *18.1*	800 *3.56*
P1119	3 *76.2*	3.500 *88.9*	12 *2.7*	47 *21.3*	800 *3.56*
P1120	3½ *88.9*	4.000 *101.6*	11 *3.0*	62 *28.1*	1,000 *4.45*
P1121	4 *101.6*	4.500 *114.3*	11 *3.0*	67 *30.4*	1,000 *4.45*

P1211 thru P1217
Universal Clamps for Rigid or Thinwall Conduit

DF EG HG

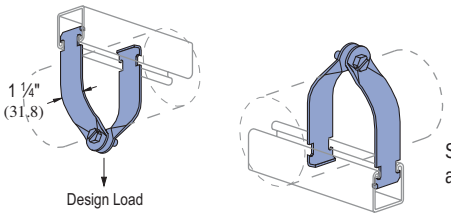

Slotted hex head screw and nut included

Part No.	Conduit Size In *(mm)*	Thickness Gauge *(mm)*	Wt/100 pcs Lbs *(kg)*	Design Load Lbs *(kN)*
P1211	½ *12.7*	16 *1.5*	10 *4.5*	400 *1.78*
P1212	¾ *19.1*	16 *1.5*	11 *5.0*	400 *1.78*
P1213	1 *25.4*	16 *1.5*	12 *5.4*	400 *1.78*
P1214	1¼ *31.8*	14 *1.9*	18 *8.2*	600 *2.67*
P1215	1½ *38.1*	14 *1.9*	20 *9.1*	600 *2.67*
P1217	2 *50.8*	14 *1.9*	22 *10.0*	600 *2.67*
P1118	2½ *63.5*	12 *2.7*	40 *18.1*	800 *3.56*
P1119	3 *76.2*	12 *2.7*	47 *21.3*	800 *3.56*
P1120	3½ *88.9*	11 *3.0*	62 *28.1*	1,000 *4.45*
P1121	4 *101.6*	11 *3.0*	67 *30.4*	1,000 *4.45*

P1563 thru P1573
Parallel Clamps for Rigid Conduit and Pipe

EG

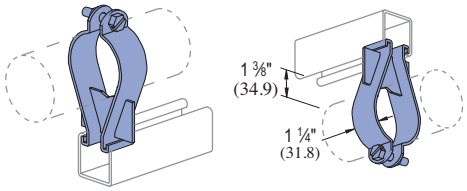

Slotted hex head screw and nut included.

Finish: Electro-galvanized.

Part No.	Pipe Size In *(mm)*	O.D. Size In *(mm)*	Thickness Gauge *(mm)*	Wt/100 pcs Lbs *(kg)*
P1563	⅜ *9.5*	0.675 *17.1*	14 *1.9*	27 *12.2*
P1564	½ *12.7*	0.840 *21.3*	14 *1.9*	29 *13.2*
P1565	¾ *19.1*	1.050 *26.7*	14 *1.9*	30 *13.6*
P1566	1 *25.4*	1.315 *33.4*	14 *1.9*	31 *14.1*
P1567	1¼ *31.8*	1.660 *42.2*	14 *1.9*	38 *17.2*
P1568	1½ *38.1*	1.900 *48.3*	12 *2.7*	40 *18.1*
P1569	2 *50.8*	2.375 *60.3*	12 *2.7*	47 *21.3*
P1570	2½ *63.5*	2.875 *73.0*	12 *2.7*	66 *29.9*
P1571	3 *76.2*	3.500 *88.9*	12 *2.7*	78 *35.4*
P1572	3½ *88.9*	4.000 *101.6*	12 *2.7*	87 *39.5*
P1573	4 *101.6*	4.500 *114.3*	12 *2.7*	90 *40.8*

P2008 thru P2020 One Hole Clamp for O.D. Tubing

EG HG



¼" X ¾" Round Head Machine Screw and Channel Nut Not Included

Part No.	O.D. Tube Size In *(mm)*	Thickness Gauge *(mm)*	Wt/100 pcs Lbs *(kg)*
P2008	¼ *6.4*	16 *1.5*	4 *1.8*
P2009	5/16 *7.9*	16 *1.5*	5 *2.3*
P2010	⅜ *9.5*	16 *1.5*	5 *2.3*
P2012	½ *12.7*	16 *1.5*	6 *2.7*
P2014	⅝ *15.9*	14 *1.9*	8 *3.6*
P2016	¾ *19.1*	14 *1.9*	9 *4.1*
P2018	⅞ *22.2*	14 *1.9*	10 *4.5*
P2020	1 *25.4*	14 *1.9*	11 *5.0*

P2024 THRU P2070-84 — Pipe Clamps for O.D. Tubing — EG HG





Slotted hex head screw and nut included

P2024 - P2029	16 ga.
P2030 - P2035	14 ga.
P2037 - P2052	12 ga.
P2053 - P2066	11 ga.
P2067 - P2070-84	10 ga.

Part Number	O.D. Size In *(mm)*	Wt/100 pcs Lbs *(kg)*	Design Load Lbs *(kN)*
P2024	¼ *(6.4)*	8 *(3.6)*	400 *(1.78)*
P2025	⅜ *(9.5)*	8 *(3.6)*	
P2026	½ *(12.7)*	9 *(4.1)*	
P2027	⅝ *(15.9)*	10 *(4.5)*	
P2028	¾ *(19.1)*	11 *(5.0)*	
P2029	⅞ *(22.2)*	12 *(5.4)*	
P2030	1 *(25.4)*	14 *(6.4)*	600 *(2.67)*
P2031	1⅛ *(28.6)*	15 *(6.8)*	
P2032	1¼ *(31.8)*	16 *(7.3)*	
P2033	1⅜ *(34.9)*	17 *(7.7)*	
P2034	1½ *(38.1)*	18 *(8.2)*	
P2035	1⅝ *(41.3)*	19 *(8.6)*	
P1430	1¾ *(44.5)*	29 *(13.2)*	800 *(3.56)*
P2037	1⅞ *(47.6)*	28 *(12.7)*	
P2038	2 *(50.8)*	31 *(14.1)*	
P2039	2⅛ *(54.0)*	32 *(14.5)*	
P2040	2¼ *(57.2)*	33 *(15)*	
P1117	2⅜ *(60.3)*	34 *(15.4)*	
P2042	2½ *(63.5)*	35 *(15.9)*	
P2043	2⅝ *(66.7)*	37 *(16.8)*	
P2044	2¾ *(69.9)*	38 *(17.2)*	
P1118	2⅞ *(73.0)*	40 *(18.1)*	
P2046	3 *(76.2)*	41 *(18.6)*	
P2047	3⅛ *(79.4)*	43 *(19.5)*	
P2048	3¼ *(82.6)*	45 *(20.4)*	
P2049	3⅜ *(85.7)*	46 *(20.9)*	
P1119	3½ *(88.9)*	47 *(21.3)*	
P2051	3⅝ *(92.1)*	56 *(25.4)*	1000 *(4.45)*
P2052	3¾ *(95.3)*	58 *(26.3)*	
P2053	3⅞ *(98.4)*	60 *(27.2)*	
P1120	4 *(101.6)*	62 *(28.1)*	
P2055	4⅛ *(104.8)*	62 *(28.1)*	
P2056	4¼ *(108.0)*	64 *(29.0)*	
P2057	4⅜ *(111.1)*	66 *(29.9)*	
P1121	4½ *(114.3)*	67 *(30.4)*	
P2059	4⅝ *(117.5)*	70 *(31.8)*	
P2060	4¾ *(120.7)*	72 *(32.7)*	

Part Number	O.D. Size In *(mm)*	Wt/100 pcs Lbs *(kg)*	Design Load Lbs *(kN)*
P2061	4⅞ *(123.8)*	73 *(33.1)*	1000 *(4.45)*
P2062	5 *(127.0)*	74 *(33.6)*	
P2063	5⅛ *(130.2)*	76 *(34.5)*	
P2064	5¼ *(133.4)*	77 *(34.9)*	
P2065	5⅜ *(136.5)*	78 *(35.4)*	
P2066	5½ *(140.0)*	79 *(35.8)*	
P2067	5⅝ *(142.9)*	88 *(39.9)*	
P2068	5¾ *(146.1)*	90 *(40.8)*	
P2069	5⅞ *(149.2)*	92 *(41.7)*	
P2070	6 *(152.4)*	94 *(42.6)*	
P2070-61	6⅛ *(155.6)*	96 *(43.5)*	
P2070-62	6¼ *(158.8)*	98 *(44.5)*	
P2070-63	6⅜ *(161.9)*	99 *(44.9)*	
P2070-64	6½ *(165.1)*	100 *(45.4)*	
P1124	6⅝ *(168.3)*	102 *(46.3)*	
P2070-66	6¾ *(171.5)*	104 *(47.2)*	
P2070-67	6⅞ *(174.6)*	106 *(48.1)*	
P2070-70	7 *(177.8)*	108 *(49.0)*	
P2070-71	7⅛ *(181.0)*	110 *(49.9)*	
P2070-72	7¼ *(184.2)*	112 *(50.8)*	
P2070-73	7⅜ *(187.3)*	114 *(51.7)*	
P2070-74	7½ *(190.5)*	116 *(52.6)*	
P2070-75	7⅝ *(193.7)*	117 *(53.1)*	
P2070-76	7¾ *(196.9)*	119 *(54.0)*	
P2070-77	7⅞ *(200.0)*	121 *(54.9)*	
P2070-80	8 *(203.2)*	123 *(55.8)*	
P2070-81	8⅛ *(206.4)*	125 *(56.7)*	
P2070-82	8¼ *(209.6)*	126 *(57.2)*	
P2070-83	8⅜ *(212.7)*	128 *(58.1)*	
P2070-84	8½ *(215.9)*	129 *(58.5)*	
P1126	8⅝ *(219.1)*	130 *(59.0)*	

P2558-5 THRU P2558-60 — Single Piece Pipe Strap — EG GR HG



Hardware sold separately.



Part No.	Nom. Pipe Size In	A In (mm)	"B" In (mm)	C In (mm)	Thickness In (mm)	Wt/100 pcs Lbs (kg)	Design Load Lbs (kN)
P2558-05	½	2⅞ *73.0*	9/32 *7.1*	7/16 *11.1*	⅛ *3.2*	23 *10.4*	500 *2.22*
P2558-07	¾	3⅛ *79.4*				26 *11.8*	
P2558-10	1	3⅜ *85.7*				31 *14.1*	
P2558-12	1¼	3¾ *95.3*				35 *15.9*	
P2558-15	1½	3⅞ *98.4*				39 *17.7*	
P2558-20	2	5¾ *146.1*	7/16 *11.1*	11/16 *17.5*	¼ *6.4*	94 *42.6*	1,000 *4.45*
P2558-25	2½	6¼ *158.8*				114 *51.7*	
P2558-30	3	6⅞ *174.6*				133 *60.3*	
P2558-35	3½	7⅜ *187.3*				152 *68.9*	
P2558-40	4	7⅞ *200.0*				176 *79.8*	
P2558-50	5	9 *228.6*				198 *89.8*	
P2558-60	6	10 *254.0*				225 *102.1*	

P3409 THRU P3417 — STAND-OFF PIPE CLAMPS EG HG



Hardware included.
Finish: Electro-galvanized.
Pipe Clamp 1¼" Wide

Part No.	Pipe Size In (mm)	O.D. Size In (mm)	Load "D" Lbs (kN)	Load "E" Lbs (kN)	A In (mm)	B In (mm)	C Gauge (mm)	Wt/100 pcs Lbs (kg)
P3409	⅜ 9.5	0.675 17.1	100 0.44	25 0.11	1⅛ 28.6	2⅛ 54.0	14 1.9	14 6.4
P3411	½ 12.7	0.840 21.3	150 0.67	35 0.16	1¼ 31.8	2 5/16 58.7	14 1.9	15 6.8
P3412	¾ 19.1	1.050 26.7	175 0.78	40 0.18	1 5/16 33.3	2½ 63.5	14 1.9	19 8.6
P3413	1 25.4	1.315 33.4	200 0.89	50 0.22	1½ 38.1	2¾ 69.9	14 1.9	22 10.0
P3414	1¼ 31.8	1.660 42.2	300 1.33	70 0.31	1 11/16 42.9	3¼ 82.6	12 2.7	34 15.4
P3415	1½ 38.1	1.900 48.3	400 1.78	80 0.36	1¾ 44.5	3½ 88.9	11 3.0	49 22.2
P3417	2 50.8	2.375 60.3	500 2.22	120 0.53	2 50.8	4 101.6	10 3.4	55 24.9

Safety factor of 5

MU025 THRU MU400 — MUSTANG UNIVERSAL ONE-PIECE PIPE, CONDUIT (GRC, EMT & IMC) AND TUBING CLAMPS EG





Finish: Electro-galvanized.
Clamps are 14 ga.

Part No.	Nominal Trade Size In (mm)	Trade Size O.D. Min In (mm)	Trade Size O.D. Max In (mm)	Height Above Channel "H" Min In (mm)	Height Above Channel "H" Max. In (mm)
MU025	¼ 6.4	0.375 9.5	0.5 13.7	1¾ 44.5	2 50.8
MU037	⅜ 9.5	0.5 12.7	0.7 17.1	1⅞ 47.6	2⅛ 54.0
MU050	½ 12.7	0.63 15.9	0.84 21.3	2 50.8	2¼ 57.2
MU075	¾ 19.1	0.88 22.2	1.05 26.7	2¼ 57.2	2½ 63.5
MU100	1 25.4	1.13 28.6	1.32 33.4	2⅜ 60.3	2¾ 69.9
MU125	1¼ 31.8	1.38 34.9	1.66 42.2	2¾ 69.9	3⅛ 79.4
MU150	1½ 38.1	1.63 41.3	1.90 48.3	3 76.2	3⅜ 85.7
MU200	2 50.8	2.13 54.0	2.38 60.3	3⅜ 85.7	3⅞ 98.4
MU250	2½ 63.5	2.63 66.7	2.88 73.0	4¼ 108.0	4⅝ 117.5
MU300	3 76.2	3.13 79.4	3.50 88.9	4⅞ 123.8	5⅜ 136.5
MU350	3½ 88.9	3.63 92.1	4.00 101.6	5¼ 133.4	5⅞ 149.2
MU400	4 101.6	4.13 104.8	4.50 114.3	5¾ 146.1	6⅜ 161.9

P2600 UNICUSHION®: Isolation Material





Wt/Carton: 2.5 Lbs (1.1 kg)

- 25 feet per carton.
- Cut to length as shown in chart below.

UNICUSHION FEATURES

- Shock absorption
- Protection from corrosion and abrasion
- Allowance for expansion and contraction in pipe diameter
- Sound and vibration isolation
- Stability in use from - 50° F (-47° C) to + 350°F (+177° C)
- Flexible elastomer material
- Will not support combustion

UNICUSHION® Clamp Selection Guide

EMT CONDUIT

Nominal Size	Use with Clamp	UNICUSHION Length In *(mm)*
⅜"	P1426	1¾ *(44.5)*
½"	P1111	2⅛ *(54.0)*
¾"	P1112	2¾ *(69.9)*
1"	P2032	3⅝ *(92.1)*
1¼"	P2035	4¾ *(120.7)*
1½"	P2037	5½ *(139.7)*
2"	P1117	6¾ *(171.5)*

STANDARD PIPE OR RIGID CONDUIT

Nominal Size	Use with Clamp	UNICUSHION Length In *(mm)*
⅜"	P1111	2⅛ *(54.0)*
½"	P2030	3 *(76.2)*
¾"	P2031	3¼ *(82.6)*
1"	P2034	4¼ *(108.0)*
1¼"	P2037	5¼ *(133.4)*
1½"	P2038	6 *(152.4)*
2"	P2042	7½ *(190.5)*
2½"	P2046	9 *(228.6)*
3"	P2051	11 *(279.4)*
3½"	P2055	12¼ *(311.2)*
4"	P2059	14 *(355.6)*
5"	P2067	17½ *(444.5)*
6"	P2070-66	20¾ *(527.1)*

COPPER TUBING TYPE K OR L

Nominal Size	Use with Clamp	UNICUSHION Length In *(mm)*
¼"	P2026	1 1/16 *(27.0)*
⅜"	P2027	1½ *(38.1)*
½"	P2028	2⅛ *(54.0)*
⅝"	P2029	2¼ *(57.2)*
¾"	P2030	3 *(76.2)*
1"	P2032	3⅝ *(92.1)*
1¼"	P2034	4½ *(114.3)*
1½"	P1430	5¼ *(133.4)*
2"	P2040	6¾ *(171.5)*
2½"	P2044	8¼ *(209.6)*
3"	P2048	10 *(254.0)*
3½"	P2052	11¼ *(285.8)*
4"	P2056	12½ *(317.5)*
5"	P2064	16 *(406.4)*
6"	P2070-62	19 *(482.6)*
8"	P2070-82	25 *(635.0)*

UNICUSHION® Clamp Cutting Guide

O. D. Size In *(mm)*	Use With Clamp	UNICUSHION Length In *(mm)*
¼ *(6.4)*	P2025	⅞ *(22.2)*
⅜ *(9.5)*	P2026	1 1/16 *(27.0)*
½ *(12.7)*	P2027	1½ *(38.1)*
⅝ *(15.9)*	P2028	2⅛ *(54.0)*
¾ *(19.1)*	P2029	2¼ *(57.2)*
⅞ *(22.2)*	P2030	3 *(76.2)*
1 *(25.4)*	P2031	3¼ *(82.6)*
1⅛ *(28.6)*	P2032	3⅝ *(92.1)*
1¼ *(31.8)*	P2033	4 *(101.6)*
1⅜ *(34.9)*	P2034	4½ *(114.3)*
1½ *(38.1))*	P2035	4⅞ *(123.8)*
1⅝ *(41.3)*	P1430	5¼ *(133.4)*
1¾ *(44.5)*	P2037	5½ *(139.7)*
1⅞ *(47.6)*	P2038	6 *(152.4)*
2 *(50.8)*	P2039	6½ *(165.1)*
2⅛ *(54.0)*	P2040	6¾ *(171.5)*
2¼ *(57.2)*	P1117	7¼ *(184.2)*
2⅜ *(60.3)*	P2042	7½ *(190.5)*
2½ *(63.5)*	P2043	8 *(203.2)*
2⅝ *(66.7)*	P2044	8¼ *(209.6)*
2¾ *(69.9)*	P1118	8¾ *(222.3)*
2⅞ *(73.0)*	P2046	9¼ *(235.0)*
3 *(76.2)*	P2047	9½ .3*(241.3)*

O. D. Size In *(mm)*	Use With Clamp	UNICUSHION Length In *(mm)*
3⅛ *(79.4)*	P2048	10 *(254.0)*
3¼ *(82.6)*	P2049	10½ *(266.7)*
3⅜ *(85.7)*	P1119	10¾ *(273.1)*
3½ *(88.9)*	P2051	11 *(279.4)*
3⅝ *(92.1)*	P2052	11¼ *(285.8)*
3¾ *(95.3)*	P2053	11½ *(292.1)*
3⅞ *(98.4)*	P1120	11¾ *(298.5)*
4 *(101.6)*	P2055	12 *(304.8)*
4⅛ *(104.8)*	P2056	12½ *(317.5)*
4¼ *(108.0)*	P2057	13 *(330.2)*
4⅜ *(111.1)*	P1121	13½ *(342.9)*
4½ *(114.3)*	P2059	14 *(355.6)*
4⅝ *(117.5)*	P2060	14¼ *(362.0)*
4¾ *(120.7)*	P2061	14¾ *(374.7)*
4⅞ *(123.8)*	P2062	15 *(381.0)*
5 *(127.0)*	P2063	15½ *(393.7)*
5⅛ *(130.2)*	P2064	16 *(406.4)*
5¼ *(133.4)*	P2065	16¼ *(412.8)*
5⅜ *(136.5)*	P2066	16½ *(419.1)*
5½ *(139.7)*	P2067	17 *(431.8)*
5⅝ *(142.9)*	P2068	17½ *(444.5)*
5¾ *(146.1)*	P2069	17¾ *(450.9)*
5⅞ *(149.2)*	P2070	18¼ *(463.6)*

O. D. Size In *(mm)*	Use With Clamp	UNICUSHION Length In *(mm)*
6 *(152.4)*	P2070-61	18½ *(469.9)*
6⅛ *(155.6)*	P2070-62	19 *(482.6)*
6¼ *(158.8)*	P2070-63	19¼ *(489.0)*
6⅜ *(161.9)*	P2070-64	19¾ *(501.7)*
6½ *(165.1)*	P1124	20 *(508.0)*
6⅝ *(168.3)*	P2070-66	20½ *(520.7)*
6¾ *(171.5)*	P2070-67	21 *(533.4)*
6⅞ *(174.6)*	P2070-70	21¼ *(539.8)*
7 *(177.8)*	P2070-71	21¾ *(552.5)*
7⅛ *(181.0)*	P2070-72	22 *(558.8)*
7¼ *(184.2)*	P2070-73	22½ *(571.5)*
7⅜ *(187.3)*	P2070-74	22¾ *(577.9)*
7½ *(190.5)*	P2070-75	23¼ *(590.6)*
7⅝ *(193.7)*	P2070-76	23½ *(596.9)*
7¾ *(196.9)*	P2070-77	24 *(609.6)*
7⅞ *(200.0)*	P2070-80	24½ *(622.3)*
8 *(203.2)*	P2070-81	24¾ *(628.7)*
8⅛ *(206.4)*	P2070-82	25 *(635.0)*
8¼ *(209.6)*	P2070-83	25½ *(647.7)*
8⅜ *(212.7)*	P2070-84	26 *(660.4)*
8½ *(215.9)*	P1126	26¼ *(666.8)*

004T008 THRU 098N106, 009N012 THRU 106N114

CUSH-A-CLAMP® ASSEMBLY EG





Materials:
Clamp: Electro-galvanized or stainless steel.
Cushion: Thermoplastic elastomer. (UV Resistant)

Includes cushion, clamp and hardware.

Temperature Rating:
-50°F to +275°F (-45°C to +135°C)

Insert Width: 1.56" (39.6)

Part Numbers are "coded" to designate cushion size and clamp size. Examples:

004T008 004 - Cushion Size 4/16" (6.4)
T - With Controlled Squeeze Shoulder Bolt Available on sizes up to 1 3/8"
008 - Clamp Size 8/16" (12.7)

009N012 009 - Cushion Size 9/16" (14.3)
N - With Standard Bolt
012 - Clamp Size 12/16" (19.1)

Pipe Series Assembly

Part No.	Nominal Pipe Size	Dimensions "A" In(mm)	"B" In(mm)	"C" In(mm)	"D" In(mm)	Wt/100 pcs Lbs(kg)
009N012	¼	0.54 (13.7)	0.98 (24.9)	1.34 (34.0)	0.43 (10.9)	13 (5.9)
011N014	⅜	0.67 (17.0)	1.13 (28.7)	1.54 (39.1)	0.49 (12.4)	14 (6.4)
014N018	½	0.84 (21.3)	1.29 (32.8)	1.82 (46.2)	0.58 (14.7)	15 (6.8)
017N022	¾	1.05 (26.7)	1.5 (38.1)	1.95 (49.5)	0.7 (17.8)	17 (7.7)
021N026	1	1.31 (33.3)	1.76 (44.7)	2.34 (59.4)	0.81 (20.6)	19 (8.6)
027N032	1¼	1.66 (42.2)	2.17 (55.1)	2.73 (69.3)	0.99 (25.1)	35 (15.9)
030N034*	1½	1.9 (48.3)	2.35 (59.7)	2.86 (72.6)	1.09 (27.7)	39 (17.7)
038N044	2	2.37 (60.2)	2.82 (71.6)	3.67 (93.2)	1.41 (35.8)	49 (22.2)
046N052	2½	2.87 (72.9)	3.32 (84.3)	4.17 (105.9)	1.66 (42.2)	57 (25.9)
056N062	3	3.5 (88.9)	3.95 (100.3)	4.79 (121.7)	1.97 (50.0)	55 (24.9)
064N072	3½	4 (101.6)	4.45 (113.0)	5.42 (137.7)	2.28 (57.9)	88 (39.9)
072N080	4	4.5 (114.3)	4.95 (125.7)	5.92 (150.4)	2.53 (64.3)	110 (49.9)
089N096	5	5.56 (141.2)	6.01 (152.7)	6.92 (175.8)	3.06 (77.7)	130 (59.0)
106N114	6	6.62 (168.1)	7.07 (179.6)	8.23 (209.0)	3.59 (91.2)	140 (63.5)

Tube Series Assembly

Part Number	Copper & Steel Tube O. D. Size	Copper Water Pipe (Nominal)	Dimensions "A" In(mm)	"B" In(mm)	"C" In(mm)	"D" In(mm)	Wt/100 pcs Lbs(kg)
004T008	¼		0.25 (6.4)	0.62 (15.7)	0.98 (24.9)	0.27 (6.9)	10 (4.5)
006T010	⅜	¼	0.37 (9.4)	0.82 (20.8)	1.13 (28.7)	0.33 (8.4)	11 (5.0)
008T012	½	⅜	0.5 (12.7)	0.94 (23.9)	1.34 (34.0)	0.4 (10.2)	13 (5.9)
010T014	⅝	½	0.62 (15.7)	1.06 (26.9)	1.54 (39.1)	0.46 (11.7)	14 (6.4)
012T016	¾	⅝	0.75 (19.1)	1.2 (30.5)	1.68 (42.7)	0.52 (13.2)	14 (6.4)
014T018	⅞	¾	0.87 (22.1)	1.31 (33.3)	1.82 (46.2)	0.58 (14.7)	15 (6.8)
016T020	1		1 (25.4)	1.44 (36.6)	1.95 (49.5)	0.65 (16.5)	17 (7.7)
018T022	1⅛	1	1.12 (28.4)	1.57 (39.9)	2.08 (52.8)	0.7 (17.8)	18 (8.2)
020T024	1¼		1.25 (31.8)	1.7 (43.2)	2.21 (56.1)	0.77 (19.6)	18 (8.2)
022T026	1⅜	1¼	1.37 (34.8)	1.82 (46.2)	2.34 (59.4)	0.83 (21.1)	20 (9.1)
024N028	1½		1.5 (38.1)	1.95 (49.5)	2.47 (62.7)	0.9 (22.9)	33 (15.0)
026N030	1⅝	1½	1.62 (41.1)	2.07 (52.6)	2.6 (66.0)	0.96 (24.4)	35 (15.9)
028N032	1¾		1.75 (44.5)	2.2 (55.9)	2.73 (69.3)	1.02 (25.9)	37 (16.8)
030N034	1⅞		1.9 (48.3)	2.35 (59.7)	2.86 (72.6)	1.09 (27.7)	39 (17.7)
032N036	2		2 (50.8)	2.45 (62.2)	3.04 (77.2)	1.15 (29.2)	46 (20.9)
034N040	2⅛	2	2.12 (53.8)	2.57 (65.3)	3.23 (82.0)	1.27 (32.3)	47 (21.3)
038N044	2⅜		2.37 (60.2)	2.82 (71.6)	3.67 (93.2)	1.41 (35.8)	49 (22.2)
040N046	2½		2.5 (63.5)	2.94 (74.7)	3.79 (96.3)	1.46 (37.1)	51 (23.1)
042N048	2⅝	2½	2.62 (66.5)	3.1 (78.0)	3.92 (99.6)	1.53 (38.9)	55 (24.9)
046N052	2⅞		2.87 (72.9)	3.3 (84.3)	4.17 (105.9)	1.66 (42.2)	57 (25.9)
050N054	3		3 (76.2)	3.6 (90.7)	4.42 (112.3)	1.78 (45.2)	60 (27.2)
050N056	3⅛	3	3.12 (79.2)	3.6 (90.7)	4.42 (112.3)	1.78 (45.2)	60 (27.2)
053N060	3 5/16		3.31 (84.1)	4.0 (100.6)	4.75 (120.7)	1.9 (48.3)	62 (28.1)
056N062	3½		3.5 (88.9)	4.0 (100.3)	4.79 (121.7)	1.97 (50.0)	55 (24.9)
058N064	3⅝	3½	3.62 (91.9)	4.2 (106.7)	4.99 (126.7)	2.03 (51.6)	70 (31.8)
064N072	4		4 (101.6)	4.5 (113.0)	5.42 (137.7)	2.28 (57.9)	88 (39.9)
066N074	4⅛	4	4.12 (104.6)	4.6 (116.1)	5.54 (140.7)	2.34 (59.4)	94 (42.6)
069N076	4 5/16		4.34 (110.2)	5.0 (126.0)	5.84 (148.3)	2.4 (61.0)	100 (45.4)
072N080	4½		4.5 (114.3)	5.0 (125.7)	5.92 (150.4)	2.53 (64.3)	110 (49.9)
082N090	5⅛	5	5.12 (130.0)	5.6 (141.5)	6.54 (166.1)	2.84 (72.1)	125 (56.7)
098N106	6⅛	6	6.12 (155.4)	6.6 (166.9)	7.54 (191.5)	3.34 (84.8)	130 (59.0)

004M007 THRU 034M040 CUSH–A–CLAMP® EG

Assembly Omega Series™



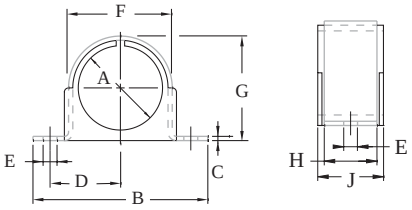

Includes clamp and cushion.

Materials: Clamp: ZD or stainless steel.

Cushion: Thermoplastic elastomer.

Note: 1-1/4 and larger can be used with Unistrut Channel.
Can be mounted to any flat surface.

CUSH–A–CLAW™ EG



Part Number	Size
CL04	1/4"
CL06	3/8"
CL08	1/2"
CL10	5/8"
CL12	3/4"
CL14	7/8"
CL18	1-1/8"

UV standardized thermo plastic

Temp Range: -50° to 275°F

Sure Grip Base

No Fasteners needed

Corrosion resistant

Prevents Galvanic Corrosion - Great for Unistrut® Defender™

Part Number	Copper & Steel Tubing O. D. In	Copper Water Pipe (Nominal) In	Pipe Size (Nominal) In	Dimensions "A" In *(mm)*	"B" In *(mm)*	"C" In *(mm)*	"D" In *(mm)*	"E" In *(mm)*	"F" In *(mm)*	"G" In *(mm)*	"H" In *(mm)*	"J" In *(mm)*	Wt/100 pcs Lbs *(kg)*
004M007	¼			0.25 *6.4*	1.8 *46.0*	0.06 *1.5*	0.6 *15.2*	0 *5.1*	0.53 *13.5*	0.48 *12.2*	0.62 *15.7*	0.78 *19.8*	3.4 *1.5*
006M008	⅜	¼		0.37 *9.4*	1.9 *48.3*	0.06 *1.5*	0.65 *16.5*	0 *5.1*	0.62 *15.7*	0.62 *15.7*	0.62 *15.7*	0.81 *20.6*	4.0 *1.8*
008M011	½	⅜	¼	0.5 *12.7*	2.2 *55.9*	0.06 *1.5*	0.8 *20.3*	0 *6.6*	0.82 *20.8*	0.75 *19.1*	0.75 *19.1*	0.98 *24.9*	5.5 *2.5*
010M013	⅝	½	⅜	0.62 *15.7*	2.3 *58.9*	0.06 *1.5*	0.86 *21.8*	0 *6.6*	0.94 *23.9*	0.87 *22.1*	0.75 *19.1*	0.98 *24.9*	6.0 *2.7*
012M015	¾	⅝		0.75 *19.1*	2.4 *61.2*	0.06 *1.5*	0.9 *22.9*	0 *6.6*	1.03 *26.2*	1.01 *25.7*	0.75 *19.1*	0.98 *24.9*	6.5 *2.9*
014M017	⅞	¾	½	0.87 *22.1*	2.6 *65.0*	0.06 *1.5*	0.98 *24.9*	0 *6.6*	1.18 *30.0*	1.03 *26.2*	0.75 *19.1*	0.98 *24.9*	7.1 *3.2*
016M019	1			1 *25.4*	2.7 *68.1*	0.06 *1.5*	1.04 *26.4*	0 *6.6*	1.31 *33.3*	1.25 *31.8*	0.75 *19.1*	0.98 *24.9*	7.8 *3.5*
018M020			¾	1.05 *26.7*	2.7 *68.1*	0.06 *1.5*	1.04 *26.4*	0 *6.6*	1.31 *33.3*	1.25 *31.8*	0.75 *19.1*	0.98 *24.9*	8.1 *3.7*
018M021	1⅛	1		1.12 *28.4*	2.8 *71.6*	0.06 *1.5*	1.11 *28.2*	0 *6.6*	1.44 *36.6*	1.33 *33.8*	0.75 *19.1*	0.98 *24.9*	8.4 *3.8*
020M024	1¼			1.25 *31.8*	3.0 *76.2*	0.08 *2.0*	1.2 *30.5*	0 *6.6*	1.65 *41.9*	1.47 *37.3*	1.25 *31.8*	1.56 *39.6*	17 *7.7*
021M026			1	1.31 *33.3*	3.1 *79.2*	0.08 *2.0*	1.26 *32.0*	0 *6.6*	1.76 *44.7*	1.71 *43.4*	1.25 *31.8*	1.56 *39.6*	20 *9.1*
022M026	1⅜	1¼		1.37 *34.8*	3.1 *79.2*	0.08 *2.0*	1.26 *32.0*	0 *6.6*	1.76 *44.7*	1.71 *43.4*	1.25 *31.8*	1.56 *39.6*	19 *8.6*
024M028	1½			1.5 *38.1*	3.7 *92.7*	0.08 *2.0*	1.42 *36.1*	0 *6.6*	1.93 *49.0*	1.88 *47.8*	1.25 *31.8*	1.56 *39.6*	20 *9.1*
026M030	1⅝	1½		1.62 *41.1*	3.8 *95.8*	0.08 *2.0*	1.48 *37.6*	0 *6.6*	2.07 *52.6*	2 *50.8*	1.25 *31.8*	1.56 *39.6*	23 *10.4*
027M032			1¼	1.66 *42.2*	3.9 *99.1*	0.1 *2.5*	1.55 *39.4*	0 *8.4*	2.21 *56.1*	2.12 *53.8*	1.25 *31.8*	1.56 *39.6*	32 *14.5*
028M032	1¾			1.75 *44.5*	3.9 *99.1*	0.1 *2.5*	1.55 *39.4*	0 *8.4*	2.21 *56.1*	2.12 *53.8*	1.25 *31.8*	1.56 *39.6*	32 *14.5*
030M034	1⅞		1½	1.87 *47.5*	4.0 *102.1*	0.1 *2.5*	1.61 *40.9*	0 *8.4*	2.33 *59.2*	2.25 *57.2*	1.25 *31.8*	1.56 *39.6*	34 *15.4*
032M036	2			2 *50.8*	4.2 *105.4*	0.1 *2.5*	1.67 *42.4*	0 *8.4*	2.46 *62.5*	2.38 *60.5*	1.25 *31.8*	1.56 *39.6*	36 *16.3*
034M040	2⅛			2.12 *53.8*	4.4 *111.8*	0.1 *2.5*	1.8 *45.7*	0 *8.4*	2.71 *68.8*	2.62 *66.5*	1.25 *31.8*	1.56 *39.6*	41 *18.6*
038M044			2	2.37 *60.2*	4.7 *119.6*	0.1 *2.5*	1.94 *49.3*	0 *8.4*	2.96 *75.2*	2.88 *73.2*	1.25 *31.8*	1.56 *39.6*	44 *20.0*
082M090	5⅛		5	5.12 *130.0*	7.6 *194.1*	0.1 *2.5*	3.41 *86.6*	0 *10.2*	5.83 *148.1*	6.75 *171.5*	1.25 *31.8*	1.56 *39.6*	120 *54.4*

UB½PA THRU UB12PA

CUSH–A–CLAMP® ASSEMBLY U-BOLT SERIES EG

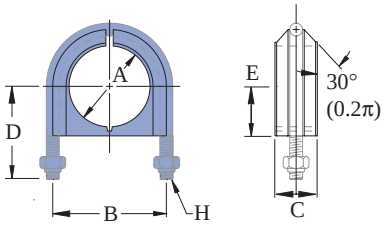

½" thru 6" assembly.

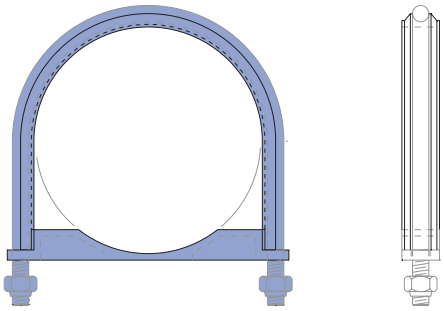

8" thru 12" assembly.

Includes: U bolt, cushion, and hardware.

Materials:

U Bolt: Electro-galvanized finish or Type 316 SS

Cushion: Thermoplastic elastomer.

Note: Not intended for use with metal framing components due to the length of the thread.

Part Number	Pipe Size (Nominal) In *(mm)*	Dimensions "A" In *(mm)*	"B" In *(mm)*	"C" In *(mm)*	"D" In *(mm)*	"E" In *(mm)*	"F" In *(mm)*	H	Wt/100 pcs Lbs *(kg)*
UB1⁄2PA	½	0.84	1.6	0.68	1.5	1	¼	¼-20 UNC-2B	9
	12.7	*21.3*	*40.6*	*17.3*	*38.1*	*17.0*	*6.4*		*4.1*
UB3⁄4PA	¾	1.1	1.8	0.7	1.6	0.8	¼	¼-20 UNC-2B	10
	19.1	*26.7*	*45.7*	*17.3*	*40.6*	*19.8*	*6.4*		*4.5*
UB1PA	1	1.3	2.1	0.7	1.7	0.9	¼	¼-20 UNC-2B	12
	25.4	*33.3*	*52.1*	*17.3*	*43.2*	*23.1*	*6.4*		*5.4*
UB1⁄4PA	1¼	1.7	2.5	1.2	2.1	1.1	⅜	⅜-16 UNC-2B	36
	31.8	*42.2*	*64.5*	*31.5*	*53.3*	*27.4*	*9.5*		*16.3*
UB1⁄2PA	1½	1.9	2.8	1.2	2.2	1.2	⅜	⅜-16 UNC-2B	32
	38.1	*48.3*	*70.6*	*31.5*	*55.9*	*30.2*	*9.5*		*14.5*
UB2PA	2	2.4	3.3	1.2	2.5	1.5	⅜	⅜-16 UNC-2B	42
	50.8	*60.2*	*84.3*	*31.5*	*63.5*	*36.8*	*9.5*		*19.1*
UB2⁄2PA	2½	2.9	3.9	1.2	3.0	1.7	½	½-13 UNC-2B	72
	63.5	*72.9*	*98.6*	*31.5*	*76.2*	*42.9*	*12.7*		*32.7*
UB3PA	3	3.5	4.5	1.2	3.3	2.0	½	½-13 UNC-2B	84
	76.2	*88.9*	*114.3*	*31.5*	*83.8*	*50.8*	*12.7*		*38.1*
UB3⁄2PA	3½	4.0	5.0	1.2	3.7	2.3	½	½-13 UNC-2B	93
	88.9	*101.6*	*127.0*	*31.5*	*94.0*	*57.2*	*12.7*		*42.2*
UB4PA	4	4.5	5.5	1.2	3.9	2.5	½	½-13 UNC-2B	102
	101.6	*114.3*	*139.7*	*31.5*	*99.1*	*63.5*	*12.7*		*46.3*
UB5PA	5	5.6	6.6	1.2	4.5	3.0	½	½-13 UNC-2B	123
	127.0	*141.2*	*167.4*	*31.5*	*114.3*	*77.0*	*12.7*		*55.8*
UB6PA	6	6.6	7.8	1.4	5.4	3.6	⅝	⅝-11 UNC-2B	123
	152.4	*168.1*	*198.4*	*36.6*	*137.2*	*90.4*	*15.9*		*55.8*
UB8PA	8	8.6	9.8	1.4	6.4	4.6	⅝	⅝-11 UNC-2B	243
	203.2	*218.9*	*249.9*	*36.6*	*162.6*	*115.8*	*15.9*		*110.2*
UB10PA	10	10.8	12.3	1.7	7.7	5.7	¾	¾-10 UNC-2B	492
	254.0	*273.1*	*311.2*	*41.9*	*195.6*	*144.3*	*19.1*		*223.2*
UB12PA	12	12.8	14.3	1.7	8.7	6.7	¾	¾-10 UNC-2B	563
	304.8	*323.9*	*362.0*	*41.9*	*221.0*	*169.7*	*19.1*		*255.4*

CUSH–A–NATOR®

STEEL

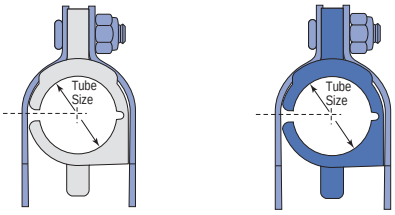

The Cush-A-Nator cushion is made from a new extremely durable thermoplastic rubber that resists high heat and provides longer life against vibration fatigue.

Part Number	Clamp Material	Size
CN04	Steel	1/4"
CN26	Steel	1-5/8"
CN24	Steel	1-1/2"
CN22	Steel	1-3/8"
CN18	Steel	1-1/8"
CN16	Steel	1"
CN14	Steel	7/8"
CN12	Steel	3/4"
CN10	Steel	5/8"
CN08	Steel	1/2"
CN06	Steel	3/8"
CN34	Steel	1-1/8"

Part Number	Clamp Material	Size
HT04	Steel	1/4"
HT26	Steel	1-5/8"
HT24	Steel	1-1/2"
HT22	Steel	1-3/8"
HT18	Steel	1-1/8"
HT16	Steel	1"
HT14	Steel	7/8"
HT10	Steel	5/8"
HT08	Steel	1/2"
HT06	Steel	3/8"
HT34	Steel	2-1/8"

CG-10 THRU CG-40 — CUSH–A–GRIP®

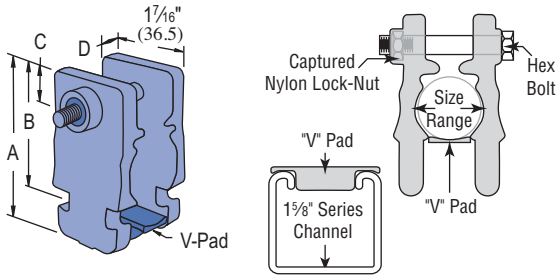

Part Number	O.D. Tube Sizes In(mm)			Nominal Pipe Sizes In(mm)		Diameters In(mm)	PullOut Load Lbs(kN)	Slip Load Lbs(kN)
CG-10	¼ 6.4	⅜ 9.5	½ 12.7	¼ 6.4		0.25 - 0.54 6.4 - 13.7	500 2.22	40 0.18
CG-20	⅝ 15.9	¾ 19.1	⅞ 22.2	⅜ 9.5	½ 12.7	0.62 - 0.87 15.7 - 22.1	500 2.22	40 0.18
CG-30	⅞ 22.2	1 25.4	1⅛ 28.6	¾ 19.1		0.87 - 1.12 22.1 - 28.4	500 2.22	40 0.18
CG-40	1 25.4	1⅛ 28.6	1¼ 31.8	¾ 19.1	1 25.4	1.00 - 1.31 25.4 - 33.3	500 2.22	40 0.18

Includes: Cushion, V-pad, and Hardware.
Materials: Cushion: Thermoplastic elastomer.
Hardware: Stainless Steel with Captured Nylon Locknut
Temperature Rating: -40°F to +275°F (-40°C to 135°C)

Part Number	Nominal Pipe Size	Dimensions "A" In(mm)	"B" In(mm)	"C" In(mm)	"D" In(mm)	Hex Head Cap Screw & Lock Nut	Wt/100 pcs Lbs(kg)
CG-10	¼	1 15/16 49.2	1⅜ 34.9	⅜ 9.5	3/16 4.8	¼-20 x 1½"	4 1.8
CG-20	⅜	2⅜ 60.3	1⅝ 41.3	7/16 11	¼ 6.4	¼-20 x 2"	6 2.7
CG-30	½	2 9/16 65.1	1 13/16 46.0	7/16 11	5/16 7.9	¼-20 x 2"	8 3.6
CG-40	¾	2 11/16 68.3	1 15/16 49.2	7/16 11	5/16 7.9	¼-20 x 2"	8 3.6

PUX1234 THRU PUX41810 — CUSH–A–THERM™

The only airtight, crush-resistant insulation clamp on the market.

- Maintains thermal barrier protection
- Prevents condensation
- Properly supports pipe and tube
- Absorbs vibration

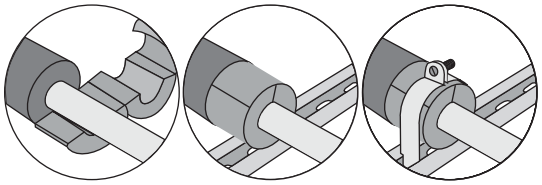

1. Insulation slides over pipes
2. Pipe hanger inserts are put in place and glued to insuation.
3. Joints are wrapped and sealed with ProTape.

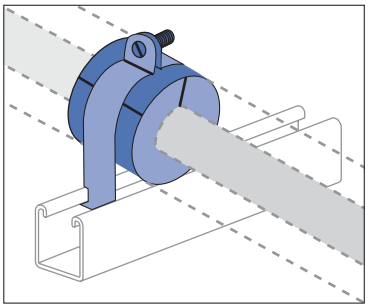

Nominal ¾" Wall

Part Number	Hole Size In(mm)	Copper Nom. I.D. In(mm)	O.D. In(mm)	IPS In(mm)	O.D. In(mm)	Length In(mm)
PUX3834	⅜ ID 9.5	¼ 6.4	⅜ 9.5	- -	1.81 46.0	2.17 55.1
PUX1234	½ ID 12.7	⅜ 9.5	½ 12.7	¼ 6.4	1.89 48.0	2.17 55.1
PUX5834	⅝ ID 15.9	½ 12.7	⅝ 15.9	⅜ 9.5	2.05 52.1	2.17 55.1
PUX3434	¾ ID 19.1	⅝ 15.9	¾ 19.1	- -	2.22 56.4	2.17 55.1
PUX7834	⅞ ID 22.2	¾ 19.1	⅞ 22.2	½ 12.7	2.44 62.0	2.17 55.1
PUX11834	1⅛ ID 28.6	1 25.4	1⅛ 28.6	¾ 19.1	2.76 70.1	2.17 55.1
PUX13834	1⅜ ID 34.9	1¼ 31.8	1⅜ 34.9	1 25.4	3.19 81.0	2.56 65.0
PUX15834	1⅝ ID 41.3	1½ 38.1	1⅝ 41.3	1¼ 31.8	3.35 85.1	2.58 65.5
PUX21834	2⅛ ID 54.0	2 50.8	2⅛ 54.0	- -	3.86 98.0	2.56 65.0
PUX23834	2⅜ ID 60.3	2¼ 57.2	2⅜ 60.3	2 50.8	4.29 109.0	2.96 75.2
PUX25834	2⅝ ID 66.7	2½ 63.5	2⅝ 66.7	- -	4.87 123.7	2.96 75.2
PUX31834	3⅛ ID 79.4	3 76.2	3⅛ 79.4	- -	5 127.0	3.35 85.1
PUX35834	3⅝ ID 92.1	3½ 88.9	3⅝ 92.1	- -	5.94 150.9	3.94 100.1
PUX41834	4⅛ ID 104.8	4 101.6	4⅛ 104.8	3½ 88.9	6.14 156.0	3.94 100.1

Nominal 1" Wall

Part Number	Hole Size In(mm)	Copper Nom. I.D. In(mm)	O.D. In(mm)	IPS In(mm)	O.D. In(mm)	Length In(mm)
PUX5810	⅝ ID 15.9	½ 12.7	⅝ 15.9	⅜ 9.5	2.54 64.5	2.2 55.1
PUX3410	¾ ID 19.1	⅝ 15.9	¾ 19.1	- -	2.82 71.6	2.2 55.1
PUX7810	⅞ ID 22.2	¾ 19.1	⅞ 22.2	½ 12.7	2.82 71.6	2.2 55.1
PUX11810	1⅛ ID 28.6	1 25.4	1⅛ 28.6	¾ 19.1	3.06 77.7	2.2 55.1
PUX13810	1⅜ ID 34.9	1¼ 31.8	1⅜ 34.9	1 25.4	3.33 84.6	2.6 65.0
PUX15810	1⅝ ID 41.3	1½ 38.1	1⅝ 41.3	1¼ 31.8	3.65 92.7	2.6 65.0
PUX21810	2⅛ ID 54.0	2 50.8	2⅛ 54.0	- -	4.16 105.7	2.6 65.0
PUX23810	2⅜ ID 60.3	2¼ 57.2	2⅜ 60.3	2 50.8	3.92 99.6	2.6 65.0
PUX25810	2⅝ ID 66.7	2½ 63.5	2⅝ 66.7	- -	4.87 123.7	3.0 75.2
PUX31810	3⅛ ID 79.4	3 76.2	3⅛ 79.4	- -	5.14 130.6	3.4 85.1
PUX35810	3⅝ ID 92.1	3½ 88.9	3⅝ 92.1	- -	6.48 164.6	3.9 100.1
PUX41810	4⅛ ID 104.8	4 101.6	4⅛ 104.8	3½ 88.9	6.48 164.6	3.9 100.1

J1205 thru J1280, J1205 N thru J1280 N (Plastic Coated)

"J" Conduit & Pipe Hanger EG

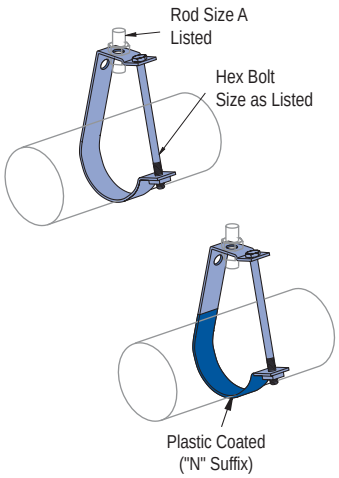

Hanger Rod Suspended

Part No.	Wt/100 pcs Lbs (kg)	Part No.	Wt/100 pcs Lbs (kg)	Pipe Size In	"A" In (mm)	"B" In (mm)	"C" In (mm)	"D" In (mm)	"E" In (mm)	"F" In (mm)	Load Lbs (kN)
J1205	20 9.1	J1205N	21 9.5	½	⅜ 9.5	2⅝ 66.7	1 25.4	2 50.8	13/32 10.3	¼ x 2¼ 6.4 x 57.2	400 1.78
J1207	21 9.5	J1207N	22 10.0	¾	⅜ 9.5	2⅞ 73.0	1 25.4	2¼ 57.2	13/32 10.3	¼ x 2¼ 6.4 x 57.2	400 1.78
J1210	24 10.9	J1210N*	25 11.3	1	⅜ 9.5	3 76.2	1 25.4	2⅜ 60.3	13/32 10.3	¼ x 2½ 6.4 x 63.5	400 1.78
J1212	27 12.2	J1212N	29 13.2	1¼	⅜ 9.5	3¼ 82.6	1 25.4	2½ 63.5	13/32 10.3	¼ x 2¾ 6.4 x 69.9	400 1.78
J1215	29 13.2	J1215N*	31 14.1	1½	⅜ 9.5	3½ 88.9	1 25.4	2⅝ 66.7	13/32 10.3	¼ x 3 6.4 x 76.2	400 1.78
J1220	33 15.0	J1220N*	35 15.9	2	⅜ 9.5	3¾ 95.3	1⅛ 28.6	2⅝ 66.7	13/32 10.3	¼ x 3½ 6.4 x 88.9	400 1.78
J1225	71 32.2	J1225N	74 33.6	2½	½ 12.7	4⅜ 111.1	1⅛ 28.6	3⅝ 92.1	9/16 14.3	⅜ x 4½ 9.5 x 114.3	800 3.56
J1230	78 35.4	J1230N*	81 36.7	3	½ 12.7	4⅞ 123.8	1⅛ 28.6	4 101.6	9/16 14.3	⅜ x 5 9.5 x 127.0	800 3.56
J1235	85 38.6	J1235N	88 39.9	3½	½ 12.7	5⅛ 130.2	1⅛ 28.6	4¼ 108.0	9/16 14.3	⅜ x 6 9.5 x 152.4	800 3.56
J1240	178 80.7	J1240N*	182 82.6	4	⅝ 15.9	6⅛ 155.6	1⅛ 28.6	5⅛ 130.2	9/16 14.3	⅜ x 6 9.5 x 152.4	800 3.56
J1250	199 90.3	J1250N	203 92.1	5	⅝ 15.9	6¾ 171.5	1⅛ 28.6	5¾ 146.1	9/16 14.3	⅜ x 7½ 9.5 x 190.5	800 3.56
J1260	231 104.8	J1260N*	236 107.0	6	¾ 19.1	7¾ 196.9	1¼ 31.8	6½ 165.1	9/16 14.3	⅜ x 8½ 9.5 x 215.9	1,000 4.45
J1280	449 203.7	J1280N	458 207.7	8	⅞ 22.2	9¼ 235.0	1¼ 31.8	8 203.2	9/16 14.3	⅜ x 10 9.5 x 254.0	1,200 5.34

*Standard glass drainline and glass process pipe sizes. Minimum safety factor of five (5) on ultimate load.

P2474

Pipe Roller for ½" - 4" Pipe EG GR



Sold in pairs.

Requires 2 each ½" x 15/16" bolts and ½" channel nuts per assembly. Sold separately.



Cast iron rollers.

Design Load
500 Lbs (2.22kN)

Wt/100 pcs: 268 Lbs (121.6 kg)

Chart for Dimension A

Pipe Size In	No Insulation In (mm)	Insulation Thickness 1" In (mm)	1½" In (mm)	2" In (mm)	2½" In (mm)	3" In (mm)	4" In (mm)
½	6½ 165.1	6½ 165.1	- -	- -	- -	- -	- -
¾	6½ 165.1	6½ 165.1	6⅝ 168.3	6⅞ 174.6	- -	- -	- -
1	6½ 165.1	6½ 165.1	6⅝ 168.3	6⅞ 174.6	- -	- -	- -
1¼	6½ 165.1	6½ 165.1	6⅞ 174.6	7⅛ 181.0	7⅜ 187.3	- -	- -
1½	6½ 165.1	6½ 165.1	6⅞ 174.6	7⅛ 181.0	7⅜ 187.3	- -	- -
2	6½ 165.1	6⅝ 168.3	7⅛ 181.0	7⅜ 187.3	7½ 190.5	8 203.2	- -
2½	6½ 165.1	6⅝ 168.3	7⅛ 181.0	7⅜ 187.3	7½ 190.5	8 203.2	- -
3	6½ 165.1	7 177.8	7½ 190.5	7¾ 196.9	7⅞ 200.0	8⅛ 206.4	- -
3½	6½ 165.1	7 177.8	7½ 190.5	7¾ 196.9	7⅞ 200.0	8⅛ 206.4	- -
4	6⅝ 168.3	7¼ 184.2	7⅝ 193.7	7⅞ 200.0	8 203.2	8⅜ 212.7	9 228.6

P2474-1 THRU P2474-4

PIPE ROLLER FOR 1" - 8" PIPE

EG GR

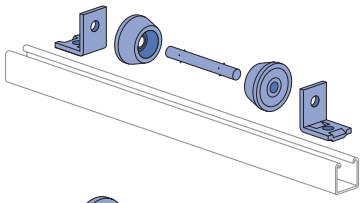





Saddle by others.

- Pipe roller will fit standard saddles.
- Select proper roller from chart.
- Requires 2 each ½" x 15⁄16" bolts and ½" channel nuts per assembly. Sold separately.

Parts are shipped loose and are easily assembled during installation.

Design Load
750 Lbs *(3.34 kN)*

Part Number	A In *(mm)*	Wt/100 pcs Lbs *(kg)*
P2474-1	6¾ *171.5*	299 *135.6*
P2474-2	7½ *190.5*	304 *137.9*
P2474-3	8½ *215.9*	311 *141.1*
P2474-4	9 9⁄16 *242.9*	319 *144.7*

Chart for Roller Part Number Selection

Pipe Size In	No Insulation	Insulation Thickness 1" *(25.4)*	1½" *(38.1)*	2" *(50.8)*	2½" *(63.5)*	3" *(76.2)*	4" *(101.6)*
½	P2474-1	P2474-1	P2474-1	P2474-2	-	-	-
¾	P2474-1	P2474-1	P2474-1	P2474-2	-	-	-
1	P2474-1	P2474-1	P2474-1	P2474-2	-	-	-
1¼	P2474-1	P2474-1	P2474-1	P2474-2	-	-	-
1½	P2474-1	P2474-1	P2474-2	P2474-2	P2474-2	-	-
2	P2474-1	P2474-1	P2474-2	P2474-2	P2474-2	-	-
2½	P2474-1	P2474-1	P2474-2	P2474-2	P2474-2	-	-
3	P2474-1	P2474-2	P2474-2	P2474-3	P2474-3	P2474-3	-
3½	P2474-1	P2474-2	P2474-2	P2474-3	P2474-3	P2474-3	-
4	P2474-1	P2474-2	P2474-2	P2474-3	P2474-3	P2474-3	-
5	P2474-2	P2474-3	P2474-3	P2474-3	P2474-3	P2474-4	P2474-4
6	P2474-2	P2474-3	P2474-3	P2474-3	P2474-3	P2474-4	P2474-4
8	P2474-2	P2474-3	P2474-4	P2474-4	P2474-4	P2474-4	P2474-4

P2475

PIPE ROLLER FOR 6" - 16" PIPE

EG GR



Sold in pairs.



Saddle by others.

Material: Cast iron rollers.

- Requires 2 each ½" x 15⁄16" bolts and ½" channel nuts per assembly. Sold separately.

Design Load
1500 Lbs *(6.67 kN)*

Wt/100 pcs: 680 Lbs (308.4 kg)

Chart for Dimension A

Pipe Size In	No Insulation In *(mm)*	Insulation Thickness 1" In *(mm)*	1½" In *(mm)*	2" In *(mm)*	2½" In *(mm)*	3" In *(mm)*	4" In *(mm)*
6	9½ *241.3*	10¼ *260.4*	10½ *266.7*	10¾ *273*	11 *279.4*	11⅜ *288.9*	11⅞ *301.6*
8	10⅛ *257.2*	*	11 *279.4*	11⅜ *288.9*	11¾ *298.5*	12 *304.8*	12½ *317.5*
10	10¾ *273.1*	*	11⅝ *295.3*	12 *304.8*	12¼ *311.2*	12½ *317.5*	13 *330.2*
12	11¼ *285.8*	*	12⅛ *308.0*	12½ *317.5*	12¾ *323.9*	13 *330.2*	13½ *342.9*
14	11⅝ *295.3*	*	12½ *317.5*	12⅞ *327.0*	13 *330.2*	13⅜ *339.7*	14 *355.6*
16	12⅛ *308.0*	*	13 *330.2*	13⅜ *339.7*	13⅞ *352.4*	14 *355.6*	14½ *368.3*

(*Not used for this size)

Standard Dimensions for 1⅝" (41.3mm) width series channel fittings *(Unless Otherwise Shown on Drawing)*

Hole Diameter: 9⁄16" (14.3mm); Hole Spacing - From End: 13⁄16" (20.6mm); Hole Spacing - On Center: 1⅞" (47.6mm); Width: 1⅝"(41.3mm); Thickness: ¼" (6.4mm)

P2476 — Pipe Roller for 16" - 24" Pipe

EG GR

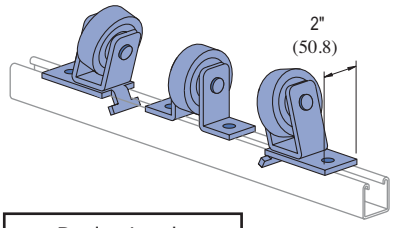

Design Load
2000 Lbs *(8.90 kN)*

Material: Cast iron rollers.

- Requires 4 each ½" x 15⁄16" bolts and ½" channel nuts per assembly. Sold separately.



Chart for Dimension A

Pipe Size In	Insulation Thickness 1½" In *(mm)*	2" In *(mm)*	2½" In *(mm)*	3" In *(mm)*	4" In *(mm)*
16	-	-	13⅞	14	14½
	-	-	*352.4*	*355.6*	*368.3*
18	13⅝	14	14⅛	14½	15
	346.1	*355.6*	*358.8*	*368.3*	*381.0*
20	14⅛	14½	14¾	15	15½
	358.8	*368.3*	*374.7*	*381.0*	*393.7*
24	15¼	15½	15⅞	16⅛	16⅝
	387.4	*393.7*	*403.2*	*409.6*	*422.3*

Wt/100 pcs: 1046 Lbs (474.5 kg)

P2481 — Pipe Support Bracket



For ½" pipe to 1½" pipe.

Wt/100 pcs Lbs *(kg)*	*Design Load (Upright Channel)* P1000 Lbs *(kN)*	P1100 Lbs *(kN)*	P2000 Lbs *(kN)*
90	85	85	85
40.8	*0.38*	*0.38*	*0.38*

P2482 — Pipe Support Bracket



For 2" pipe to 3" pipe.

Wt/100 pcs Lbs *(kg)*	*Design Load (Upright Channel)* P1000 Lbs *(kN)*	P1100 Lbs *(kN)*	P2000 Lbs *(kN)*
139	185	120	95
63.0	*0.82*	*0.53*	*0.42*

P2243 — Pipe Block



For 2" (50.8) to 8" (203.2) Pipes

Wt/100 pcs: 40 Lbs (18.1 kg)

Standard Dimensions for 1⅝" (41.3mm) width series channel fittings *(Unless Otherwise Shown on Drawing)*
Hole Diameter: 9⁄16" (14.3mm); Hole Spacing - From End: 13⁄16" (20.6mm); Hole Spacing - On Center: 1⅞" (47.6mm); Width: 1⅝"(41.3mm); Thickness: ¼" (6.4mm)

Nominal Pipe Dia.		Centerline to Centerline (In/mm)																	
		¾" (19.1mm)		1" (25.4mm)			1¼" (31.8mm)			1½" (38.1mm)			2" (50.8mm)			2½" (63.5mm)		
		T	S	T	F	S	T	F	S	T	F	S	T	F	S	T	F	S
¾" 19.1mm	T	4¾ 120.7	– –	– –	– –	– –	– –	– –	– –	– –	– –	– –	– –	– –	– –	– –	– –	– –
	S	4½ 114.3	4¾ 120.7	– –	– –	– –	– –	– –	– –	– –	– –	– –	– –	– –	– –	– –	– –	– –
1" 25.4mm	T	5 127.0	4¾ 120.7	5¼ 133.4	– –	– –	– –	– –	– –	– –	– –	– –	– –	– –	– –	– –	– –	– –
	F	6 152.4	5¾ 146.1	6¼ 158.8	7¼ 184.2	– –	– –	– –	– –	– –	– –	– –	– –	– –	– –	– –	– –	– –
	S	4¾ 120.7	4½ 114.3	5 127.0	6 152.4	4½ 114.3	– –	– –	– –	– –	– –	– –	– –	– –	– –	– –	– –	– –
1¼" 31.8mm	T	5¼ 133.4	5 127.0	5½ 139.7	6½ 165.1	5 127.0	5½ 139.7	– –	– –	– –	– –	– –	– –	– –	– –	– –	– –	– –
	F	6¼ 158.8	6 152.4	6½ 165.1	7½ 190.5	6¼ 158.8	6¾ 171.5	7¾ 196.9	– –	– –	– –	– –	– –	– –	– –	– –	– –	– –
	S	4¾ 120.7	4½ 114.3	5 127.0	6 152.4	4½ 114.3	5¼ 133.4	6¼ 158.8	4¾ 120.7	– –	– –	– –	– –	– –	– –	– –	– –	– –
1½" 38.1mm	T	5¼ 133.4	5 127.0	5½ 139.7	6½ 165.1	5¼ 133.4	5¾ 146.1	6¾ 171.5	5¼ 133.4	5¾ 146.1	– –	– –	– –	– –	– –	– –	– –	– –
	F	6½ 165.1	6¼ 158.8	6¾ 171.5	7¾ 196.9	6¼ 158.8	6¾ 171.5	8 203.2	6½ 165.1	7 177.8	8 203.2	– –	– –	– –	– –	– –	– –	– –
	S	5 127.0	4¾ 120.7	5¼ 133.4	6¼ 158.8	4¾ 120.7	5¼ 133.4	6 152.4	5 127.0	5½ 139.7	6½ 165.1	5 127.0	– –	– –	– –	– –	– –	– –
2" 50.8mm	T	5¾ 146.1	5½ 139.7	6 152.4	7 177.8	5½ 139.7	6 152.4	7¼ 184.2	5¾ 146.1	6¼ 158.8	7¼ 184.2	5¾ 146.1	6½ 165.1	– –	– –	– –	– –	– –
	F	7 177.8	6¾ 171.5	7¼ 184.2	8¼ 209.6	6¾ 171.5	7¼ 184.2	8½ 215.9	7 177.8	7½ 190.5	8½ 215.9	7 177.8	7¾ 196.9	9 228.6	– –	– –	– –	– –
	S	5¼ 133.4	5 127.0	5½ 139.7	6½ 165.1	5 127.0	5½ 139.7	6¾ 171.5	5¼ 133.4	5¾ 146.1	6¾ 171.5	5¼ 133.4	6 152.4	7¼ 184.2	5½ 139.7	– –	– –	– –
2½" 63.5mm	T	6 152.4	5¾ 146.1	6¼ 158.8	7¼ 184.2	6 152.4	6½ 165.1	7½ 190.5	6 152.4	6½ 165.1	7¾ 196.9	6¼ 158.8	7 177.8	8¼ 209.6	6½ 165.1	7¼ 184.2	– –	– –
	F	7½ 190.5	7¼ 184.2	7¾ 196.9	8¾ 222.3	7¼ 184.2	7¾ 196.9	9 228.6	7½ 190.5	8 203.2	9 228.6	7½ 190.5	8¼ 209.6	9½ 241.3	7¾ 196.9	8¾ 222.3	10 254.0	– –
	S	5½ 139.7	5¼ 133.4	5¾ 146.1	6¾ 171.5	5¼ 133.4	5¾ 146.1	7 177.8	5½ 139.7	6 152.4	7 177.8	5½ 139.7	6¼ 158.8	7½ 190.5	5¾ 146.1	6¾ 171.5	8 203.2	6 152.4
3" 76.2mm	T	6¼ 158.8	6 152.4	6½ 165.1	7½ 190.5	6¼ 158.8	6¾ 171.5	7¾ 196.9	6¼ 158.8	6¾ 171.5	8 203.2	6½ 165.1	7¼ 184.2	8½ 215.9	6¾ 171.5	7½ 190.5	9 228.6	7 177.8
	F	7¾ 196.9	7½ 190.5	8 203.2	9 228.6	7½ 190.5	8 203.2	9¼ 235.0	7¾ 196.9	8¼ 209.6	9¼ 235.0	7¾ 196.9	8½ 215.9	9¾ 247.7	8 203.2	9 228.6	10¼ 260.4	8¼ 209.6
	S	5¾ 146.1	5½ 139.7	6 152.4	7 177.8	5½ 139.7	6 152.4	7¼ 184.2	5¾ 146.1	6¼ 158.8	7¼ 184.2	5¾ 146.1	6½ 165.1	7¾ 196.9	6 152.4	7 177.8	8¼ 209.6	6¼ 158.8
4" 101.6mm	T	7½ 190.5	7¼ 184.2	7¾ 196.9	8¾ 222.3	7¼ 184.2	7¾ 196.9	9 228.6	7½ 190.5	8 203.2	9 228.6	7½ 190.5	8¼ 209.6	9½ 241.3	7¾ 196.9	8¾ 222.3	10 254.0	8 203.2
	F	9 228.6	8¾ 222.3	9¼ 235.0	10¼ 260.4	8¾ 222.3	9¼ 235.0	10½ 266.7	9 228.6	9½ 241.3	10½ 266.7	9 228.6	9¾ 247.7	11 279.4	9¼ 235.0	10¼ 260.4	11½ 292.1	9½ 241.3
	S	6¾ 171.5	6½ 165.1	7 177.8	8 203.2	6½ 165.1	7 177.8	8¼ 209.6	6¾ 171.5	7¼ 184.2	8¼ 209.6	6¾ 171.5	7½ 190.5	8¾ 222.3	7 177.8	8 203.2	9¼ 235.0	7¼ 184.2
5" 127.0mm	T	8 203.2	7¾ 196.9	8¼ 209.6	9¼ 235.0	7¾ 196.9	8¼ 209.6	9½ 241.3	8 203.2	8½ 215.9	9½ 241.3	8 203.2	8¾ 222.3	10 254.0	8¼ 209.6	9¼ 235.0	10½ 266.7	8½ 215.9
	F	9½ 241.3	9¼ 235.0	9¾ 247.7	10¾ 273.1	9¼ 235.0	9¾ 247.7	11 279.4	9½ 241.3	10 254.0	11 279.4	9½ 241.3	10¼ 260.4	11½ 292.1	9¾ 247.7	10¾ 273.1	12 304.8	10 254.0
	S	7¼ 184.2	7 177.8	7½ 190.5	8¼ 209.6	7 177.8	7½ 190.5	8¾ 222.3	7¼ 184.2	7¾ 196.9	8¾ 222.3	7¼ 184.2	8 203.2	9¼ 235.0	7½ 190.5	8½ 215.9	9¾ 247.7	7¾ 196.9
6" 152.4mm	T	8¾ 222.3	8½ 215.9	9 228.6	10 254.0	8½ 215.9	9 228.6	10¼ 260.4	8¾ 222.3	9¼ 235.0	10¼ 260.4	8¾ 222.3	9½ 241.3	10¾ 273.1	9 228.6	10 254.0	11¼ 285.8	9¼ 235.0
	F	10 254.0	9¾ 247.7	10¼ 260.4	11¼ 285.8	9¾ 247.7	10¼ 260.4	11½ 292.1	10 254.0	10½ 266.7	11½ 292.1	10 254.0	10¾ 273.1	12 304.8	10¼ 260.4	11¼ 285.8	12½ 317.5	10½ 266.7
	S	7¾ 196.9	7½ 190.5	8 203.2	9 228.6	7½ 190.5	8 203.2	9¼ 235.0	7¾ 196.9	8¼ 209.6	9¼ 235.0	7¾ 196.9	8½ 215.9	9¾ 247.7	8 203.2	9 228.6	10¼ 260.4	8¼ 209.6
8" 203.2mm	T	8¾ 222.3	9½ 241.3	10 254.0	11 279.4	9¾ 247.7	10½ 266.7	11¼ 285.8	9¾ 247.7	10¼ 260.4	11½ 292.1	10 254.0	10¾ 273.1	12 304.8	10½ 266.7	11 279.4	12½ 317.5	10½ 266.7
	F	11¼ 285.8	11 279.4	11½ 292.1	12½ 317.5	11 279.4	11½ 292.1	12¾ 323.9	11¼ 285.8	11¾ 298.5	12¾ 323.9	11¼ 285.8	12 304.8	13¼ 336.6	11½ 292.1	12½ 317.5	13¾ 349.3	11¾ 298.5
10" 254.0mm	T	11¼ 285.8	11 279.4	11½ 292.1	12½ 317.5	11 279.4	11½ 292.1	12¾ 323.9	11¼ 285.8	11¾ 298.5	12¾ 323.9	11¼ 285.8	12 304.8	13¼ 336.6	11½ 292.1	12½ 317.5	13¾ 349.3	11¾ 298.5
	F	12½ 317.5	12¼ 311.2	12¾ 323.9	13¾ 349.3	12¼ 311.2	12¾ 323.9	14 355.6	12½ 317.5	13 330.2	14 355.6	12½ 317.5	13¼ 336.6	14½ 368.3	12¾ 323.9	13¾ 349.3	15 381.0	13 330.2
12" 304.8mm	T	12¼ 311.2	12 304.8	12½ 317.5	13½ 342.9	12 304.8	12½ 317.5	13¾ 349.3	12¼ 311.2	12¾ 323.9	13¾ 349.3	12¼ 311.2	13 330.2	14¼ 362.0	12½ 317.5	13½ 342.9	14¾ 374.7	12¾ 323.9
	F	14 355.6	13¾ 349.3	14¼ 362.0	15¼ 387.4	13¾ 349.3	14¼ 362.0	15½ 393.7	14 355.6	14½ 368.3	15½ 393.7	14 355.6	14¾ 374.7	16 406.4	14¼ 362.0	15¼ 387.4	16½ 419.1	14½ 368.3

Pipe Spacing Table

This chart, developed by Julius Getlan of Seelye Stevenson Value & Knect, consulting engineers, New York City, enables one to quickly determine the centerline-to-centerline dimension between any two size pipes on a rack.

Select the smaller pipe size at top and select the other at the side of the table. Where the appropriate columns intersect, the dimension is given.

These factors are included in the dimensions given:

- O.D. of flanges and fittings.
- 1" insulation over flanges and fittings.
- All fractional dimensions less than ¼" were increased to the next larger ¼".
- Clear space between fittings as follows:
  1. 1" between piping 3" and smaller.
  2. 1½" between a pipe 3" and smaller and a pipe 4" or larger.
  3. 2" between piping 4" and larger.

T – denotes threaded IPS pipe. F – denotes flanged fittings on pipe. S – denotes soldered or brazed tubing.

Centerline to Centerline (In/mm)																			
3" *(76.2mm)*			4" *(101.6mm)*			5" *(127.0mm)*			6" *(152.4mm)*			8" *(203.2mm)*		10" *(254.0mm)*		12" *(304.8mm)*		Nominal Pipe Dia.	
T	F	S	T	F	S	T	F	S	T	F	S	T	F	T	F	T	F		
7¾	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	T	
196.9	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–		
9¼	10½	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	F	3"
235.0	*266.7*	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–		*76.2mm*
7¼	8½	6½	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	S	
184.2	*215.9*	*165.1*	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–		
9	10¼	8¼	10	–	–	–	–	–	–	–	–	–	–	–	–	–	–	T	
228.6	*260.4*	*209.6*	*254.0*	–	–	–	–	–	–	–	–	–	–	–	–	–	–		
10½	11¾	9¾	11½	13	–	–	–	–	–	–	–	–	–	–	–	–	–	F	4"
266.7	*298.5*	*247.7*	*292.1*	*330.2*	–	–	–	–	–	–	–	–	–	–	–	–	–		*101.6mm*
8¼	9½	7½	9¼	10¾	8½	–	–	–	–	–	–	–	–	–	–	–	–	S	
209.6	*241.3*	*190.5*	*235.0*	*273.1*	*215.9*	–	–	–	–	–	–	–	–	–	–	–	–		
9½	10¾	8¾	10¼	12	9¾	11	–	–	–	–	–	–	–	–	–	–	–	T	
241.3	*273.1*	*222.3*	*260.4*	*304.8*	*247.7*	*279.4*	–	–	–	–	–	–	–	–	–	–	–		
11	12¼	10¼	12	13½	11¼	12½	14	–	–	–	–	–	–	–	–	–	–	F	5"
279.4	*311.2*	*260.4*	*304.8*	*342.9*	*285.8*	*317.5*	*355.6*	–	–	–	–	–	–	–	–	–	–		*127.0mm*
8¾	10	8	9¾	11¼	9	10¼	11¾	9½	–	–	–	–	–	–	–	–	–	S	
222.3	*254.0*	*203.2*	*247.7*	*285.8*	*228.6*	*260.4*	*298.5*	*241.3*	–	–	–	–	–	–	–	–	–		
10¼	11½	9½	11¼	12¾	10½	11¾	13¼	11	12½	–	–	–	–	–	–	–	–	T	
260.4	*292.1*	*241.3*	*285.8*	*323.9*	*266.7*	*298.5*	*336.6*	*279.4*	*317.5*	–	–	–	–	–	–	–	–		
11½	12¼	10¾	12½	14	11¾	13	14½	12¼	13¾	15	–	–	–	–	–	–	–	F	6"
292.1	*311.2*	*273.1*	*317.5*	*355.6*	*298.5*	*330.2*	*368.3*	*311.2*	*336.6*	*381.0*	–	–	–	–	–	–	–		*152.4mm*
9¼	10½	8½	10¼	11¾	9½	10¾	12¼	10	11½	12¾	10½	–	–	–	–	–	–	S	
235.0	*266.7*	*215.9*	*260.4*	*298.5*	*241.3*	*273.1*	*311.2*	*254.0*	*292.1*	*323.9*	*266.7*	–	–	–	–	–	–		
11¼	12¾	10¾	12½	14	11¾	13	14½	12¼	13¾	15	12¾	14¾	–	–	–	–	–	T	
285.8	*323.9*	*273.1*	*317.5*	*355.6*	*298.5*	*330.2*	*368.3*	*311.2*	*349.3*	*381.0*	*323.9*	*374.7*	–	–	–	–	–		8"
12¾	14	12	13¾	15¼	13	14¼	15¾	13½	15	16¼	14	16¼	17 .5	–	–	–	–	F	*203.2mm*
323.9	*355.6*	*304.8*	*349.3*	*387.4*	*330.2*	*362.0*	*400.1*	*342.9*	*381.0*	*412.8*	*355.6*	*412.8*	*17 .5*	–	–	–	–		
12¾	14	12	13¾	15¼	13	14¼	15¾	13½	15	16¼	14	16¼	17½	17½	–	–	–	T	
323.9	*355.6*	*304.8*	*349.3*	*387.4*	*330.2*	*362.0*	*400.1*	*342.9*	*381.0*	*412.8*	*355.6*	*412.8*	*444.5*	*444.5*	–	–	–		10"
14	15¼	13¼	15	16½	14¼	15½	17	14¾	16¼	17½	15¼	17½	18¾	18¾	20	–	–	F	*254.0mm*
355.6	*387.4*	*336.6*	*381.0*	*419.1*	*362.0*	*393.7*	*431.8*	*374.7*	*412.8*	*444.5*	*387.4*	*444.5*	*476.3*	*476.3*	*508.0*	–	–		
13¾	15	13	14¾	16¼	14	15¼	16¾	14½	16	17¼	15	17¼	18½	18½	19¾	19½	–	T	
349.3	*381.0*	*330.2*	*374.7*	*412.8*	*355.6*	*387.4*	*425.5*	*368.3*	*406.4*	*438.2*	*381.0*	*438.2*	*469.9*	*469.9*	*501.7*	*495.3*	–		12"
15½	16¾	14¾	16½	18	15¾	17	18¼	16¼	17¾	19	16¾	14	20¼	20¼	21½	21¼	29	F	*304.8mm*
393.7	*425.5*	*374.7*	*419.1*	*457.2*	*400.1*	*431.8*	*463.6*	*412.8*	*450.9*	*482.6*	*425.5*	*355.6*	*514.4*	*514.4*	*546.1*	*539.8*	*736.6*		

Channel Selection for Schedule 10 Sprinkler Pipe Trapeze Hangers

Note: Based on NFPA-13-2013-Table 9.1.1.7.1(a). Each of the following tables indicate the allowable span of the trapeeze and the nominal pipe size for the specified channel . An entry of "N/A" indicates that the channel cannot be used for this span/pipe size combination. The table is based on a maximum allowable bending stress of 15 KSI and a midspan concentrated load from 15 ft of water-filled pipe, plus 250 lb.

Unistrut Channel	Section Modulus in³ *(cm³)*
P3000	0.154 *2.52*
P1000	0.202 *3.31*
P5500	0.391 *6.41*
P5000	0.628 *10.29*

Unistrut Channel	Section Modulus in³ *(cm³)*
P3001	0.431 *7.06*
P1001	0.572 *9.37*
P5501	1.153 *18.89*
P5001	1.916 *31.40*

Schedule 10 Pipe						
Nominal Pipe Dia. (in)	O.D. (in)	Wall Thickness (in)	I. D. (in)	Pipe Weight (p/f)	Water Weight (p/f)	Total Weight (p/f)
1	1.315	0.109	1.097	1.41	0.42	1.83
1¼	1.660	0.109	1.442	1.81	0.73	2.54
1½	1.900	0.109	1.682	2.09	0.99	3.08
2	2.375	0.109	2.157	2.64	1.63	4.28
2½	2.875	0.120	2.635	3.53	2.44	5.97
3	3.500	0.120	3.260	4.34	3.73	8.07
3½	4.000	0.120	3.760	4.98	4.97	9.95
4	4.500	0.120	4.260	5.62	6.38	12.00
5	5.563	0.134	5.295	7.78	9.85	17.63
6	6.625	0.134	6.357	9.30	14.20	23.50
8	8.625	0.188	8.249	16.96	23.91	40.87
10	10.750	0.188	10.374	21.23	37.82	59.04

NFPA 13 Required Trapeze Section Modulus for Sch 10 Pipe												
Trapeze Span	Pipe Diameter 1"	1¼"	1½"	2"	2½"	3"	3½"	4"	5"	6"	8"	10"
1' - 6"	0.08	0.08	0.09	0.09	0.10	0.11	0.12	0.13	0.15	0.18	0.26	0.34
2' - 0"	0.11	0.11	0.12	0.13	0.14	0.15	0.16	0.17	0.2	0.24	0.34	0.45
2' - 6"	0.14	0.14	0.15	0.16	0.18	0.21	0.23	0.25	0.3	0.36	0.5	0.69
3' - 0"	0.16	0.17	0.18	0.19	0.2	0.22	0.24	0.26	0.31	0.36	0.51	0.67
4' - 0"	0.22	0.22	0.24	0.25	0.27	0.30	0.32	0.34	0.41	0.48	0.68	0.89
5' - 0"	0.27	0.28	0.3	0.31	0.34	0.37	0.40	0.43	0.51	0.60	0.85	1.12
6' - 0"	0.33	0.34	0.35	0.38	0.41	0.44	0.48	0.51	0.61	0.71	1.02	1.34
7' - 0"	0.38	0.39	0.41	0.44	0.47	0.52	0.56	0.6	0.71	0.83	1.19	1.56
8' - 0"	0.43	0.45	0.47	0.5	0.54	0.59	0.63	0.68	0.82	0.95	1.36	1.79
9' - 0"	0.49	0.50	0.53	0.56	0.61	0.66	0.71	0.77	0.92	1.07	1.53	2.01
10' - 0"	0.54	0.56	0.59	0.63	0.68	0.74	0.79	0.85	1.02	1.19	1.7	2.23

Values taken from NFPA 13 (2013 Edition), Table 9.1.1.7.1(a)

Single Channel Trapeze for Sch 10 Pipe												
Trapeze Span	Pipe Diameter 1"	1¼"	1½"	2"	2½"	3"	3½"	4"	5"	6"	8"	10"
1' - 6"	P3000	P3000	P3000	P3000	P3000	P3000	P3000	P3000	P3000	P1000	P5500	P5500
2' - 0"	P3000	P3000	P3000	P3000	P3000	P3000	P1000	P1000	P1000	P5500	P5500	P5000
2' - 6"	P3000	P3000	P3000	P1000	P1000	P5500	P5500	P5500	P5500	P5500	P5000	N/A
3' - 0"	P1000	P1000	P1000	P1000	P1000	P5500	P5500	P5500	P5500	P5500	P5000	N/A
4' - 0"	P5500	P5500	P5500	P5500	P5500	P5500	P5500	P5500	P5000	P5000	N/A	N/A
5' - 0"	P5500	P5500	P5500	P5500	P5500	P5500	P5000	P5000	P5000	P5000	N/A	N/A
6' - 0"	P5500	P5500	P5500	P5500	P5000	P5000	P5000	P5000	P5000	N/A	N/A	N/A
7' - 0"	P5500	P5500	P5000	P5000	P5000	P5000	P5000	P5000	N/A	N/A	N/A	N/A
8' - 0"	P5000	P5000	P5000	P5000	P5000	P5000	P5000	N/A	N/A	N/A	N/A	N/A
9' - 0"	P5000	P5000	P5000	P5000	P5000	N/A	N/A	N/A	N/A	N/A	N/A	N/A
10' - 0"	P5000	P5000	P5000	P5000	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Double Channel Trapeze for Sch 10 Pipe												
Trapeze Span	Pipe Diameter 1"	1¼"	1½"	2"	2½"	3"	3½"	4"	5"	6"	8"	10"
1' - 6"	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001
2' - 0"	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001
2' - 6"	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P1001	P5501
3' - 0"	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P1001	P5501
4' - 0"	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P1001	P5501	P5501
5' - 0"	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P1001	P5501	P5501	P5501
6' - 0"	P3001	P3001	P3001	P3001	P3001	P1001	P1001	P1001	P5501	P5501	P5501	P5001
7' - 0"	P3001	P3001	P3001	P1001	P1001	P1001	P1001	P5501	P5501	P5501	P5001	P5001
8' - 0"	P3001	P1001	P1001	P1001	P1001	P5501	P5501	P5501	P5501	P5501	P5001	P5001
9' - 0"	P1001	P1001	P1001	P1001	P5501	P5501	P5501	P5501	P5501	P5501	P5001	N/A
10' - 0"	P1001	P1001	P5501	P5501	P5501	P5501	P5501	P5501	P5501	P5501	P5001	N/A

Channel Selection for Schedule 40 Sprinkler Pipe Trapeze Hangers

Note: Based on NFPA-13-2013-Table 9.1.1.7.1(a). Each of the following tables indicate the allowable span of the trapeeze and the nominal pipe size for the specified channel . An entry of "N/A" indicates that the channel cannot be used for this span/pipe size combination. The table is based on a maximum allowable bending stress of 15 KSI and a midspan concentrated load from 15 ft of water-filled pipe, plus 250 lb.

Unistrut Channel	Section Modulus in³ *(cm³)*
P3000	0.154 *2.52*
P1000	0.202 *3.31*
P5500	0.391 *6.41*
P5000	0.628 *10.29*

Unistrut Channel	Section Modulus in³ *(cm³)*
P3001	0.431 *7.06*
P1001	0.572 *9.37*
P5501	1.153 *18.89*
P5001	1.916 *31.40*

Schedule 40 Pipe						
Nominal Pipe Dia. (in)	O.D. (in)	Wall Thickness (in)	I. D. (in)	Pipe Weight (p/f)	Water Weight (p/f)	Total Weight (p/f)
1	1.315	0.133	1.049	1.68	0.39	2.07
1¼	1.660	0.140	1.380	2.27	0.67	2.94
1½	1.900	0.145	1.610	2.72	0.91	3.63
2	2.375	0.154	2.067	3.66	1.50	5.16
2½	2.875	0.203	2.469	5.80	2.14	7.94
3	3.500	0.216	3.068	7.58	3.31	10.89
3½	4.000	0.226	3.548	9.12	4.42	13.54
4	4.500	0.237	4.026	10.80	5.70	16.50
5	5.563	0.258	5.047	14.63	8.95	23.58
6	6.625	0.280	6.065	18.99	12.93	31.92
8	8.625	0.322	7.981	28.58	22.38	50.96
10	10.750	0.365	10.020	40.52	35.28	75.80

NFPA 13 Required Trapeze Section Modulus for Sch 40 Pipe												
Trapeze Span	Pipe Diameter 1"	1¼"	1½"	2"	2½"	3"	3½"	4"	5"	6"	8"	10"
1' - 6"	0.08	0.09	0.09	0.1	0.11	0.12	0.14	0.15	0.18	0.22	0.3	0.41
2' - 0"	0.11	0.11	0.12	0.13	0.15	0.16	0.18	0.2	0.24	0.29	0.4	0.55
2' - 6"	0.14	0.14	0.15	0.16	0.17	0.18	0.2	0.21	0.25	0.3	0.43	0.56
3' - 0"	0.16	0.17	0.18	0.2	0.22	0.25	0.27	0.3	0.36	0.43	0.6	0.82
4' - 0"	0.22	0.23	0.24	0.26	0.29	0.33	0.36	0.4	0.48	0.58	0.8	1.1
5' - 0"	0.27	0.29	0.3	0.33	0.37	0.41	0.45	0.49	0.6	0.72	1	1.37
6' - 0"	0.33	0.34	0.36	0.39	0.44	0.49	0.54	0.59	0.72	0.87	1.2	1.64
7' - 0"	0.38	0.4	0.43	0.46	0.52	0.58	0.63	0.69	0.84	1.01	1.41	1.92
8' - 0"	0.44	0.46	0.49	0.52	0.59	0.66	0.72	0.79	0.96	1.16	1.61	2.19
9' - 0"	0.49	0.51	0.55	0.59	0.66	0.74	0.81	0.89	1.08	1.3	1.81	2.47
10' - 0"	0.55	0.57	0.61	0.65	0.74	0.82	0.9	0.99	1.2	1.45	2.01	2.74

Values taken from NFPA 13 (2013 Edition), Table 9.1.1.7.1(a)

Single Channel Trapeze for Sch 40 Pipe												
Trapeze Span	Pipe Diameter 1"	1¼"	1½"	2"	2½"	3"	3½"	4"	5"	6"	8"	10"
1' - 6"	P3000	P3000	P3000	P3000	P3000	P3000	P3000	P3000	P1000	P5500	P5500	P5000
2' - 0"	P3000	P3000	P3000	P3000	P3000	P1000	P1000	P1000	P5500	P5500	P5000	P5000
2' - 6"	P3000	P3000	P3000	P1000	P1000	P1000	P1000	P1000	P5500	P5500	P5000	P5000
3' - 0"	P1000	P1000	P1000	P1000	P5500	P5500	P5500	P5500	P5500	P5000	P5000	N/A
4' - 0"	P5500	P5500	P5500	P5500	P5500	P5500	P5000	P5000	P5000	P5000	N/A	N/A
5' - 0"	P5500	P5500	P5500	P5500	P5500	P5000	P5000	P5000	P5000	N/A	N/A	N/A
6' - 0"	P5500	P5500	P5500	P5500	P5000	P5000	P5000	P5000	N/A	N/A	N/A	N/A
7' - 0"	P5500	P5000	P5000	P5000	P5000	P5000	P5000	N/A	N/A	N/A	N/A	N/A
8' - 0"	P5000	P5000	P5000	P5000	P5000	N/A	N/A	N/A	N/A	N/A	N/A	N/A
9' - 0"	P5000	P5000	P5000	P5000	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
10' - 0"	P5000	P5000	P5000	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Double Channel Trapeze for Sch 40 Pipe												
Trapeze Span	Pipe Diameter 1"	1¼"	1½"	2"	2½"	3"	3½"	4"	5"	6"	8"	10"
1' - 6"	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001
2' - 0"	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P1001
2' - 6"	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P1001
3' - 0"	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P5501	P5501
4' - 0"	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P1001	P5501	P5501	P5501
5' - 0"	P3001	P3001	P3001	P3001	P3001	P3001	P1001	P1001	P5501	P5501	P5501	P5001
6' - 0"	P3001	P3001	P3001	P3001	P1001	P1001	P1001	P5501	P5501	P5501	P5001	P5001
7' - 0"	P3001	P3001	P3001	P1001	P1001	P5501	P5501	P5501	P5501	P5501	P5001	P5001
8' - 0"	P1001	P1001	P1001	P1001	P5501	P5501	P5501	P5501	P5501	P5001	P5001	N/A
9' - 0"	P1001	P1001	P1001	P5501	P5501	P5501	P5501	P5501	P5501	P5001	P5001	N/A
10' - 0"	P1001	P1001	P5501	P5501	P5501	P5501	P5501	P5501	P5001	P5001	N/A	N/A

Electrical Metallic Tubing (EMT) - *Thin Wall*

Tubing Size (Nominal) In	Outside Diameter In *(mm)*	Inside Diameter In *(mm)*	Weight Of Tubing Lbs/Ft *(kg/m)*
⅜	0.577 *14.7*	0.497 *12.6*	0.23 *0.34*
½	0.706 *17.9*	0.626 *15.9*	0.29 *0.43*
¾	0.922 *23.4*	0.830 *21.1*	0.44 *0.65*
1	1.163 *29.5*	1.055 *26.8*	0.64 *0.95*
1¼	1.510 *38.4*	1.388 *35.3*	0.95 *1.41*
1½	1.740 *44.2*	1.618 *41.1*	1.10 *1.64*
2	2.197 *55.8*	2.075 *52.7*	1.40 *2.08*
2½	2.875 *73.0*	2.731 *69.4*	2.30 *3.42*
3	3.500 *88.9*	3.356 *85.2*	2.70 *4.02*
3½	4.000 *101.6*	3.834 *97.4*	3.40 *5.06*
4	4.500 *114.3*	4.334 *110.1*	4.00 *5.95*

Intermediate Metallic Conduit (IMC)

Conduit Size (Nominal) In	Outside Diameter In *(mm)*	Inside Diameter In *(mm)*	Weight Of Conduit Lbs/Ft *(kg/m)*	Weight of Conduit and Conductor Lbs/Ft *(kg/m)*
½	0.815 *20.7*	0.745 *18.9*	0.60 *0.89*	0.12 *0.18*
¾	1.029 *26.1*	0.954 *24.2*	0.82 *1.22*	1.13 *1.68*
1	1.290 *32.8*	1.205 *30.6*	1.16 *1.73*	1.82 *2.71*
1¼	1.638 *41.6*	1.553 *39.4*	1.50 *2.23*	2.67 *3.97*
1½	1.883 *47.8*	1.793 *45.5*	1.82 *2.71*	3.42 *5.09*
2	2.360 *59.9*	2.266 *57.6*	2.42 *3.60*	5.04 *7.50*
2½	2.857 *72.6*	2.727 *69.3*	4.01 *5.97*	7.75 *11.53*
3	3.476 *88.3*	3.346 *85.0*	4.43 *6.59*	10.69 *15.91*
3½	3.971 *100.9*	3.841 *97.6*	5.73 *8.53*	13.46 *20.03*
4	4.466 *113.4*	4.336 *110.1*	6.38 *9.49*	16.37 *24.36*

Copper Tube (Type L)

Nom. Tube Size	O.D. Tubing In *(mm)*	O.D. In *(mm)*	Wall Thick. In *(mm)*	Weight Lbs/Ft *(kg/m))*	Weight Water Lbs/Ft *(kg/m)*
¼"	⅜ *9.5*	0.375 *9.5*	0.030 *0.8*	0.126 *0.19*	0.034 *0.05*
⅜"	½ *12.7*	0.500 *12.7*	0.035 *0.9*	0.198 *0.29*	0.062 *0.09*
½"	⅝ *15.9*	0.625 *15.9*	0.040 *1.0*	0.285 *0.42*	0.100 *0.15*
⅝"	¾ *19.1*	0.750 *19.1*	0.042 *1.1*	0.362 *0.54*	0.151 *0.22*
¾"	⅞ *22.2*	0.875 *22.2*	0.045 *1.1*	0.455 *0.68*	0.209 *0.31*
1"	1⅛ *28.6*	1.125 *28.6*	0.050 *1.3*	0.655 *0.97*	0.357 *0.53*
1¼"	1⅜ *34.9*	1.375 *34.9*	0.055 *1.4*	0.884 *1.32*	0.546 *0.81*
1½"	1⅝ *41.3*	1.625 *41.3*	0.060 *1.5*	1.140 *1.70*	0.767 *1.14*
2"	2⅛ *54.0*	2.125 *54.0*	0.070 *1.8*	1.750 *2.60*	1.341 *2.00*
2½"	2⅝ *66.7*	2.625 *66.7*	0.080 *2.0*	2.480 *3.69*	2.064 *3.07*
3"	3⅛ *79.4*	3.125 *79.4*	0.090 *2.3*	3.330 *4.96*	2.949 *4.39*
3½"	3⅝ *92.1*	3.625 *92.1*	0.100 *2.5*	4.290 *6.38*	3.989 *5.94*
4"	4⅛ *104.8*	4.125 *104.8*	0.110 *2.8*	5.380 *8.01*	5.188 *7.72*
5"	5⅛ *130.2*	5.125 *130.2*	0.125 *3.2*	7.610 *11.32*	8.081 *12.03*
6"	6⅛ *155.6*	6.125 *155.6*	0.140 *3.6*	10.200 *15.18*	11.616 *17.29*
8"	8⅛ *206.4*	8.125 *206.4*	0.200 *5.1*	19.290 *28.71*	20.289 *30.19*
10"	10⅛ *257.2*	10.125 *257.2*	0.250 *6.4*	30.100 *44.79*	31.590 *47.01*
12"	12⅛ *308.0*	12.125 *308.0*	0.280 *7.1*	40.400 *60.12*	45.426 *67.60*

Copper Tube (Type K)

Nom. Tube Size	O.D. Tubing In *(mm)*	O.D. In *(mm)*	Wall Thick. In *(mm)*	Weight Lbs/Ft *(kg/m))*	Weight Water Lbs/Ft *(kg/m)*
¼"	⅜ *9.5*	0.375 *9.53*	0.035 *0.89*	0.145 *0.22*	0.032 *0.05*
⅜"	½ *12.7*	0.500 *12.70*	0.005 *0.13*	0.269 *0.40*	0.055 *0.08*
½"	⅝ *15.9*	0.625 *15.88*	0.049 *1.24*	0.344 *0.51*	0.094 *0.14*
⅝"	¾ *19.1*	0.750 *19.05*	0.049 *1.24*	0.418 *0.62*	0.144 *0.21*
¾"	⅞ *22.2*	0.875 *22.23*	0.065 *1.65*	0.641 *0.95*	0.188 *0.28*
1"	1⅛ *28.6*	1.125 *28.58*	0.065 *1.65*	0.839 *1.25*	0.337 *0.50*
1¼"	1⅜ *34.9*	1.375 *34.93*	0.065 *1.65*	1.040 *1.55*	0.527 *0.78*
1½"	1⅝ *41.3*	1.625 *41.28*	0.072 *1.83*	1.360 *2.02*	0.743 *1.11*
2"	2⅛ *54.0*	2.125 *53.98*	0.083 *2.11*	2.060 *3.07*	1.310 *1.95*
2½"	2⅝ *66.7*	2.625 *66.68*	0.095 *2.41*	2.920 *4.35*	2.000 *2.98*
3"	3⅛ *79.4*	3.125 *79.38*	0.109 *2.77*	4.000 *5.95*	2.960 *4.40*
3½"	3⅝ *92.1*	3.625 *92.08*	0.120 *3.05*	5.120 *7.62*	3.900 *5.80*
4"	4⅛ *104.8*	4.125 *104.78*	0.134 *3.40*	6.510 *9.69*	5.060 *7.53*
5"	5⅛ *130.2*	5.125 *130.18*	0.160 *4.06*	9.670 *14.39*	8.000 *11.91*
6"	6⅛ *155.6*	6.125 *155.58*	0.192 *4.88*	13.870 *20.64*	11.200 *16.67*
8"	8⅛ *206.4*	8.125 *206.38*	0.271 *6.88*	25.900 *38.54*	19.500 *29.02*
10"	10⅛ *257.2*	10.125 *257.18*	0.338 *8.59*	40.300 *59.97*	30.423 *45.27*
12"	12⅛ *308.0*	12.125 *307.98*	0.405 *10.29*	57.800 *86.02*	43.675 *65.00*

Atkore Unistrut

Rigid Steel (Heavy Duty) Conduit

Conduit Size (Nominal) In	I. D. Of Conduit In *(mm)*	O. D. Of Conduit In *(mm)*	O. D. Of Coupling In *(mm)*	Weight of Conduit Lbs/Ft *(kg/m)*	Maximum Weight* Of Conduit And Conductor Lead Covered Lbs/Ft *(kg/m)*	Not Lead Covered Lbs/Ft *(kg/m)*
½	0.622 *15.8*	0.840 *21.3*	1.063 *27.0*	0.85 *1.26*	1.20 *1.79*	1.00 *1.49*
¾	0.824 *20.9*	1.050 *26.7*	1.297 *32.9*	1.13 *1.68*	1.80 *2.68*	1.40 *2.08*
1	1.049 *26.6*	1.315 *33.4*	1.563 *39.7*	1.68 *2.50*	2.60 *3.87*	2.30 *3.42*
1¼	1.380 *35.1*	1.660 *42.2*	1.969 *50.0*	2.28 *3.39*	4.30 *6.40*	3.60 *5.36*
1½	1.610 *40.9*	1.900 *48.3*	2.234 *56.7*	2.73 *4.06*	5.90 *8.78*	4.50 *6.70*
2	2.067 *52.5*	2.375 *60.3*	2.719 *69.1*	3.68 *5.48*	8.50 *12.65*	7.20 *10.71*
2½	2.469 *62.7*	2.875 *73.0*	3.313 *84.2*	5.82 *8.66*	11.50 *17.11*	10.20 *15.18*
3	3.068 *77.9*	3.500 *88.9*	3.938 *100.0*	7.62 *11.34*	16.50 *24.55*	14.50 *21.58*
3½	3.548 *90.1*	4.000 *101.6*	4.438 *112.7*	9.20 *13.69*	19.00 *28.28*	17.50 *26.04*
4	4.026 *102.3*	4.500 *114.3*	4.938 *125.4*	10.89 *16.21*	24.80 *36.91*	21.50 *32.00*
5	5.047 *128.2*	5.563 *141.3*	6.296 *159.9*	14.81 *22.04*	35.90 *53.43*	30.80 *45.84*
6	6.065 *154.1*	6.625 *168.3*	7.358 *186.9*	19.19 *28.56*	50.70 *75.45*	43.40 *64.59*

* Maximum weight equals weight of rigid conduit plus weight of heaviest conductor combination (from the National Electrical Code Handbook.)

Water Filled Pipe Support Spacing

Nominal Pipe Size In	Max. Span Ft *(m)*	Nominal Pipe Size In	Max. Span Ft *(m)*
1	7 *2.13*	8	19 *5.79*
1½	9 *2.74*	10	22 *6.71*
2	10 *3.05*	12	23 *7.01*
2½	11 *3.35*	14	25 *7.62*
3	12 *3.66*	16	27 *8.23*
3½	13 *3.96*	18	28 *8.53*
4	14 *4.27*	20	30 *9.14*
5	16 *4.88*	24	32 *9.75*

The above spacing based on a combined bending and shear stress of 1500 PSI when pipe is filled with water and the pitch of the line is such that a sag of 0.1 in. between supports is permissible.

Conduit Support Spacing

346-12. Supports. Rigid metal conduit shall be installed as a complete system as provided in Article 344 and shall be securely fastened in place. Conduit shall be firmly fastened within 3 feet (914.4 mm) of each outlet box, junction box, cabinet, or fitting. Conduit shall be supported at least every 10 feet (3.05 m).

Exception: If made up with threaded couplings, it shall be permissible to support straight runs of rigid metal conduit in accordance with Table 344.30 (B)(2), provided such supports prevent transmission of stresses to termination where conduit is deflected between supports.

Table 344.30 (B)(2)
Support for Rigid Metal Conduit

Conduit Size In *(mm)*	Maximum Distance Between Supports Ft *(m)*
½-¾ *12.7 - 19.1*	10 *3.05*
1 *25.4*	12 *3.66*
1¼- 1½ *31.8 - 38.1*	14 *4.27*
2- 2½ *50.8 - 63.5*	16 *4.88*
3 & larger *76.2 - Larger*	20 *6.10*

Schedule 40: PVC Plastic Pipe

Pipe Size (Nominal) In	Outside Diameter In *(mm)*	Inside Diameter In *(mm)*	Pipe Weight Lbs/Ft *(kg/m)*	Pipe and Water Weight Lbs/Ft *(kg/m)*
¼	0.540 *13.7*	0.354 *9.0*	0.081 *0.12*	0.12 *0.18*
⅜	0.675 *17.1*	0.483 *12.3*	0.109 *0.16*	0.19 *0.28*
½	0.840 *21.3*	0.608 *15.4*	0.161 *0.24*	0.29 *0.43*
¾	1.050 *26.7*	0.810 *20.6*	0.214 *0.32*	0.44 *0.65*
1	1.315 *33.4*	1.033 *26.2*	0.315 *0.47*	0.68 *1.01*
1¼	1.660 *42.2*	1.364 *34.6*	0.426 *0.63*	1.06 *1.58*
1½	1.900 *48.3*	1.592 *40.4*	0.509 *0.76*	1.37 *2.04*
2	2.375 *60.3*	2.049 *52.0*	0.682 *1.01*	2.11 *3.14*
2½	2.875 *73.0*	2.445 *62.1*	1.076 *1.60*	3.11 *4.63*
3	3.500 *88.9*	3.042 *77.3*	1.409 *2.10*	4.55 *6.77*
4	4.500 *114.3*	3.998 *101.5*	2.006 *2.99*	7.44 *11.07*
6	6.625 *168.3*	6.031 *153.2*	3.535 *5.26*	15.90 *23.66*
8	8.625 *219.1*	7.943 *201.8*	5.305 *7.89*	26.75 *39.81*
10	10.750 *273.1*	9.976 *253.4*	7.532 *11.21*	41.35 *61.54*

Data for Schedule Steel Pipe

Nom. Size In	Pipe Schedule	Outside Dia. In *(mm)*	Inside Dia. In *(mm)*	Pipe Weight Lbs/Ft *(kg/m)*	Pipe and Water Weight Lbs/Ft *(kg/m)*
⅛	40	0.405 *10.3*	0.269 *6.8*	0.24 *0.36*	0.27 *0.40*
	80	0.405 *10.3*	0.215 *5.5*	0.31 *0.46*	0.33 *0.49*
¼	40	0.540 *13.7*	0.364 *9.2*	0.42 *0.63*	0.47 *0.70*
	80	0.540 *13.7*	0.302 *7.7*	0.53 *0.79*	0.57 *0.85*
⅜	40	0.675 *17.1*	0.493 *12.5*	0.57 *0.85*	0.65 *0.97*
	80	0.675 *17.1*	0.423 *10.7*	0.74 *1.10*	0.80 *1.19*
½	40	0.840 *21.3*	0.622 *15.8*	0.85 *1.26*	0.98 *1.46*
	80	0.840 *21.3*	0.546 *13.9*	1.09 *1.62*	1.19 *1.77*
	160	0.840 *21.3*	0.464 *11.8*	1.31 *1.95*	1.38 *2.05*
¾	40	1.050 *26.7*	0.824 *20.9*	1.13 *1.68*	1.36 *2.02*
	80	1.050 *26.7*	0.742 *18.8*	1.47 *2.19*	1.66 *2.47*
	160	1.050 *26.7*	0.612 *15.5*	1.94 *2.89*	2.07 *3.08*
1	40	1.315 *33.4*	1.049 *26.6*	1.68 *2.50*	2.05 *3.05*
	80	1.315 *33.4*	0.957 *24.3*	2.17 *3.23*	2.48 *3.69*
	160	1.315 *33.4*	0.815 *20.7*	2.84 *4.23*	3.07 *4.57*
1¼	40	1.660 *42.2*	1.380 *35.1*	2.27 *3.38*	2.92 *4.35*
	80	1.660 *42.2*	1.278 *32.5*	2.99 *4.45*	3.55 *5.28*
	160	1.660 *42.2*	1.160 *29.5*	3.76 *5.60*	4.22 *6.28*
1½	40	1.900 *48.3*	1.610 *40.9*	2.71 *4.03*	3.60 *5.36*
	80	1.900 *48.3*	1.500 *38.1*	3.63 *5.40*	4.39 *6.53*
	160	1.900 *48.3*	1.338 *34.0*	4.85 *7.22*	5.46 *8.13*
2	40	2.375 *60.3*	2.067 *52.5*	3.65 *5.43*	5.10 *7.59*
	80	2.375 *60.3*	1.939 *49.3*	5.02 *7.47*	6.30 *9.38*
	160	2.375 *60.3*	1.687 *42.8*	7.45 *11.09*	8.42 *12.53*
2½	40	2.875 *73.0*	2.469 *62.7*	5.79 *8.62*	7.86 *11.70*
	80	2.875 *73.0*	2.323 *59.0*	7.65 *11.38*	9.49 *14.12*
	160	2.875 *73.0*	2.125 *54.0*	10.00 *14.88*	11.54 *17.17*
3	40	3.500 *88.9*	3.068 *77.9*	7.57 *11.27*	10.77 *16.03*
	80	3.500 *88.9*	2.900 *73.7*	10.24 *15.24*	13.11 *19.51*
	160	3.500 *88.9*	2.624 *66.6*	14.31 *21.30*	16.65 *24.78*
3½	40	4.000 *101.6*	3.548 *90.1*	9.10 *13.54*	13.39 *19.93*
	80	4.000 *101.6*	3.364 *85.4*	12.49 *18.59*	16.35 *24.33*
4	40	4.500 *114.3*	4.026 *102.3*	10.78 *16.04*	16.30 *24.26*
	80	4.500 *114.3*	3.826 *97.2*	14.97 *22.28*	19.95 *29.69*
	120	4.500 *114.3*	3.624 *92.0*	18.98 *28.25*	23.45 *34.90*
	160	4.500 *114.3*	3.438 *87.3*	22.48 *33.45*	26.51 *39.45*
5	40	5.563 *141.3*	5.047 *128.2*	14.60 *21.73*	23.27 *34.63*
	80	5.563 *141.3*	4.813 *122.2*	20.75 *30.88*	28.64 *42.62*
	120	5.563 *141.3*	4.563 *115.9*	27.01 *40.20*	34.09 *50.73*
	160	5.563 *141.3*	4.313 *109.5*	32.92 *48.99*	39.26 *58.43*
6	40	6.625 *168.3*	6.065 *154.1*	18.95 *28.20*	31.48 *46.85*
	80	6.625 *168.3*	5.761 *146.3*	28.54 *42.47*	39.84 *59.29*
	120	6.625 *168.3*	5.501 *139.7*	36.35 *54.09*	46.66 *69.44*
	160	6.625 *168.3*	5.187 *131.7*	45.30 *67.41*	54.47 *81.06*
8	20	8.625 *219.1*	8.125 *206.4*	22.34 *33.25*	44.82 *66.70*
	30	8.625 *219.1*	8.071 *205.0*	24.67 *36.71*	46.85 *69.72*
	40	8.625 *219.1*	7.981 *202.7*	28.52 *42.44*	50.21 *74.72*
	60	8.625 *219.1*	7.813 *198.5*	35.60 *52.98*	56.39 *83.92*
	80	8.625 *219.1*	7.625 *193.7*	43.34 *64.50*	63.14 *93.96*
	100	8.625 *219.1*	7.437 *188.9*	50.89 *75.73*	69.73 *103.77*
	120	8.625 *219.1*	7.187 *182.5*	60.65 *90.26*	78.23 *116.42*
	140	8.625 *219.1*	7.001 *177.8*	67.68 *100.72*	84.37 *125.56*
	160	8.625 *219.1*	6.813 *173.1*	74.61 *111.03*	90.42 *134.56*
10	20	10.750 *273.1*	10.250 *260.4*	28.01 *41.68*	63.78 *94.92*
	30	10.750 *273.1*	10.136 *257.5*	34.20 *50.90*	69.19 *102.97*
	40	10.750 *273.1*	10.020 *254.5*	40.44 *60.18*	74.63 *111.06*
	60	10.750 *273.1*	9.750 *247.7*	54.68 *81.37*	87.05 *129.54*
	80	10.750 *273.1*	9.562 *242.9*	64.36 *95.78*	95.50 *142.12*
	100	10.750 *273.1*	9.312 *236.5*	76.95 *114.51*	106.47 *158.44*
	120	10.750 *273.1*	9.062 *230.2*	89.20 *132.74*	117.16 *174.35*
	140	10.750 *273.1*	8.750 *222.3*	104.02 *154.80*	130.09 *193.60*
	160	10.750 *273.1*	8.500 *215.9*	115.52 *171.91*	140.13 *208.54*

ELECTRICAL FITTINGS

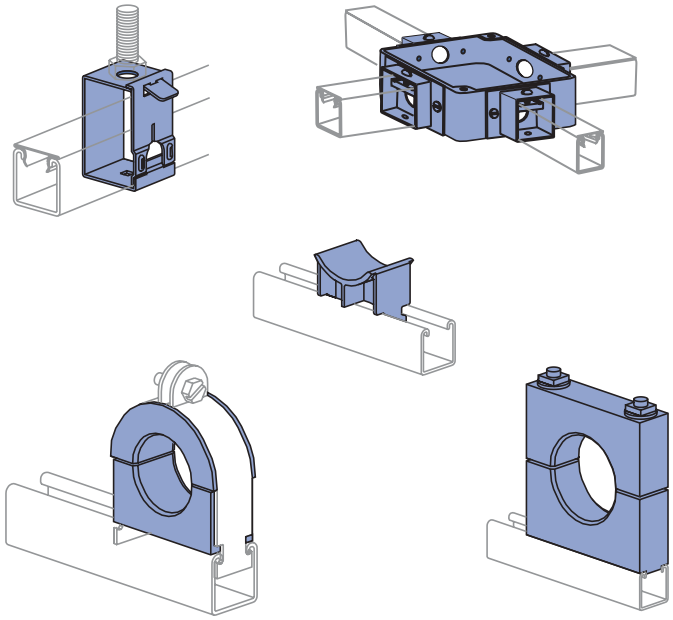

Electrical Fittings ..... 128 - 130

Receptacles 131

Fixture Hangers 131

Accessories and Connectors 132

Junction Boxes 132

In-Channel Joiners 133

Swivel Hangers 133

Cable Entrance Tubing and Accessories ..... 134 - 136

Electrical Fittings Technical Data ..... 137 - 138

MATERIAL

Unistrut fittings, unless noted, are made from hot-rolled, pickled and oiled steel plates, strip, bar or coil, and conform to one or more of the following specifications:

ASTM A575, A576, A635, A1011 SS GR 33, A1011 HSLAS GR 45 or A36. The fitting steel also meets or exceeds the physical requirements of ASTM A1011 SS GR 33.

Maple cable saddles, cable clamps and bus bar clamps are made from kiln-dry maple treated with paraffin to a depth of 1/16" (1.6mm). Special sizes of clamps can be fabricated upon request. Cable saddles are fiberglass-reinforced polyester.

CHANNEL RACEWAYS

The Unistrut Metal Framing System includes an exclusive combination of channel, fittings and hardware listed under new UL classification 5B. This classification covers strut-type channel raceways and fittings for use in accordance with Article 384 of the National Electrical Code, NFPA 70. Included are metal strut-type channel raceways at least .071 inch (1.81mm) thick and metal or non-metal closure strips at least .040 inch (1.02mm) thick.

The Unistrut system requires no welding, drilling or other complex fabrication techniques. This means faster, easier solutions for virtually any electrical support problem.

Unistrut channel offers structural and spanning capabilities not available with conventional surface raceway products and is available in continuous lengths of up to 20 feet. Just as important, it is part of an integrated system that can be used for raceways, trapeze hangers, cable-tray supports, lighting grids, fluorescent-fixture supports and countless other electrical applications.

CHANNEL COMPATABILITY

All of the electrical components in this section are intended for use with any of the 1 5/8" wide channel. They are not intended for use with 1 1/4" or 13/16" framing systems.

FINISHES

Components listed in this section are available in:

Electro-galvanized (EG), conforming to ASTM B633 Type III SC1;

Hot-dipped galvanized (HG), conforming to ASTM A123 or A153,

Green Powder Coat (GR), conforming to commercial standards for Powder Coating

Plain (PL)

Note: Many Unistrut Metal Framing components, when used with appropriate closures, are UL® listed, and CSA approved.

DESIGN LOAD

Design load data, where shown, is based on the ultimate strength of the connection with a safety factor of 2.5, unless otherwise noted.

DIMENSIONS

Imperial dimensions are illustrated in inches. Metric dimensions are shown in parenthesis or as noted. Unless noted, all metric dimensions are in millimeters and rounded to one decimal place.

LISTINGS

UL File No. - E19459	Channel & Closure Strips
UL File No. - E25629	Fittings
CSA File No. - 013669	All Products

Electrical Fittings

P1753-Pg 128

P2649 A-Pg 128

P2645 A-Pg 129


P2647 A-Pg 129

P1690-Pg 129

P1787-Pg 130


P2537-Pg 131


P2539-Pg 131

P2755-Pg 131

P2855-Pg 131


P3922-Pg 131


P2534-50-Pg 129


P2535-Pg 130


P2536-Pg 130


P2522-Pg 130

P3521-50-Pg 131

P2521-50-Pg 131

P5521-50-Pg 131

P5021-50-Pg 132

P2521-100-Pg 131

P5021-100-Pg 132

P5521-100-Pg 132

P1180 W-Pg 132


P2541-Pg 132

P2552-Pg 133

P2540-Pg 132

P3116-125-Pg 133

P2602-Pg 131

P2801-Pg 132

P2802-Pg 132


P2803-Pg 132


P2900-Pg 133


P2901-Pg 133


P2902-Pg 133


P2903-Pg 133


P2904-Pg 133

M2037-Pg 133

M2137-Pg 133

M2250-Pg 133

M2350-Pg 133


P16F-Pg 134


P21H-Pg 134


P2820-Pg 136


P2822-Pg 136


P2823-Pg 136


P2821-Pg 136


P2920-Pg 136


P2928-Pg 136

P2649A thru P2649H — Maple Cable Saddles



- ⅜" Flat Head Machine Screw included.
- Specify hole size when ordering.
- Order channel nuts as required.

Material: Paraffin impregnated maple hardwood.

Part No.	Hole Size In *(mm)*	"A" In *(mm)*	"B" In *(mm)*	Wt/100 pcs Lbs *(kg)*
P2649A	0 - 1 *0 - 25.4*	3 *76.2*	1¾ *44.5*	31 *14.1*
P2649B	1 - 1½ *25.4 x 38.1*	3½ *88.9*	2 *50.8*	38 *17.2*
P2649C	1½ - 2 *38.1 - 50.8*	4 *101.6*	2¼ *57.2*	47 *21.3*
P2649D	2 - 2½ *50.8 x 63.5*	4½ *114.3*	2½ *63.5*	57 *25.9*
P2649E	2½ - 3 *63.5 - 76.2*	5 *127.0*	2¾ *69.9*	68 *30.8*
P2649F	3 - 3½ *76.2 x 88.9*	5½ *139.7*	3 *76.2*	80 *36.3*
P2649G	3½ - 4 *88.9 - 101.6*	6 *152.4*	3¼ *82.6*	94 *42.6*
P2649H	over 4 *over 101.6*			

P1753, P1754 — Cable Saddles FG



Part Number	"A" In *(mm)*	Maximum Cable Dia. In *(mm)*	Wt/100 pcs Lbs *(kg)*
P1753 FG	2 13/16 *71.4*	3 *76.2*	12 *5.4*
P1754 FG	3¾ *95.3*	4½ *114.3*	17 *7.7*
P1753 PO	3 *76.2*	3 *76.2*	75 *34.0*
P1754 PO	4 *101.6*	4½ *114.3*	95 *43.1*

Material: FG - Fiberglass Reinforced Polyester,
PO - Dry Process White Glazed Porcelain

P2645A thru P2645H — Maple Cable Clamps



- 3⁄8" studs, square nuts and washers included.
- Specify hole size when ordering.
- Order channel nuts as required.

Material: Paraffin impregnated maple hardwood.

Part No.	Hole Size In *(mm)*	"A" & "B" Dimensions In *(mm)*	Wt/100 pcs Lbs *(kg)*
P2645A	0 - 1 *0 - 25.4*	3½ *88.9*	84 *38.1*
P2645B	1 - 1½ *25.4 x 38.1*	4 *101.6*	102 *46.3*
P2645C	1½ - 2 *38.1 - 50.8*	4½ *114.3*	121 *54.9*
P2645D	2 - 2½ *50.8 x 63.5*	5½ *139.7*	165 *74.8*
P2645E	2½ - 3 *63.5 - 76.2*	6 *152.4*	189 *85.7*
P2645F	3 - 3½ *76.2 x 88.9*	6½ *165.1*	215 *97.5*
P2645G	3½ - 4 *88.9 - 101.6*	7 *177.8*	243 *110.2*
P2645H	over 4 *over 101.6*	–	–

P2647A thru P2647F — 4" (101.6) Bus Bar Maple Clamps

- ½" studs, square nuts and washers are included.
- Channel nuts must be ordered separately.
- Bus bar maple clamps also available in ¼" (6.4) x 2" (50.8) and ¼" (6.4) x 6" (152.4).

Material: Paraffin impregnated maple hardwood.

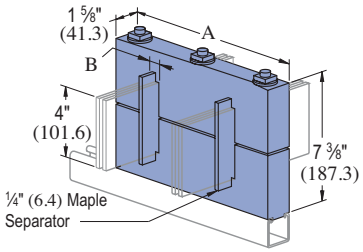

Part No.	"A" In *(mm)*	"B" In *(mm)*	No. Bus Separators	No. Bars Per Leg	Wt/100 pcs Lbs *(kg)*
P2647A	8½ *215.9*	9⁄32 *7.1*	0	1	421 *191.0*
P2647B	9½ *241.3*	13⁄16 *20.6*	2	2	465 *210.9*
P2647C	10½ *266.7*	1 5⁄16 *33.3*	4	3	509 *230.9*
P2647D	11½ *292.1*	1 13⁄16 *46.0*	6	4	553 *250.8*
P2647E	12½ *317.5*	2⅜ *60.3*	8	5	597 *270.8*
P2647F	13½ *342.9*	2⅞ *73.0*	10	6	631 *286.2*

P1690 thru P1697 — Maple Cable Clamps



- Use with steel clamp and Everdur hardware. Order clamp separately.
- Specify hole size when ordering.

Material: Paraffin impregnated maple hardwood.

Part No.	Steel Clamp No.	Hole Size In *(mm)*	"A" In *(mm)*	Wt/100 pcs Lbs *(kg)*
P1690	P1113 E	0 -⅝ *0 - 15.9*	1 5⁄16 *33.3*	24 *10.9*
P1691	P1115 E	½ - 1 *12.7- 25.4*	1 15⁄16 *49.2*	42 *19.1*
P1692	P1117 E	¾ - 1½ *19.1 x 38.1*	2⅜ *60.3*	54 *24.5*
P1693	P1118 E	1¼ - 1¾ *31.8 x 44.5*	2⅞ *73.0*	65 *29.5*
P1694	P1119 E	1½ - 2¼ *38.1 x 57.2*	3½ *88.9*	84 *38.1*
P1695	P1120 E	2 - 2½ *50.8 x 63.5*	4 *101.6*	107 *48.5*
P1696	P1121 E	2¼ - 3 *57.2 - 76.2*	4½ *114.3*	123 *55.8*
P1697	P1123 E	3 - 4 *76.2 - 101.6*	5 9⁄16 *141.3*	163 *73.9*

P2534-50, P2534-75 — Conduit Swing Fitting

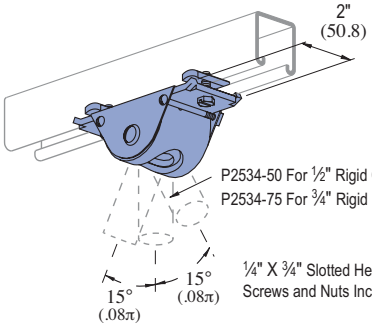

Design Load
300 Lbs (1.33 kN)

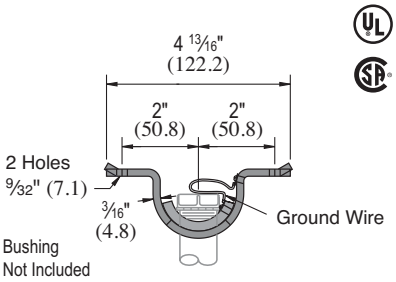

- Conduit hanger fittings allow a free swivel of 15˚ in one direction.
- Fitting may be mounted to the slot side of the Unistrut channel or to the back.

Wt/100 pcs: 96 Lbs (43.5 kg)

P1787 thru P1795 — Porce-A-Clamp™



Patents Pending
Strap Material:
Electro-galvanized Steel (EG) or Stainless Steel (SS)
Use With: All 1⅝" channel

Porce-A-Clamp™
- Non-Breakable TPE Material.
- U.V. Resistant.
- U.L. Listed.
- Optional Stainless Steel Clamps.
- Tapered Flange to Protect Cable.
- Dielectric Strength 640 Volts Per Mil.
- One Piece Insulator.
- Replaces Porcelain & Maple Cable Clamp.
- For use in accordance with National Electrical Code ANSI/NFPA 70.
- Includes Pipe Strap.
- Temperature Rating -50°F to +275°F (-45°C to +135°C)

Part Number	Hole Size In (mm)	"A" In (mm)	"B" In (mm)	Wt/100 pcs Lbs (kg)
P1787A	⅜ 9.5	1.36 34.5	1.82 46.2	25 11.3
P1787B	½ 12.7			
P1787C	⅝ 15.9			
P1788	¾ 19.1	1.86 47.2	2.34 59.4	37 16.8
P1788A	⅞ 22.2			
P1788B	1 25.4			
P1788C	1⅛ 28.6			
P1789	1¼ 31.8	2.36 59.9	2.86 72.6	58 26.3
P1789A	1⅜ 34.9			
P1789B	1½ 38.1			
P1789C	1⅝ 41.3			
P1790	1¾ 44.5	2.86 72.6	3.50 88.9	76 34.5
P1790A	1⅞ 47.6			
P1790B	2 50.8			
P1790C	2⅛ 54.0			
P1791	2¼ 57.2	3.36 835	4.05 102.9	90 40.8
P1791A	2⅜ 60.3			

Part Number	Hole Size In (mm)	"A" In (mm)	"B" In (mm)	Wt/100 pcs Lbs (kg)
P1791B	2½ 63.5	3.36 85.3	4.05 102.9	90 40.8
P1791C	2⅝ 66.7			
P1792	2¾ 69.9	3.86 98.0	4.75 120.7	109 49.4
P1792A	2⅞ 73.0			
P1792B	3 76.2			
P1792C	3⅛ 79.4			
P1793	3¼ 82.6	4.36 110.7	5.125 130.2	130 59.0
P1793A	3⅜ 85.7			
P1793B	3½ 88.9			
P1793C	3⅝ 92.1			
P1794	3¾ 95.3	4.86 123.4	5.54 140.7	160 72.6
P1794A	3⅞ 98.4			
P1794B	4 101.6			
P1794C	4⅛ 104.8			
P1795	4¼ 108.0	5.24 133.1	5.92 150.4	160 72.6
P1795A	4⅜ 111.1			
P1795B	4½ 114.3			

P2535
Conduit Hanger Connection For ½"Conduit

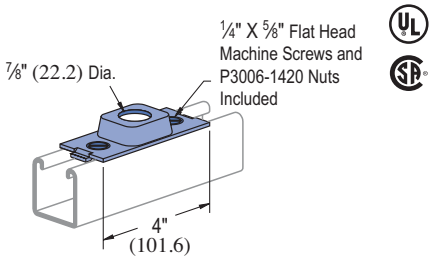

Design Load 400 Lbs (1.78 kN)

Material: 12 gauge (2.7).

Wt/100 pcs: 28 Lbs (12.7 kg)

P2536
Conduit Hanger Connection For ¾"Conduit

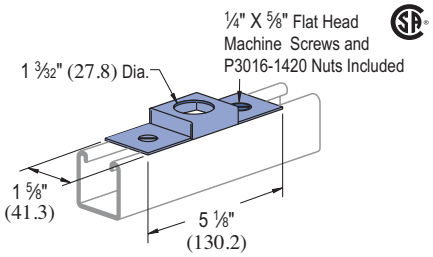

Design Load 200 Lbs (0.89 kN)

Material: 16 gauge (1.5)

Wt/100 pcs: 36 Lbs (16.3 kg)

P2522 — Outlet Box Connection

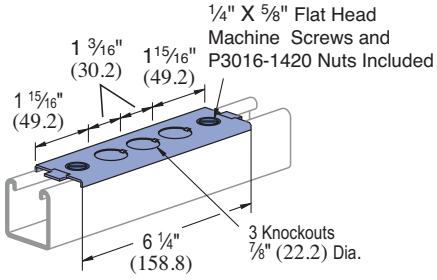

Wt/100 pcs: 35 Lbs (15.9 kg)

P2755, P2756, P2757
Raceway Hangers



Design Load
120 Lbs (0.53 kN)

Part No.	"A" In (mm)	Wt/100 pcs Lbs (kg)
P2755	9/16 14.3	44 20.0
P2756	7/8 22.2	44 20.0
P2757	13/32 10.3	44 20.0

Use with Channels:
P1001, P1101, P2001, P5000, & P5500.
Material: 14 gauge (1.9).

P2855, P2856, P2857
Raceway Hangers

EG



Design Load
120 Lbs (0.53 kN)

Part No.	"A" In (mm)	Wt/100 pcs Lbs (kg)
P2855	9/16 14.3	32 14.5
P2856	7/8 22.2	32 14.5
P2857	13/32 10.3	32 14.5

Use with Channels:
P1000, P1100, P3000, P3300
Material: 14 gauge (1.9).

P2537, P5537
Fluorescent Fixture Hangers



Design Load
120 Lbs (0.53 kN)

- Hanger provides more than ½" (12.7) space between channel and fixtures.

Materials: 18 gauge (1.2).

Part No.	Use w/Channel	"A" In (mm)	Wt/100 pcs Lbs (kg)
P2537	P1000 P1100 P3000	2 1/16 61.9	19 8.6
P5537	P5500	3¼ 82.6	22 10.0

P2602
Mecury Vapor Fixture Hanger







Use with 1⅝" Channel
Finish: Electro-galvanized
Stock Size: ¼"
NOTE: Supports fixture in slot up or down system.

Wt/100 pcs: 154 Lbs (69.9 kg)

P2539, P3539, P5539
Fluorescent Fixture Hangers



- Hanger provides ⅛" (3.2) space between channel and fixtures.

Design Load
120 Lbs (0.53 kN)

Materials: 18 gauge (1.2).

Part No.	Use w/Channel	"A" In (mm)	Wt/100 pcs Lbs (kg)
P2539	P1000 P1100	1¾ 44.5	17 7.7
P3539	P3000	1½ 38.1	15 6.8
P5539	P5500	2 9/16 65.1	18 8.2

P3922 thru P3926
Splice Fittings

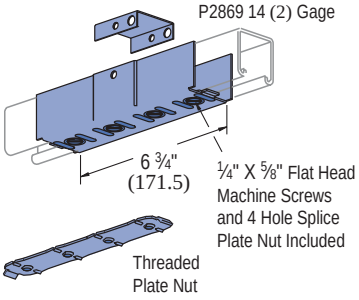

Assy. No.	Use W/ Channel	"A" In (mm)	Clevis No.	Back Clevis No.	Plate Nut No.	Wt/100 pcs Lbs (kg)
P3922	P1000 P1100	1⅝ 41.3	P2377	P2517	P2869	100 45.4
P3923	P3000	1⅜ 34.9	P3377	P2517	P2869	97 44.0
P3924	P4000	13/16 20.6	P5377	P2517	P2869	80 36.3
P3925	P5500	1⅝ 41.3	P2377	P5517	P2869	103 46.7
P3926	P5000	1⅝ 41.3	P2377	P5017	P2869	106 48.1

Material: 16 gauge (1.6).

P3521-50
End Connectors For ½"Conduit



Material: 12 gauge (3).

Wt/100 pcs: 27 Lbs (12.2 kg)

P2521-50, P2521-75
End Connectors For ½" & ¾" Conduit



Part No.	Conduit Size A In	Wt/100 pcs Lbs (kg)
P2521-50	½	27 12.2
P2521-75	¾	26 11.8

Use with channels:
P1000 and P1100.
Material:
12 gauge (3)

P5521-50, P5521-75
End Connectors For ½" & ¾" Conduit



Part No.	Conduit Size A In	Wt/100 pcs Lbs (kg)
P5521-50	½	27 12.2
P5521-75	¾	26 11.8

Material:
12 gauge (3).

P5021-50, P5021-75 End Connector For ½" & ¾" Conduit



Part No.	Conduit Size A In	Wt/100 pcs Lbs *(kg)*
P5021-50	½	31 *14.1*
P5021-75	¾	30 *13.6*

Material: 12 gauge (2.7).

P2521-100 End Connector For 1" Conduit



Material: 12 gauge (2.7).

Wt/100 pcs: 24 Lbs (10.9 kg)

P5021-100 End Connector For 1" Conduit



Material: 12 gauge (2.7).

Wt/100 pcs: 28 Lbs (12.7 kg)

P5521-100 End Connector For 1" Conduit



Material: 12 gauge (2.7).

Wt/100 pcs: 24 Lbs (10.9 kg)

P2541 Spacer Clevis





Material: 12 gauge (2.7).

Wt/100 pcs: 24 Lbs (10.9 kg)

P1180W thru P5580W End Caps

EG



Material: 14 gauge (1.9)

Part Number	Use With	Wt/100 pcs Lbs *(kg)*
P1180W	P1100	12 *(5.4)*
P1280W	P1000	11 *(5.0)*
P2280W	P2000	11 *(5.0)*
P3280W	P3000	8 *(3.6)*
P4280W	P4000	5 *(2.3)*
P5280W	P5000	22 *(10.0)*
P5580W	P5500	18 *(8.2)*

P2540, P2540A Wiring Stud Nut



Stamped Ident. No.
P2540 – 121961
P2540A – 121960
Material: Sintered metal.

½" American Standard
Straight Pipe Thread

Part No.	"A" In *(mm)*	Wt/100 pcs Lbs *(kg)*
P2540	1 5/64 *27.4*	10.0 *4.5*
P2540A	⅝ *15.9*	8 *3.6*

Design Load
320 Lbs (1.42 kN)

P2801 Junction Box



Wt/100 pcs: 113 Lbs (51.4 kg)

P2802 Junction Box Cover



Wt/100 pcs: 30 Lbs (13.6kg)

P2803 Hub Assembly





Stamp ID No. 122022

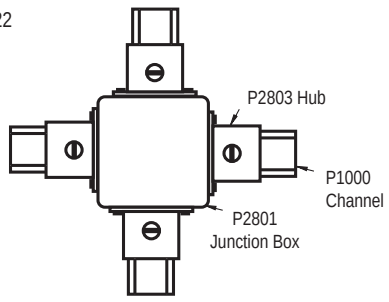

Note: Combine junction box (P2801) and hub assemblies (P2803) to make 1, 2, 3, or 4 way junction box.

Wt/100 pcs: 32 Lbs (14.5 kg)

P3116-125
Fixture Stud Nut



Wt/100 pcs: 11 Lbs (5.0 kg)

P2552 Polypropylene Wire Retainer



Retainer may be easily pushed into channel to support wires until closure strip is installed.



Wt/100 pcs: .30 Lbs (.1 kg)

P2904



3/8"-16 x 1/4" Socket Cup Point
Set Screws Included
Extruded Aluminum

Wt/100 pcs: 12 Lbs (5.4kg)

P2900



3/8"-16 x 1/4" Socket Cup Point
Set Screws Included
Material: Cast aluminum.

Wt/100 pcs: 20 Lbs (9.1 kg)

P2901



3/8"-16 x 1/4" Socket Cup Point
Set Screws Included
Material: Cast aluminum.

Wt/100 pcs: 35 Lbs (15.9 kg)

P2902



3/8"-16 x 1/4" Socket Cup Point
Set Screws Included
Material: Cast aluminum.

Wt/100 pcs: 27 Lbs (12.2 kg)

P2903



3/8"-16 x 1/4" Socket Cup Point
Set Screws Included
Material: Cast aluminum.

Wt/100 pcs: 45 Lbs (20.4 kg)

M2037, M2050 Swivel Hangers



Design Load
600 Lbs (2.67 kN)

Part No.	"A" In	"B" In *(mm)*	Wt/100 pcs Lbs *(kg)*
M2037	3/8" - 16	2 31/32 *75.4*	23 *10.4*
M2050	½" - 13	2¾ *69.9*	32 *14.5*

M2137, M2150 Swivel Hangers



Design Load
600 Lbs (2.67 kN)

Part No.	"A" In	"B" In *(mm)*	Wt/100 pcs Lbs *(kg)*
M2137	3/8" - 16	2 29/32 *74*	27 *12.2*
M2150	½" - 13	2¾ *69.9*	45 *20.4*

M2250 Swivel Hanger



Design Load
600 Lbs (2.67 kN)

Wt/100 pcs: 18 Lbs (8.2 kg)

M2350 Swivel Hanger



Design Load
600 Lbs (2.67 kN)

Wt/100 pcs: 20 Lbs (9.1 kg)

P16F

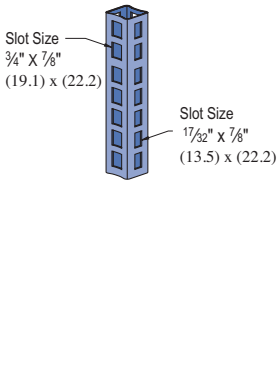

Slot spacing
1¼" (31.8)
on center.



Tubing Finishes: PL, GR, HG, PG;
Standard Lengths: 10' & 20'

Wt/100 Ft: 178 Lbs (260 kg/100 m)
Allowable Moment 4,800 In-Lbs (540 N•m)
12 Gauge Nominal Thickness .105" (2.7mm)

P21H



Slot spacing
1¼" (31.8)
on center.



Tubing Finishes: PL, GR, HG, PG;
Standard Lengths: 10' & 20'

Wt/100 Ft: 297 Lbs (440 kg/100 m)
Allowable Moment 11,370 In-Lbs (540 N•m)
12 Gauge Nominal Thickness .105" (2.7mm)

P16F - Column Loading

Unbraced Height In	Max. Allowable Load Column Loaded at C.G. Lbs	Max. Allowable Load Column Loaded at Slot Face Lbs
24	9,600	3,300
36	9,000	3,100
48	8,300	2,900
60	7,500	2,700
72	6,600	2,400
84	5,600	2,200
96	4,500	1,900
108	3,600	1,600
120	2,900	1,400
144	2,000	1,100

P21H - Column Loading

Unbraced Height In	Max. Allowable Load Column Loaded at C.G. Lbs	Max. Allowable Load Column Loaded at Slot Face Lbs
24	17,700	6,200
36	16,900	6,000
48	16,000	5,700
60	15,000	5,400
72	13,900	5,100
84	12,600	4,700
96	11,300	4,300
108	9,900	3,900
120	8,300	3,500
144	5,800	2,800
168	4,230	2,300

P16F - Column Loading (metric)

Unbraced Height *mm*	Max. Allowable Load Column Loaded at C.G. *kN*	Max. Allowable Load Column Loaded at Slot Face *kN*
610	*42.7*	*14.7*
914	*40.0*	*13.8*
1,219	*36.9*	*12.9*
1,524	*33.4*	*12.0*
1,829	*29.4*	*10.7*
2,134	*24.9*	*9.8*
2,438	*20.0*	*8.5*
2,743	*16.0*	*7.1*
3,048	*12.9*	*6.2*
3,658	*8.9*	*4.9*

P21H - Column Loading (metric)

Unbraced Height *mm*	Max. Allowable Load Column Loaded at C.G. *kN*	Max. Allowable Load Column Loaded at Slot Face *kN*
610	*78.7*	*27.6*
914	*75.2*	*26.7*
1,219	*71.2*	*25.4*
1,524	*66.7*	*24.0*
1,829	*61.8*	*22.7*
2,134	*56.0*	*20.9*
2,438	*50.3*	*19.1*
2,743	*44.0*	*17.3*
3,048	*36.9*	*15.6*
3,658	*25.8*	*12.5*
4,267	*18.8*	*10.2*

P16F - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	1,600	0.06	1,600	1,600	1,600
36	1,070	0.13	1,070	1,070	820
48	800	0.23	800	690	460
60	640	0.36	590	440	290
72	530	0.52	410	310	200
84	460	0.71	300	220	150
96	400	0.93	230	170	110
108	360	1.18	180	140	90
120	320	1.45	150	110	70
144	270	2.09	100	80	50
168	230	2.85	70	60	40

P21H - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	3,790	0.05	3,790	3,790	3,790
36	2,530	0.11	2,530	2,530	2,380
48	1,900	0.19	1,900	1,900	1,340
60	1,520	0.29	1,520	1,280	860
72	1,260	0.42	1,190	890	590
84	1,080	0.58	870	660	440
96	950	0.76	670	500	330
108	840	0.96	530	400	260
120	760	1.18	430	320	210
144	630	1.70	300	220	150
168	540	2.31	220	160	110

P16F - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
600	*7.2*	*1*	*7.2*	*7.2*	*7.2*
750	*5.8*	*2*	*5.8*	*5.8*	*5.4*
1,000	*4.3*	*4*	*4.3*	*4.3*	*3.0*
1,250	*3.5*	*6*	*3.5*	*2.9*	*1.9*
1,500	*2.9*	*9*	*2.7*	*2.0*	*1.4*
1,750	*2.5*	*12*	*2.0*	*1.5*	*1.0*
2,000	*2.2*	*16*	*1.5*	*1.1*	*0.8*
2,500	*1.7*	*25*	*1.0*	*0.7*	*0.5*
3,000	*1.5*	*36*	*0.7*	*0.5*	*0.3*
3,500	*1.2*	*49*	*0.5*	*0.4*	*0.2*
4,000	*1.1*	*64*	*0.4*	*0.3*	*0.2*

P21H - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
600	*17.1*	*1*	*17.1*	*17.1*	*17.1*
750	*13.7*	*2*	*13.7*	*13.7*	*13.7*
1,000	*10.3*	*3*	*10.3*	*10.3*	*8.8*
1,250	*8.2*	*5*	*8.2*	*8.2*	*5.7*
1,500	*6.9*	*7*	*6.9*	*5.9*	*3.9*
1,750	*5.9*	*10*	*5.8*	*4.3*	*2.9*
2,000	*5.1*	*13*	*4.4*	*3.3*	*2.2*
2,500	*4.1*	*20*	*2.8*	*2.1*	*1.4*
3,000	*3.4*	*29*	*2.0*	*1.5*	*1.0*
3,500	*2.9*	*40*	*1.4*	*1.1*	*0.7*
4,000	*2.6*	*52*	*1.1*	*0.8*	*0.5*

Notes:

1. Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
2. Long span beams should be supported in such a manner as to prevent rotation and twist.
3. Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.

P16F - Elements of Section

Parameter		P16F		P16F (metric)	
Area of Section		0.416	In^2	*2.68*	cm^2
Axis 1-1					
	Moment of Inertia (I)	0.168	In^4	*7.0*	cm^4
	Section Modulus (S)	0.192	In^3	*3.1*	cm^3
	Radius of Gyration (r)	0.650	In	*1.7*	*cm*
Axis 2-2					
	Moment of Inertia (I)	0.210	In^4	*8.7*	cm^4
	Section Modulus (S)	0.240	In^3	*3.9*	cm^3
	Radius of Gyration (r)	0.725	In	*1.8*	*cm*

P21H - Elements of Section

Parameter		P21H		P21H (metric)	
Area of Section		0.749	In^2	*4.83*	cm^2
Axis 1-1					
	Moment of Inertia (I)	0.490	In^4	*20.4*	cm^4
	Section Modulus (S)	0.455	In^3	*7.5*	cm^3
	Radius of Gyration (r)	0.820	In	*2.1*	*cm*
Axis 2-2					
	Moment of Inertia (I)	0.590	In^4	*24.6*	cm^4
	Section Modulus (S)	0.540	In^3	*8.8*	cm^3
	Radius of Gyration (r)	0.900	In	*2.3*	*cm*

P2820, P2940 Channel/Tube Connectors

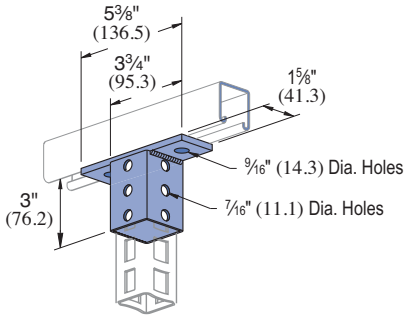

Part No.	Use With	Wt/100 pcs Lbs *(kg)*
P2820	P16F	116 *(2.6)*
P2940	P21H	148 *(67.1)*

P2822, P2932 Splice Fittings

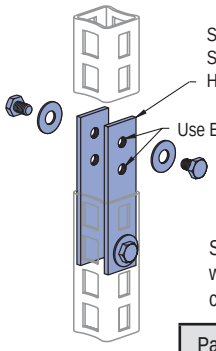

Splicing should occur within the top one quarter of column height.

Part No.	Use With	Wt/100 pcs Lbs *(kg)*
P2822	P16F	97 *(44.0)*
P2932	P21H	122 *(55.3)*

P2823 90° Rack Fitting



Wt/100 pcs: 66 Lbs (29.9 kg)

P2821 Locking Clip



Cable Hook supplied by others.

Exclusive Cable Hook Locking Clip prevents Cable Hook removal.

Wt/100 pcs: 3 Lbs (1.4 kg)

P2928, P2929 and P2930 Cable Brackets



Use with P16F or P21H.

Material: 12 gauge steel.

Part Number	"L" In *(mm)*	"A" In *(mm)*	"B" In *(mm)*	Wt/100 pcs Lbs *(kg)*	Uniform Design Load Lbs *(kN)*
P2928	6 *152.4*	3½ *88.9*	⅞ *22.2*	92 *41.7*	500 *2.22*
P2929	12 *304.8*	3½ *88.9*	1⅝ *41.3*	320 *145.1*	250 *1.11*
P2930	18 *457.2*	3½ *88.9*	1⅝ *41.3*	420 *190.5*	170 *0.76*

Safety factor of 3.

P2920 thru P2924 Cable Brackets HG



Use with P16F or P21H.

Material: 12 gauge steel.

Part Number	"L" In *(mm)*	"A" In *(mm)*	"B" In *(mm)*	Wt/100 pcs Lbs *(kg)*	Uniform Design Load Lbs *(kN)*
P2920	5½ *139.7*	3½ *88.9*	⅞ *22.2*	90 *40.8*	500 *2.22*
P2921	8¼ *209.6*	3½ *88.9*	⅞ *22.2*	120 *54.4*	325 *1.45*
P2922	11 *279.4*	3½ *88.9*	1⅝ *41.3*	300 *136.1*	275 *1.22*
P2923	13¾ *349.3*	3½ *88.9*	1⅝ *41.3*	340 *154.2*	220 *0.98*
P2924	19¼ *489.0*	3½ *88.9*	1⅝ *41.3*	430 *195.0*	160 *0.71*

Safety factor of 3.

U.L. Listed

Unistrut channel is listed by Underwriters' Laboratories as a surface metal raceway. Snap-in closure strip is used to complete the raceway. Accessory parts listed by Underwriters are noted on drawings.
The following tables represent maximum number of conductors when raceway is not employed with fixtures or where the clearance between fixtures and raceway is greater than ½" (12.7). In all cases the snap-in cover is required to complete raceway enclosure.

P3000, & -KO

	Number and Conductor Size (AWG)				
Gauge	14	12	10	8	6
THWN, THHN	72	54	34	17	12
XHHW	48	37	29	13	10
T, TW	46	36	28	13	7
THW	30	25	20	10	7
RH	27	22	13	7	5
RHH, RHW	19	16	13	7	5

P3300

	Number and Conductor Size (AWG)				
Gauge	14	12	10	8	6
THWN, THHN	40	30	19	9	6
XHHW	26	21	16	7	5
T, TW	26	20	15	7	4
THW	17	14	11	6	4
RH	15	12	7	4	3
RHH, RHW	10	9	7	4	2

P5500, & -KO

	Number and Conductor Size (AWG)				
Gauge	14	12	10	8	6
THWN, THHN	141	105	66	33	23
XHHW	93	73	57	27	19
T, TW	91	58	55	26	15
THW	59	49	39	20	15
RH	53	44	26	14	10
RHH, RHW	37	32	26	14	10

P1000, & -KO, P1100 & -KO

	Number and Conductor Size (AWG)				
Gauge	14	12	10	8	6
THWN, THHN	88	66	42	20	14
XHHW	58	46	35	16	12
T, TW	57	44	34	16	9
THW	37	30	24	12	9
RH	33	27	16	9	6
RHH, RHW	23	20	16	9	6

P5000, & -KO

	Number and Conductor Size (AWG)				
Gauge	14	12	10	8	6
THWN, THHN	193	105	91	45	32
XHHW	128	101	78	37	27
T, TW	125	98	75	35	20
THW	81	67	54	28	20
RH	73	60	36	19	13
RHH, RHW	51	44	36	19	13

	Channel Size and Inside Area			
Channel Part Number	Size	Area	40% Area	25% Area
P3300 & KO	1⅝" x ⅞"	0.975 629	0.390 252	0.244 157
P3000 & KO	1⅝" x 1⅜"	1.677 1,082	0.671 433	0.419 270
P1000 & KO, P1100 & KO	1⅝" x 1⅝"	2.028 1,308	0.811 523	0.507 327
P5500 & KO	1⅝" x 2 7/16"	3.169 2,045	1.268 818	0.792 511
P5000 & KO	1⅝" x 3¼"	4.308 2,779	1.723 1,112	1.077 695

Note:

Raceways with external joiners shall use a 40% wire fill calculation to determine the number of conductors permitted.

Raceways with internal joiners shall use a 25% wire fill calculation to determine the number of conductors permitted

Also UL Listed

P1001, P1101, P3001, P3301, P5001 & P5501

C.S.A. APPROVED

Suitable for number of wires in Column A when installed to support and supply electric discharge type lighting fixtures when raceway wiring is suitable for at least 75° C except wire suitable for 60° C may be used when clearance between fixtures and raceways is at least ½" (12.7). Also suitable for number of wires in column B when installed to support electric discharge type lighting fixtures when raceway wiring is suitable for at least 75° C and clearance between fixtures and raceway is at least ⅛" (3.2).
Maximum number of wires for types T, THHN, THW, THWN, TW, R, RH, RHH, RHW or XHHW

Raceway Wire Size AWG	P1000, &-KO P1100, &-KO		P3000, &-KO		P3300		P5000 &-KO		P5500, &-KO	
	A	B	A	B	A	B	A	B	A	B
14	6	10	5	10	4	6	10	10	10	10
12	6	10	4	10	3	6	10	10	10	10
10	5	8	4	6	-	-	8	10	8	10
8	4	6	3	4	-	-	6	9	6	8
6	2	3	2	2	-	-	4	6	4	6

Unistrut channels are also certified by Canadian Standards Association.

Fluorescent Fixtures - Support Applications

Spring-Nut attachment system

Conduit connects through knockout in fixture. Fixture is supported by P1006-1420 spring nut and 1/4" round head machine screw. Assembly is supported by P2855 hinged hanger.

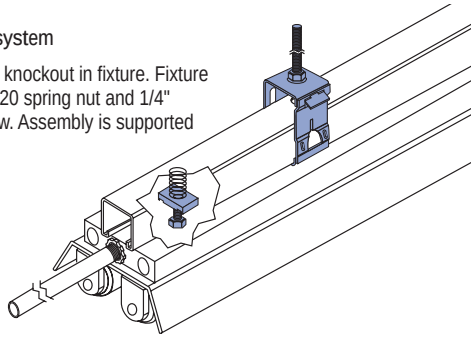

Slotted channel attachment system

Conduit connects through knockout in fixture. Fixture is supported by HCSS series hex bolt and hex nut. Raceway is supported by P2855 hanger. To splice a continuous run, use P3922.

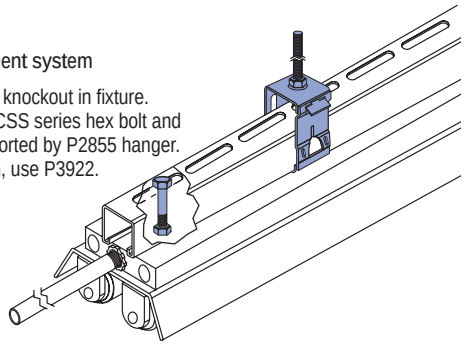

Recommended Support Spacing for Fixtures

Deflections are based on continuity of span and use of 4 ft. fixtures weighing approximately 30 lbs. each. Do not use joiner fittings between supporting hangers. When using knock-out or slotted channels deflections will be increased approximately 5%. With fixtures spaced 2' - 0" apart, deflection is 60-70% of table. When spaced 4' - 0" apart, deflection is 50-60% of table.

Deflection Table

Channel	Distance Between Supports - In *(mm)*								
	8' (2.4m)	10' (3m)	12' (3.7m)	14' (4.3m)	16' (4.9m)	18' (5.5m)	20' (6.1m)	22' (6.7m)	24' (7.3m)
P3300	0.187 *4.7*	–	–	–	–	–	–	–	–
P3000	0.100 *2.5*	0.250 *6.4*	0.500 *12.7*	–	–	–	–	–	–
P1100	0.088 *2.2*	0.250 *6.4*	0.437 *11.1*	0.875 *22.2*	–	–	–	–	–
P1000	–	0.180 *4.6*	0.312 *7.9*	0.625 *15.9*	1.000 *25.4*	1.625 *41.3*	–	–	–
P5500	–	–	–	0.250 *6.4*	0.500 *12.7*	0.812 *20.6*	1.620 *41.1*	–	–
P5000	–	–	–	–	0.310 *7.9*	0.625 *15.9*	1.000 *25.4*	1.800 *45.7*	2.500 *63.5*
P1001	–	–	–	–	0.310 *7.9*	0.625 *15.9*	1.000 *25.4*	1.800 *45.7*	2.500 *63.5*
P5001	–	–	–	–	–	0.200 *5.1*	0.250 *6.4*	0.400 *10.2*	0.500 *12.7*

High-Bay Fixture Raceway Applications

H.I.D. Knockout mounted system

Fixture attached to and wired from raceway by ½" nipple assembly of desired length at channel knockout. P1280W end cap, P3184 closure strip, P2535 conduit connector, and P2855 channel hanger complete assembly. For splicing channels into continuous raceway runs, use joiner fitting P3922.



High-Bay dual mounted system

Fixtures are connected to and wired form raceway by conduit connector fitting P2536. Raceway is supported by P2855 hanger. P1280W end caps and P3184 closure strip complete the assembly. Conduit connected to raceway through channel knockout.

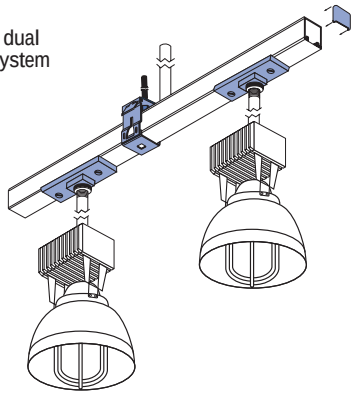

H.I.D. Plug-in system (with swivel)

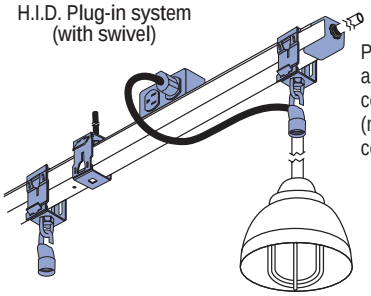

P2855 hangers support raceway and P251-75 end connector joins conduit raceway. P1280W end caps (not shown) and P3184 closure strip complete assembly.

H.I.D. Plug-in system (rigid mount)

Raceway is supported and wired by top mounted P2535 conduit connectors. P1280W end caps and P3184 closure strip complete assembly.

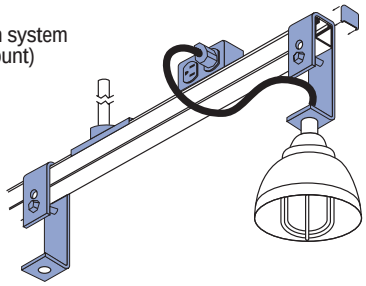

Uplighting with underhung or remote ballast



Fixtures attached to and wired from P2535 conduit fittings mounted to slot side of channel. Raceway can be wired by P2521 as shown or, conduit can enter through available knockout. Ballasts in P2521 are connected at the knockout by fixture adapter. In remote ballast installations, follow manufacturers instructions. P2855 hinged hangers support both types of installations. P3184 closure strip and P1280W end caps complete assembly. For continuous raceways, use joiner fitting P3922. P2521-75 end connector joins conduit to raceway.

CONCRETE INSERTS

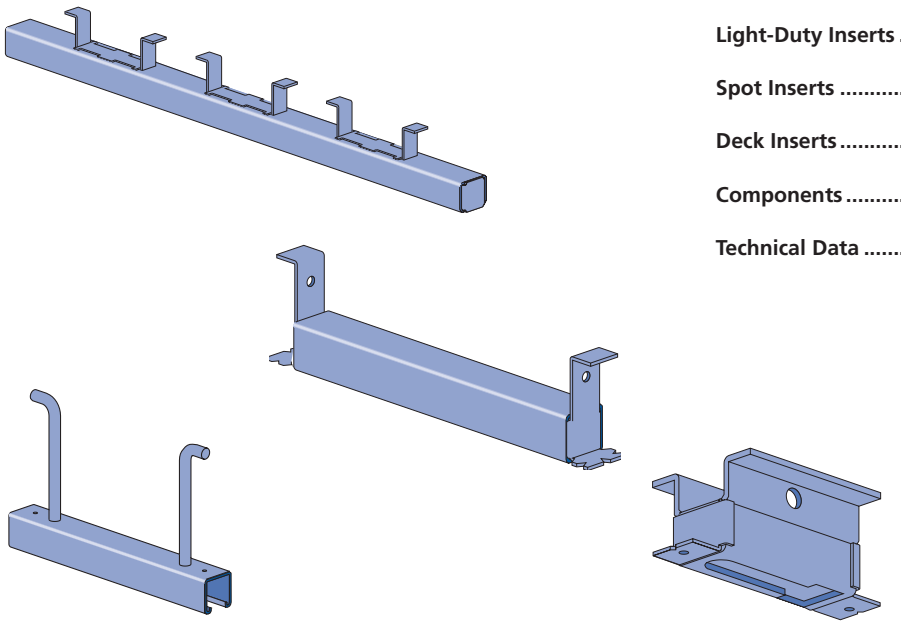

Heavy-Duty Inserts 141

Standard-Duty Inserts..... 142, 144

Light-Duty Inserts 143

Spot Inserts 144

Deck Inserts 145

Components 145

Technical Data 146

MATERIAL

Cold-formed inserts are manufactured from standard 12 gauge (2.7 mm) Unistrut channel sections conforming to ASTM A1011 SS GR 33 or ASTM A653 GR 33, unless otherwise noted.

To inhibit concrete seepage, all inserts (except spot inserts) are provided with closure strips and end caps or foam filler, unless otherwise requested.

Most concrete inserts are available in stainless steel on special order. Consult factory for ordering information.

APPLICATION

A wide range of heavy-duty to light-duty "continuous" and "spot" concrete inserts are available for use in pre-cast, pre-stressed or poured-in-place concrete floors, walls or ceilings.

FINISHES

Cold-formed, standard-duty, light-duty and spot concrete inserts are available in:

Hot dipped galvanized (HG), conforming to ASTM A123 or A153;

Pre-galvanized (PG), conforming to ASTM A653 GR 33

Plain (PL)

DESIGN LOAD

Design loads, where shown, are based on 3,000 PSI concrete, unless noted.

STANDARD LENGTHS

Insert lengths range from 3 inches (76.2 mm) to 20 feet (6.10m) with a tolerance of ±¼-inch (6.4mm).

DIMENSIONS

Imperial dimensions are illustrated in inches. Metric dimensions are shown in parentheses or as noted. Unless noted, all metric dimensions are in millimeters and rounded to one decimal place.

Custom-designed inserts are available on special order. Consult factory for ordering information.

Heavy Duty Light Duty Standard Duty

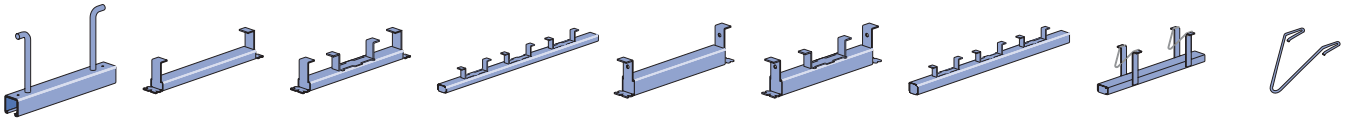

P3754-Pg 141 | P3349-Pg 143 | P3352-Pg 143 | P3354-Pg 143 | P3249-Pg 142 | P3253-Pg 142 | P3254-Pg 142 | P3165-Pg 144 | P2865-Pg 144

Spot Inserts and Components



P3245-Pg 144 | P3245N4-Pg 144 | M24-Pg 144 | M2506-Pg 144 | P3700-Pg 145 | P1703-Pg 145 | P2407-Pg 145 | P3663-Pg 145

Fiberglass Concrete Inserts



Heavy Duty-Pg 193 | Light Duty-Pg 194 | Heavy Duty - Standard Profile-Pg 195

Closure Strips



P1184P Pg 60 | P3184 Pg 60 | P3184P Pg 60 | P3184F Pg 60 | P3712P Pg 60

Channel Nuts

Heavy Duty-Pg 73 | Heavy Duty-Pg 73 | Standard Duty-Pg 73 | Standard Duty-Pg 73 | Light Duty-Pg 73 | Light Duty-Pg 73

Installing Concrete Inserts

1. Nail insert to concrete form using prepunched nail holes
2. Attach rebars to flanges on insert

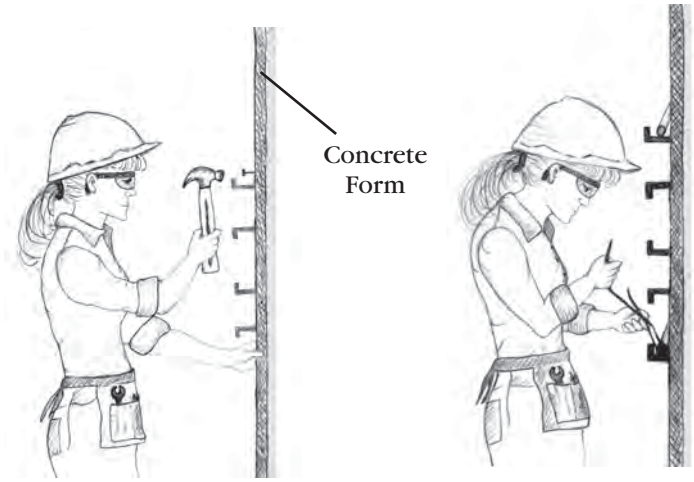

The Unistrut concrete insert is firmly fixed to the concrete side of the form before pouring. When the forms are removed, the insert is ready for use. Brackets and other components can be attached at any point of the continuous entry channel.

Using Installed Concrete Insert



1. Scrape out filler



2. Insert channel nut.



3. Attach fitting

P3246

- Up to 5,700 lbs. tension capacity in 3,000 psi concrete
- Sizes available to accept threaded rod from ¾" to 1-½"
- Fiberglass rods to interface with the rebar or reinforcing rods, reducing the potential for a galvanic interaction
- 316 Stainless steel body with fiberglass rods to prevent corrosion
- Meets several industry and federal specifications, including: A-A-1192A (Type 18), WW-H-171-E (Type 18), ANSI/MSS SP-69 and MSS SP-58 (Type 18)

P3246 Installed

Part Number	Threaded Hole Size[a]	Maximum Allowable Load (lbs.) Vertical	Shear[b]	45° Pull
P3246-75 ST	¾" - 10	3,230[a]	1,930	2,740
P3246-87 ST	⅞" - 9	4,480[a]	2,680	3,800
P3246-1 ST	1" - 8	5,700	3,540	5,000
P3246-125 ST	1¼" - 7	5,700	5,700	6,000
P3246-150 ST	1½" - 6	5,700	8,280	6,000

Safety Factor of 5 in 3,000 psi concrete
[a] Limited by Threaded Rod Safe Load in accordance with MSS-SP-58
[b] Limited by MSS-SP-58 Tension Safe Load multiplied by 0.6

P3754

1⅝" x 1⅝" Channel

- Closure strip P3712 P and a styrene bead end cap that fits inside the channel to inhibit concrete seepage are included.
- The recommended design load when used for curtain wall anchorage is 5,000 pounds and is based on use in average, good concrete. The design load includes ⅓ increase in load as permitted by AISI Specifications and Uniform Building Code when stresses are produced by wind or earthquake and other loads.
- The recommended design load is based on using two P1010 nuts at no less than 3" O.C. and no closer than 2" to either end of the insert. The distance between the insert centerline and the concrete edge must be a minimum of 3".
- All nuts and fittings for P3200 series concrete inserts will fit.
- Material: Cold formed from 12 Ga. (2.7mm) steel conforming to ASTM A1011 SS GR 33 or ASTM A653 GR 33 A.
- Finish: Choice of hot-dipped galvanized (HG) conforming to ASTM A123 or A153, or pre-galvanized (PG) conforming to ASTM A653-G90.









Part Number	Insert Length ±¼" *(6.4mm)* In *(mm)*	Wt/100 pcs Lbs *(kg)*	Max. Anchor Spacing In *(mm)*	Max. Allowable Point Load Lbs *(kN)*	Spacing of Point Loads In *(mm)*	Max. Allowable Uniform Load Lbs *(kN)*
P3754	12 *304.8*	210 *95.3*	8 *203.2*	2,500 *11.12*	3 *76.2*	5,000 *22.24*

Safety factor 3

P3200 Series

1⅝" x 1⅜" Channel PG HG

- Includes closure and end caps unless otherwise requested.
- P3280 end cap used when distance to first anchor is up to 2" (51 mm).
- P3704 end cap is used when end distance to first anchor is over 2" (51 mm).
- Nail or anchor inserts to forms every 16" (406.4 mm) to 24" (609.6 mm).
- Anchors are 8" (203.2 mm) on center.
- Material: Cold formed from 12 Ga. (3) steel conforming to ASTM A1011 SS GR 33 or ASTM A653 GR 33. A. Stainless steel available on special order.
- Finish: Choice of hot-dipped galvanized (HG) conforming to ASTM A123 or A153, or pre-galvanized (PG) conforming to ASTM A653-G90.

P3249 thru P3252



"NC" Suffix – No Closure Strip, With End Caps
"WC" Suffix – With Closure Strip & End Caps

P3253



"NC" Suffix – No Closure Strip, With End Caps & Back Plates
"WC" Suffix – With Closure Strip, End Caps & Back Plates

P3254 thru P3270

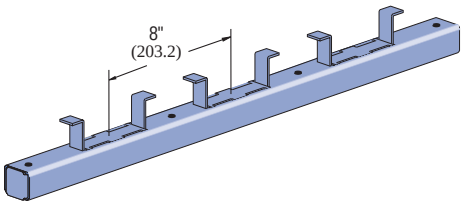

"NC" Suffix – No Closure Strip, W/End Caps & Back Plates
"WC" Suffix – W/Closure Strip, End Caps & Back Plates
"X" – No Closure Strip, No End Caps, W/Back Plates







Part Number	Insert Length In/Ft *(mm)*	Wt/100 pcs Lbs *(kg)*	Max. Allowable Point Load Lbs *(kN)*	Min. Spacing of Pt. Loads In *(mm)*	Max. Allowable Uniform Load Lbs *(kN)*	
P3249	3" *76.2*	85 *39*	500 *2.22*	—	500 *2.22*	
P3250	4" *101.6*	100 *45*	800 *3.56*	—	800 *3.56*	
P3251	6" *152.4*	130 *59*	1,000 *4.45*	—	1,000 *4.45*	
P3252	8" *203.2*	159 *72*	1,200 *5.34*	—	1,200 *5.34*	
P3253	12" *304.8*	227 *103*	2,000 *8.90*	—	2,000 *8.90*	
P3254	16" *406.4*	270 *122*	2,000 *8.90*	12 *304.8*	4,000 *17.79*	
P3255	20" *508.0*	357 *162*	2,000 *8.90*	12 *304.8*	4,000 *17.79*	
P3256	24" *609.6*	399 *181*	2,000 *8.90*	12 *304.8*	4,000 *17.79*	
P3257	32" *812.8*	527 *239*	2,000 *8.90*	12 *304.8*	2,000 *2,976.3*	Lbs./Ft. *(kg/m)*
P3257A	36" *914.4*	616 *279*	2,000 *8.90*	12 *304.8*	2,000 *2,976.3*	Lbs./Ft. *(kg/m)*
P3258	40" *1,016.0*	661 *300*	2,000 *8.90*	12 *304.8*	2,000 *2,976.3*	Lbs./Ft. *(kg/m)*
P3259	4' *1,219.2*	786 *357*	2,000 *8.90*	12 *304.8*	2,000 *2,976.3*	Lbs./Ft. *(kg/m)*
P3260	5' *1,524.0*	1,003 *455*	2,000 *8.90*	12 *304.8*	2,000 *2,976.3*	Lbs./Ft. *(kg/m)*
P3261	6' *1,828.8*	1,173 *532*	2,000 *8.90*	12 *304.8*	2,000 *2,976.3*	Lbs./Ft. *(kg/m)*
P3262	7' *2,133.6*	1,390 *630*	2,000 *8.90*	12 *304.8*	2,000 *2,976.3*	Lbs./Ft. *(kg/m)*
P3263	8' *2,438.4*	1,560 *708*	2,000 *8.90*	12 *304.8*	2,000 *2,976.3*	Lbs./Ft. *(kg/m)*
P3264	9' *2,743.2*	1,741 *790*	2,000 *8.90*	12 *304.8*	2,000 *2,976.3*	Lbs./Ft. *(kg/m)*
P3265	10' *3,048.0*	1,947 *883*	2,000 *8.90*	12 *304.8*	2,000 *2,976.3*	Lbs./Ft. *(kg/m)*
P3266	12' *3,657.6*	2,334 *1,059*	2,000 *8.90*	12 *304.8*	2,000 *2,976.3*	Lbs./Ft. *(kg/m)*
P3267	14' *4,267.2*	2,717 *1,232*	2,000 *8.90*	12 *304.8*	2,000 *2,976.3*	Lbs./Ft. *(kg/m)*
P3268	16' *4,876.8*	3,116 *1,413*	2,000 *8.90*	12 *304.8*	2,000 *2,976.3*	Lbs./Ft. *(kg/m)*
P3269	18' *5,486.4*	3,530 *1,601*	2,000 *8.90*	12 *304.8*	2,000 *2,976.3*	Lbs./Ft. *(kg/m)*
P3270	20' *6,096.0*	3,882 *1,761*	2,000 *8.90*	12 *304.8*	2,000 *2,976.3*	Lbs./Ft. *(kg/m)*

Safety factor 3.

P3300 Series

1⅝" x ⅞" Channel PG HG

P3349 thru P3351



"NC" Suffix – No Closure Strip, With End Caps
"WC" Suffix – With Closure Strip & End Caps

P3352 thru P3353



"NC" Suffix – No Closure Strip, With End Caps & Back Plates
"WC" Suffix – With Closure Strip, End Caps & Back Plates

P3354 thru P3370

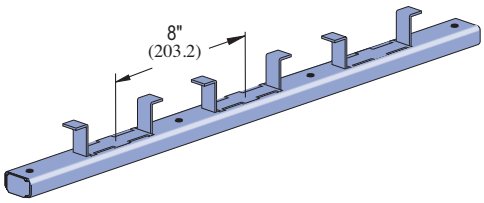

"NC" Suffix – No Closure Strip, W/End Caps & Back Plates
"WC" Suffix – W/Closure Strip, End Caps & Back Plates
"X" – No Closure Strip, No End Caps, W/Back Plates









- Includes closure and end caps unless otherwise requested.
- P3380 end cap used when distance to first anchor is up to 2" (51 mm).
- P3703 end cap is used when end distance to first anchor is over 2" (51 mm).
- Nail or anchor inserts to forms every 16" (406.4 mm) to 24" (609.6 mm).
- Anchors are 8" (203.2 mm) on center.
- Material: Cold formed from 12 Ga. (3 mm) steel conforming to ASTM A1011 SS GR. 33 or A653 GR 33. A. Stainless steel available on special order.
- Finish: Choice of hot-dipped galvanized (HG) conforming to ASTM A123 or A153, or pre-galvanized (PG) conforming to ASTM A653-G90.

Part Number	Insert Length In/Ft. *(mm)*	Wt/100 pcs Lbs *(kg)*	Max. Allowable Point Load Lbs *(kN)*	Min. Spacing of Pt. Loads In *(mm)*	Max. Allowable Uniform Load Lbs *(kN)*	
P3349	3" *76.2*	68 *31*	400 *1.78*	—	400 *1.78*	
P3350	4" *101.6*	81 *37*	500 *2.22*	—	500 *2.22*	
P3351	6" *152.4*	102 *46*	750 *3.34*	—	750 *3.34*	
P3352	8" *203.2*	122 *55*	1,000 *4.45*	—	1,000 *4.45*	
P3353	12" *304.8*	174 *79*	1,500 *6.67*	—	1,500 *6.67*	
P3354	16" *406.4*	185.0 *84*	1,500 *6.67*	12 *304.8*	3,000 *13.34*	
P3355	20" *508.0*	231 *105*	1,500 *6.67*	12 *304.8*	3,000 *13.34*	
P3356	24" *609.6*	277 *126*	1,500 *6.67*	12 *304.8*	3,000 *13.34*	
P3357	32" *812.8*	370 *168*	1,500 *6.67*	12 *304.8*	1,500 *2,232.2*	Lbs./Ft. *(kg/m)*
P3357A	36" *914.4*	416 *189*	1,500 *6.67*	12 *304.8*	1,500 *2,232.2*	Lbs./Ft. *(kg/m)*
P3358	40" *1,016.0*	463 *210*	1,500 *6.67*	12 *304.8*	1,500 *2,232.2*	Lbs./Ft. *(kg/m)*
P3359	4' *1,219.2*	555 *252*	1,500 *6.67*	12 *304.8*	1,500 *2,232.2*	Lbs./Ft. *(kg/m)*
P3360	5' *1,524.0*	694 *315*	1,500 *6.67*	12 *304.8*	1,500 *2,232.2*	Lbs./Ft. *(kg/m)*
P3361	6' *1,828.8*	832 *377*	1,500 *6.67*	12 *304.8*	1,500 *2,232.2*	Lbs./Ft. *(kg/m)*
P3362	7' *2,133.6*	971 *440*	1,500 *6.67*	12 *304.8*	1,500 *2,232.2*	Lbs./Ft. *(kg/m)*
P3363	8' *2,438.4*	1,110 *503*	1,500 *6.67*	12 *304.8*	1,500 *2,232.2*	Lbs./Ft. *(kg/m)*
P3364	9' *2,743.2*	1,249 *567*	1,500 *6.67*	12 *304.8*	1,500 *2,232.2*	Lbs./Ft. *(kg/m)*
P3365	10' *3,048.0*	1,387 *629*	1,500 *6.67*	12 *304.8*	1,500 *2,232.2*	Lbs./Ft. *(kg/m)*
P3366	12' *3,657.6*	1,665.0 *755*	1,500 *6.67*	12 *304.8*	1,500 *2,232.2*	Lbs./Ft. *(kg/m)*
P3367	14' *4,267.2*	1,942 *881*	1,500 *6.67*	12 *304.8*	1,500 *2,232.2*	Lbs./Ft. *(kg/m)*
P3368	16' *4,876.8*	2,220 *1,007*	1,500 *6.67*	12 *304.8*	1,500 *2,232.2*	Lbs./Ft. *(kg/m)*
P3369	18' *5,486.4*	2,497 *1,133*	1,500 *6.67*	12 *304.8*	1,500 *2,232.2*	Lbs./Ft. *(kg/m)*
P3370	20' *6,096.0*	2,775 *1,259*	1,500 *6.67*	12 *304.8*	1,500 *2,232.2*	Lbs./Ft. *(kg/m)*

Safety factor 3.

P3165 Series — 1⅝" x ⅞" Channel





"X" Suffix – No Closure Strip, No End Caps
"WC" Suffix – With Closure Strip & End Caps

Part No.	Length Ft *(M)*	Wt/100 pcs Lbs *(kg)*
P3165	10 *3.05*	1,650 *748.4*
P3170	20 *6.10*	3,280 *1,487.8*

Safety factor 3.

Maximum allowable load/ft.

Concrete	A Lbs *(kN)*	B Lbs *(kN)*
Light Wt	425 *1.89*	800 *3.56*
Normal Wt	500 *2.22*	1,000 *4.45*

Safety factor 3.

- Designed for use in prestressed concrete.
- Anchors 8" (203.2 mm) on center; first anchor 4" (101.6 mm) from end.
- Includes closure and end caps unless otherwise requested.
- Material: Cold formed from 12 Ga. (2.7 mm) steel conforming to ASTM A1011 SS GR 33 or ASTM A653 GR 33. A. Stainless steel available on special order.
- Finish: Choice of pre-galvanized (PG) conforming to ASTM A653-G90, or plain (PL).

P2865-10, -15, -20 — Hold-Down Springs





Finish: Plain

Part Number	A In *(mm)*	Wt/100 pcs Lbs *(kg)*
P2865-10	1 *25.4*	2 *0.9*
P2865-15	1½ *38.1*	2 *0.9*
P2865-20	2 *50.8*	2 *0.9*

P3245





Part Number	Wt/100 pcs Lbs *(kg)*	Max. Allowable Pt. Load Lbs *(kN)*
P3245	54 *24.5*	1,000 *4.45*

Square Nut for P3245 Insert

Part Number	Size/Thread In	T In (mm)	Wt/100 pcs Lbs *(kg)*
P3245-N4	¼" — 20	5⁄16" *7.9*	6 *2.7*
P3245-N6	⅜" — 16	5⁄16" *7.9*	5 *2.3*
HSQN050	½" — 13	7⁄16" *11.1*	6 *2.7*

Finish: Pre-galvanized
Safety factor of 3
- For ¼", ⅜", or ½" size attachment or hanger rod.
- Insert nuts to be ordered separately.

M24 — Spot Insert





Part Number	Wt/100 pcs Lbs *(kg)*	Max. Allowable Pt. Load Lbs *(kN)*
M24	52 *23.6*	800 *3.56*

Square Nut for M24

Part Number	Size/ Thread In	T In (mm)	Wt/100 pcs Lbs *(kg)*
M2506	¼" — 20	¼" *6.4*	13 *5.9*
M2508	⅜" — 16	⅜" *9.5*	14 *6.4*
M2510	½" — 13	½" *12.7*	14 *6.4*
M2512	⅝" — 11	½" *12.7*	12 *5.4*
M2523	¾" — 10	½" *12.7*	11 *5.0*
M2524	⅞" — 9	½" *12.7*	10 *4.5*

Finish: Electro-galvanized
Safety factor of 5
- Ribs along sides of slot give extra strength to case.
- Insert nuts M2506 thru M2524 to be ordered separately.

P3700 Series — Deck Insert

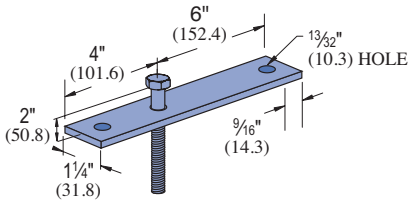

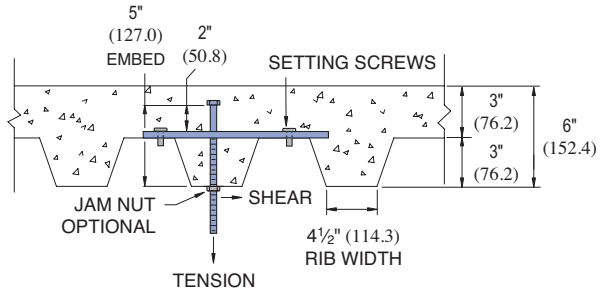

Part Number	Rod Dia. In	Tension Load Lbs *(kN)*	Shear Load Lbs *(kN)*	Wt/100 pcs Lbs *(kg)*
P3700-37	⅜	850 *3.78*	600 *2.67*	89 *40.4*
P3700-50	½	1,380 *6.14*	1000 *4.45*	111 *50.3*
P3700-62	⅝	1920 *8.54*	1760 *7.83*	141 *64.0*

Notes:

1. Allowable loads have been determined by the manufacturer's testing, analysis, and technical specification.
2. Values are based on a safety factor of 5.
3. 20 Gauge Metal Deck

P1703, P1704, P3703, P3704, P4703 — End Cap Anchors PG HG





Part Number	Channel	"A" In *(mm)*	Wt/100 pcs Lbs *(kg)*
P1703	P1000	2 13/32 *61.1*	30 *13.6*
P1704	P1000	3 17/32 *89.7*	37 *16.8*
P3703	P3300	2 7/16 *61.9*	17 *7.7*
P3704	P3000	3 *76.2*	20 *9.1*
P4703	P4000	2⅜ *60.3*	27 *12.2*

Note: End cap anchor for use with 1⅝" wide standard Unistrut inserts only.

P2407, P3280, P3380 — End Caps EG



Part Number	Fits Channel	Wt/100 pcs Lbs *(kg)*
P2407	P1000	10 *4.5*
P3280	P3000	8 *3.6*
P3380	P3300	5 *2.3*

P3663, P4663 — Joint Covers



Part Number	Use With Insert Series	Wt/100 pcs Lbs *(kg)*
P3663	P3270	10 *4.5*
P4663	P3370	6 *2.7*

Note: Joint cover for use with 1⅝" wide standard Unistrut inserts only.

Load Chart by Length

Part Number	Insert Length In *(mm)*	Wt/100 ft Lbs *(kg)*	Anchor Spacing In *(mm)*	Max. Allowable Point Load Lbs *(kN)*	Min. Spacing Between Pt. Loads In *(mm)*	Max. Allowable Uniform Load Lbs *(kN)*
P3249	3 *76.2*	85 *38.6*	3 *76.2*	500 *2.22*	–	500 *2.22*
P3349		68 *30.8*	3 *76.2*	400 *1.78*	–	400 *1.78*
P3250	4 *101.6*	100 *45.4*	4 *101.6*	800 *3.56*	–	800 *3.56*
P3350		81 *36.7*	4 *101.6*	500 *2.22*	–	500 *2.22*
P3251	6 *152.4*	130 *59.0*	6 *152.4*	1,000 *4.45*	–	1,000 *4.45*
P3351		102 *46.3*	6 *152.4*	750 *3.34*	–	750 *3.34*
P3252	8 *203.2*	159 *72.1*	8 *203.2*	1,200 *5.34*	–	1,200 *5.34*
P3352		122 *55.3*	8 *203.2*	1,000 *4.45*	–	1,000 *4.45*
P3754	12 *304.8*	210 *95.3*	8 *203.2*	2,500 *11.12*	3 *76.2*	5,000 *22.24*
P3253		227 *103.0*	4 *101.6*	2,000 *8.90*	–	2,000 *8.90*
P3353		174 *78.9*	4 *101.6*	1,500 *6.67*	–	1,500 *6.67*
P3254	16 *406.4*	270 *122.5*	4 *101.6*	2,000 *8.90*	12 *304.8*	4,000 *17.79*
P3354		185 *83.9*	4 *101.6*	1,500 *6.67*	12 *304.8*	3,000 *13.34*
P3255	20 *508.0*	357 *161.9*	4 *101.6*	2,000 *8.90*	12 *304.8*	4,000 *17.79*
P3355		231 *104.8*	4 *101.6*	1,500 *6.67*	12 *304.8*	3,000 *13.34*
P3256	24 *609.6*	399 *181.0*	4 *101.6*	2,000 *8.90*	12 *304.8*	4,000 *17.79*
P3356		277 *125.6*	4 *101.6*	1,500 *6.67*	12 *304.8*	3,000 *13.34*

Spot Insert Load Chart

Part Number	Wt/100 pcs Lbs *(kg)*	Anchor Spacing In *(mm)*	Max. Allowable Point Load Lbs *(kN)*
P3246	414 *187.8*	–	5,700 *25.35*
M26/M2812	54 *24.5*	–	1,500 *6.67*
M3245	52 *23.6*	–	1,000 *4.45*
M24/M2512	52 *23.6*	–	800 *3.56*

Maximum Allowable Point Load



The maximum allowable point load may be placed anywhere along the insert.
All loads placed less than 2" from the end of an insert must be reduced by 50%.

Maximum Allowable Uniform Load

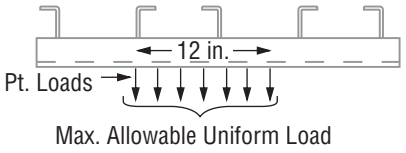

The maximum allowable uniform load must be placed as a series of point loads.

Spacing of Multiple Point Loads

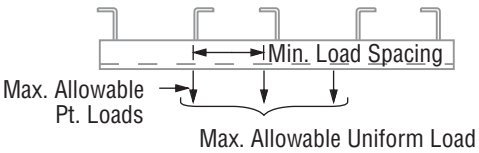

Continuous Concrete Insert Load Chart

Up to 20 Ft. *(6.10m)*

Part Number	Wt/100 ft Lbs *(kg)*	Anchor Spacing In *(mm)*	Max. Allowable Point Load Lbs *(kN)*	Min. Spacing Between Pt. Loads In *(mm)*	Max. Allowable Uniform Load Lbs/Ft *(kg/m)*
P3270	194 *88.0*	4 *101.6*	2,000 *8.90*	12 *304.8*	2,000 *2,976.3*
P3370	139 *63.0*	4 *101.6*	1,500 *6.67*	12 *304.8*	1,500 *2,232.2*
P3170*	165 *74.8*	8 *203.2*	1,000 *4.45*	12 *304.8*	1,000 *1,488.2*

*When used in prestressed concrete "T" Beam.
Load data is based on use of 3000 PSI concrete.

Pull-Out Load

Minimum Edge Distance to Achieve Rated Pull-Out Capacity

1⅞" (47.6mm); P3170
A = 3" (76.2mm); all others





SOLAR COMPONENTS

Unistrut® represents a line of steel, aluminum, and fiberglass strut and accessories used extensively in electrical infrastructure support.

Application Example 148

Solar Connectors 149

Key Advantages 150

Unistrut is available in a range of corrosion inhibiting finishes making it a prime choice in today's marketplace. The Unistrut system is infinitely adjustable for a multitude of configurations and uses.

The solar components shown in this section allow you to shape an effective solution for mounting solar panels that fits your exact needs.

MATERIAL

Unistrut channels are accurately and carefully cold formed to size from low-carbon strip steel.

STEEL: PLAIN

12 Ga. (2.7 mm), 14 Ga.(1.9 mm) and 16 Ga. (1.5 mm) ASTM A1011 SS GR 33.

STEEL: PRE-GALVANIZED

12 Ga. (2.7 mm), 14 Ga. (1.9 mm) and 16 Ga. (1.5mm) ASTM A653 GR 33.

FINISHES

Fittings are available in:

Green Powder Coat (GR), conforming to commercial standards for Powder Coating,

Electro-galvanized (EG), conforming to ASTM B633 Type III SC1;

Hot-dipped Galvanized (HG), conforming to ASTM A123 or A153

Plain (PL).

DIMENSIONS

Imperial dimensions are illustrated in inches. Metric dimensions are shown in parenthesis or as noted. Unless noted, all metric dimensions are in millimeters and rounded to one decimal place.

DESIGN BOLT TORQUE

BOLT SIZE	¼"-20	5⁄16"-18	⅜"-16	½"-13	⅝"-11	¾"-10
Rec.Torque Ft/Lbs *(N•m)*	6 *(8)*	11 *(15)*	19 *(26)*	50 *(68)*	100 *(136)*	125 *(170)*
Max Torque Ft/Lbs *(N•m)*	7 *(9)*	15 *(20)*	25 *(34)*	70 *(95)*	125 *(170)*	135 *(183)*

LISTINGS

UL File No. - E361025	PV Mounting Systems

Typical Solar Installation

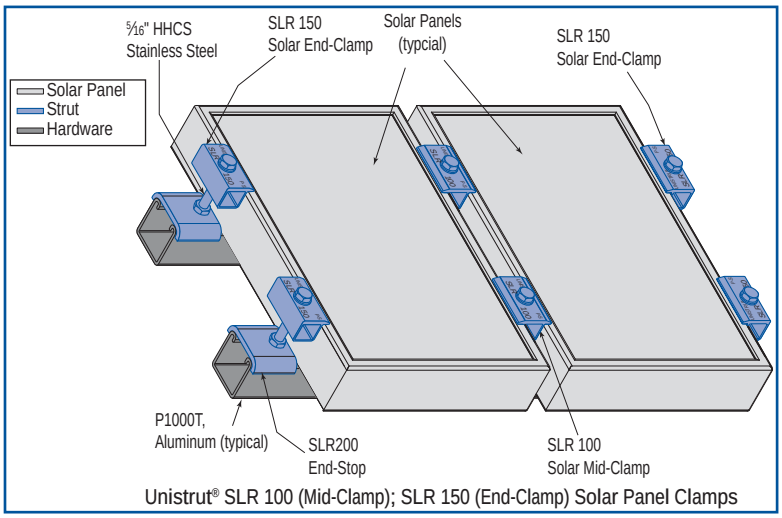

Unistrut® SLR 100 (Mid-Clamp); SLR 150 (End-Clamp) Solar Panel Clamps

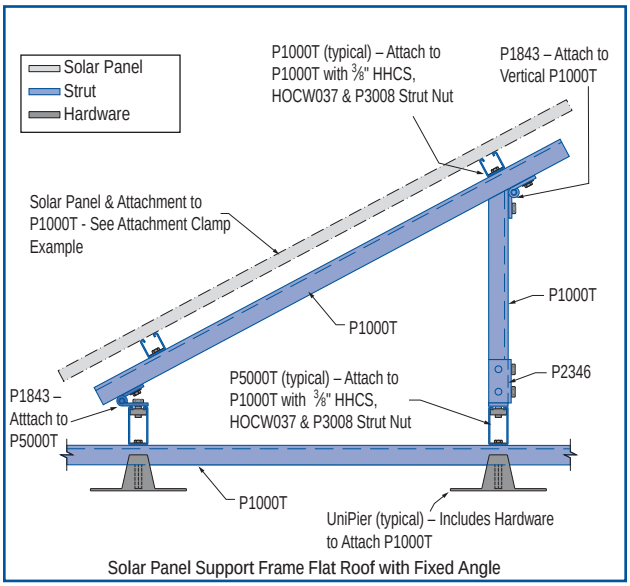

Solar Panel Support Frame Flat Roof with Fixed Angle

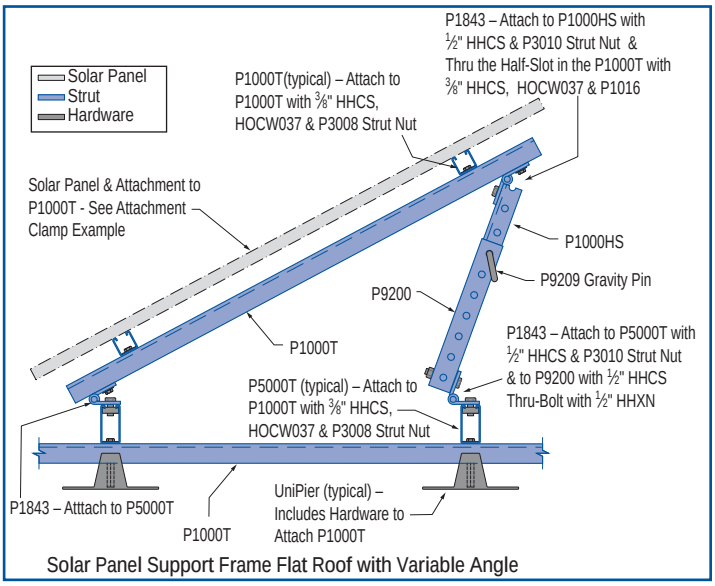

Solar Panel Support Frame Flat Roof with Variable Angle

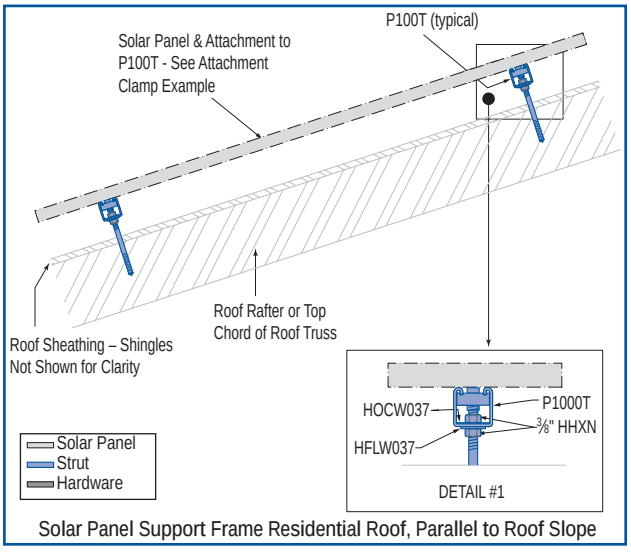

Solar Panel Support Frame Residential Roof, Parallel to Roof Slope

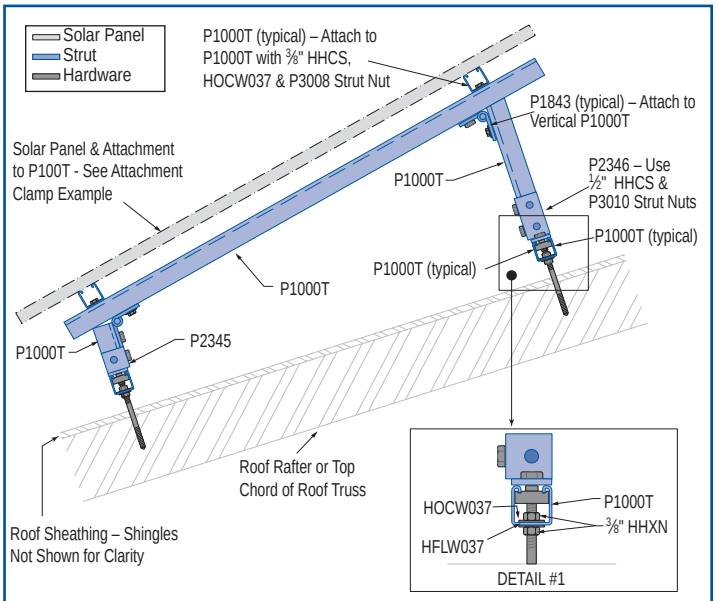

Solar Panel Support Frame Residential Shingle, Angled From Roof Slope

Atkore Unistrut

SLR200 – Solar End Clamp



- 5/16" x 2 3/4" hex head cap screw; stainless steel nut; lock washer included
- End-clamp design for use with strut based racking system
- Patent-pending end-stop feature allows use with vertical strut
- Meets uplift loads of 350 lbs.

*Patent-pending

SLR100 – Solar Mid-Clamp

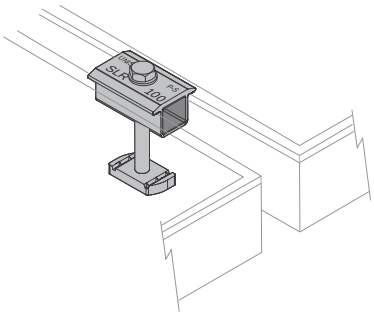

- 5/16" x 2 3/4" hex head cap screw; stainless steel nut; lock washer included
- Mid-clamp design for use with strut based racking system
- Provides .8"(21 mm) panel spacing
- Meets spacing requirements of WEEB-WMC
- Meets uplift loads of 350 lbs.

WEEB - WMC – Electrical Equipment Bonding Washer

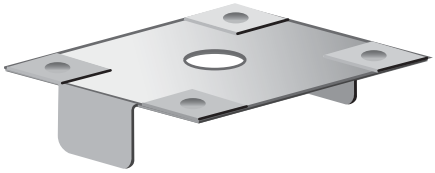

- Patented design features stainless steel teeth that pierce into anodized aluminum, providing a gas tight connection which prevents oxidation
- Meets ANSI/UL467 requirements for bonding/grounding systems
- Quick installation that is safe, reliable and consistent

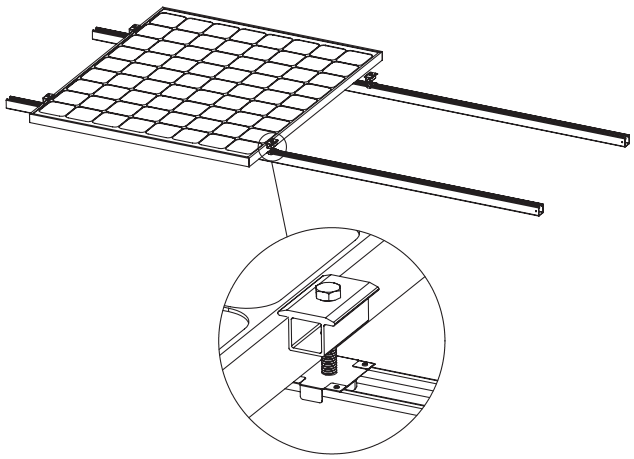

Key Advantages

- The market's only specific panel mounting components made exclusively for use with Unistrut.
- Simple design used by the industry for a variety of installation methods and applications.
- Stainless steel hardware included with all solar clamps.
- Available in Black or Silver Anodized (Material AA-6063-T6) for corrosion protection and sleek appearance.
- Best fit with Unistrut channel to create less penetration, and superior slip resistance.
- Available and supported by Unistrut's national network of distributors.







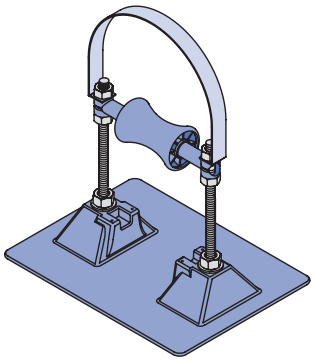



Sleeper Support ..... 153 - 154
Strut Support ..... 155 - 156

Conduit Supports

Mounted Support, Polycarbonate Base 157
Elevated Support, Polycarbonate Base 157
Elevated Support, Steel Base 158

Gas and Mechanical Supports

Mounted Support, Polycarbonate Base 158
Mounted Support, w/Roller Polycarbonate Base 158
Elevated Support, w/Roller, Polycarbonate Base 159
Elevated Support, w/Roller, Steel Base 160

Accessories

Spacer 160
Support Pads, Deck Plates 160
Pipe Hanger Bases, Polycarbonate and Steel 161

Fabricated Supports

Single Base Trapeze 162
Double Base Trapeze 163
Heavy Duty Double Base Trapeze 163
Double Base Duct Support 163
Mechanical Supports 164
Bridge Cross-Over, Walkway, Service Platform or Ramp 164

Installation 165

Pipe Diameters and Loading 166

Technical Data ..... 167 – 168

UNIpier®
ROOFTOP PIPE SUPPORT SYSTEM

Sleeper Support



Rooftop Sleeper Support
Pg 153 - 154

Strut Support



Model UP
Strut Support
Pg 155

Conduit Support



Mounted
Polycarbonate Base
Pg 157



Elevated Support
Polycarbonate Base
Pg 157



Elevated Support
Steel Base
Pg 158

Gas and Mechanical Support



Mounted
Polycarbonate Base
Pg 158



Mounted, w/Roller
Polycarbonate Base
Pg 158



Elevated Support, w/Roller
Polycarbonate Base
Pg 159



Elevated Support, w/Roller
Steel Base
Pg 160

Accessories



Spacer for Model 1.5, 3-R
Pg 160



Support Pads &
Deck Plates
Pg 160

Pipe Hanger Bases



Polycarbonate Bases
Pg 161



Steel Bases
Pg 161

Fabricated Supports



Single Base Trapeze
Pg 162



Double Base Trapeze
Pg 163



Heavy Duty, Double Base Trapeze
Pg 163



Double Base Duct Support
Pg 163



Heavy Duty Mechanical Support
Pg 164



Light Duty Mechanical Support
Pg 164

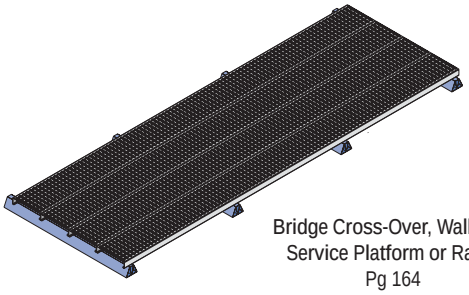

Bridge Cross-Over, Walkway,
Service Platform or Ramp
Pg 164

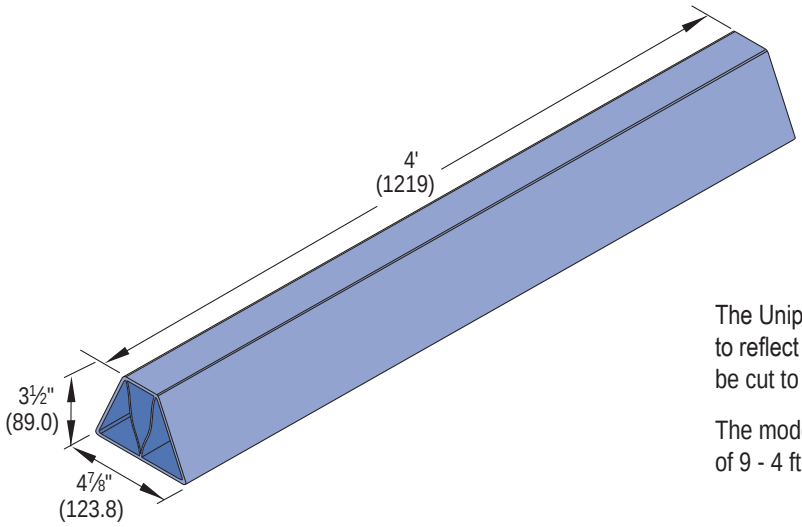

The Unipier rooftop sleeper is the first rooftop support that is white to reflect the sun's UV rays. It is cost-effective, lightweight and can be cut to the desired length while on the job site.

The model RSS4 is conveniently packaged in shrink wrap bundles of 9 - 4 ft. supports that can be easily carried to the rooftop.

The Unipier sleeper support is lightweight, just 4 lbs./4 ft. section, so it is easily transported to the job site in bundles of 9 supports.

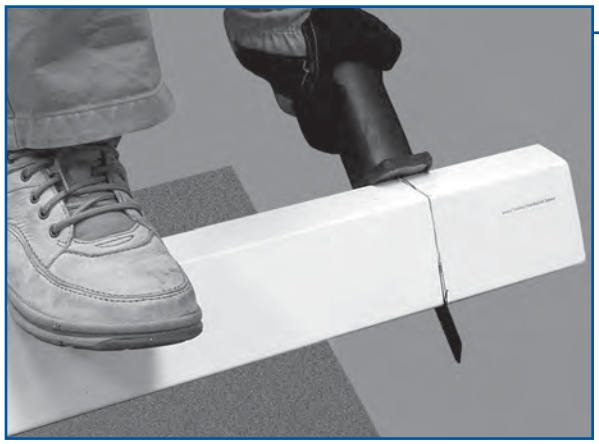

The Unipier sleeper support can be conveniently cut to lengths of 6" or longer right on the job site.

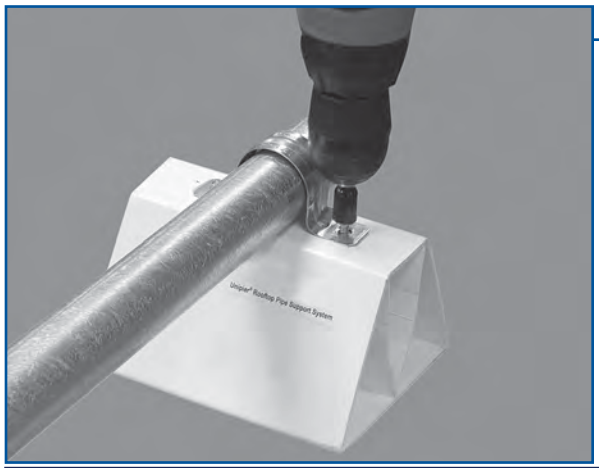

TEK screws or other self tapping fasteners are used to attach conduit supports, pipe clamps or other clamping fittings.

NOTE: Load not to exceed 50 lbs./6" length
Part Number: RSS4

The Sleeper Support is not restricted to just pipe clamps. It makes a perfect companion for the Roofwalk® Rooftop Walkways.

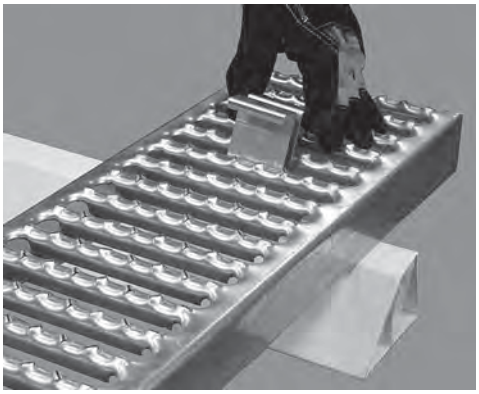

Position the grating on the Unipier sleeper support and insert the appropriate size hold down clip (G639, G607, or G620).

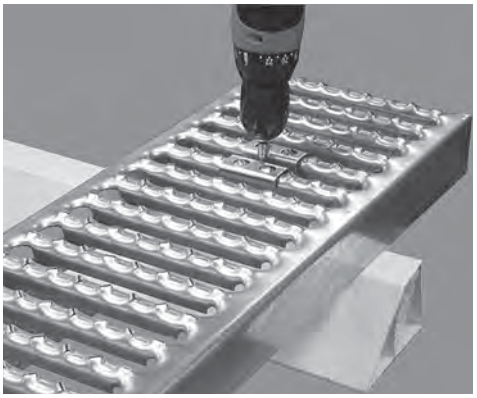

Use a TEK screw to attach the hold down clip.

That's all that is required!

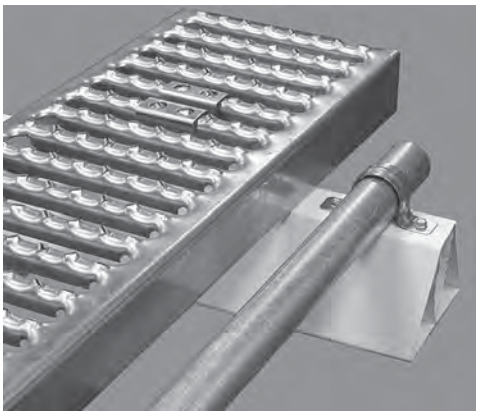

You can even use the Unipier support for multiple tasks. Here we have Unistrut Roofwalks® Rooftop Walkways and a piece of electrical conduit attached to the sleeper.

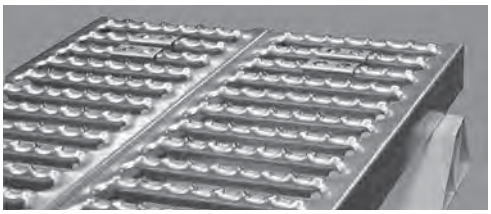

Grating can also be used to construct a platform for heavy equipment or even as a workstand.

UP-SPSS Style Support

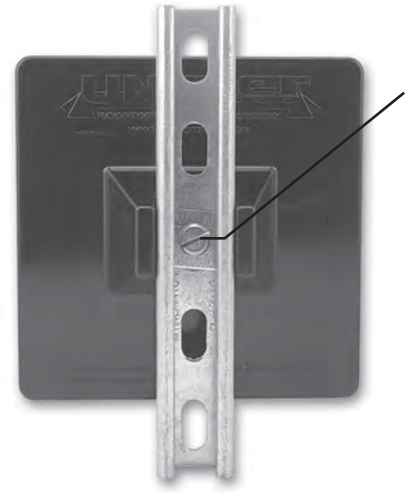

- Align Center hole of P4100T on base.
- Place square washer inside P4100T.
- Insert screw & torque to 19 ft./lbs.

Part Number	Qty. Unipier Bases	Supporting Channel	
		Qty.	Description
UP-BK	4	0	Base Only
UP-SPSS-6 HG	4	4	6" - P4100T HG (up to 3½" Pipe)
UP-SPSS-10HG	4	4	10" - P4100T HG (4" to 8" Pipe)

NOTE:
1. The maximum uniform load on P1000T is 400 lbs.
2. Uniform load is limited by roof base allowed load of 200 lbs. (5 psi on roof).

Single Pier Installation

1. Align center hole of Unistrut P4100T on base and attach using supplied hardware. Torque screw to 19 ft./lbs.
2. Place pipe/tubing on P4100T and attach pipe/tubing clamp.

UP-MPDS Style Support

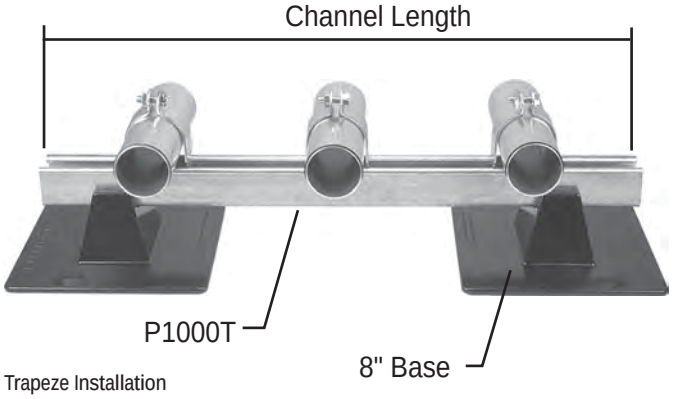

Trapeze Installation

1. Align end holes of Unistrut P1000T on bases and attach using supplied hardware. Torque screw to 19 ft./lbs.
2. Place pipe/tubing on support and attach with appropriate pipe/tubing clamp.

Part Number	Qty. Unipier Bases	Supporting Channel	
		Qty.	Description
UP-MPDS-26HG	4	2	26" - P1000T HG for Trapeze
UP-MPDS-38HG	4	2	38" - P1000T HG for Trapeze
UP-MPDS-50HG	4	2	50" - P1000T HG for Trapeze
UP-MPDS-62HG	4	2	62" - P1000T HG for Trapeze

NOTE:
1. The maximum uniform load on P1000T is 400 lbs.
2. Uniform load is limited by roof base allowed load of 200 lbs. (5 psi on roof).

NOTE: Kits do not include pipe/tubing or clamps.

Support Spacing

Support Spacing				
Pipe Size (Nom.)	Sch. 40 Pipe Water-Filled[a]		Conduit GRC[b]	
	Single Pier	Trapeze[d]	Single Pier	Trapeze[d]
⅜"	7'	7'	N/A	N/A
½"	7'	7'	10'	10'
¾"	7'	7'	10'	10'
1"	7'	7'	12'	12'
1¼"	7'	7'	14'	14'
1½"	9'	9'	14'	14'
2"	10'	10'	16'	16'

Support Spacing				
Pipe Size (Nom.)	Sch. 40 Pipe Water-Filled[a]		Conduit GRC[b]	
	Single Pier	Trapeze[d]	Single Pier	Trapeze[d]
2½"	11'	11'	16'	16'
3"	12'	12'	13'[c]	20'
3½"	13'	13'	11'[c]	20'
4"	12'[c]	14'	9'[c]	20'
5"	8'[c]	16'	6'[c]	20'
6"	6'[c]	17'	4'[c]	20'
8"	4'[c]	19'	N/A	N/A

Note:
(a) Based on ANSI/MSS SP-69, 2003 Edition, Table 3.
(b) Based on 2002 NEC, Table 344.30(B)(2).
(c) Spacing limited to roof base allowed load of 200 lbs. (5 psi on roof).
(d) Spacing may be limited by maximum allowed weight on trapeze to 400 lbs.

Application Examples

Unipier Rooftop Support System provides a simple and versatile way to support and manage pipe, tubing, conduit, HVAC systems, and the like. The Unipier Rooftop Support System does not require roof surface penetration and allows the parts to remain off the surface.

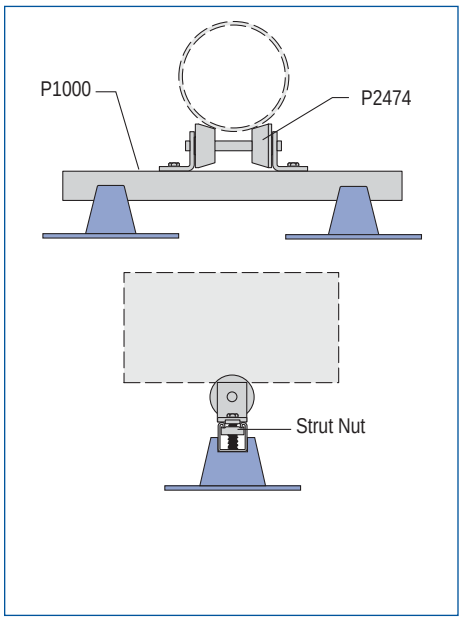

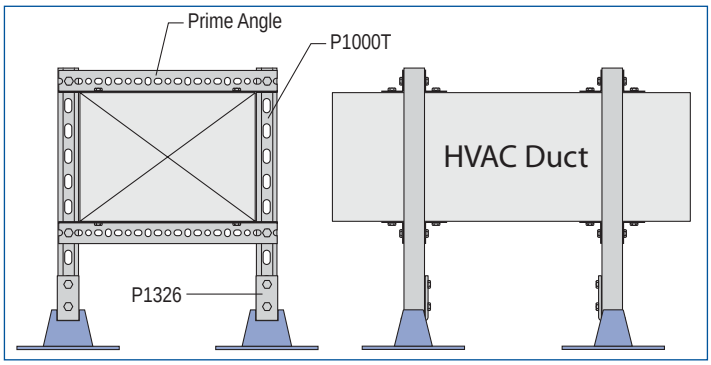

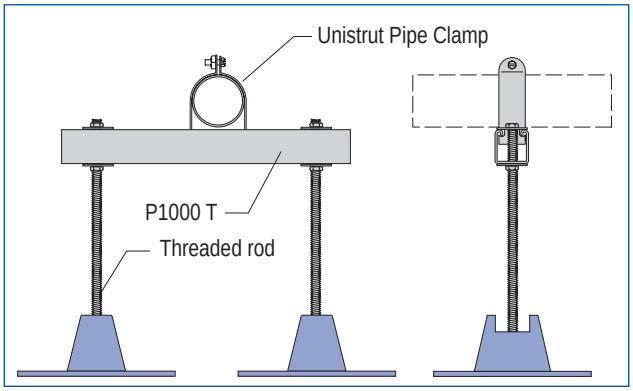

Mounted Support, Polycarbonate Base

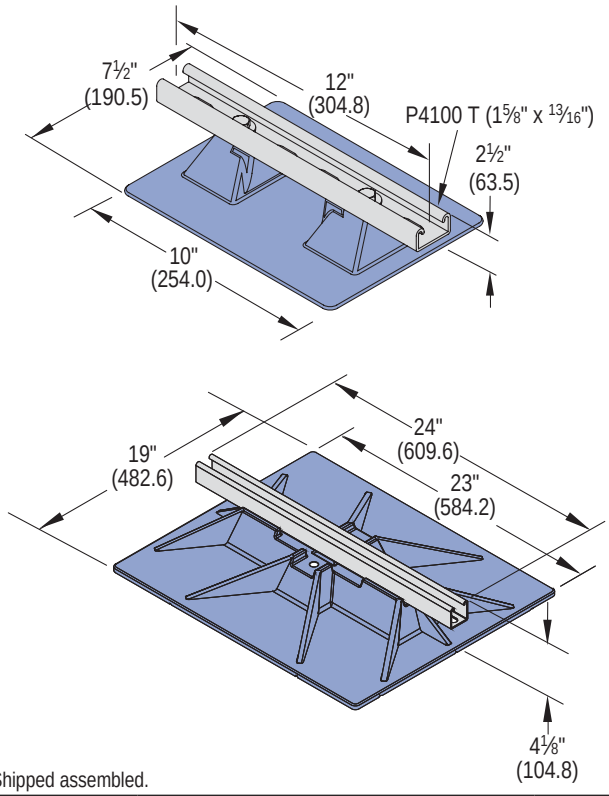

Shipped assembled.

Part Number	Material	Max. Uniform Load	Wt./Each
2.5-CS-2	Polycarbonate	100 lbs.	2.3 lbs.
24-BS-4	Polycarbonate	640 lbs.	8.0 lbs.

Determining Maximum Pipe Size

Maximum pipe size supported by any of the strut supports is determined by the load and the clear space required between the pipes. The spacing between pipes should be as follows:

- 1" between piping 3" and smaller.
- 1-½" between a pipe 3" and smaller and a pipe 4" or larger.
- 2" between piping 4" and larger.
- At least 1" between pipe clamp and end of strut

For example, a support for two 3" pipes would require:
1" + 3" + 1-½" + 3" + 1" = 9-½" wide channel support

Elevated Support, Polycarbonate Base

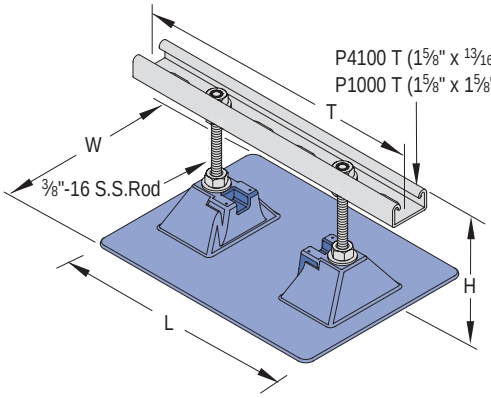

Note: Base for 2.5-CS-5, 2.5-CS-7 shown. Other bases have additional support or flanges to handle the increased loads.

All bases are polycarbonate material

Shipped assembled.

Part Number	"H" (max) in. (mm)	"W" in. (mm)	"L" in. (mm)	"T" in. (mm)	Max. Uniform Load	Wt./Each (lbs.)
2.5-CS-5	5" *(127.0)*	7 ½" *(190.5)*	10" *(254.0)*	12" *(304.8)*	100 lbs.	2.1
2.5-CS-7	7 ½" *(190.5)*	7 ½" *(190.5)*	10" *(254.0)*	12" *(304.8)*	100 lbs.	2.5
2.5-CS-12	12" *(304.8)*	9" *(228.6)*	15 ¼" *(387.4)*	12" *(304.8)*	100 lbs.	4.0
16-BS-7	7" *(177.8)*	9" *(228.6)*	15 ¼" *(387.4)*	16" *(406.4)*	125 lbs.	5.0
16-BS-12	12" *(304.8)*	9" *(228.6)*	15 ¼" *(387.4)*	16" *(406.4)*	125 lbs.	8.0
20-BS-7	7" *(177.8)*	16" *(406.4)*	18" *(457.2)*	20" *(508.0)*	440 lbs.	10.8
20-BS-12	12" *(304.8)*	16" *(406.4)*	18" *(457.2)*	20" *(508.0)*	440 lbs.	15.1
24-BS-18	12" *(304.8)*	23" *(584.2)*	19" *(482.6)*	24" *(609.6)*	640 lbs.	8.0

Elevated Support, Steel Base

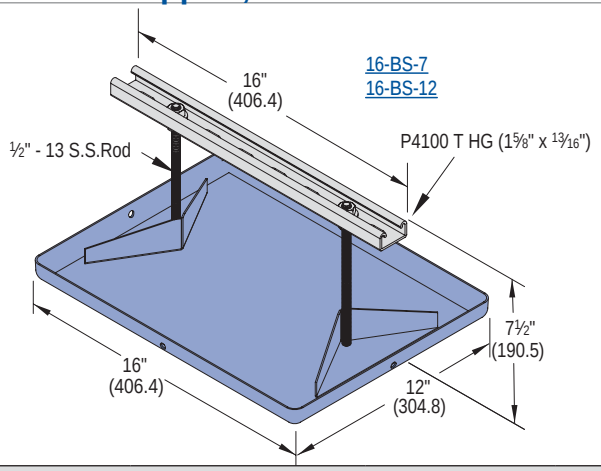

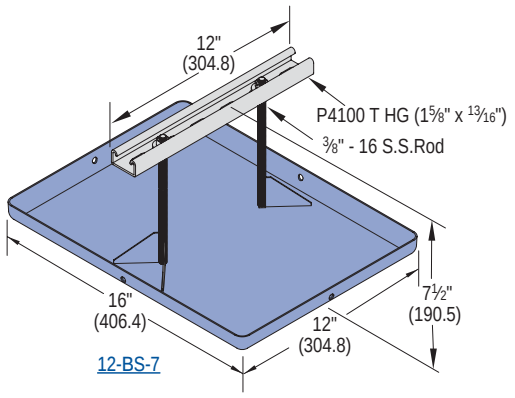

Shipped assembled.

Part Number	Base Material	Max. Uniform Load	Wt./Each
16-BS-7 HG	Hot-Dipped Galvanized	150 lbs.	7.5 lbs.
16-BS-7 SS	Stainless Steel	150 lbs.	7.5 lbs.

Part Number	Base Material	Max. Uniform Load	Wt./Each
12-BS-7 HG	Hot-Dipped Galvanized	150 lbs.	7.5 lbs.
12-BS-7 SS	Stainless Steel	150 lbs.	7.5 lbs.

Unipier® Rooftop Pipe Support System - Gas & Mechanical Support

Mounted, Polycarbonate Base

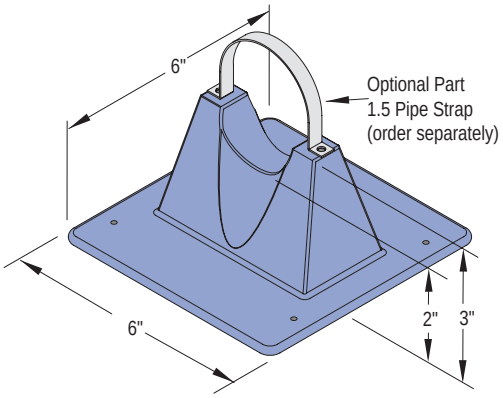

Part Number	Max. Pipe Capacity	Max. Uniform Load	Wt./Ea.	Optional Pipe Strap
1.5 Pipe Support	1½" ID , 1.9" OD	80 lbs.	0.35 lbs.	1.5 Pipe Strap

Note: Base is polycarbonate

Optional pipe strap aluminum w/SS Screws

Shipped assembled.

Mounted, with Roller, Polycarbonate Base

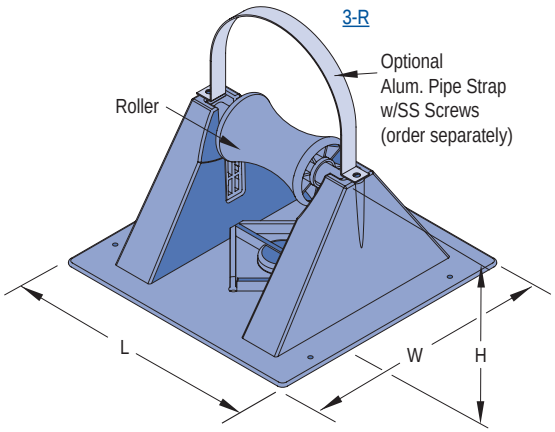

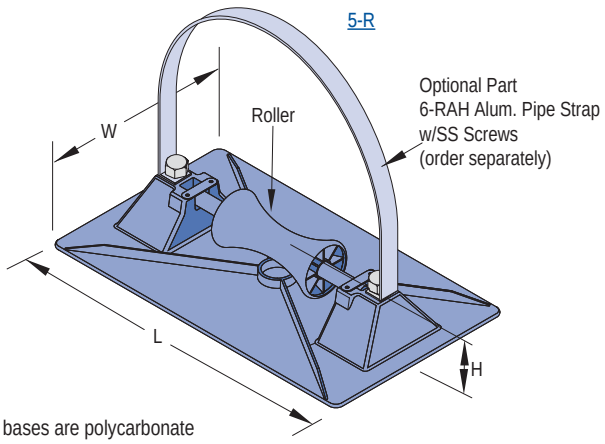

Note: All bases are polycarbonate

Part Number	"H" in. (mm)	"W" in. (mm)	"L" in. (mm)	Roller size	Max. Pipe Capacity	Max. Uniform Load	Wt./Ea. Lbs.	Optional Pipe Strap
3-R-2	2.15" *(54.6)*	7 ¾" *(196.9)*	7 ¾" *(196.9)*	3" *(76.2)*	3" ID 3 ¾" OD	100 lbs.	1.1 lbs.	3-R-2 Pipe Strap
3-R-4	4" *(101.6)*	7 ¾" *(196.9)*	7 ¾" *(196.9)*	3" *(76.2)*	3" ID 3 ¾" OD	100 lbs.	1.2 lbs.	3-R-4 Pipe Strap
5-R	2.35" *(59.7)*	9" *(228.6)*	15 ¼" *(387.4)*	5" *(127.0)*	5" ID 6" OD	150 lbs.	2.4 lbs.	6-RAH Pipe Strap

Elevated Support, with Roller, Polycarbonate Base

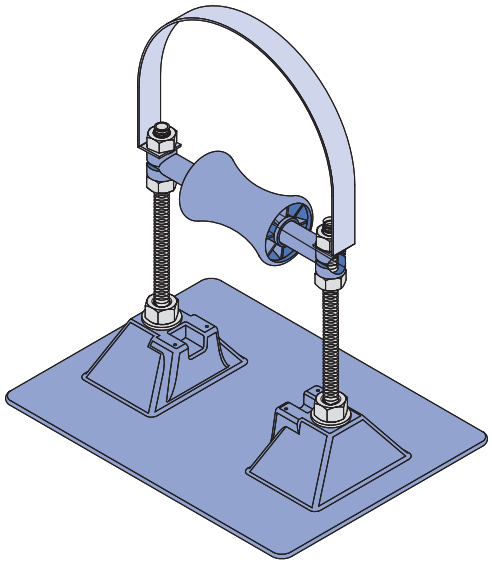

5-RAH

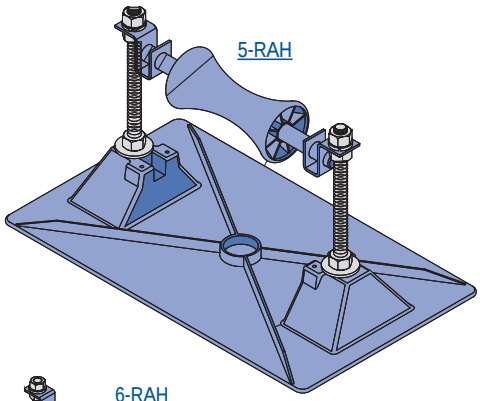

6-RAH

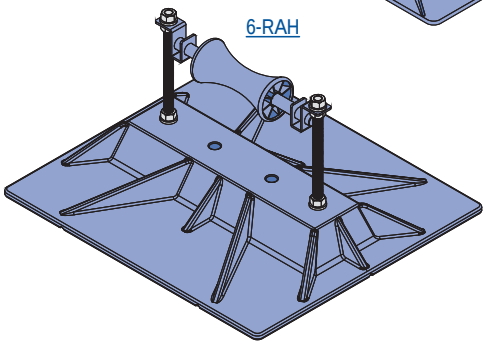

8-RAH

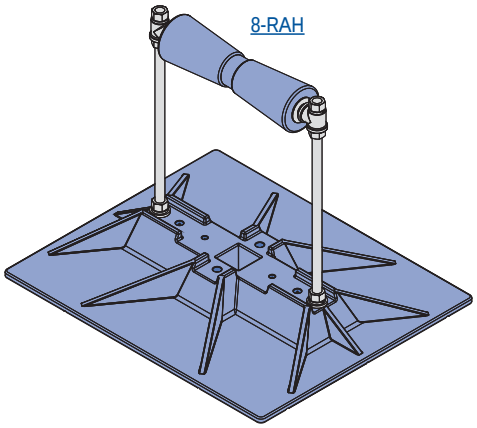

Note: Base for 3-RAH-7 shown. Other bases have additional support or flanges to handle the increased loads.

All bases are polycarbonate material

Optional pipe strap aluminum w/SS Screws

Shipped assembled.

Part Number	"H " (max) in. (mm)	"W" in. (mm)	"L" in. (mm)	Roller Size in. (mm)	Max. Pipe Capacity	Max. Uniform Load	Wt./Ea. Lbs.	Optional Pipe Strap
3-RAH-7	7" *(177.8)*	7 ½" *(190.5)*	10" *(254.0)*	3" *(76.2)*	3" ID 3¾" OD	100 lbs.	1.9	3-RAH Pipe Strap
3-RAH-12	12" *(304.8)*	9" *(228.6)*	15 ¼" *(387.4)*	3" *(76.2)*	3" ID 3¾" OD	100 lbs.	5.8	3-RAH Pipe Strap
5-RAH-7	7" *(177.8)*	9" *(228.6)*	15 ¼" *(387.4)*	5" *(127.0)*	5" ID 6" OD	150 lbs.	4.8	6-RAH Pipe Strap
5-RAH-12	12" *(304.8)*	9" *(228.6)*	15 ¼" *(387.4)*	5" *(127.0)*	5" ID 6" OD	150 lbs.	4.8	6-RAH Pipe Strap
6-RAH-7	7 ½" *(190.5)*	16" *(406.4)*	18" *(457.2)*	5" *(127.0)*	6" ID 8 ½" OD	250 lbs.	8.8	6-RAH Pipe Strap
6-RAH-12	12" *(304.8)*	16" *(406.4)*	18" *(457.2)*	5" *(127.0)*	6" ID, 8 ½" OD	250 lbs.	9.8	6-RAH Pipe Strap
8-RAH-18	18" *(457.2)*	19" *(482.6)*	23" *(584.2)*	12" *(304.8)*	6" ID, 8 ½" OD	640 lbs.	20.0	8-RAH Pipe Strap

Elevated Support, with Roller, Steel Base

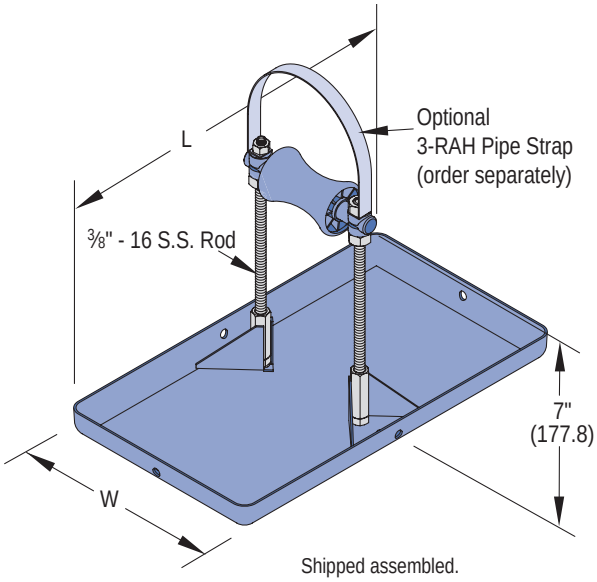

Shipped assembled.

Part Number	"W" in. (mm)	"L" in. (mm)	Roller in. (mm)	Material	Max. Pipe Capacity	Max. Uniform Load	Wt. Each Lbs
3-RAH-7 HG	8" *(203.2)*	14" *(355.6)*	3" *(76.2)*	Hot-Dipped Galvanized	3" ID 3¾" OD	100 lbs.	3.3
3-RAH-7 SS	8" *(203.2)*	14" *(355.6)*	3" *(76.2)*	Stainless Steel	3" ID 3¾" OD	100 lbs.	3.3
4-RAH-7 HG	12.07" *(306.6)*	16.07" *(408.2)*	5" *(127.0)*	Hot-Dipped Galvanized	4" ID 5" OD	150 lbs.	6.8
4-RAH-7 SS	12.07" *(306.6)*	16.07" *(408.2)*	5" *(127.0)*	Stainless Steel	4" ID 5" OD	150 lbs.	5.8

Note: Optional 3-RAH Pipe Strap aluminum w/SS Screws

Unipier® Rooftop Pipe Support System - Accessories

Spacer for Model 1.5 and Model 3-R



Example: Spacer with Model 1.5

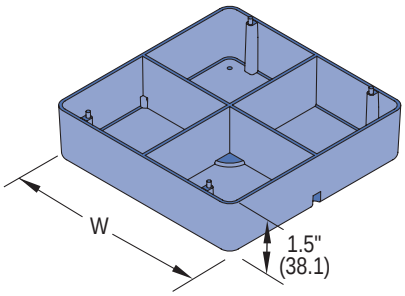

Part Number	Use With	"W"	Added Pipe Clearance	Wt./Ea.
1.5 Spacer	1.5	6"	1 ½"	0.43 lbs
3-R Spacer	3-R-2 or 3-R-4	7-½"	2"	0.75 lbs

Material: Polycarbonate

Support Pad, Polycarbonate

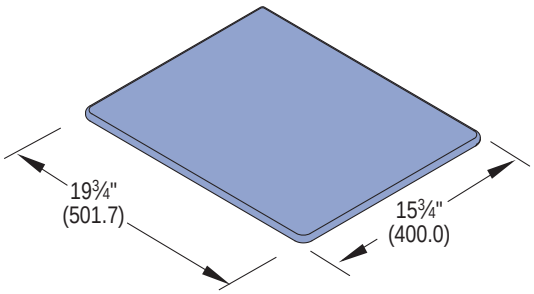

The Unipier support pad is designed to provide a barrier between the roof membrane and rooftop equipment. The support pad is 1/8" thick and are compatible with all current types of decking and commonly used built-up and single-ply roof membranes.

Support pads should be installed in the following areas:

- Under all Unipier pipe supports. The pipe support must be placed evenly over the support pad.
- In high traffic points or where regular maintenance is necessary to service rooftop equipment.

When installing the support pad, remove all rock, aggregate, dirt and excess dust from an area of the roof membrane slightly larger than the support pad. Then, apply the support pad on the cleaned area and center the Unipier pipe support on the rooftop pad.

The maximum roof top load should not exceed 5 p.s.i. The rooftop pad can withstand higher loading, but the roof membrane and insulation are typically limited to 5 p.s.i.

Deck Plate, Stainless Steel

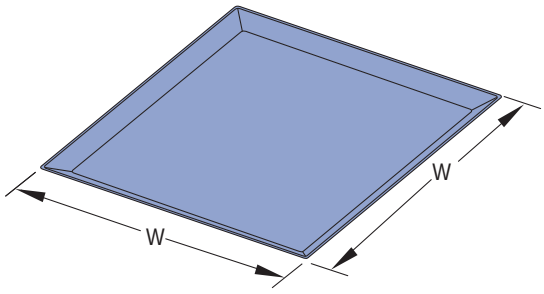

Part Number	Material	Width "W"	Wt./Each
Deck Plates 12 SS	Stainless Steel	12"	2.0 lbs.
Deck Plates 18 SS	Stainless Steel	18"	4.5 lbs.

Polycarbonate Base

Model 6-H Base P

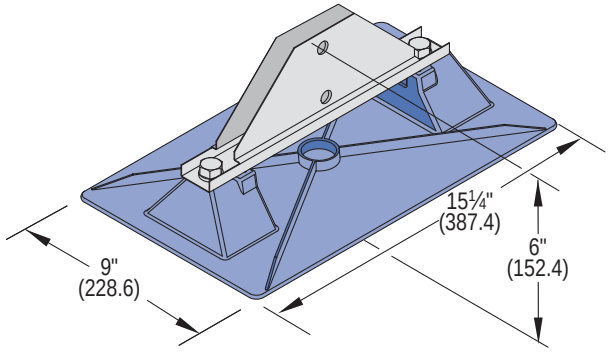

Note: Maximum 150 lbs. Load
Wt./Ea.: 2.5 lbs.

Model 8-H-DB Base P

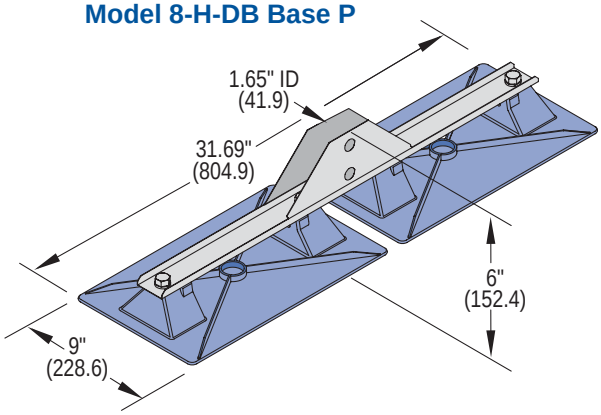

Note: Maximum 350 lbs. Load
Wt./Ea.: 4.5 lbs.

Model 16-H Base P

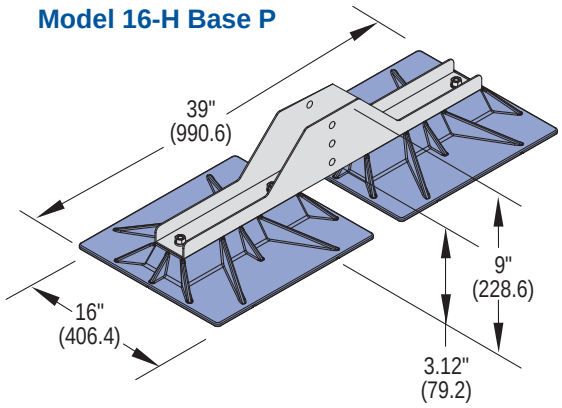

Note: Maximum 350 lbs. Load
Wt./Ea.:18.5 lbs.

Stainless Steel / Hot Dip Galvanized Steel Base

Model 6-H, 8-H, 16-H Base HG or S.S.

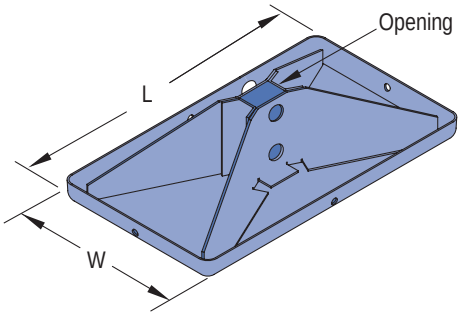

Part Number	"W"	"L"	"Opening"
6-H Base HG	8" *(203.2mm)*	14" *(355.6mm)*	1-5/8" x 7/8" *(41.3 x 22.2)*
6-H Base SS	8" *(203.2mm)*	14" *(355.6mm)*	1-5/8" x 7/8" *(41.3 x 22.2)*
8-H Base HG	16" *(406.4mm)*	12" *(304.8mm)*	1-5/8" x 1-5/8" *(41.3 x 41.3)*
8-H Base SS	16" *(406.4mm)*	12" *(304.8mm)*	1-5/8" x 1-5/8" *(41.3 x 41.3)*
16-H Base HG	20" *(508.0mm)*	20" *(508.0mm)*	3" x 3" *(76.2 x 76.2)*
16-H Base SS	20" *(508.0mm)*	20" *(508.0mm)*	3" x 3" *(76.2 x 76.2)*

Single Base Trapeze

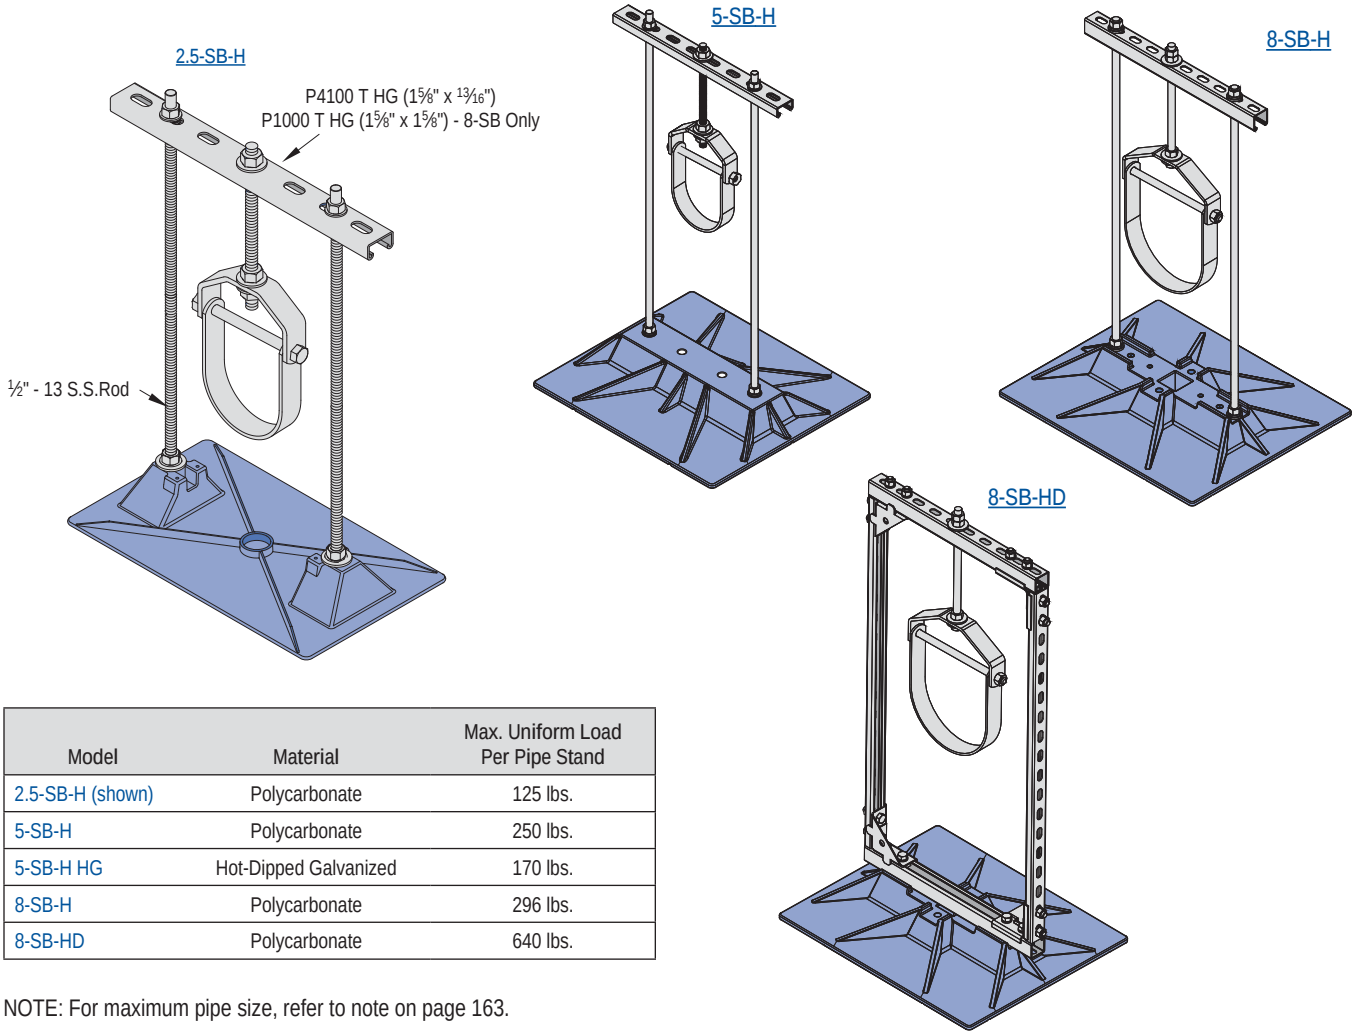

Model	Material	Max. Uniform Load Per Pipe Stand
2.5-SB-H (shown)	Polycarbonate	125 lbs.
5-SB-H	Polycarbonate	250 lbs.
5-SB-H HG	Hot-Dipped Galvanized	170 lbs.
8-SB-H	Polycarbonate	296 lbs.
8-SB-HD	Polycarbonate	640 lbs.

NOTE: For maximum pipe size, refer to note on page 163.

Atkore Unistrut

Double Base Trapeze

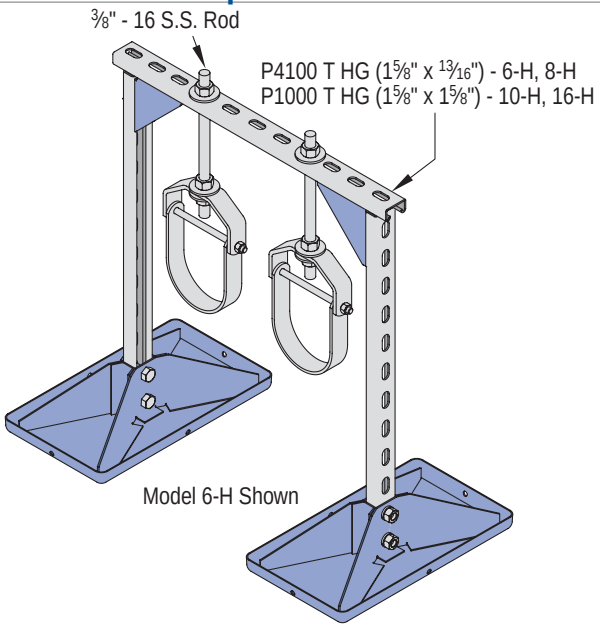

Model	Material	Max. Uniform Load Per Pipe Stand	Max. Pipe Capacity
6-H-P	Polycarbonate	300 lbs.	7 ½"
8-H-P	Polycarbonate	700 lbs.	9"
6-H-HG	Hot-Dipped Galvanized	300 lbs.	7 ½"
6-H-SS	Stainless Steel	300 lbs.	7 ½"
8-H-HG	Hot-Dipped Galvanized	700 lbs.	9"
8-H-SS	Stainless Steel	700 lbs.	9"
10-H-P	Polycarbonate	1,600 lbs.	9"
16-H-HG	Hot-Dipped Galvanized	1,600 lbs.	18"
16-H-SS	Stainless Steel	1,600 lbs.	18"

Heavy Duty Double Base Trapeze

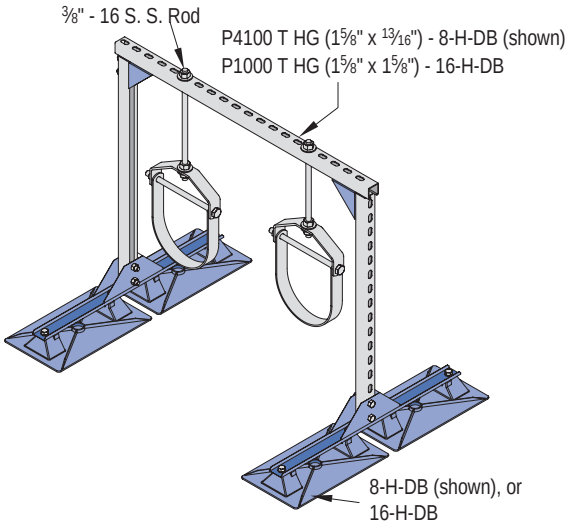

Model	Max. Uniform Load Per Pipe Stand	Max. Pipe Capacity
8-H-DB	700 lbs.	9"
16-H-DB	1,600 lbs.	18"

Base Material: Polycarbonate

Double Base Duct Support

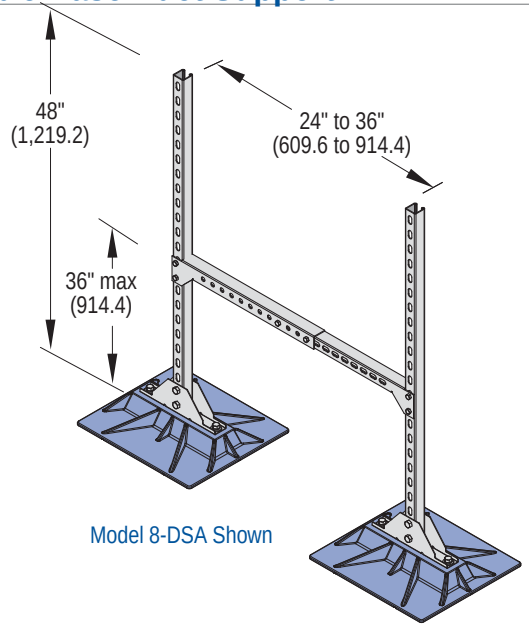

Model	Material	Max. Uniform Load Per Duct
6-DSA	Polycarbonate	150 lbs.
8-DSA	Polycarbonate	300 lbs.

Double Base Duct Support

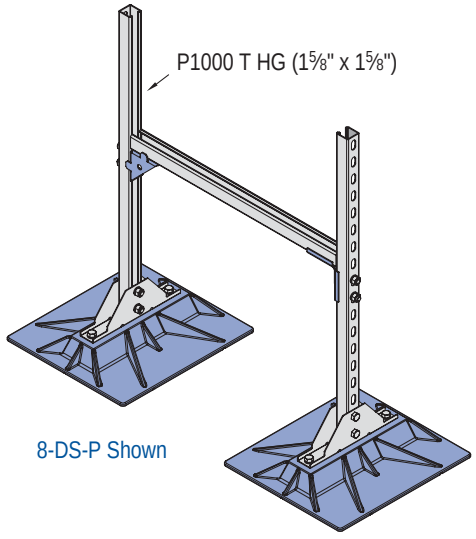

Model	Material	Max. Uniform Load Per Duct
6-DS-P	Polycarbonate	150 lbs.
6-DS-HG	Hot-Dipped Galvanized	300 lbs.
6-DS-SS	Stainless Steel	300 lbs.
8-DS-P	Polycarbonate	300 lbs.
8-DS-HG	Hot-Dipped Galvanized	300 lbs.
8-DS-SS	StainlessSteel	300 lbs.
8-DS-DB-P	Polycarbonate	300 lbs.
10-DS-P	Polycarbonate	300 lbs.

Heavy Duty Mechanical Support

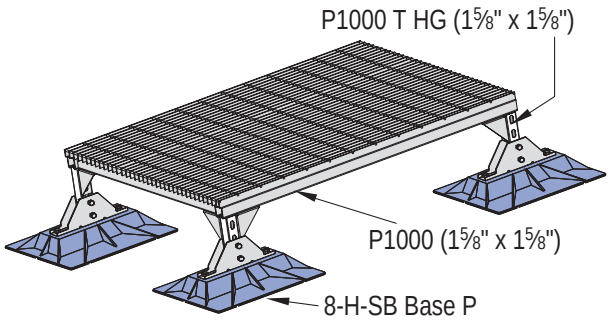

Light Duty Mechanical Support

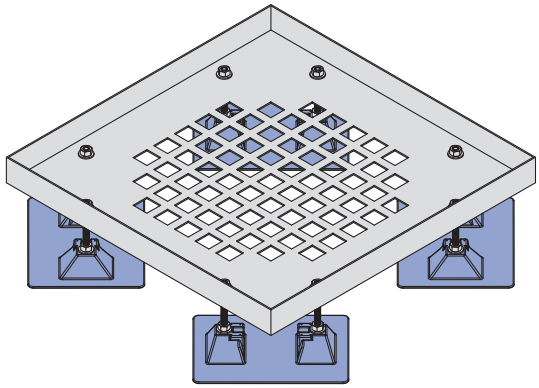

Note: Adjustable height, maximum load 200 lbs.
Available Sizes: 18" x 18", 24" x 24", 30" x 30", 36" x 36"
Note: Custom sizes available, Contact Unistrut for information.

Bridge Cross-Over, Walkway, Service Platform or Ramp

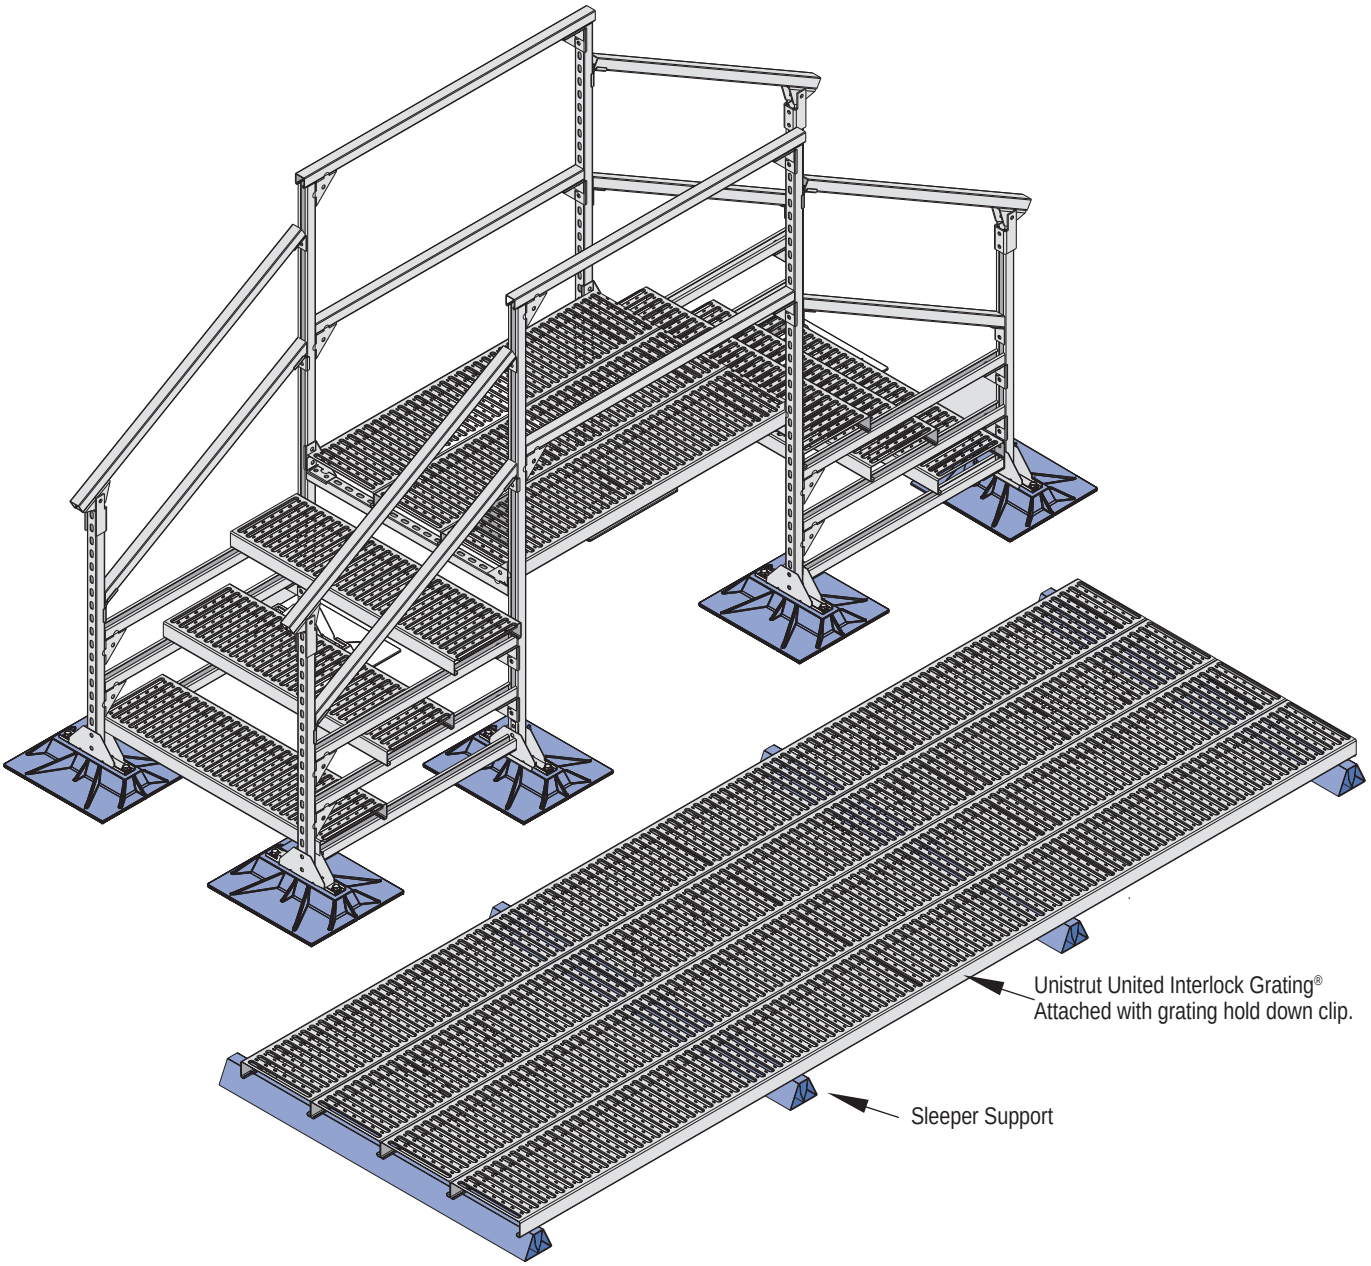

Product Description:

A pipe support used to support roof mounted gas pipes, electrical conduit, solar piping and other mechanical piping. Unique design absorbs thermal expansion and contraction of pipes thus preventing damage to the roof membrane. Pipes rests include:

- "U" shaped cradle situated in a polycarbonate resin seat.
- Self-lubricating roller polycarbonate resin rod and roller. As daytime temperatures warm the roof membrane and the mechanical pipe network found on the roof, causing them to expand, the roller bearing in the pipe stand rolls beneath the pipe it supports. A difference between night and day temperatures of 20° F. causes 100 ft. of 1" steel pipe to move as much as 1/4".
- A strut system constructed of hot-dipped galvanized steel components including clevis hangers or band hangers.
- For the duct supports, the ducts rest on a 1 5/8" x 1 5/8" or 1 5/8" x 7/8" Unistrut channel and are adjustable in height.

Composition and Material:

Support base is made of polycarbonate resin or hot-dipped galvanized or stainless steel as indicated for the specific base. The base is gently rounded to prevent gouging the roof membrane. Carbon black is added to the polycarbonate resin for UV resistance and protection.

Pipe Roller is made of polycarbonate, or steel as indicated for the specific part.

Other Metal Parts are made of hot-dipped galvanized or stainless steel.

Duct Supports are made of hot-dipped galvanized Unistrut channel

All-Thread Rod are 1/2" or 3/8" stainless steel and are used for vertical supports.

Compatibility:

Pillow Block Pipe Stands are recommended for use on and compatible with all current types of decking and with all commonly used built-up and single-ply roofing membranes where roof-mounted pipes occur. For heavier loads it is prudent to use a Unipier Support Pad or other traffic pad to further protect the roof membrane.

Adjustable Height:

Several models allow adjustable height as desired or required by the code or roof system. Each model can be configured to allow plus or minus height above the roof. Purchasers should specify desired heights upon ordering the pillow block hangers.

Installation Process:

1. Center the support beneath the pipes or ducts so that the pipe or ducts are squarely over the pipe stand.
2. For adjustable models, adjust the support to the desired height and to ensure a uniform load with other supports. Make certain the horizontal support strut is level.
3. Place the pipe or duct on the support without dropping or causing undue impact.

For heavier loads it is prudent to install an additional sheet of roofing material, a Unipier Deck Plate, or Unipier Support Pad beneath the duct support.

For built-up roofs, all loose aggregate from an area 2" larger than each base should be removed from the area directly beneath the support. Care should be taken to install each support so it supports a proportional and equal amount of weight at each support.

Optional Straps:
For many of the models, the pipe may be secured to the pipe stand by using optional Unipier Pipe Straps.

Note:
When using a pipe strap, allow sufficient room between the pipe and the strap to allow free movement of the pipe without binding.

Loads and Spacing:
Unistrut recommends that spacing not exceed 10' between centers depending upon the load. Make certain each pipe stand is properly elevated to ensure a uniform load weight at all pipe stands and not exceed the load specified for the particular model support. All loads given in this catalog are for uniformly distributed loads.

Maintenance:
Normally maintenance is not required. Semi-annual inspection is required to check pipe stand position and set pipe alignment, weight distribution and improper installation which may cause pipe stand damage or failure.

Typical Steel Pipe Weights – Pipe Standing Load

For Schedule 40 Steel Pipe. (ASTM A53-86)

Pipe Size	Pounds per Foot of Pipe Empty	Pounds per Foot Containing Gas / Pounds per Foot Containing Water	PSI per Foot on Model 6-RAH-7 BASE	5 Feet Spacing	7.5 Feet Spacing	10 Feet Spacing
3"	7.575	7.578	.02	37.89 lbs. .13 psi	56.84 lbs. .20 psi	75.78 lbs. .26 psi
		13.4	.04	67.00 lbs. .23 psi	100.50 lbs. .35 psi	134.00 lbs. .47 psi
4"	10.790	10.794	.03	53.97 lbs. .19 psi	80.96 lbs. .28 psi	107.94 lbs. .37 psi
		16.3	.05	81.50 lbs. .28 psi	122.25 lbs. .42 psi	163.00 lbs. .57 psi
5"	14.620	14.627	.04	73.14 lbs. .25 psi	109.7 lbs. .38 psi	146.27 lbs. .51 psi
		23.2	.07	116.00 lbs. .40 psi	174.00 lbs. .60 psi	232.00 lbs. .80 psi
6"	18.970	18.98	.05	94.49 lbs. .33 psi	142.35 lbs. .49 psi	189.80 lbs. .66 psi
		31.5	.09	157.50 lbs. .55 psi	236.25 lbs. .82 psi	315.00 lbs. 1.09 psi
8"	28.55	28.567	.08	142.84 lbs. .50 psi	214.25 lbs. .74 psi	285.67 lbs. .99 psi
		50.1	.14	250.00 lbs. .87 psi	375.75 lbs. 1.30 psi	501.00 lbs. 1.74 psi
10"	40.48	40.507	.12	202.54 lbs. .70 psi	303.80 lbs. 1.05 psi	405.07 lbs. 1.41 psi
		74.6	.21	373.00 lbs. 1.30 psi	559.50 lbs. 1.94 psi	746.00 lbs. 2.60 psi

PSI is in pounds per square inch on models 6-RAH-7 BASE, which contain 2 bases for a total of 288 square inches of roof contact area support.

Typical Pipe Diameters

PIPE	PVC (Steel Size)	PVC (C900)	Cast Iron	Steel	Conduit
Inside Diameter	Outside Diameter	Outside Diameter	Outside Diameter	Outside Diameter	Outside Diameter
½"	.84"	–	–	.84"	.840"
¾"	1.05"	–	–	1.05"	1.050"
1"	1.32"	–	–	1.32"	1.315"
1 ¼"	1.66"	–	–	1.66"	1.660"
1 ½"	1.90"	–	–	1.90"	1.90"
2"	2.38"	2.50"	2.50"	2.38"	2.375"
2 ½"	2.88"	–	–	2.88"	2.875"
3"	3.50"	–	3.96"	3.50"	3.500"
3 ½"	–	–	–	–	4.000"
4"	4.50"	4.80"	5.00"	4.50"	4.500"
5"	–	–	–	5.56"	5.563"
6"	6.63"	6.90"	7.22"	6.63"	6.625"
8"	8.63"	9.05"	9.42"	8.63"	–
10"	10.75"	11.10"	11.60"	10.75"	–

Unipier Specifications for Typical Bases

Base Model	Outside Dimension at Roof Contact (in.)	Roof Contact Area (in.^{2})	Allowable Loading in Pounds	PSI on Roof for Each Base Under Maximum Load	Composition of Material of Base
1.5	6 X 6	24.42	80	3.27	P
1.5 SPACER	6 X 6	33.06	80	2.41	P
2.5-CS-2, 2.5-CS-5, 2.5-CS-7	7.5 X 10	57.50	100	1.73	P
2.5-CS-12	9 X 15.25	111.75	100	0.89	P
2.5-SB-H P	9 X 15.25	111.75	125	1.11	P
3-R-2; 3-R-4	7.75 X 7.75	39.64	100	2.52	P
3-R SPACER	7.25 X 7.25	52.56	100	1.90	P
3-RAH-7	7.5 X 10	57.50	100	1.73	P
3-RAH-12	9 X 15.25	111.75	100	1.11	P
3-RAH-7 HG / SS	8 X 14	96.06	100	1.04	HG / SS
4-RAH-7 HG / SS	12 X 16	174.89	150	0.85	HG / SS
5-R; 5-RAH-7; 5-RAH-12	9 X 15.25	111.75	150	1.34	P
5-SB-H HG	12 X 16	174.89	170	0.97	HG / SS
5-SB-H P	16 X 18	220.32	250	1.13	P
6-RAH-7; 6-RAH-12	16 X 18	220.32	250	1.13	P
6-RAH-7 HG/SS; 6-RAH-RS HG/SS	12 X 16	174.89	150	0.85	HG / SS
6-H-P (used in pairs)	9 X 15.25	223.50	310	1.38	P
6-H (2 Bases) HG / SS	8 X 14	192.12	310	1.61	HG / SS
8-H-DB-P (used in pairs)	9 X 31.69	447.00	700	1.56	P
8-H HG / SS (used in pairs)	12 X 16	349.78	700	2.00	HG / SS
8-RAH-18	19 x 23	325.98	640	1.96	P
8-SB-H	19 x 23	325.98	640	1.96	P
10-H-DS P	19 x 23	325.98	640	1.96	P
12-BS-7 HG / SS	12 X 16	174.89	150	0.85	HG / SS
16-BS-7; 16-BS-12	9 X 15.25	111.75	125	1.11	P
16-BS-7 HG / SS	12 X 16	174.89	150	0.85	HG / SS
16-H-P (used in pairs)	16 X 39	881.28	1600	1.81	P
16-H HG / SS (used in pairs)	20 X 20	800.00	1600	2.00	HG / SS
20-BS-7; 20-BS-12	16 X 18	220.32	250	1.13	P
24-BS-4; 24-BS-18	19 x 23	325.98	640	1.96	P

P – Polycarbonate Resin, SS – Stainless Steel - ASTM No. 304, HG – Hot-Dipped Galvanized

Note: Care should be taken to properly engineer the roof design so as to not overload the actual limits or manufacturer's recommended limits for each pipe support, the roof membrane, the roof top insulation, or the roof structure.

Note: Unipier has set the above load limits for each base to come within usual and customary roof structure, roof insulation, and roof membrane load limits. Unipier's manufacturing recommendations do not replace actual engineering required for each specific job.

Technical Properties For Polycarbonate Resin*

PROPERTY	ASTM TEST METHOD	VALUE
PHYSICAL		
Specific Gravity	D792	1.20
Specific Volume, in ^{3}/lb (cm^3/g)	–	23.1 (0.83)
Weight/Volume, lbs/in^3 (g/cm^3)	–	0.043 (1.20)
Water Absorption %	D570	–
24 hours @ 73°F (23°C)	–	0.15
Equilibrium, 73°F (23°C)	–	0.35
Equilibrium, 212°F (100°C)	–	0.58
Mold Shrinkage, in/in (mm/mm)	D955	0.005-0.007
Light Transmittance, % at 0.125"	D1003	89
Haze, % @ 0.125"	D1003	1
Refractive Index	–	1.586
THERMAL		
Deflection Temperature °F (°C)	D648	–
@ 66 psi (0.46 MPa)	–	–
@ 254 psi (1.82 MPa)	–	270 ( )
Specific Heat, Btu/lb/°F (kJ/kg/°K)	–	0.30 (1.25)
Thermal Conductivity	–	–
Btu-in/h-ft^2- °F (W/Km)	–	1.35 (.19)
Coefficient of Thermal Expansion	–	–
in/in/°F (m.m/°C)	D696	3.75 x 10^{-5} (6.75 s 10^{-5})
Vicat Softening Temperature, °F (°C)	D1525	305-315 (152-157)
Viscosity Midpoint	D1238	9.5
(Melt Flow Rate) g/10 min.	Condition 0	–
Brittleness Temperature, °F (°C)	D746	<-200 (-129)
Flammability Ratings	–	–
ASTM	D365°	AEB>1"
UL Standard 94° 1/16 (1.6 mm)	UL94	V-2
UL Standard 94° ⅛" (3.2 mm)	UL94	V-2
Oxygen Index	D2863	25.0
PHYSICAL		
Dielectric Strength, volts/mil (kV/mm)	D149	380 (15.0)
Short time, 125 mils (3.2mm)	–	–
Dielectric Constant	D150	–
60 Hz	–	3.17
106 Hz	–	2.96
Dielectric Factor	D150	–
60 Hz	–	0.0009
106 Hz	–	0.010
Volume Resistivity, ohm-cm	–	D257
@ 73°F, dry (23°C)	–	>10^{16}
Arc Resistance, sec	D495	–
Stainless Steel Electrodes	–	10-11
Tungsten Electrodes	–	120

PROPERTY	ASTM TEST METHOD	VALUE
MECHANICAL		
Tensile Strength, psi (MPa)	D638	–
Yield	–	9,000 (62)
Ultimate	–	10,000 (69)
Elongation, %	D638	–
Rupture	–	130
Flexural Strength, psi (MPa)	D790	14,000 (97)
Flexural Modules, 10^5 psi (MPa)	D790	3.40 (2,300)
Compressive Strength, psi (MPa)	D695	12,500 (86)
Compressive Modules, psi (MPa)	D695	–
10^5 osu (MPa)	–	3.45 (2,400)
Shear Strength, psi (MPa)	D732	–
Yield	–	6,000 (40)
Ultimate	–	10,000 (70)
Shear Modules, 10^5 psi (MPa)	–	1.14 (790)
Izod Impact Strength, ft-lbs/in (J/m)	D1822	–
Notched, ⅛" thick (3.22mm)	–	15 (801)
Tensile Impact Strength, ft-lbs/in^2 (kJ/m^2)	D1822	–
S-type	–	275 (579)
Dynatup Impact Strength, ft-lbs/in (J)	D3763	47 (64)
Fatigue Strength, psi @ 2.5mm	D671	–
cycles (MPa)	–	1,000 (7.0)
Rockwell Hardness	D785	–
M	–	70
R	–	118
Deformation Under Load %	D621	–
4000 psi @ 73°F (27 MPa @ 23°C)	–	0.2
4000 psi @ 158°F (27 MPa @ 70°C)	–	0.5
Taber Abrasion Resistance	–	–
Weight Loss, mg/1000 cycles	D1044	10

*Polycarbonate Resin is used in all models indicated in catalog as Polycarbonate, and in all rollers.

1¼" FRAMING SYSTEM

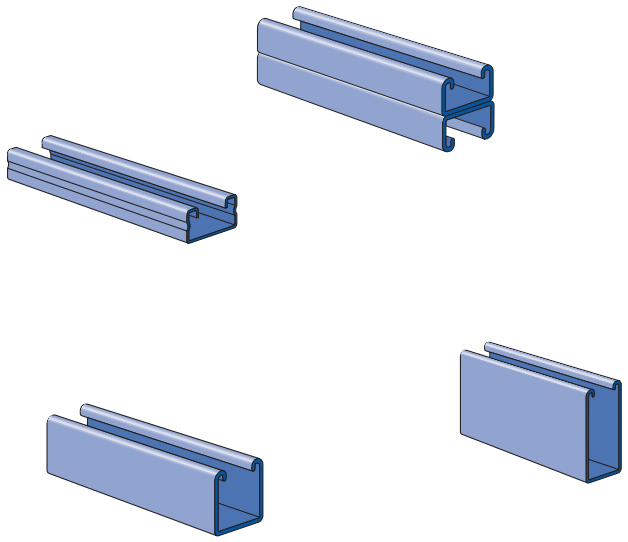

A1000 (14 Gauge) ..... 171 - 172

A3300 (14 Gauge) ..... 173 - 174

Channel Nuts and Closure Strips 175

Flat Plate Fittings ..... 175 - 176

Ninety Degree Fittings..... 176

Angle and Wing Shape Fittings 176

"U" Shape Fittings 177

Pipe / Tubing Clips 177

Brackets 177

MATERIAL

Unistrut channels are accurately and carefully cold formed to size from low-carbon strip steel.

STEEL: PLAIN

14 Gauge (1.9 mm), ASTM A1011 SS GR 33
19 Gauge (1.0 mm) ASTM A1008

STEEL: PRE-GALVANIZED

14 Gauge (1.9 mm) ASTM A653 GR 33,
19 Gauge (1.0 mm) ASTM A653 GR 33

Channel nuts are manufactured from mild steel bars conforming to ASTM A576, GR 1015, and are case hardened.

Fittings are made from hot rolled, pickled and oiled steel plate or strip and conform to ASTM A1011 SS GR 33.

Many framing channels are available in special metal on request. Consult factory for ordering information.

FINISHES

All channels and fittings are available in: Perma-Green III (GR), Pre-galvanized (PG), conforming to ASTM A653 GR 33 and plain (PL).

Nuts are available in plain or electro-galvanized (EG) finish.

Fittings are available in Perma-Green III (GR) or plain (PL).

STANDARD LENGTHS

Standard lengths are 10 feet (3.05M) and 20 feet (6.10M). Tolerances are: +⅛" (3.2 mm) to +½" (12.7 mm) to allow for cutting. Special lengths are available for a small cutting charge with a tolerance of ±⅛" (3.2mm).

APPLICATION

A framing system designed for medium loads, the 1¼" series is especially suitable for use in the OEM, commercial and display markets. It maintains a lightness in scale and a clean line that makes it aesthetically pleasing as well as functional.

THREADS

All threads on the nuts and bolts are Unified and American coarse screw threads.

DESIGN BOLT TORQUE

BOLT SIZE	¼"-20	5⁄16"-18	⅜"-16
Rec. Torque Ft/Lbs (N•m)	6 *(8)*	11 *(15)*	19 *(26)*
Max Torque Ft/Lbs (N•m)	7 *(9)*	15 *(20)*	25 *(34)*

DIMENSIONS

Imperial dimensions are illustrated in inches. Metric dimensions are shown in parenthesis or as noted. Unless noted, all metric dimensions are in millimeters and rounded to one decimal place.

LOAD DATA

All beam and column load data pertains to carbon steel and stainless steel channels. Load tables and charts are constructed to be in accordance with the SPECIFICATION FOR THE DESIGN OF COLD-FORMED STEEL STRUCTURAL MEMBERS 2007 EDITION published by the AMERICAN IRON AND STEEL INSTITUTE USING ASD METHOD. Loads are based on 33 ksi steel cold formed to 42 ksi.

Type of Load	Safety Factor to Yield Strength	Safety Factor to Ultimate Strength
Beam Loads	1.67	2.0
Column Load	1.80	2.2

A1000 Series

1¼" x 1¼" 14 Ga.


A1000-Pg 171


A1001-Pg 171


A1001 A-Pg 172


A1001 B-Pg 172


A1001 C-Pg 172

A3300 Series

1¼" x ¾" 14 Ga.


A3300-Pg 173


A3301-Pg 173

Channel Nuts & Closures

A1006-1420-Pg 175

A4006-1420-Pg 175

A3006-1420-Pg 175

A3016-0832-Pg 175

A1280-Pg 175

A4280-Pg 175


A1184-Pg 175


A1184P-Pg 175

A Series Fittings

A1063-Pg 175

A1065-Pg 175


A1191-Pg 175

A1066-Pg 176


A2324-Pg 176

A1036-Pg 176


A1031-Pg 176


A1026-Pg 176


A1068-Pg 176


A1326-Pg 176


A1458-Pg 176


A1325-Pg 176


A2110-Pg 176


A2126-Pg 176


A2084-Pg 176

A2472 R-L-Pg 176


A2223-Pg 176


A2345-Pg 176


A2227-Pg 176


A1047-Pg 177


A3347-Pg 177


A4047-Pg 177


A5047-Pg 177

A2608-Pg 177


A2492 R-Pg 177


A2492 L-Pg 177


A2494 R-Pg 177


A2494 L-Pg 177

Atkore Unistrut

A1000 – 1¼" x 1¼"

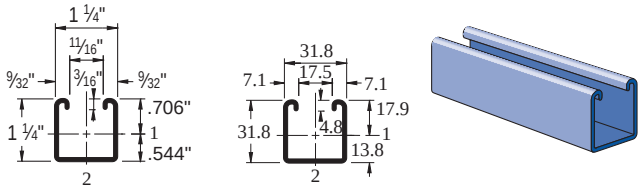

Wt/100 Ft: 104 Lbs(154 kg/100m)
Allowable Moment 2,170 In-Lbs (240 N•m)
14 Gauge Nominal Thickness .075" (1.9mm)

A1001 – 1¼" x 2½"

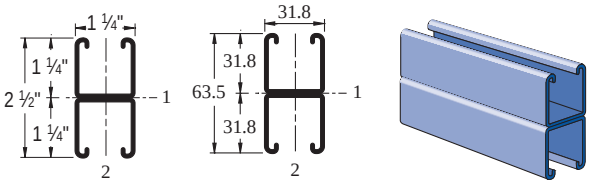

Wt/100 Ft: 207 Lbs (308 kg/100m)
Allowable Moment 6,070 In-Lbs (690 N•m)
14 Gauge Nominal Thickness .075" (1.9mm)

A1000 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Defl. Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
18	960	0.04	960	960	960
24	720	0.07	720	720	660
36	480	0.16	480	440	300
48	360	0.29	330	250	170
60	290	0.45	210	160	110
72	240	0.65	150	110	70
84	210	0.90	110	80	50
96	180	1.16	80	60	40
108	160	1.46	70	50	30
120	140	1.75	50	40	30

A1001 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Defl. Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
18	1,650*	0.01	1,650*	1,650*	1,650*
24	1,650*	0.03	1,650*	1,650*	1,650*
36	1,350	0.09	1,350	1,350	1,350
48	1,010	0.16	1,010	1,010	820
60	810	0.26	810	790	530
72	670	0.37	670	550	370
84	580	0.50	540	400	270
96	510	0.66	410	310	210
108	450	0.83	330	240	160
120	400	1.01	260	200	130

A1000 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
18	1,960	5,900	5,430	4,800	4,210
24	1,840	5,210	4,590	3,850	3,220
36	1,500	3,940	3,220	2,480	2,010
48	1,220	2,950	2,300	1,790	1,460
60	1,020	2,260	1,790	1,400	1,130
72	880	1,840	1,460	1,130	910
84	780	1,550	1,230	940	**
96	690	1,340	1,050	**	**
108	620	1,170	910	**	**

A1001 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
18	3,530	13,300	12,920	12,400	11,880
24	3,480	12,750	12,220	11,550	10,950
36	3,370	11,630	10,950	10,220	9,150
48	3,260	10,680	10,020	8,260	6,500
60	2,960	9,930	8,260	6,080	4,270
72	2,630	8,480	6,500	4,270	2,970
84	2,260	7,040	4,900	3,140	2,180
96	1,940	5,680	3,750	2,400	**
108	1,670	4,490	2,970	**	**
120	1,440	3,640	2,400	**	**

A1000/A1001 - Elements of Section

Parameter		A1000		A1001	
Area of Section		0.305	In^2	0.609	In^2
Axis 1-1					
	Moment of Inertia (I)	0.061	In^4	0.302	In^4
	Section Modulus (S)	0.086	In^3	0.242	In^3
	Radius of Gyration (r)	0.447	In	0.704	In
Axis 2-2					
	Moment of Inertia (I)	0.078	In^4	0.156	In^4
	Section Modulus (S)	0.125	In^3	0.250	In^3
	Radius of Gyration (r)	0.506	In	0.506	In

Notes:
* Load limited by spot weld shear.
** KL/r > 200
NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to Page 177 for reduction factors for unbraced lengths.
3. Deduct channel weight from the beam loads.
4. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
5. All beam loads are for bending about Axis 1-1.

A1000 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
600	3.2	2	3.2	3.2	3.1
750	2.6	3	2.6	2.6	2.0
1,000	2.0	5	2.0	1.6	1.1
1,250	1.6	8	1.4	1.1	0.7
1,500	1.3	11	1.0	0.7	0.5
1,750	1.1	15	0.7	0.5	0.4
2,000	1.0	20	0.5	0.4	0.3
2,500	0.8	32	0.4	0.3	0.2
3,000	0.7	46	0.2	0.2	0.1

A1001 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
600	7.3*	1	7.3*	7.3*	7.3
750	7.3*	2	7.3*	7.3*	7.3
1,000	5.5	3	5.5	5.5	5.5
1,250	4.4	4	4.4	4.4	3.5
1,500	3.6	6	3.6	3.6	2.4
1,750	3.2	9	3.2	2.7	1.8
2,000	2.8	11	2.7	2.0	1.4
2,500	2.2	17	1.7	1.3	0.9
3,000	1.8	25	1.2	0.9	0.6
3,500	1.6	34	0.9	0.7	0.4

A1000 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Max. Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
600	8.2	23.4	20.7	17.3	14.6
750	7.5	20.5	17.3	14.0	11.3
1,000	6.3	16.2	13.0	9.9	8.1
1,250	5.3	12.8	9.9	7.7	6.3
1,500	4.6	10.2	8.1	6.3	5.2
1,750	4.1	8.6	6.8	5.3	4.3
2,000	3.6	7.4	5.9	4.5	**
2,250	3.3	6.5	5.2	3.9	**
2,500	3.0	5.8	4.5	**	**
2,750	2.7	5.2	4.0	**	**

A1001 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Max. Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
600	15.5	56.9	54.5	51.6	48.9
750	15.2	54.4	51.6	48.4	45.7
1,000	14.9	50.4	47.4	43.9	37.4
1,250	14.4	47.2	43.9	35.7	27.8
1,500	13.3	44.6	37.4	27.8	19.6
1,750	12.1	39.4	30.9	20.7	14.4
2,000	10.8	34.1	24.8	15.9	11.0
2,250	9.5	29.0	19.6	12.5	**
2,500	8.4	24.1	15.9	10.2	**
2,750	7.4	19.9	13.1	**	**

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to Page 177 for reduction factors for unbraced lengths.
3. Deduct channel weight from the beam loads.
4. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
5. All beam loads are for bending about Axis 1-1.

Finishes: PL, GR, HG, PG Standard Lengths: 10' & 20'

A1000/A1001 - Elements of Section (metric)

Parameter		A1000		A1001	
Area of Section		1.96	cm^2	3.93	cm^2
Axis 1-1					
	Moment of Inertia (I)	2.53	cm^4	12.57	cm^4
	Section Modulus (S)	1.41	cm^3	3.96	cm^3
	Radius of Gyration (r)	1.14	cm	1.79	cm
Axis 2-2					
	Moment of Inertia (I)	3.25	cm^4	6.50	cm^4
	Section Modulus (S)	2.05	cm^3	4.09	cm^3
	Radius of Gyration (r)	1.29	cm	1.29	cm

A1001A – 1¼" x 2½"

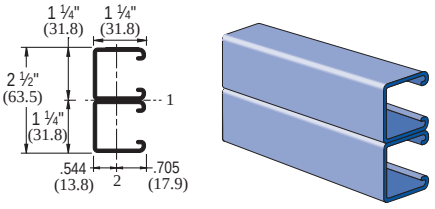

Wt/100 Ft: 207 Lbs (308 kg/100m)
Allowable Moment 7,930 In-Lbs (900 N•m)
14 Gauge Nominal Thickness .075" (1.9mm)

A1001B – 1¼" x 2½"

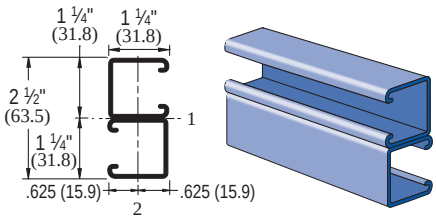

Wt/100 Ft: 207 Lbs (308 kg/100m)
Allowable Moment 7,930 In-Lbs (900 N•m)
14 Gauge Nominal Thickness .075" (1.9mm)

A1001C – 1¼" x 2½"

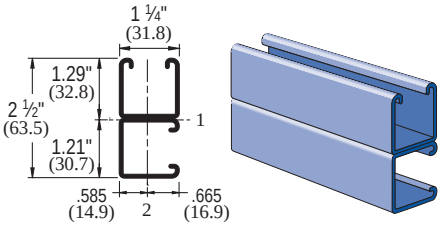

Wt/100 Ft: 207 Lbs (308 kg/100m)
Allowable Moment 6,760 In-Lbs (760 N•m)
14 Gauge Nominal Thickness .075" (1.9mm)

Atkore Unistrut

A3300 – 1¼" x ¾"

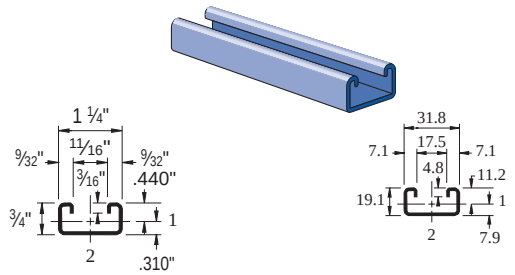

Wt/100 Ft: 78 Lbs (116 kg/100m)
Allowable Moment 950 In-Lbs (110 N•m)
14 Gauge Nominal Thickness .075" (1.9mm)

A3301 – 1¼" x 1½"

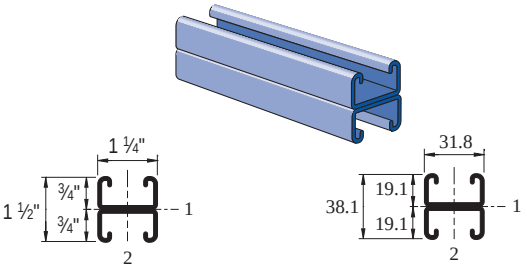

Wt/100 Ft: 156 Lbs (232 kg/100m)
Allowable Moment 2,590 In-Lbs (290 N•m)
14 Gauge Nominal Thickness .075" (1.9mm)

A3300 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
18	420	0.07	420	420	320
24	320	0.12	320	270	180
36	210	0.26	160	120	80
48	160	0.47	90	70	50
60	130	0.75	60	40	30
72	110	1.09	40	30	20
84	90	1.42	30	20	10
96	80	1.88	20	20	10

A3301 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
18	990*	0.03	990*	990*	990*
24	860	0.07	860	860	850
36	580	0.15	580	560	380
48	430	0.27	420	320	210
60	350	0.43	270	200	140
72	290	0.62	190	140	90
84	250	0.85	140	100	70
96	220	1.11	110	80	50

A3300 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Max. Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
18	1,430	4,490	4,210	3,860	3,550
24	1,370	4,090	3,750	3,310	2,680
36	1,190	3,390	2,680	1,820	1,260
48	900	2,380	1,600	1,020	**
60	680	1,550	1,020	**	**

A3301 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Max. Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
18	2,540	9,890	9,620	9,300	9,020
24	2,510	9,510	9,200	8,710	7,960
36	2,410	8,800	7,960	6,730	5,490
48	2,230	7,560	6,320	4,690	3,310
60	1,970	6,210	4,690	3,050	2,120
72	1,650	4,890	3,310	2,120	**
84	1,380	3,680	2,430	**	**
96	1,160	2,820	1,860	**	**

A3300/A3301 - Elements of Section

Parameter		A3300		A3301	
Area of Section		0.230	In^2	0.459	In^2
Axis 1-1					
	Moment of Inertia (I)	0.017	In^4	0.077	In^4
	Section Modulus (S)	0.038	In^3	0.103	In^3
	Radius of Gyration (r)	0.269	In	0.411	In
Axis 2-2					
	Moment of Inertia (I)	0.052	In^4	0.104	In^4
	Section Modulus (S)	0.083	In^3	0.167	In^3
	Radius of Gyration (r)	0.477	In	0.477	In

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to Page 177 for reduction factors for unbraced lengths.
3. Deduct channel weight from the beam loads.
4. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
5. All beam loads are for bending about Axis 1-1.

A3300 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
600	1.4	3	1.4	1.2	0.8
750	1.2	5	1.1	0.8	0.5
1,000	0.8	8	0.6	0.4	0.3
1,250	0.7	12	0.4	0.3	0.2
1,500	0.6	18	0.3	0.2	0.1
1,750	0.5	24	0.2	0.1	0.1
2,000	0.4	33	0.1	0.1	0.1

A3301 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
600	3.9	2	3.9	3.9	3.9
750	3.1	3	3.1	3.1	2.5
1,000	2.4	5	2.4	2.1	1.4
1,250	1.9	7	1.8	1.3	0.9
1,500	1.6	10	1.2	0.9	0.6
1,750	1.3	14	0.9	0.7	0.4
2,000	1.2	18	0.7	0.5	0.4
2,500	0.9	29	0.4	0.4	0.2
3,000	0.8	43	0.3	0.2	0.1

A3300 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Max. Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
600	6.1	18.3	16.8	14.9	12.2
750	5.8	16.7	14.9	11.5	8.4
1,000	4.9	13.8	10.4	6.8	4.7
1,250	3.9	10.1	6.8	4.3	**
1,500	3.1	7.1	4.7	**	**

A3301 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Max. Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
600	11.2	42.4	41.0	39.0	35.7
750	11.0	40.9	39.0	34.9	30.4
1,000	10.5	37.7	33.4	27.4	21.4
1,250	9.8	33.0	27.4	20.0	14.0
1,500	8.9	28.1	21.4	14.0	9.7
1,750	7.7	23.2	16.1	10.3	**
2,000	6.7	18.6	12.3	7.9	**
2,250	5.8	14.7	9.7	**	**
2,500	5.0	11.9	7.9	**	**

A3300/A3301 - Elements of Section (metric)

Parameter		A3300		A3301	
Area of Section		1.48	cm^2	2.96	cm^2
Axis 1-1					
	Moment of Inertia (I)	0.69	cm^4	3.22	cm^4
	Section Modulus (S)	0.62	cm^3	1.69	cm^3
	Radius of Gyration (r)	0.68	cm	1.04	cm
Axis 2-2					
	Moment of Inertia (I)	2.17	cm^4	4.34	cm^4
	Section Modulus (S)	1.37	cm^3	2.73	cm^3
	Radius of Gyration (r)	1.21	cm	1.21	cm

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to Page 177 for reduction factors for unbraced lengths.
3. Deduct channel weight from the beam loads.
4. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
5. All beam loads are for bending about Axis 1-1.

Bearing Loads on Unistrut Channel

Loads are calculated based on 2001 Specification For The Design Of Cold Formed Steel Structural Members published by AISI			
Channel	Bearing Length 1¼" (31.8 mm) Maximum Allowable Loads - Lbs *(kN)*	Bearing Length 1¼" (31.8 mm) Maximum Allowable Loads - Lbs *(kN)*	Bearing Length 2½" (63.5 mm) Maximum Allowable Loads - Lbs *(kN)*
A1000	3,700 *(16.46)*	1,700 *(7.56)*	4,300 *(19.13)*
A3300	3,800 *(16.90)*	1,700 *(7.56)*	4,300 *(19.13)*

Channel Nut With Spring

EG

	Part Number	Nut Size Thread	Wt/100 pcs Lbs *(kg)*	Use With
	A1006-1420	¼" -20	6 *(2.7)*	A1000
	A1007	5/16" -18	6 *(2.7)*	
	A1008	⅜" -16	6 *(2.7)*	
	A4006-1420	¼" -20	5 *(2.3)*	A3300
	A4007	5/16" -18	5 *(2.3)*	
	A4008	⅜" -16	5 *(2.3)*	

Channel Nut Without Springs

	Part Number	Nut Size Thread	Wt/100 pcs Lbs *(kg)*	Use With
	A3006-1420	¼" -20	5 *(2.3)*	A1000 or A3300
	A3007	5/16" -18	5 *(2.3)*	
	A3008	⅜" -16	5 *(2.3)*	
	A3016-0832	#8 -32	1 *(0.5)*	A1000 or A3300
	A3016-1024	#10 -24	1 *(0.5)*	
	A3016-1032	#10 -32	1 *(0.5)*	
	A3016-1420	¼" -20	1 *(0.5)*	

A1280 End Cap



Material: .075" (1.9)
Note: Use with A1000 channel
Wt/100 pcs: 7 Lbs (3.2 kg)

A4280 End Cap

Material: .075" (1.9)
Note: Use with A3300 channel

A1184 Closure Strip



Finish:
Perma-Green II (GR), Plain (PL).
Wt/100 Ft: 21 Lbs (31.3 kg/100M)

A1191



Wt/100 pcs: 87 Lbs (39.5 kg)

A1063

EG



Wt/100 pcs: 8 Lbs (3.6 kg)

A1065



Wt/100 pcs: 17 Lbs (7.7 kg)

A1184P Closure Strip



Material: Paintable PVC.
Color: Green, Grey.
Wt/100 Ft: 21 Lbs (31.3 kg/100M)

Standard Dimensions for 1¼" (31.8 mm) width series channel fittings *(Unless Otherwise Shown on Drawing)*
Hole Diameter: 13/32" (10.3mm); Hole Spacing - From End: ⅝" (15.9 mm); Hole Spacing - On Center: 1½" (38.1mm); Width: 1¼"(31.8mm); Thickness: 3/16" (4.8mm)

A1066



Wt/100 pcs: 26 Lbs (11.8 kg)

A2324



Wt/100 pcs: 39 Lbs (17.7 kg)

A1036



Wt/100 pcs: 27 Lbs (12.2 kg)

A1031



Wt/100 pcs: 34 Lbs (15.4 kg)

A1026



Wt/100 pcs: 17 Lbs (7.7 kg)

A1068 EGR



Wt/100 pcs: 17 Lbs (7.7 kg)

A1326



Wt/100 pcs: 27 Lbs (12.2 kg)

A1458



Wt/100 pcs: 27 Lbs (12.2 kg)

A1325



Wt/100 pcs: 38 Lbs (17.2 kg)

A2110



Wt/100 pcs: 23 Lbs (10.4 kg)

A2126



Wt/100 pcs: 17 Lbs (7.7 kg)

A2084



Wt/100 pcs: 90 Lbs (40.8 kg)

A2472 R-L



R-As shown
L-Opposite hand

Wt/100 pcs: 33 Lbs (15.0 kg)

A2223



Wt/100 pcs: 34 Lbs (15.4 kg)

A2345



Wt/100 pcs: 41 Lbs (18.6 kg)

A2227



Wt/100 pcs: 52 Lbs (23.6 kg)

Standard Dimensions for 1¼" (31.8 mm) width series channel fittings *(Unless Otherwise Shown on Drawing)*
Hole Diameter: 13/32" (10.3mm); Hole Spacing - From End: 5/8" (15.9 mm); Hole Spacing - On Center: 1½" (38.1mm); Width: 1¼"(31.8mm); Thickness: 3/16" (4.8mm)

Atkore Unistrut

A1047



Wt/100 pcs: 43 Lbs (19.5 kg)

A3347



Wt/100 pcs: 37 Lbs (16.8 kg)

A2608 THRU A2617 UNI-CLIP®





Part Number	Pipe Size In (mm)	O.D. Size In (mm)	Wt/100 pcs Lbs (kg)
A2608	¼ (6.4)	0.540 (13.7)	0.6 (0.3)
A2609	⅜ (9.5)	0.675 (17.1)	0.7 (0.3)
A2611	½ (12.7)	0.840 (21.3)	1.0 (0.5)
A2612	¾ (19.1)	1.050 (26.7)	1.4 (0.6)
A2613	1 (25.4)	1.35 (33.4)	2.0 (0.9)
A2614	1¼ (31.8)	1.660 (42.2)	2.4 (1.1)
A2615	1½ (38.1)	1.900 (48.3)	3.2 (1.5)
A2617	2 (50.8)	2.375 (60.3)	4.7 (2.1)

Stainless steel, Type 301.

A2492 R-L



Right



Left

Design Uniform Load (Channel Upright Listed)		
A1000	200 Lbs	(.89 kN)
A3300	130 Lbs	(.58 kN)
Safety Factor of 2½		

Material: 14 Gauge Steel.

Wt/100 pcs: 56 Lbs (25.4 kg)

A2494 R-L

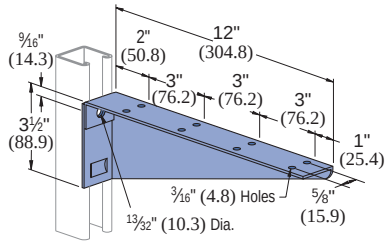

Right

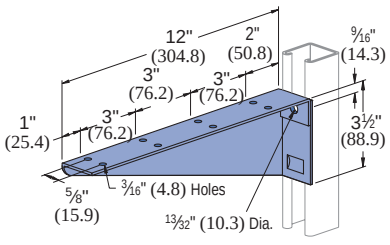

Left

Design Uniform Load (Channel Upright Listed)		
A1000	200 Lbs	(.89 kN)
A3300	130 Lbs	(.58 kN)
Safety Factor of 2½		

Material: 14 Gauge Steel.

Wt/100 pcs: 94 Lbs (42.6 kg)

Standard Dimensions for 1¼" (31.8 mm) width series channel fittings *(Unless Otherwise Shown on Drawing)*

Hole Diameter: 13/32" (10.3mm); Hole Spacing - From End: ⅝" (15.9 mm); Hole Spacing - On Center: 1½" (38.1mm); Width: 1¼"(31.8mm); Thickness: 3/16" (4.8mm)

13/16" FRAMING SYSTEM

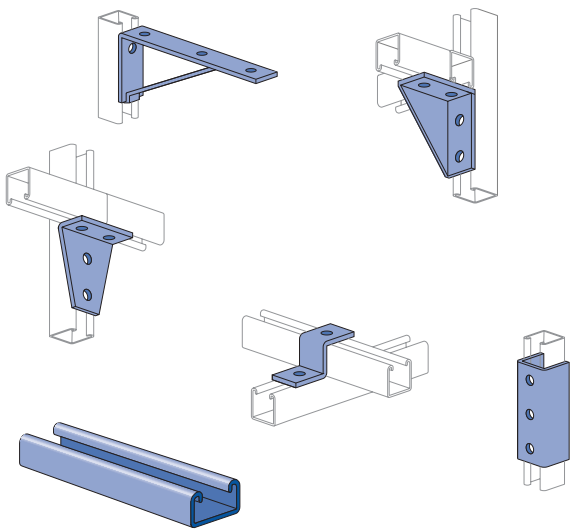

P6000 (19 Gauge) 179-181

P7000 (19 Gauge) 182-183

Channel Nuts, End Caps, and Closure Strips 184

Flat Plate Fittings 184-185

Ninety Degree Fittings 185

Angular Fittings, Wing Shape Fittings 186

"Z" Shape Fittings 186

"U" Shape Fittings 186-187

Special Application Fittings 187

Beam Clamps 187

Tubing Clips 187

MATERIAL

Channels are accurately and carefully cold formed to size from low-carbon strip steel.

STEEL: PLAIN

19 Gauge (1.0 mm) ASTM A1008

STEEL: PRE-GALVANIZED

19 Gauge (1.0 mm) ASTM A653 GR 33

All nuts are manufactured from mild steel bars conforming to ASTM A1011 SS Grade 33.

Fittings are made from hot rolled, pickled and oiled steel plate or strip and conform to ASTM A1011 SS GR 33.

FINISHES

Channels are available in: Perma-Green III (GR), electro-galvanized (EG), Pre-galvanized (PG), conforming to ASTM A653 GR 33 and plain (PL).

Nuts are available in plain or electro-galvanized (EG) finish.

Fittings are available in Perma-Green III, electrogalvanized (EG) with zinc electrolytically to commercial standards ASTM B653-G90 Type III SC1; or plain (PL).

STANDARD LENGTHS

P-6000 – 16 Feet (4.88m)
P-7000 – 10 Feet (3.05m)

Tolerances are +⅛" (3.2 *mm*) to +½" (12.7 *mm*) to allow for cutting. Special lengths are available for a small cutting charge with a tolerance of ±⅛" (3.2*mm*).

APPLICATION

A unique half-size reduction of the 1⅝" channel width series, this smaller channel size can be used to carry light loads economically in applications such as instrumentation, retail displays and light-duty laboratory supports. It also provides the flexibility found in all Unistrut® framing systems.

DESIGN BOLT TORQUE

BOLT SIZE	1/4"-20	Rec. Torque Ft/Lbs (N•m)	6 *(8)*	Max Torque Ft/Lbs (N•m)	7 *(9)*

DIMENSIONS

Imperial dimensions are illustrated in inches. Metric dimensions are shown in parenthesis or as noted. Unless noted, all metric dimensions are in millimeters and rounded to one decimal place.

LOAD DATA

All beam and column load data pertains to carbon steel and stainless steel channels. Load tables and charts are constructed to be in accordance with the SPECIFICATION FOR THE DESIGN OF COLD-FORMED STEEL STRUCTURAL MEMBERS 2007 EDITION published by the AMERICAN IRON AND STEEL INSTITUTE USING ASD METHOD. Loads are based on 33 ksi steel cold formed to 42 ksi.

Type of Load	Safety Factor to Yield Strength	Safety Factor to Ultimate Strength
Beam Loads	1.67	2.0
Column Load	1.80	2.2

Atkore Unistrut

P6000 Series

13⁄16" x 13⁄16"
19 Ga.


P6000 - Pg 180

P6001 - Pg 180

P6001 A - Pg 181

P6001 B - Pg 181

P6001 C - Pg 181

P7000 Series

13⁄16" x 13⁄32"
19 Ga.


P7000 - Pg 182


P7001 - Pg 182

Channel Nuts & Closures

P6006-0832 - Pg 184

P7006-0832 - Pg 184

P6280 - Pg 184

P7280 - Pg 184


P6184P - Pg 184

13⁄16" Series Fittings

P6062 - Pg 184

P6065 - Pg 184

P6924 - Pg 184


P7325 - Pg 184


P7324 - Pg 184

P6925 - Pg 184

P6066 - Pg 184

P6067 - Pg 184

P6962 - Pg 184

P6356 A - Pg 184

P6358 A - Pg 184

P6726 A - Pg 184

P6334 - Pg 184

P6380 - Pg 184

P6036 - Pg 184

P6380 A - Pg 184

P6031 - Pg 185

P6028 - Pg 185

P6026 - Pg 185

P6068 - Pg 185

P6281 - Pg 185

P6069 - Pg 185


P6326 - Pg 185


P6346 - Pg 185

P6458 - Pg 185


P6325 - Pg 185


P6357 - Pg 185


P6359-Pg 185

P6579-Pg 185


P7235-Pg 185

P6887-Pg 185


P6331-Pg 185


P6332-Pg 186

P6546-Pg 186


P6045-Pg 186

P6186-Pg 186

P6454-Pg 186

P7045-Pg 186

P6453-Pg 186

P6047-Pg 186

P6737-Pg 186

P6048-Pg 186

P6376-Pg 186

P7376-Pg 186

P6376 A-Pg 186

P7376 A-Pg 186

P6377-Pg 186

P7377-Pg 186

P6455-Pg 187

P6973-Pg 187

P6349-Pg 187

P6353-Pg 187

P6127-Pg 187

P6386-Pg 187

P6379 S-Pg 187


P6805-Pg 187

P7008-Pg 187

P6000

PG

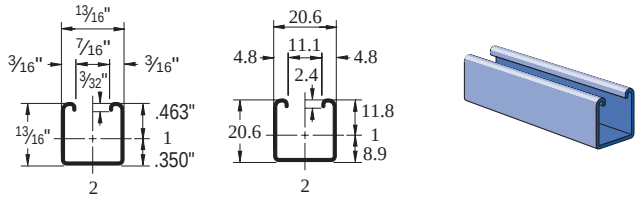

Wt/100 Ft: 36 Lbs (54 *kg*/100 m)
Allowable Moment 510 In-Lbs (60 N•m)
19 Gauge Nominal Thickness .040" (1.0 *mm*)

P6001

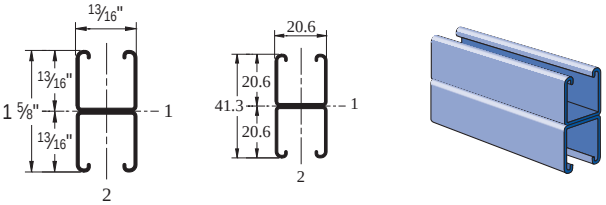

Wt/100 Ft: 73 Lbs (108 *kg*/100 m)
Allowable Moment 1,390 In-Lbs (160 N•m)
19 Gauge Nominal Thickness .040" (1.0 *mm*)

P6000 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
18	230	0.06	230	230	180
24	170	0.11	170	150	100
30	140	0.18	130	100	70
36	110	0.24	90	70	50
42	100	0.35	70	50	30
48	80	0.42	50	40	30
54	80	0.60	40	30	20
60	70	0.72	30	20	20
66	60	0.82	30	20	10
72	60	1.06	20	20	10

P6001 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
18	620	0.04	620	620	620
24	460	0.06	460	460	460
30	370	0.10	370	370	320
36	310	0.14	310	310	220
42	270	0.20	270	240	160
48	230	0.25	230	180	120
54	210	0.32	190	150	100
60	190	0.40	160	120	80
66	170	0.48	130	100	70
72	150	0.55	110	80	50

P6000 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
18	600	1,660	1,400	1,100	860
24	490	1,300	1,010	740	590
30	420	990	740	560	450
36	340	770	590	450	370
42	300	630	490	380	310
48	260	540	420	330	270
54	240	470	370	290	**
60	210	410	330	**	**
66	210	370	300	**	**
72	180	340	270	**	**

P6001 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
18	1,210	4,320	4,080	3,770	3,500
24	1,170	3,980	3,680	3,330	3,060
30	1,130	3,650	3,330	3,000	2,460
36	1,070	3,370	3,060	2,460	1,800
42	1,020	3,140	2,690	1,900	1,320
48	900	2,930	2,230	1,460	1,010
54	820	2,550	1,800	1,150	800
60	700	2,180	1,460	930	**
66	700	1,830	1,210	770	**
72	550	1,530	1,010	**	**

P6000 & P6001 - Elements of Section

Parameter		P6000		P6001	
Area of Section		0.107	In^2	0.213	In^2
Axis 1-1					
	Moment of Inertia (I)	0.009	In^4	0.045	In^4
	Section Modulus (S)	0.020	In^3	0.055	In^3
	Radius of Gyration (r)	0.295	In	0.460	In
Axis 2-2					
	Moment of Inertia (I)	0.012	In^4	0.024	In^4
	Section Modulus (S)	0.029	In^3	0.058	In^3
	Radius of Gyration (r)	0.333	In	0.333	In

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to Page 186 for reduction factors for unbraced lengths.
3. Deduct channel weight from the beam loads.
4. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
5. All beam loads are for bending about Axis 1-1.

P6000 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
300	1.5	1	1.5	1.5	1.5
450	1.0	2	1.0	1.0	0.8
600	0.8	3	0.8	0.7	0.5
750	0.6	4	0.6	0.4	0.3
1,000	0.4	7	0.4	0.3	0.2
1,250	0.4	11	0.2	0.2	0.1
1,500	0.3	17	0.1	0.1	0.1
1,750	0.3	24	0.1	0.1	0.0

P6001 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
300	2.9*	0	2.9*	2.9*	2.9*
450	2.8	1	2.8	2.8	2.8
600	2.1	2	2.1	2.1	2.1
750	1.7	2	1.7	1.7	1.5
1,000	1.2	4	1.2	1.2	0.8
1,250	1.0	7	1.0	0.8	0.5
1,500	0.8	10	0.7	0.5	0.4
1,750	0.7	13	0.5	0.4	0.3
2,000	0.6	17	0.4	0.3	0.2

P6000 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
300	3.1	9.2	8.4	7.3	6.3
450	2.7	7.5	6.3	5.0	3.9
600	2.2	5.9	4.6	3.4	2.7
750	1.8	4.5	3.4	2.5	2.0
1,000	1.4	3.0	2.4	1.8	1.5
1,250	1.1	2.3	1.8	1.4	1.2
1,500	0.9	1.9	1.5	1.2	**
1,750	0.8	1.6	1.2	**	**

P6001 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
300	5.5	20.7	20.1	19.2	18.2
450	5.4	19.3	18.2	16.9	15.7
600	5.2	17.8	16.5	14.9	13.7
750	5.0	16.4	14.9	13.5	11.2
1,000	4.6	14.4	12.9	9.5	6.7
1,250	3.9	12.7	9.5	6.2	4.3
1,500	3.2	9.9	6.7	4.3	**
1,750	2.6	7.5	4.9	**	**
2,000	2.2	5.7	3.8	**	**

P6000 & P6001 - Elements of Section (metric)

Parameter		P6000		P6001	
Area of Section		0.69	cm^2	1.38	cm^2
Axis 1-1					
	Moment of Inertia (I)	0.39	cm^4	1.88	cm^4
	Section Modulus (S)	0.33	cm^3	0.91	cm^3
	Radius of Gyration (r)	0.75	cm	1.17	cm
Axis 2-2					
	Moment of Inertia (I)	0.49	cm^4	0.99	cm^4
	Section Modulus (S)	0.48	cm^3	0.96	cm^3
	Radius of Gyration (r)	0.85	cm	0.85	cm

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to Page 186 for reduction factors for unbraced lengths.
3. Deduct channel weight from the beam loads.
4. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
5. All beam loads are for bending about Axis 1-1.

P6001A

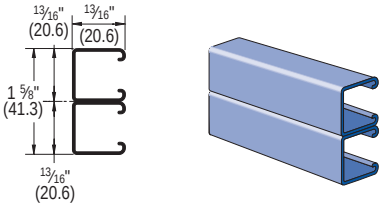

Wt/100 Ft: 73 Lbs (108 *kg*/100 m)
Allowable Moment 1,820 In-Lbs (210 N•m)
19 Gauge Nominal Thickness .040" (1.0 *mm*)

P6001B

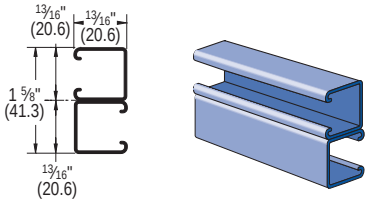

Wt/100 Ft: 73 Lbs (108 *kg*/100 m)
Allowable Moment 1,820 In-Lbs (210 N•m)
19 Gauge Nominal Thickness .040" (1.0 *mm*)

P6001C

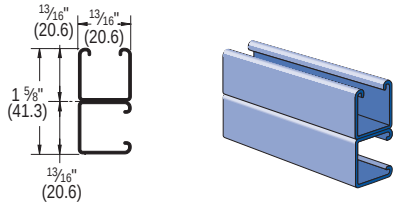

Wt/100 Ft: 73 Lbs (108 *kg*/100 m)
Allowable Moment 1,550 In-Lbs (180 N•m)
19 Gauge Nominal Thickness .040" (1.0 *mm*)

P7000

PG PL



Wt/100 Ft: 25 Lbs (38 *kg*/100m)
Allowable Moment 170 In-Lbs (20 N•m)
19 Gauge Nominal Thickness .040" (1.0 *mm*)





P7001



Wt/100 Ft: 50 Lbs (75 *kg*/100m)
Allowable Moment 450 In-Lbs (50 N•m)
19 Gauge Nominal Thickness .040" (1.0 *mm*)





P7000 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
18	80	0.12	60	50	30
24	60	0.22	40	30	20
30	50	0.36	20	20	10
36	40	0.50	20	10	10

P7001 - Beam Loading

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
18	200	0.07	200	200	140
24	150	0.12	150	120	80
30	120	0.19	100	80	50
36	100	0.28	70	50	40
42	90	0.40	50	40	30
48	80	0.53	40	30	20

P7000 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
18	420	1,200	990	720	510
24	330	900	640	410	280
30	260	620	410	**	**
36	200	430	280	**	**

P7001 - Column Loading

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G. K = 0.65 Lbs	K = 0.80 Lbs	K =1.0 Lbs	K = 1.2 Lbs
18	790	2,930	2,690	2,330	1,960
24	740	2,570	2,210	1,720	1,260
30	680	2,180	1,720	1,160	800
36	580	1,780	1,260	800	560
42	500	1,400	920	590	**
48	420	1,070	710	**	**
54	360	850	560	**	**

P7000 & P7001 - Elements of Section

Parameter		P7000		P7001	
Area of Section		0.074	In^2	0.148	In^2
Axis 1-1					
	Moment of Inertia (I)	0.002	In^4	0.007	In^4
	Section Modulus (S)	0.007	In^3	0.018	In^3
	Radius of Gyration (r)	0.150	In	0.222	In
Axis 2-2					
	Moment of Inertia (I)	0.007	In^4	0.014	In^4
	Section Modulus (S)	0.017	In^3	0.034	In^3
	Radius of Gyration (r)	0.307	In	0.307	In

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to Page 186 for reduction factors for unbraced lengths.
3. Deduct channel weight from the beam loads.
4. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
5. All beam loads are for bending about Axis 1-1.

P7000 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
300	0.5	1	0.5	0.5	0.4
450	0.4	3	0.3	0.2	0.1
600	0.3	5	0.2	0.1	0.1
750	0.2	9	0.1	0.1	0.0
1,000	0.2	16	0.0	0.0	0.0
1,250	0.1	24	0.0	0.0	NR
1,500	0.1	28	0.0	NR	NR

P7001 - Beam Loading (metric)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection Span/180 kN	Span/240 kN	Span/360 kN
300	1.4	1	1.4	1.4	1.4
450	0.9	2	0.9	0.9	0.7
600	0.7	3	0.7	0.5	0.4
750	0.5	5	0.5	0.4	0.2
1,000	0.4	8	0.3	0.2	0.1
1,250	0.3	13	0.2	0.1	0.1
1,500	0.3	19	0.1	0.1	NR

P7000 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
300	2.1	6.4	6.0	5.3	4.5
450	1.9	5.4	4.5	3.3	2.3
600	1.5	4.1	2.9	1.9	1.3
750	1.2	2.8	1.9	1.2	**

P7001 - Column Loading (metric)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G. K = 0.65 kN	K = 0.80 kN	K =1.0 kN	K = 1.2 kN
300	3.6	14.0	13.6	13.0	12.1
450	3.5	13.1	12.1	10.5	8.9
600	3.3	11.6	10.0	7.8	5.8
750	3.0	9.8	7.8	5.3	3.7
1,000	2.4	6.9	4.7	3.0	**
1,250	1.8	4.5	3.0	**	**

P7000 & P7001 - Elements of Section (metric)

Parameter		P7000		P7001	
Area of Section		0.48	cm^2	0.96	cm^2
Axis 1-1					
	Moment of Inertia (I)	0.07	cm^4	0.31	cm^4
	Section Modulus (S)	0.11	cm^3	0.30	cm^3
	Radius of Gyration (r)	0.38	cm	0.57	cm
Axis 2-2					
	Moment of Inertia (I)	0.29	cm^4	0.58	cm^4
	Section Modulus (S)	0.28	cm^3	0.56	cm^3
	Radius of Gyration (r)	0.78	cm	0.78	cm

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

1. Beam loads are given in *total* uniform load (W Lbs) not uniform load (w lbs/ft or w lbs/in).
2. Beam loads are based on a simple span and assumed to be adequately laterally braced. Unbraced spans can reduce beam load carrying capacity. Refer to table below for reduction factors for unbraced lengths.
3. Deduct channel weight from the beam loads.
4. For concentrated midspan point loads, multiply beam loads by 50% and the corresponding deflection by 80%. For other load conditions refer to page 18.
5. All beam loads are for bending about Axis 1-1.

Bearing Loads on Unistrut Channel

Loads are calculated based on 2001 Specification For The Design Of Cold Formed Steel Structural Members published by AISI







Channel	Bearing Length 13/16" (20.6 mm) Maximum Allowable Loads - Lbs (kN)	Bearing Length 13/16" (20.6 mm) Maximum Allowable Loads - Lbs (kN)	Bearing Length 1 5/8" (41.3 mm) Maximum Allowable Loads - Lbs (kN)
P6000	1,000 (4.45)	500 (2.22)	1,200 (5.34)
P7000	1,000 (4.45)	500 (2.22)	1,200 (5.34)

Lateral Bracing Load Reduction Charts

Span	Single Channel		Double Channel	
In. (cm)	P6000	P7000	P6001	P7001
24 (61)	0.80	0.95	0.99	1.00
36 (91)	0.63	0.90	0.89	0.93
48 (122)	0.52	0.87	0.79	0.86
60 (152)	0.45	0.83	0.70	0.80
72 (183)	0.40	0.80	0.60	0.73
84 (213)	0.37	0.76	0.51	0.67
96 (244)	0.34	0.73	0.44	0.60

Maximum Allowable Pull-Out And Slip Loads

Nut Size/ Thread	Max. Allowable Pull-Out Lbs (kN)	Resistance to Slip Lbs (kN)	Torque Ft-Lbs (N•m)
¼"-20	250 1.11	150 0.67	6 8

P6006-0832 thru P6006-1420 Channel Nut w/Spring EG



Part Number	Thread Size In	Wt/100 pcs Lbs (kg)
P6006-0836	#8 - 36	1 (0.5)
P6006-0832	#8 - 32	1 (0.5)
P6006-1032	#10 - 32	1 (0.5)
P6006-1024	#10 - 24	1 (0.5)
P6006-1420	¼"- 20	1 (0.5)

P6013-0832 thru P6006-1420 Channel Nut EG



Part Number	Thread Size In	Wt/100 pcs Lbs (kg)
P6013-0836	#8 - 36	1 (0.5)
P6013-0832	#8 - 32	1 (0.5)
P6013-1032	#10 - 32	1 (0.5)
P6013-1024	#10 - 24	1 (0.5)
P6013-1420	¼"- 20	1 (0.5)

P7006-0832 thru P7006-1420 Channel Nut w/Spring EG

Part Number	Thread Size In	Wt/100 pcs Lbs (kg)
P7006-0836	#8 - 36	1 (0.5)
P7006-0832	#8 - 32	1 (0.5)
P7006-1032	#10 - 32	1 (0.5)
P7006-1024	#10 - 24	1 (0.5)
P7006-1420	¼"- 20	1 (0.5)

P6184 P - Closure Strip



Material: PVC, Plastic.
Standard Length: 10 Feet (3.05 m).

Wt/100 Ft: 4 Lbs (6.0 *kg*/100m)

P6280 - End Cap for P6000

Material: .060" (1.5)



Wt/100 pcs: 3 Lbs (1.4 *kg*)

P7280 - End Cap for P7000

Material: .048" (1.2)



Wt/100 pcs: 1 Lbs (0.5 *kg*)

P6062



Wt/100 pcs: 2 Lbs (0.9 *kg*)

P6065



Wt/100 pcs: 5 Lbs (2.3 *kg*)

P6924



Wt/100 pcs: 5 Lbs (2.3 *kg*)

P7325



Wt/100 pcs: 7 Lbs (3.2 *kg*)

P7324



Wt/100 pcs: 10 Lbs (4.5 *kg*)

P6925



Wt/100 pcs: 7 Lbs (3.2 *kg*)

P6066



Wt/100 pcs: 8 Lbs (3.6 *kg*)

P6067



Wt/100 pcs: 11 Lbs (5.0 *kg*)

P6962



Wt/100 pcs: 19 Lbs (8.6 *kg*)

P6356A



Wt/100 pcs: 10 Lbs (4.5 *kg*)

P6358A



Wt/100 pcs: 15 Lbs (6.8 *kg*)

P6726A



Wt/100 pcs: 22 Lbs (10.0 *kg*)

P6334



Wt/100 pcs: 11 Lbs (5.0 *kg*)

P6380



Wt/100 pcs: 15 Lbs (6.8 *kg*)

P6036



Wt/100 pcs: 8 Lbs (3.6 *kg*)

P6380A



Wt/100 pcs: 11 Lbs (5.0 *kg*)

Standard Dimensions for 13/16" (20.6*mm*) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 9/32" (7.1mm); Hole Spacing - From End: 13/32" (10.3mm); Hole Spacing - On Center: 1 1/16" (27.0mm); Width: 13/16"(20.6mm); Thickness: 1/8" (3.2mm)

Atkore Unistrut

P6031



Wt/100 pcs: 11 Lbs (5.0 *kg*)

P6028



Wt/100 pcs: 14 Lbs (6.4 *kg*)

P6026



Wt/100 pcs: 5 Lbs (2.3 *kg*)

P6068



Wt/100 pcs: 5 Lbs (2.3 *kg*)

P6281 , P6282, P6283



Part Number	A In *(mm)*	Wt/100 pcs Lbs *(kg)*
P6281	2 *50.8*	8 *3.6*
P6282	2½ *63.5*	9 *4.1*
P6283	3 *76.2*	10 *4.5*

P6069



Wt/100 pcs: 8 Lbs (3.6 *kg*)

P6326



Wt/100 pcs: 8 Lbs (3.6 *kg*)

P6346



Wt/100 pcs: 8 Lbs (3.6 *kg*)

P6458



Wt/100 pcs: 8 Lbs (3.6 *kg*)

P6325



Wt/100 pcs: 11 Lbs (5.0 *kg*)

P6357



Wt/100 pcs: 10 Lbs (4.5 *kg*)

P6359



Wt/100 pcs: 15 Lbs (6.8 *kg*)

P6579



Wt/100 pcs: 15 Lbs (6.8 *kg*)

P7235



Wt/100 pcs: 18 Lbs (8.2 *kg*)

P6887



Wt/100 pcs: 28 Lbs (12.7 *kg*)

P6331



Wt/100 pcs: 19 Lbs (8.6 *kg*)

Standard Dimensions for 13/16" (20.6*mm*) width series channel fittings (Unless Otherwise Shown on Drawing)
Hole Diameter: 9/32" (7.1mm); Hole Spacing - From End: 13/32" (10.3mm); Hole Spacing - On Center: 1 1/16" (27.0mm); Width: 13/16"(20.6mm); Thickness: 1/8" (3.2mm)

P6332



Wt/100 pcs: 19 Lbs (8.6 *kg*)

P6546



Wt/100 pcs: 8 Lbs (3.6 *kg*)

P6045



Wt/100 pcs: 7 Lbs (3.2 *kg*)

P6186



Wt/100 pcs: 8 Lbs (3.6 *kg*)

P6454



Wt/100 pcs: 5 Lbs (2.3 *kg*)

P7045



Wt/100 pcs: 6 Lbs (2.7 *kg*)

P6453



Wt/100 pcs: 9 Lbs (4.1 *kg*)

P6047, P7047



Part No.	A In *(mm)*	Wt/100 pcs Lbs *(kg)*	Use with Channel
P6047	13/16 *20.6*	12 *5.4*	P6000
P7047	13/32 *10.3*	10 *4.5*	P7000

P6737



Wt/100 pcs: 16 Lbs (7.3 *kg*)

P6048



Wt/100 pcs: 14 Lbs (6.4 *kg*)

P6376



Wt/100 pcs: 17 Lbs (7.7 *kg*)

P7376



Wt/100 pcs: 11 Lbs (5.0 *kg*)

P6376A



Wt/100 pcs: 26 Lbs (11.8 *kg*)

P7376A



Wt/100 pcs: 16 Lbs (7.3 *kg*)

P6377



Wt/100 pcs: 36 Lbs (16.3 *kg*)

P7377



Wt/100 pcs: 24 Lbs (10.9 *kg*)

Standard Dimensions for 13/16" (20.6*mm*) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 9/32" (7.1mm); Hole Spacing - From End: 13/32" (10.3mm); Hole Spacing - On Center: 1 1/16" (27.0mm); Width: 13/16"(20.6mm); Thickness: 1/8" (3.2mm)

P6455



Wt/100 pcs: 8 Lbs (3.6 *kg*)

P6973



Wt/100 pcs: 8 Lbs (3.6 *kg*)

P6349 Acetal Slide



Wt/100 pcs: 1 Lbs (0.5 *kg*)

P6353 Acetal Slide



Wt/100 pcs: 1 Lbs (0.5 *kg*)

P6127 - P6129 Bracket



Part No.	Uniform Design Load Lbs *(kN)*	"A" In *(mm)*	"B" In *(mm)*	"C" In *(mm)*	Wt/100 pcs Lbs *(kg)*
P6127	150	6½	2½	2½	30
	0.67	*165.1*	*63.5*	*63.5*	*13.6*
P6128	150	8½	3¼	3½	40
	0.67	*215.9*	*82.6*	*88.9*	*18.1*
P6129	130.0	10½	4	4½	50
	0.58	*266.7*	*101.6*	*114.3*	*22.7*

Safety Factor 2½

Wt/100 pcs: 4 Lbs (1.8 *kg*)

P6386 Beam Clamp



Use in pairs.

P6379 S Beam Clamp

Use in pairs.



Wt/100 pcs: 13 Lbs (5.9 *kg*)

P6805 thru P6810 Tubing Clips



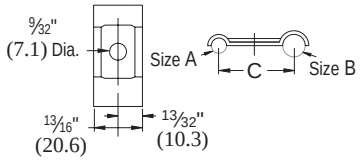

Material: 16 Gauge (1.5)

Part Number	O.D. Tube Size "A" In *(mm)*	O.D. Tube Size "B" In *(mm)*	"C" In *(mm)*	Wt/100 pcs Lbs *(kg)*
P6805	¼	¼	¾	1
	6.4	*6.4*	*19.1*	*0.5*
P6806	⅜	⅜	1	2
	9.5	*9.5*	*25.4*	*0.9*
P6807	½	½	1¼	3
	12.7	*12.7*	*31.8*	*1.4*
P6808	¼	⅜	⅞	2
	6.4	*9.5*	*22.2*	*0.9*
P6809	¼	½	1	2
	6.4	*12.7*	*25.4*	*0.9*
P6810	⅜	½	1⅛	3
	9.5	*12.7*	*28.6*	*1.4*

P7008 thru P7020 Tubing Clips



Part Number	O.D. Tube Size "A" In *(mm)*	Wt/100 pcs Lbs *(kg)*
P7008	¼	1
	6.4	*0.45*
P7009	5/16	1
	7.9	*0.45*
P7010	⅜	2
	9.5	*0.91*
P7012	½	2
	12.7	*0.91*
P7014	⅝	3
	15.9	*1.4*
P7016	¾	4
	19.1	*1.8*
P7018	⅞	5
	22.2	*2.3*
P7020	1	5
	25.4	*2.3*

Standard Dimensions for 13/16" (20.6*mm*) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 9/32" (7.1mm); Hole Spacing - From End: 13/32" (10.3mm); Hole Spacing - On Center: 1 1/16" (27.0mm); Width: 13/16"(20.6mm); Thickness: ⅛" (3.2mm)

FIBERGLASS SYSTEM

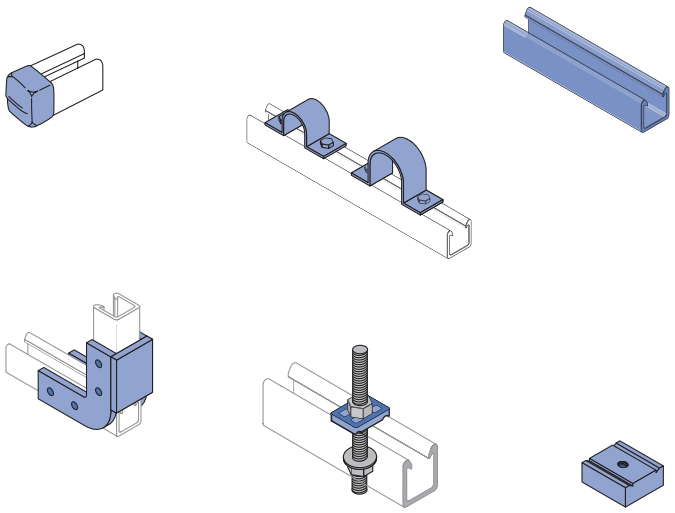

Heavy Duty Channel (Flange Profile) 190

Light Duty Channel (Flange Profile) 191

Heavy Duty Channel (SST Profile)..... 192

Nuts & Hardware ..... 193 - 195

Fittings..... 196 - 197

Pipe Clamps..... 198

Clevis Hangers and Channel Inserts 199

Beam Clamps..... 200

Power Rack Stanchions 200

Chemical Compatibility ..... 201 - 202

Specifications 203

POLYESTER AND VINYL ESTER MATERIALS

Polyester and vinyl ester channels are manufactured from the pultrusion process and are color coded gray and beige respectively. Components are made by reinforcing a polymer resin (polyester or vinyl ester) with multiple strands of glass filament, alternating layers of glass mat and U.V. resistant surfacing veils. The glass is drawn through the liquid resin, which coats and saturates the fibers. The combination of resin, glass and veil is then continuously guided and pulled (pultruded) through a heated die that determines the shape of the component.

In the die, the resin is cured to form a reinforced part which can be cut to length. The hardened fiberglass pultrusion is reinforced with an internal arrangement of permanently bonded continuous glass fibers to increase its strength.

INSTALLATION

Fabrication requires just three simple operations: cutting, drilling and sealing as described below.

Cutting – Hand held saws, such as hack saws (24 to 32 teeth per inch) are suitable when a few cuts are required. For frequent cutting, a circular power saw with a carbide-tipped masonry blade yields the best results. When using a power saw, dust filter masks, gloves and long sleeve clothing should be worn.

Drilling – Any standard twist bit, even when used with battery-powered drills will work well. Carbide-tipped drill bits are recommended.

Sealing – To protect against future migration of corrosive elements into the cut sections, all cuts and holes should be properly sealed with clear urethane sealer.

OPERATING ENVIRONMENT

Temperature Ranges – Fiberglass parts are supplied in five different materials covering distinct temperature ranges. The temperature ranges indicated are meant to be used only as a general guideline. Continual exposure to elevated temperatures reduces the strength properties of plastics and glass-reinforced fiberglass. Actual resin test data confirms that a 50% reduction in strength occurs at the extreme high temperature levels.

Chemical Resistance – See the chart on page 204-205 for corrosion resistance. The results are based upon immersion for a 24 hour period. This is typically the "worst case" exposure to corrosion. Less severe contact such as spills, splashes and vapor condensate will exceed the performance results listed in the table.

Loading – Channel loading is defined with description of each type of channel. Additional loading and design limitations for fittings and accessories are described in the appropriate section for that part.

Material Temperature Ratings		
Material Code	Low Temp.	High Temp.
E - (Rigid PVC)	-25°F *(-31°C)*	130°F *(54°C)*
P - (Poly/Glass)	-35°F *(-37°C)*	200°F *(93°C)*
V - (Vinyl/Glass)	-35°F *(-37°C)*	200°F *(93°C)*
PU - (Poly)	-40°F *(-40°C)*	140°F *(60°C)*
N - (Nylon)	-20°F *(-29°C)*	150°F *(66°C)*

Atkore Unistrut

Channel - Aickinstrut Flange Profile



Unistrut fiberglass channels, except the SST series, incorporate the Aickinstrut flange design which provides reliable fastening and interlocking of components and accessories.
It is important to note that standard metal framing components such as pipe clamps and strut nuts will not work with the flange design.

Heavy Duty Aickinstrut Flange Profile 1⅝" x 1⅝"


20P/V-2000-Pg 190


20P/V-2100-Pg 190


20P/V-2200-Pg 190


20P/V-2300-Pg 190

Light Duty Aickinstrut Flange Profile 1½" x 1⅛"


20P/V-1000-Pg 191


20P/V-1100-Pg 191


20P/V-1200-Pg 191


20P/V-1300-Pg 191

Channel - SST Profile



The Unistrut SST profile is similar to the profile of standard metal channel. The Unistrut SST profile will accommodate standard 1⅝" metal channel fittings and components. This profile is available in polyester or vinyl ester resin. The Unistrut SST profile is not compatible with the fiberglass pipe clamps and channel nuts shown in this section. Typically, stainless steel clamps and strut nuts (listed elsewhere in this catalog) are used with this profile.

Heavy Duty SST Profile 1⅝" x 1⅝"


20P/V-2000 SST-Pg 192


20P/V-2100 SST-Pg 192


20P/V-2200 SST-Pg 192


20P/V-2300 SST-Pg 192

Hardware & Accessories

Heavy Duty-Pg 193

Standard Duty-Pg 193


Saddle Clip-Pg 193


Stop Lock-Pg 193


Hex Flange Bolt-Pg 193

Hex Bolt-Pg 194

Hex Flange Nut-Pg 194

Hex Nut - Pg 194

Flat Washer-Pg 194

Spacer - Pg 194

Threaded Rod-Pg 195


Rod Coupler-Pg 195

Fittings

End Cap-Pg 195


Capping Strip-Pg 195

U-Bolt-Pg 195

20P/V-2500-Pg 196


20P/V-2502-Pg 196


20P/V-2504-Pg 196


20P/V-2506-Pg 196

20P/V-2508-Pg 196

20P/V-2510-Pg 196


20P/V-2512-Pg 196

20P/V-2514-Pg 196

20P/V-2516-Pg 196


20P/V-2518-Pg 196

20P/V-2520-Pg 196


20P/V-2522-Pg 196


20P/V-2524-Pg 196


20P/V-2526-Pg 197


20P/V-2528-Pg 197


20P/V-2530-Pg 197


20P/V-2534-Pg 197


20P/V-2540-Pg 197


20PU-2538-Pg 197


20PU-2611-Pg 197


20PU-2613-Pg 197


50PU-1508
50PU-2008-Pg 197

Pipe Clamps, Beam Clamps and Stanchions


50PU-2045-Pg 197


50PU-2636-Pg 197


50PU-2090-Pg 197


50PU-2616-Pg 197


20PU-5853
20PU-5855-Pg 197


20PU-5903
20PU-5095-Pg 197


Adj. Pipe Clamp-Pg 198


Rigid Pipe Clamp-Pg 198


Pipe Strap-Pg 198


Fabricated Clevis Hanger-Pg 199

Molded Clevis Hanger-Pg 199


Channel Insert-Pg 199


Molded Beam Clamp Assembly-Pg 200

Molded Beam Clamp-Pg 200


Rack Stanchion-Pg 200

20P-2000, 20V-2000

Heavy Duty Single Channel - Aickinstrut flange profile





Wt/100 Ft: 82 Lbs(122 kg/100 m)

20P-2100, 20V-2100

Heavy Duty Back-to-Back Channel - Aickinstrut flange profile





Wt/100 Ft: 164 Lbs (244 kg/100 m)

Section Properties

Part Number	Weight lbs./ft. (kg/m)	Area in² (mm²)	X - X Axis I in⁴ (mm⁴)	X - X Axis R In (mm)	X - X Axis C1 In (mm)	X - X Axis C2 In (mm)	Y - Y Axis I in⁴ (mm⁴)	Y - Y Axis R In (mm)	Y - Y Axis C In (mm)
20P-2000, 20V-2000	0.82	1.06	0.31	0.54	0.7	0.93	0.42	0.63	0.82
	1.2	*6.8*	*12.9*	*13.7*	*17.8*	*23.622*	*17.5*	*16.0*	*20.8*
20P-2100, 20V-2100	1.64	2.12	1.77	0.91	1.63	1.63	0.85	0.63	0.82
	2.4	*13.7*	*73.7*	*23.1*	*41.4*	*41.402*	*35.4*	*16.0*	*20.8*

Flange Loading

Part Number	Pull-Out Strength* Lbs (kN)
20V-2000/2100	449 *2.0*
20P-2000/2100	360 *1.6*

FLANGE LOAD

*Values shown represent a 3:1 safety factor

20P-2200, 20V-2200 Slotted Channel



Wt/100 Ft: 82 Lbs (122 kg/100 m)

20P-2300, 20V-2300 w/Concrete Insert





Wt/100 Ft: 88 Lbs (131 kg/100 m)

20P-2000, 20V-2000 Channel Beam/Column Loading

Span In (mm)	Max. Uniform Beam Load (Safety Factor - 3:1) Load Lbs (kN)	Max. Uniform Beam Load (Safety Factor - 3:1) Deflection In (mm)	Uniform Load at Deflection of 1/360 Span Load Lbs (kN)	Uniform Load at Deflection of 1/360 Span Deflection In (mm)	Maximum Column Load Lbs (kN)
12	3,561	0.102	1,159	0.033	5,160
304.8	*15.8*	*2.6*	*5.2*	*0.8*	*23.0*
18	2,374	0.23	515	0.05	4,704
457.2	*10.6*	*5.8*	*2.3*	*1.3*	*20.9*
24	1,781	0.41	290	0.067	4,168
609.6	*7.9*	*10.4*	*1.3*	*1.7*	*18.5*
30	1,424	0.64	185	0.083	3,553
762.0	*6.3*	*16.3*	*0.8*	*2.1*	*15.8*
36	1,187	0.922	129	0.1	2,859
914.4	*5.3*	*23.4*	*0.6*	*2.5*	*12.7*
48	890	1.638	72	0.133	1,636
1,219.2	*4.0*	*41.6*	*0.3*	*3.4*	*7.3*
60	712	2.56	46	0.167	1,047
1,524.0	*3.2*	*65*	*0.2*	*4.2*	*4.7*
72	594	3.686	32	0.2	727
1,828.8	*2.6*	*93.6*	*0.1*	*5.1*	*3.2*

20P-2100, 20V-21000 Channel Beam/Column Loading

Span In (mm)	Max. Uniform Beam Load (Safety Factor - 3:1) Load Lbs (kN)	Max. Uniform Beam Load (Safety Factor - 3:1) Deflection In (mm)	Uniform Load at Deflection of 1/360 Span Load Lbs (kN)	Uniform Load at Deflection of 1/360 Span Deflection In (mm)	Maximum Column Load Lbs (kN)
12	5,559	0.028	5,559	0.033	9,454
304.8	*24.7*	*0.7*	*24.7*	*0.8*	*42.1*
18	3,706	0.064	2,914	0.05	8,866
457.2	*16.5*	*1.6*	*13.0*	*1.3*	*39.4*
24	2,780	0.113	1,639	0.067	8,181
609.6	*12.4*	*2.9*	*7.3*	*1.7*	*36.4*
30	2,224	0.177	1,049	0.083	7,405
762.0	*9.9*	*4.5*	*4.7*	*2.1*	*32.9*
36	1,853	0.254	730	0.1	6,451
914.4	*8.2*	*6.5*	*3.2*	*2.5*	*28.7*
48	1,390	0.452	410	0.133	4,534
1,219.2	*6.2*	*11.5*	*1.8*	*3.4*	*20.2*
60	1,112	0.707	262	0.167	2,902
1,524.0	*4.9*	*18.0*	*1.2*	*4.2*	*12.9*
72	927	1.018	182	0.2	2,015
1,828.8	*4.1*	*25.9*	*0.8*	*5.1*	*9.0*

Atkore Unistrut

20P-1000, 20V-1000
Light Duty Single Channel - Aickinstrut flange Profile





Wt/100 Ft: 47 Lbs (70 kg/100 m)

20P-1100, 20V-1100
Light Duty Back-to-Back Channel - Aickinstrut flange Profile





Wt/100 Ft: 94 Lbs (140 kg/100 m)

Section Properties

Part Number	Weight lbs./ft. (kg/m)	Area in² (mm²)	X - X Axis I in⁴ (mm⁴)	X - X Axis R In (mm)	X - X Axis C1 In (mm)	X - X Axis C2 In (mm)	Y - Y Axis I in⁴ (mm⁴)	Y - Y Axis R In (mm)	Y - Y Axis C In (mm)
20P-1000, 20V-1000	0.47	0.61	0.1	0.4	0.51	0.62	0.22	0.6	0.75
	0.7	*3.9*	*4.2*	*10*	*13*	*16*	*9.2*	*15*	*19*
20P-1100, 20V-1100	0.94	1.22	0.42	0.59	1.13	1.13	0.44	0.6	0.75
	1.4	*7.9*	*17.5*	*15*	*29*	*28*	*18.3*	*15*	*19.1*

Flange Loading

Part Number	Pull-Out Strength* Lbs (kN)
20V-1000/1100	213
	1.0
20P-1000/1100	213
	1.0

FLANGE LOAD

*Values shown represent a 3:1 safety factor

20P-1200, 20V-1200 — Slotted Channel

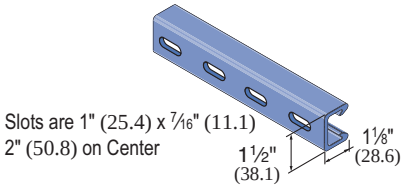

Wt/100 Ft: 47 Lbs (70 kg/100 m)

20P-1300, 20V-1300 — w/Concrete Insert





Wt/100 Ft: 53 Lbs (79 kg/100 m)

20P-1000, 20V-1000 — Channel Beam/Column Loading

Span In (mm)	Max. Uniform Beam Load (Safety Factor - 3:1) Load Lbs (kN)	Max. Uniform Beam Load (Safety Factor - 3:1) Deflection In (mm)	Uniform Load at Deflection of 1/360 Span Load Lbs (kN)	Uniform Load at Deflection of 1/360 Span Deflection In (mm)	Maximum Column Load Lbs (kN)
12	1,629	0.151	359	0.033	2,759
304.8	*7.2*	*3.8*	*1.6*	*0.8*	*12.3*
18	1,086	0.340	160	0.050	2,351
457.2	*4.8*	*8.6*	*0.7*	*1.3*	*10.5*
24	815	0.605	90	0.067	1,862
609.6	*3.6*	*15.4*	*0.4*	*1.7*	*8.3*
30	652	0.945	57	0.083	1,298
762.0	*2.9*	*24.0*	*0.3*	*2.1*	*5.8*
36	543	1.360	40	0.100	901
914.4	2.4	34.5	0.2	2.5	4.0
48	407	2.418	22	0.133	507
1,219.2	*1.8*	*61.4*	*0.1*	*3.4*	*2.3*
60	326	3.779	14	0.167	324
1,524.0	*1.5*	*96.0*	*0.1*	*4.2*	*1.4*
72	272	5.441	10	0.200	225
1,828.8	*1.2*	*138.2*	*0.0*	*5.1*	*1.0*

20P-1100, 20V-1100 — Channel Beam/Column Loading

Span In (mm)	Max. Uniform Beam Load (Safety Factor - 3:1) Load Lbs (kN)	Max. Uniform Beam Load (Safety Factor - 3:1) Deflection In (mm)	Uniform Load at Deflection of 1/360 Span Load Lbs (kN)	Uniform Load at Deflection of 1/360 Span Deflection In (mm)	Maximum Column Load Lbs (kN)
12	3,804	0.082	1,556	0.033	5,961
304.8	*16.9*	*2.1*	*6.9*	*0.8*	*26.5*
18	2,536	0.183	691	0.05	5,509
457.2	*11.3*	*4.6*	*3.1*	*1.3*	*24.5*
24	1,902	0.326	389	0.067	4,979
609.6	*8.5*	*8.3*	*1.7*	*1.7*	*22.1*
30	1,522	0.509	249	0.083	4,375
762.0	*6.8*	*12.9*	*1.1*	*2.1*	*19.5*
36	1,268	0.734	173	0.1	3,698
914.4	*5.6*	*18.6*	*0.8*	*2.5*	*16.4*
48	951	1.304	97	0.133	2,254
1,219.2	*4.2*	*33.1*	*0.4*	*3.4*	*10.0*
60	761	2.038	62	0.167	1,442
1,524.0	*3.4*	*51.8*	*0.3*	*4.2*	*6.4*
72	634	2.935	43	0.2	1,001
1,828.8	*2.8*	*74.5*	*0.2*	*5.1*	*4.5*

20P-2000 SST, 20V-2000 SST
Heavy Duty Single Channel - SST Profile

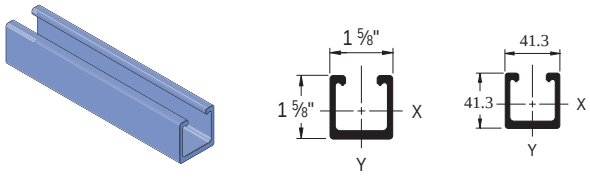

Wt/100 Ft: 82 Lbs (122 kg/100 m)

20P-2100 SST, 20V-2100 SST
Heavy Duty Back-to-Back Channel - SST Profile

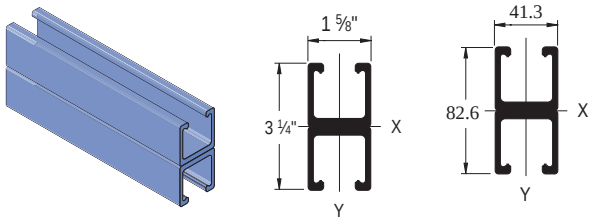

Wt/100 Ft: 164 Lbs (244 kg/100 m)

20P-2200 SST, 20V-2200 SST — Slotted Channel

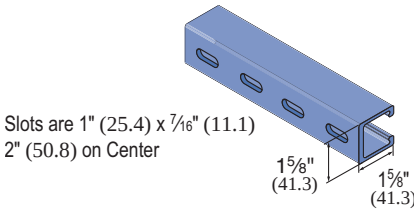

Wt/100 Ft: 82 Lbs (122 kg/100 m)

20P-2300 SST, 20V-2300 SST — w/Concrete Insert



Wt/100 Ft: 88 Lbs (131 kg/100 m)

NOTE: Unistrut SST Channel is not compatible with the Unistrut fiberglass pipe clamps and channel nuts shown in this catalog. Metal clamps and channel nuts are compatible with this profile and are shown elsewhere in this catalog.

20P-2000 SST, F20V-2000 SST
Channel Beam/Column Loading

Span In (mm)	Maximum Uniform Beam Load (Safety Factor - 3:1) Poly Lbs (kN)	Vinyl Lbs (kN)	Deflection @ Max. Allowable Beam Load Poly In (mm)	Vinyl In (mm)	Deflection @ Max. Deflection = 0.25 In (Lbs) Poly Lbs (kN)	Vinyl Lbs (kN)	Uniform Load @ Max. Deflection = 0.50 In (Lbs) Poly Lbs (kN)	Vinyl Lbs (kN)	Max. Column Load Lbs (kN)
12	1,720	2,150	0.07	0.07	—	—	—	—	3,650
304.8	7.6	9.6	1.8	1.8					16.2
18	1,150	1,440	0.15	0.17	—	—	—	—	3,370
457.2	5.1	6.4	3.8	4.3					15.0
24	860	1,080	0.27	0.3	810	910	—	—	2,960
609.6	3.8	4.8	6.9	7.6	3.6	4.0			13.2
30	690	870	0.42	0.48	410	460	—	—	2,450
762.0	3.1	3.9	10.7	12.2	1.8	2.0			10.9
36	580	730	0.61	0.69	240	270	480	540	1,800
914.4	2.6	3.2	15.5	17.5	1.1	1.2	2.1	2.4	8.0
48	430	540	1.07	1.2	100	115	200	230	1,010
1,219.2	1.9	2.4	27.2	30.5	0.4	0.5	0.9	1.0	4.5
60	350	440	1.7	1.91	60	70	120	135	260
1,524.0	1.6	2.0	43.2	48.5	0.3	0.3	0.5	0.6	1.2
72	290	370	2.44	2.78	30	34	60	70	NR
1,828.8	1.3	1.6	62.0	70.6	0.1	0.2	0.3	0.3	NR

20P-2100 SST, F20V-2100 SST
Channel Beam/Column Loading

Span In (mm)	Maximum Uniform Beam Load (Safety Factor - 3:1) Poly Lbs (kN)	Vinyl Lbs (kN)	Deflection @ Max. Allowable Beam Load Poly In (mm)	Vinyl In (mm)	Deflection @ Max. Deflection = 0.25 In (Lbs) Poly Lbs (kN)	Vinyl Lbs (kN)	Uniform Load @ Max. Deflection = 0.50 In (Lbs) Poly Lbs (kN)	Vinyl Lbs (kN)	Max. Column Load Lbs (kN)
12	5,080	6,350	0.04	0.04	—	—	—	—	7,300
304.8	22.6	28.2	1.0	1.0					32.5
18	3,390	4,240	0.09	0.1	—	—	—	—	6,740
457.2	15.1	18.9	2.3	2.5					30.0
24	2,540	3,180	0.16	0.17	—	—	—	—	5,920
609.6	11.3	14.1	4.1	4.3					26.3
30	2,040	2,550	0.24	0.27	—	2,350	—	—	4,900
762.0	9.1	11.3	6.1	6.9		10.5			21.8
36	1,700	2,130	0.35	0.39	1,220	1,370	—	—	3,600
914.4	7.6	9.5	8.9	9.9	5.4	6.1			16.0
48	1,270	1,590	0.62	0.69	520	590	1,040	1,170	2,020
1,219.2	5.6	7.1	15.7	17.5	2.3	2.6	4.6	5.2	9.0
60	1,020	1,280	0.97	1.09	270	310	540	610	520
1,524.0	4.5	5.7	24.6	27.7	1.2	1.4	2.4	2.7	2.3
72	850	1,070	1.4	1.57	160	180	320	360	NR
1,828.8	3.8	4.8	35.6	39.9	0.7	0.8	1.4	1.6	NR

Heavy Duty Channel Nuts



- Heavy duty channel nuts are designed to be used where high thread shear values or spring nuts are required. They can not be used with light duty 1000 series channel or SST profile channel.
- Material: glass-reinforced polyurethane.

Part Number	Size	Thread Shear Lbs *(kN)**	Torque Ft/Lbs *(N•m)*	Wt/100 pcs Lbs *(kg)*
375PU-CNHD	⅜"-16	1,400 *6.23*	8 *11*	5.7 *2.6*
500PU-CNHD	½"-13	1,400 *6.23*	8 *11*	5.3 *2.4*
625PU-CNHD	⅝"-11	1,400 *6.23*	10 *14*	5.1 *2.3*
750PU-CNHD	¾"-10	1,400 *6.23*	10 *14*	4.4 *2.0*
10PU-CNMHD	10 mm	1,400 *6.23*	8 *11*	5.8 *2.6*
12PU-CNMHD	12 mm	1,400 *6.23*	8 *11*	5.5 *2.5*
16PU-CNMHD	16 mm	1,400 *6.23*	10 *14*	5.3 *2.4*
20PU-CNMHD	20 mm	1,400 *6.23*	10 *14*	4.4 *2.0*

*Thread shear values shown represent a 3:1 safety factor.

Saddle Clips



- Saddle clips mate with the exterior of the channel flanges and are secured with threaded rods and nuts.
- Material: glass-reinforced polyurethane.

Part Number	Size (In.)	Wt/100 pcs Lbs *(kg)*
200-4226	⅜	3.5 *1.6*
200-4217	½	2.5 *1.1*
200-4341	⅝	3.0 *1.4*
200-4342	¾	2.5 *1.1*

Stop-Lock Assemblies



- Stop-Lock Assemblies reduce the chance of pipe slippage when running supports vertically and are recommended for applications that are subject to vibration, have regular contact with fluids or are vertically mounted. The Stop-Locks fit both sizes of channel.
- Material: glass-reinforced polyurethane.

Part Number	Size (in.)	Force Resistance Lbs *(kN)**	Torque Ft/Lbs (N•m)	Wt/100 pcs Lbs *(kg)*
200-4227	⅜"	200 *0.9*	7 *9*	6.3 *2.9*
200-4219	½"	220 *1.0*	12 *16*	6.4 *2.9*
200-4343	⅝"**	250 *1.1*	15 *20*	11.0 *5.0*

* Force resistance values shown represents a 3:1 safety factor.

** Supplied with a heavy duty channel nut for use only with the heavy duty series 2000 channel.

Standard Duty Channel Nuts



- Standard Duty channel nuts are designed for light duty applications that do not require high thread shear values. They can be used with both light duty series 1000 and heavy duty series 2000 fiberglass channel.
- Not for use with SST profile channel.
- Material: glass-reinforced polyurethane.

Part Number	Size	Thread Shear Lbs *(kN)**	Torque Ft/Lbs *(N•m)*	Wt/100 pcs Lbs *(kg)*
250PU-CN	¼"-20	460 *2.05*	2 *3*	1.8 *0.8*
312PU-CN	5⁄16"-18	460 *2.05*	2 *3*	1.7 *0.8*
375PU-CN	⅜"-16	460 *2.05*	3 *4*	1.8 *0.8*
500PU-CN	½"-13	460 *2.05*	3 *4*	1.4 *0.6*
10PU-CN	10 mm	460 *2.05*	3 *4*	1.7 *0.8*
12PU-CN	12 mm	460 *2.05*	3 *4*	1.4 *0.6*
10PU-CNS	#10 Screw	460 *2.05*	N/A	1.9 *0.9*

*Thread shear values shown represent a 3:1 safety factor.

Hex Flange Bolts



- Fiberfast bolts are ideal for mechanical connections that require a high degree of corrosion resistance. The ⅜" diameter fasteners are recommended for all channel fitting mechanical connections.
- Material: glass-reinforced polyurethane.

Part Number	Size (in.)	Thread Shear Lbs *(kN)**	Shank Shear Lbs *(kN)**	Shoulder Length In *(mm)*	Torque Ft/Lbs *(N•m)*	Wt/100 pcs Lbs *(kg)*
250PU-075	¼ x ¾	110 *0.49*	210 *0.93*	Full Thread	0.8 *1*	.4 *0.2*
250PU-100	¼ x 1	110 *0.49*	210 *0.93*	Full Thread	0.8 *1*	.5 *.02*
250PU-150	¼ x 1½	110 *0.49*	210 *0.93*	½ *12.7*	0.8 *1*	.6 *0.3*
500PU-125	½ x 1¼	450 *2.00*	870 *3.87*	Full Thread	8 *11*	1.0 *0.5*
500PU-150	½ x 1½	450 *2.00*	870 *3.87*	Full Thread	8 *11*	1.1 *.05*
500PU-200	½ x 2	450 *2.00*	870 *3.87*	¾ *19.1*	8 *11*	1.3 *0.6*
500PU-250	½ x 2½	450 *2.00*	870 *3.87*	Full Thread	8 *11*	1.6 *0.7*
500PU-300	½ x 3	450 *2.00*	870 *3.87*	1 *25.4*	8 *11*	1.8 *0.8*
500PU-350	½ x 3½	450 *2.00*	870 *3.87*	2 3⁄16 *55.6*	8 *11*	2.0 *0.9*

*Thread shear values shown represent a 3:1 safety factor.

Hex Bolts



- Fiberfast bolts are ideal for mechanical connections that require a high degree of corrosion resistance. The ⅜" diameter fasteners are recommended for all channel fitting mechanical connections.
- Material: glass-reinforced polyurethane.

Part Number	Size (in.)	Thread Shear Lbs *(kN)**	Shank Shear Lbs *(kN)**	Shoulder Length In *(mm)*	Torque Ft/Lbs *(N•m)*	Wt/100 pcs Lbs *(kg)*
375PU-125	⅜ x 1¼	250 *1.11*	470 *2.09*	Full Thread	3 *4*	1.0 *0.5*
375PU-150	⅜ x 1½	250 *1.11*	470 *2.09*	¼ *6.4*	3 *4*	1.1 *0.5*
375PU-200	⅜ x 2	250 *1.11*	470 *2.09*	½ *12.7*	3 *4*	1.3 *0.6*
375PU-250	⅜ x 2½	250 *1.11*	470 *2.09*	¾ *19.1*	3 *4*	1.6 *0.7*
375PU-300	⅜ x 3	250 *1.11*	470 *2.09*	1 *25.4*	3 *4*	1.8 *0.8*
625PU-125	⅝ x 1¼	700 *3.11*	1,360 *6.05*	¼ *6.4*	12 *16*	2.5 *1.1*
625PU-150	⅝ x 1½	700 *3.11*	1,360 *6.05*	¼ *6.4*	12 *16*	2.8 *1.3*
625PU-200	⅝ x 2	700 *3.11*	1,360 *6.05*	¼ *6.4*	12 *16*	3.2 *1.5*
625PU-250	⅝ x 2½	700 *3.11*	1,360 *6.05*	¼ *6.4*	12 *16*	3.4 *1.5*
625PU-300	⅝ x 3	700 *3.11*	1,360 *6.05*	¼ *6.4*	12 *16*	3.9 *1.8*
625PU-350	⅝ x 3½	700 *3.11*	1,360 *6.05*	1¼ *6.4*	12 *16*	5.5 *2.5*

*Thread shear values shown represent a 3:1 safety factor.

Flat Washers

Material: PVC

Note: PVC washers are recommended for connections that utilize hex nuts and bolts.



Part Number	Size (in.)	Outside Diameter In *(mm)*	Wt/100 pcs Lbs *(kg)*
250E-999	¼	0.49 *12*	0.1 *0.05*
375E-999	⅜	1.00 *25*	0.1 *0.05*
500E-999	½	1.25 *32*	0.5 *0.2*
625E-999	⅝	1.50 *38*	0.5 *0.2*
750E-999	¾	1.50 *38*	1.0 *0.5*
1000E-999	1	2.25 *57*	1.5 *0.7*

Hex Flange Nuts



- The hex flange nut is preferred for applications that require additional thread engagement (such as with all-thread rod) or maximum thread shear strength.
- Material: glass-reinforced polyurethane.

Part Number	Size (in.)	Thread Shear Lbs *(kN)**	Height In *(mm)*	Torque Ft/Lbs *(N•m)*	Wt/100 pcs Lbs *(kg)*
375PU-FN-000	⅜-16	500 *2.22*	0.750 *19.1*	3 *4*	0.8 *0.4*
500PU-FN-000	½-13	1,200 *5.34*	0.855 *21.7*	8 *11*	1.6 *0.7*
625PU-FN-000	⅝-11	2,200 *9.79*	1.220 *31.0*	12 *16*	3.5 *1.6*
750PU-FN-000	¾-10	2,900 *12.90*	1.590 *40.4*	15 *20*	5.5 *2.5*

*Thread shear values shown represent a 3:1 safety factor.

Hex Nuts



Part Number	Size (in.)	Thread Shear Lbs *(kN)**	Height In *(mm)*	Torque Ft/Lbs *(N•m)*	Wt/100 pcs Lbs *(kg)*
250PU-000	¼-20	150 *0.67*	0.218 *5.5*	0.8 *1*	0.1 *0.05*
375PU-000	⅜-16	460 *2.05*	0.328 *8.3*	3 *4*	0.3 *0.1*
500PU-000	½-13	800 *3.56*	0.437 *11.1*	8 *11*	0.5 *0.2*
625PU-000	⅝-11	1,000 *4.45*	0.546 *13.9*	12 *16*	1.5 *0.7*

*Thread shear values shown represent a 3:1 safety factor.

50PU-500SP Channel Spacers



- Channel spacers are designed to prevent wall compression under heavy loading conditions. Such loading occurs during the torquing of hardware for channel fittings.
- The spacers are designed to be used only with 1⅝" channels and will accommodate ⅜" and ½" bolts.
- Material: molded from polyurethane



Wt/100 pcs: 2.0 Lbs (.91 kg)

Threaded Rod



Material: pultruded vinyl ester resin and is gray in color.

* Thread shear values shown represent a 3:1 safety factor.

** Standard lengths are 4' and 8'. The part number shown is for 4' lengths. To order eight foot lengths, add suffix "-96" to part number (Example: F200-3827-96)

Part Number	Size (in.)	Weight Lbs *(kg)*	Thread Shear Lbs *(kN)**	Torque Ft/Lbs *(N•m)*	Wt/100 pcs 4' in Len. Lbs *(kg)*
200-3827	⅜-16	0.07 *0.03*	415 *1.85*	5 *7*	35 *15.9*
200-3828	½-13	0.12 *0.05*	570 *2.54*	10 *14*	57 *25.9*
200-3829	⅝-11	0.18 *0.08*	1,260 *5.60*	40 *54*	91 *41.3*
200-3830	¾-10	0.28 *0.13*	1,700 *7.56*	50 *68*	133 *60.3*
200-3831	1-8	0.50 *0.23*	3,000 *13.34*	60 *81*	200 *90.7*

A-Konnector Rod Couplers

A-Konnectors provide an excellent means for extending FRP all-thread rods beyond their standard lengths. A-Konnectors are manufactured from glass-reinforced polyurethane and are colored gray. A-Konnectors are packaged in bags containing 25 pieces.



Part Number	Size (in.)	Length In (mm)	Thread Shear Lbs (kN)*	Wt/100 pcs Lbs (kg)
200-3840	⅜-16	2¼ *57.2*	800 *3.56*	6.5 *2.9*
200-3841	½-13	2¼ *57.2*	870 *3.87*	6.0 *2.7*
200-3842	⅝-11	2¼ *57.2*	1,500 *6.67*	13.0 *5.9*
200-3843	¾-10	2¼ *57.2*	1,500 *6.67*	11.0 *5.0*

* Thread shear values shown represent a 3:1 safety factor.

AIC-EC – Channel End Cap



- Material: red PVC and designed for 1⅝" channel.
- End caps are desired when the ends of the channel need to be enclosed. The cap easily installs by pressing it onto the end of the channel opening.

Wt/100 pcs: 3.4 Lbs (1.5 kg)

20E-5000 – Channel Capping Strip



- Material: PVC
- Installs simply by pressing it onto the channel opening. It is designed to be used when a cover is desired for the channel opening (such as concrete embedment channel).

Supplied in 10 foot lengths.



Wt/100 Ft: 5 Lbs (7.4 kg/100 m)

Nonmetallic U-Bolts





Note: Plate not included. Illustration purpose only

*Torque and load values shown represent a 3:1 safety factor.

Part Number	Size In	"A" Dim. In *(mm)*	"B" Dim. In *(mm)*	"C" Dim. In *(mm)*	"D" Dim. In *(mm)*	"TL" Dim. In *(mm)*	Load Lbs *(kN)**	Torque In/Lbs *(N•m)*	Wt/100 pcs Lbs *(kg)*
UB-050	½	0.937 *23.8*	0.375 *9.5*	1.568 *39.8*	2.412 *61.3*	1.25 *31.8*	135 *0.60*	40 *5*	3 *1.4*
UB-075	¾	1.125 *28.6*	0.375 *9.5*	1.662 *42.2*	2.600 *66.0*	1.25 *31.8*	135 *0.60*	40 *5*	3 *1.4*
UB-100	1	1.375 *34.9*	0.375 *9.5*	1.787 *45.4*	2.850 *72.4*	1.25 *31.8*	135 *0.60*	40 *5*	4 *1.8*
UB-125	1¼	1.687 *42.8*	0.375 *9.5*	1.943 *49.4*	3.162 *80.3*	1.25 *31.8*	135 *0.60*	40 *5*	4 *1.8*
UB-150	1½	2.000 *50.8*	0.375 *9.5*	2.100 *53.3*	3.475 *88.3*	1.25 *31.8*	135 *0.60*	40 *5*	5 *2.3*
UB-200	2	2.437 *61.9*	0.500 *12.7*	2.468 *62.7*	4.187 *106.3*	1.50 *38.1*	135 *0.60*	80 *9*	10 *4.5*
UB-250	2½	2.937 *74.6*	0.500 *12.7*	2.718 *69.0*	4.687 *119.0*	1.50 *38.1*	135 *0.60*	80 *9*	11 *5.0*
UB-300	3	3.562 *90.5*	0.500 *12.7*	3.031 *77.0*	5.312 *134.9*	1.50 *38.1*	135 *0.60*	80 *9*	14 *6.4*
UB-350	3½	4.062 *103.2*	0.500 *12.7*	3.281 *83.3*	5.812 *147.6*	1.50 *38.1*	135 *0.60*	80 *9*	15 *6.8*
UB-400	4	4.562 *115.9*	0.500 *12.7*	3.531 *89.7*	6.312 *160.3*	1.50 *38.1*	135 *0.60*	80 *9*	16 *7.3*
UB-600	6	6.750 *171.5*	0.625 *15.9*	5.750 *146.1*	9.875 *250.8*	3.25 *82.6*	135 *0.60*	120 *14*	17 *7.7*

- Unistrut Nonmetallic U-Bolts provide a corrosion resistant alternative to traditional metallic U-Bolts. They have oversized diameters which allow them to hold steel conduit and plastic pipe. These bolts will outlast stainless steel in most corrosive applications.
- Each U-Bolt comes with two polyurethane hex nuts. Additional nuts and washers can be purchased separately.
- Material: glass-reinforced polyurethane

Channel Fittings

- Channel Fittings are required to fabricate structures and are easily attached to Channels with channel nuts and polyurethane fasteners. The fittings are offered in two types; fabricated (cut from flat stock) or molded.
- Material (Fabricated Fittings): Either polyester (P Series) or vinyl ester (V Series) material.
- Material (Molded Fittings): All molded fittings with the exception of the post bases are molded in polyurethane.

Note: The drawings for all fittings are shown with the Aickinstrut flange profile, however they can be used with either channel profile. All fittings are provided with 13⁄32" holes which accommodate 3⁄8" hardware. However several of the molded fittings are 1/4" thick and come with 9/16" holes which accommodate 1/2" hardware.

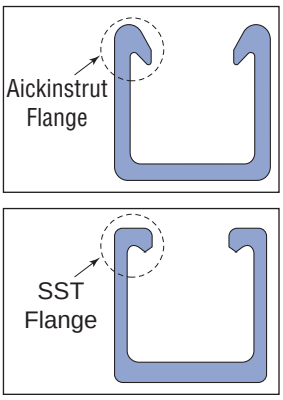

20P-2500, 20V-2500



Wt/100 pcs: 12 Lbs (5.4 kg)

20P-2502, 20V-2502



Wt/100 pcs: 17 Lbs (7.7 kg)

20P-2504, 20V-2504



Wt/100 pcs: 24 Lbs (10.9 kg)

20P-2506, 20V-2506



Wt/100 pcs: 32 Lbs (14.5 kg)

20P-2508, 20V-2508



Wt/100 pcs: 17 Lbs (7.7 kg)

20P-2510, 20V-2510



Wt/100 pcs: 25 Lbs (11.3 kg)

20P-2512, 20V-2512



Wt/100 pcs: 26 Lbs (11.8 kg)

20P-2514, 20V-2514



Wt/100 pcs: 20 Lbs (9.1 kg)

20P-2516, 20V-2516



Wt/100 pcs: 32 Lbs (14.5 kg)

20P-2518, 20V-2518



Wt/100 pcs: 33 Lbs (15.0 kg)

20P-2520, 20V-2520



Wt/100 pcs: 45 Lbs (20.4 kg)

20P-2522, 20V-2522



Wt/100 pcs: 21 Lbs (9.5 kg)

20P-2524, 20V-2524



Wt/100 pcs: 32 Lbs (14.5 kg)

Atkore Unistrut

20P-2526, 20V-2526



Wt/100 pcs: 45 Lbs (20.4 kg)

20P-2528, 20V-2528



Wt/100 pcs: 20 Lbs (9.1 kg)

20P-2530, 20V-2530



Wt/100 pcs: 50 Lbs (22.7 kg)

20P-2534, 20V-2534



Wt/100 pcs: 77 Lbs (34.9 kg)

20P-2540, F20V-2540



Wt/100 pcs: 41 Lbs (18.6 kg)

50PU-2538



Wt/100 pcs: 57 Lbs (26.0 kg)

50PU-2611



Wt/100 pcs: 9 Lbs (4.1 kg)

50PU-2613



Wt/100 pcs: 16 Lbs (7.3 kg)

50PU-1508 (1½"), 50PU-2008 (1⅝")



Wt/100 pcs: 27 Lbs (12.2 kg)

50PU-2045 (1⅝")



Wt/100 pcs: 35 Lbs (15.9 kg)

50PU-2636



Wt/100 pcs: 14 Lbs (6.4 kg)

50PU-2090 (1⅝")



Wt/100 pcs: 35 Lbs (15.9 kg)

50PU-2616



Wt/100 pcs: 51 Lbs (23.1 kg)

20PU-5853 (1⅝"), 20PU-5855 (1⅛")



Wt/100 pcs: 71 Lbs (32.2 kg)

20PU-5903 (3¼"), 20PU-5905 (2¼")



Wt/100 pcs: 86 Lbs (39.0 kg)

Adjustable Pipe Clamps

- Unistrut Adjustable Pipe Clamps are manufactured from glass-reinforced polyurethane and are adjustable to accommodate a wide range of outside diameters. They can be utilized with a variety of piping systems including: PVC, fiberglass, copper, rigid steel conduit and PVC coated rigid steel conduit.
- Care should be taken not to exceed 3 ft./lbs. of torque on the adjustable pipe straps.



Part Number	O.D. Pipe Size (in.)	Design Load Type 1 Lbs *(kN)*	Design Load Type 2 Lbs *(kN)*	Torque Ft/Lbs *(N•m)*	Wt/100 pcs Lbs *(kg)*
200-3100	½ – 1½	135 *(0.6)*	65 *(0.3)*	0.8 *(1)*	3 *(1.4)*
200-3110	1½ – 2¼	135 *(0.6)*	65 *(0.3)*	3 *(4)*	5 *(2.3)*
200-3120	2¼ – 3¼	145 *(0.6)*	70 *(0.3)*	3 *(4)*	5 *(2.3)*
200-3130	3 – 4	215 *(1.0)*	70 *(0.3)*	3 *(4)*	8 *(3.6)*
200-3140	4 – 6½	215 *(1.0)*	70 *(0.3)*	3 *(4)*	10 *(4.5)*

*Design loads shown represent a 3:1 safety factor.

Rigid Pipe Clamps

Part Number	Nominal & Rigid Metal Size (in.)	PVC, Sch. 80 Design Loads* In (mm)	Type 1 Lbs (kN)	Type 2 Lbs (kN)	FRP Bolt Size (in.)	FRP Bolt Torque Ft/Lbs (N•m)	Wt/100 pcs Lbs (kg)
PCR-050	½	0.840 *(21.3)*	225 *(1.0)*	90 *(0.4)*	⅜ x 1¼		3 *(1.4)*
PCR-075	¾	1.050 *(26.7)*	225 *(1.0)*	90 *(0.4)*	⅜ x 1¼		3 *(1.4)*
PCR-100	1	1.315 *(33.4)*	225 *(1.0)*	90 *(0.4)*	⅜ x 1¼		4 *(1.8)*
PCR-125	1¼	1.660 *(42.2)*	225 *(1.0)*	90 *(0.4)*	⅜ x 1¼		5 *(2.3)*
PCR-150	1½	1.900 *(48.3)*	225 *(1.0)*	90 *(0.4)*	⅜ x 1¼		5 *(2.3)*
PCR-200	2	2.375 *(60.3)*	225 *(1.0)*	90 *(0.4)*	⅜ x 1¼	3 *(4)*	5 *(2.3)*
PCR-250	2½	2.875 *(73.0)*	225 *(1.0)*	90 *(0.4)*	⅜ x 1¼		7 *(3.2)*
PCR-300	3	3.500 *(88.9)*	225 *(1.0)*	90 *(0.4)*	⅜ x 1¼		10 *(4.5)*
PCR-400	4	4.500 *(114.3)*	300 *(1.3)*	125 *(0.6)*	⅜ x 1¼		12 *(5.4)*
PCR-600	6	6.625 *(168.3)*	300 *(1.3)*	125 *(0.6)*	⅜ x 1¼		15 *(6.8)*
PCR-800	8	8.625 *(219.1)*	300 *(1.3)*	125 *(0.6)*	⅜ x 1¼		18 *(8.1)*

*Design loads shown represent a 3:1 safety factor.



Rigid Pipe Clamps resemble the more traditional style of pipe clamps and are sized based on the pipe inside diameter or nominal size.
Polyurethane clamps are recommended for applications up to 160°F. For high temperature applications (up to 230°F).
Care should be taken not to exceed the recommended torque values of the rigid pipe clamps.
Material: glass-reinforced polyurethane.

Two Hole Pipe Straps

Part No.	Dimension A (in.)	Dimension B (in.)	Bolt Size (in.)	Material Size (in.)	Design Load (lbs)* Type 1	Design Load (lbs)* Type2	Torque (ft./lbs.)
PS050	0.840	4.840	½	¼ X 1⅝	135	50	4
PS075	1.050	5.050					
PS100	1.315	5.315					
PS150	1.900	5.900					
PS200	2⅜	6.375					
PS250	2⅞	6.875					
PS300	3½	7.500					
PS350	4	8.000					
PS400	4½	8.500			175	60	
PS500	5⁹⁄₁₆	9.563					
PS600	6⅝	10.625					
PS800	8⅝	12.625			225	125	
PS1000	10¾	15.750	⅝	¼ X 1⅝	225	125	10
PS1200	12¾	16.250					
PS1400	14	18.000		⅜ X 1⅝	250	150	
PS1600	16	20.000					
PS1800	18	23.000					

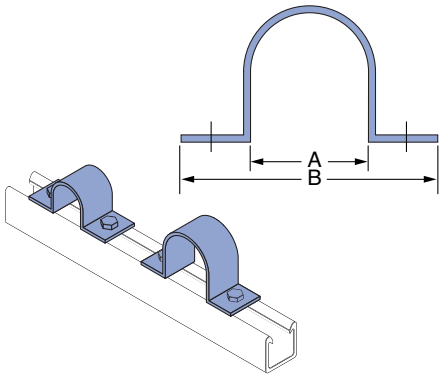

- Two Hole Pipe Straps are designed for use in securing pipe, conduit and ducts to Channel. Two hole fiberglass straps can also be used independently from the channel for surface mounting. All sizes of the straps are suitable for load bearing applications.
- Material: fire-retardant, glass-reinforced polyester resin.
- For extreme chemical environments, the straps can be manufactured from vinyl ester resin. Larger diameter straps for special applications are also available. Contact the factory for pricing and availability of vinyl ester and large diameter straps. Two hole pipe straps should not be torqued above recommended values.

Notes:
(1) Bolts and channel nuts are sold separately.
(2) When bolting onto 1⅝" channel a 1¼" long bolt is req'd.

Atkore Unistrut

Molded Clevis Hangers



Material: glass-reinforced polyurethane.

*Design load values shown represent a 3:1 safety factor.

Part Number	Nominal Diameter In *(mm)*	Max. Pipe O.D. In *(mm)*	"A" Dim. In *(mm)*	"B" Dim. In *(mm)*	"C" Dim. In *(mm)*	Hanger Rod In *(mm)*	Load* Lbs *(kN)*	Wt/100 pcs Lbs *(kg)*
CVHPU-100	½ - 1 *12.7 - 25.4*	1 *25.4*	1.500 *38.1*	4.25 *108*	1.25 *32*	½ *12.7*	670 *2.98*	29 *13.2*
CVHPU-150	1¼- 1½ *31.8 - 38.1*	1½ *38.1*	2.000 *50.8*	5.14 *131*	1.25 *32*	½ *12.7*	670 *2.98*	40 *18.1*
CVHPU-200	1½ - 2 *38.1 - 50.8*	2 *50.8*	2.500 *63.5*	6.52 *166*	1.25 *32*	½ *12.7*	730 *3.25*	43 *19.5*
CVHPU-400	2½ - 4 *63.5 - 101.6*	4 *101.6*	5.125 *130.2*	10.00 *254*	1.50 *38*	½ *12.7*	1,150 *5.12*	129 *58.5*
CVHPU-600	4½ - 6 *114.3 - 152.4*	6 *152.4*	6.750 *171.5*	12.33 *313*	1.50 *38*	½ *12.7*	1,170 *5.20*	168 *76.2*

Fabricated Clevis Hangers



Material: glass-reinforced polyester resin.

*Design load values shown represent a 3:1 safety factor.

Part Number	Size Range In *(mm)* A	Dimensions - In *(mm)* T	H	H1	W	Hanger Rod In *(mm)*	Trans Rod In *(mm)*	Spreader Rod O.D. In *(mm)*	Loads* Lbs *(kN)*	Wt/100 pcs Lbs *(kg)*
100-1500	1–1½ *25.4 – 38.1*	⅛ *3.2*	2¾ *69.9*	1⅞ *47.6*	1 ½ *38.1*	½ *12.7*	⅜ *9.5*	½ *12.7*	60 *0.27*	21 *9.5*
100-1501	1½ – 2 *38.1 – 50.8*	⅛ *3.2*	3½ *88.9*	2⅜ *60.3*	1 ½ *38.1*	½ *12.7*	⅜ *9.5*	½ *12.7*	60 *0.27*	25 *11.3*
100-1502	2 – 2⅝ *50.8 – 66.7*	⅛ *3.2*	4¾ *120.7*	3 *76.2*	2 *50.8*	½ *12.7*	⅜ *9.5*	½ *12.7*	90 *0.40*	55 *24.9*
100-1503	2½ – 3¼ *63.5 – 82.6*	⅛ *3.2*	5½ *139.7*	3⅝ *92.1*	2 *50.8*	½ *12.7*	⅜ *9.5*	½ *12.7*	120 *0.53*	57 *25.9*
100-1504	3 – 3⅞ *76.2 – 98.4*	⅛ *3.2*	7 *177.8*	4¼ *108.0*	2 *50.8*	⅝ *15.9*	⅜ *9.5*	½ *12.7*	160 *0.71*	61 *27.7*
100-1505	4 – 5⅛ *101.6 – 130.2*	13⁄16 *20.6*	8½ *215.9*	5⅝ *142.9*	2 *50.8*	⅝ *15.9*	⅜ *9.5*	½ *12.7*	250 *1.11*	82 *37.2*
100-1506	6 – 7⅛ *152.4 – 181.0*	13⁄16 *20.6*	10⅞ *276.2*	7½ *190.5*	3 *76.2*	⅝ *15.9*	⅜ *9.5*	½ *12.7*	300 *1.33*	136 *61.7*
100-1507	8 – 9¼ *203.2 – 235.0*	¼ *6.4*	14 *355.6*	9¾ *247.7*	3 *76.2*	⅝ *15.9*	⅜ *9.5*	½ *12.7*	350 *1.56*	189 *85.7*
100-1508	10 – 11⅜ *254.0 – 288.9*	¼ *6.4*	18 *457.2*	12 *304.8*	4 *101.6*	⅝ *15.9*	½ *12.7*	¾ *19.1*	450 *2.00*	333 *151.0*
100-1509	12 – 13½ *304.8 – 342.9*	¼ *6.4*	21½ *546.1*	14⅛ *358.8*	5 *127.0*	⅝ *15.9*	½ *12.7*	¾ *19.1*	600 *2.67*	350 *158.8*
100-1510	14 – 15¾ *355.6 – 400.1*	¼ *6.4*	24½ *622.3*	16½ *419.1*	5 *127.0*	¾ *19.1*	½ *12.7*	¾ *19.1*	700 *3.11*	872 *395.5*
100-1511	16 – 18 *406.4 – 457.2*	⅜ *9.5*	27⅜ *695.3*	19½ *495.3*	6 *152.4*	¾ *19.1*	¾ *19.1*	1 *25.4*	750 *3.34*	1,023 *464.0*
100-1512	19 – 21 *482.6 – 533.4*	⅜ *9.5*	34½ *876.3*	22½ *571.5*	6 *152.4*	¾ *19.1*	¾ *19.1*	1 *25.4*	800 *3.56*	1,673 *758.9*
100-1513	21 – 22 *533.4 - 558.8*	½ *12.7*	35½ *901.7*	24 *609.6*	6 *152.4*	¾ *19.1*	¾ *19.1*	1 *25.4*	850 *3.78*	2,323 *1,053.7*
100-1514	22 – 24 *558.8 - 609.6*	½ *12.7*	41 *1,041.4*	28 *711.2*	6 *152.4*	¾ *19.1*	¾ *19.1*	1 *25.4*	900 *4.00*	2,973 *1,348.5*

200-4101 Unisert Channel Insert

- Unisert is a polyurethane nonmetallic insert which can be used with standard cable ties for securing tubing, conduit and cables to standard metal channels.
- The Unisert works with all 1⅝" channels that are 13⁄16" deep or more. One size fits 12, 14 and 16 metal gauge channels.

Note: For use only with metallic channel.



Wt/100 pcs: 1.0 Lbs (.5 kg)

375PU & 500PU — Molded Beam Clamps

Material: glass-reinforced polyurethane



Assembly Part Number	Size In	Thread Shear Lbs *(kN)**	Torque Ft/Lbs *(N•m)*	Wt/100 pcs Lbs *(kg)*
375PU-BC	⅜	400 *1.78*	10 *14*	30 *13.6*
500PU-BC	½	400 *1.78*	10 *14*	30 *13.6*

*Design load values shown represent a 3:1 safety factor.

RGBC — Molded Beam Clamp Assembly





F375PU-BCCLP (⅜") Beam Clip Only

Note: Beam clamp clip must be purchased separately. Illustration purpose only

Material: glass-reinforced polyurethane.

Part Number	Size In	Thread Shear Lbs *(kN)**	Torque Ft/Lbs *(N•m)*	Wt/100 pcs Lbs *(kg)*
RGBC-1	⅜	500 *2.22*	10 *14*	43 *19.5*
RGBC-2	½	500 *2.22*	10 *14*	43 *19.5*
RGBC-3	⅝	500 *2.22*	10 *14*	43 *19.5*

*Design load values shown represent a 3:1 safety factor.

Power-Rack Stanchions

The Power-Rack Stanchion is made entirely from glass-reinforced nylon, these stanchions offer greater corrosion resistance than classical metal stanchions. The interlocking design allows the arm to "lock" into nine different levels on the 14¼" stanchions and fourteen on the 17½" stanchion. Glass-reinforced polyurethane stanchions are available as a special order. Contact Unistrut for pricing and availability.

Dimensions – The stanchion back has ⁹⁄₁₆" x ¹⁵⁄₁₆" holes to accept fasteners for mounting. There are two mounting holes in the 21⅜" long stanchion and three in the 33⁵⁄₁₆" long stanchion. Thickness at the slotted mounting holes is 1⅞". The mounting holes are spaced on 12" centers and require ½" diameter fasteners.

Installation – The Stanchions can be anchored into existing concrete structures using any industrial anchoring system. For new concrete structures, the Stanchions can be mounted to fiberglass concrete embedment channel and attached with ½" channel nuts and ½"x 3" Fiberfast Bolts.

Fire Retardance – Power-Rack materials meet or exceed the requirements of UL94 HB.

Loading – The recommended allowable loads on Power-Rack Stanchions vary depending upon the position of the arm. Use these guidelines for a safe, reliable installation:

- Total load on any one arm should not exceed 800 lbs.
- The sum of the loads on an arm multiplied by their distances to the wall stanchion should not exceed 1200 in./lbs.

Example: A cable weighing 200 lbs. is positioned on an arm at a distance of 5" from the wall stanchion.

If the total load is less than 800 lbs and the sum of the load multiplied by their distances to the wall stanchion does not exceed 1200 in./lbs., then the system is adequate. In this case,

Total load (200<800 lbs) = OK
Tot. moment (200x5 in. = 1000<1200 in./lbs.) = OK

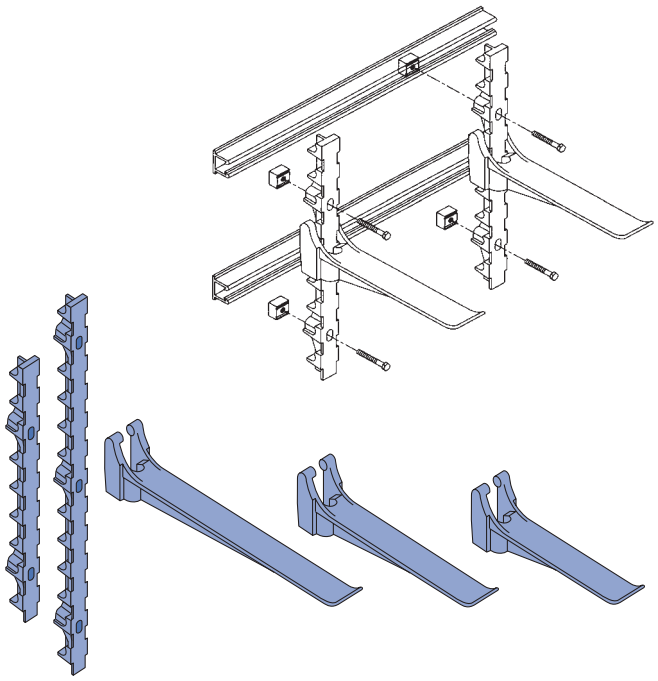

Part No.	Description	Size In *(mm)*	Wt/100 pcs Lbs *(kg)*	Load (lbs.)* Lbs *(kN)*
20N-ARM08	Arm	8 *203.2*	100 *45.4*	800 *3.56*
20N-ARM14	Arm	14¼ *362.0*	116 *52.6*	800 *3.56*
20N-ARM17	Arm	17½ *444.5*	145 *65.8*	800 *3.56*
20N-ARM23	Arm	23 ⅞ *606.4*	186 *84.4*	800 *3.56*
20N-STA21	Stanchion	21⅜ *542.9*	149 *67.6*	N/A
20N-STA33	Stanchion	33⁵⁄₁₆ *846.1*	231 *104.8*	N/A

*Design load values shown represent a 3:1 safety factor.

Fiberglass Clamps Design Load Information

There are two types of piping system loadings:

- overhead (Type 1) and
- vertical (Type 2)

as described below.

All pipe straps and clamps show the recommended loading for both types of loading.

Type 1 Overhead Design Load

The design load shown represents pipes supported below the strut. The design loads shown are based on a minimum ultimate failure safety factor of 3:1.



Type 2 Vertical Design Load

The design loading shown can be achieved with the addition of a vertical stop lock assembly (Part #F200-4219) installed directly beneath the pipe clamp. The adjacent illustration shows how the vertical stop lock assembly provides additional support for pipe and how it can be used to achieve full Type 2 design loads.

Design loads are based on a minimum clamp slip safety factor or 3:1. It is recommended that stop lock assemblies be used for all vertical pipe support applications.



Chemical Compatibility Table

Chemical	Series									
	E		P		V		PU		N	
	Rigid PVC		Poly/Glass		Vinyl/Glass		Poly		Nylon	
	70°	160°F	70°	160°F	70°	160°F	70°	160°F	70°	160°F
Acetic Acid, Up to 50%	R	R	R	R	R	R	R	–	nr	nr
Acetone, Up to 10%	nr	nr	nr	nr	nr	nr	R	–	R	R
Aluminum Hydroxide	R	R	R	R	R	R	R	–	nr	nr
Ammonium Hydroxide (Aqueous Ammonia), Up to 5%	R	R	nr	nr	R	R	R	–	–	–
Ammonium Hydroxide (Aqueous Ammonia), Up to 10%	R	R	nr	nr	R	150°	R	–	–	–
Ammonium Hydroxide, Up to 20%	R	R	nr	nr	R	150°	R	–	–	–
Ammonium Nitrate	R	nr	R	R	R	R	R	–	–	–
Ammonium Phosphate	R	R	R	nr	R	R	R	–	–	–
Ammenium Sulfide, saturated	R	R	nr	nr	R	120°	R	–	–	–
Aqua Regia, fumes	nr	nr	nr	nr	R	150°	nr	–	–	–
Benzene	nr	nr	nr	nr	nr	nr	R	R	–	R
Benzoic Acid	R	R	R	R	R	R	R	–	–	–
Bromine, wet gas	R	nr	nr	nr	R	100°	–	–	–	–
Butylene Glycol, Up to 100%	R	R	R	R	R	R	R	–	R	R
Butyric Acid, Up to 50%	nr	nr	R	R	R	R	R	–	–	–
Calcium Hydroxide	R	R	R	nr	R	R	R	–	–	–
Calcium Hypochlorite	R	R	R	nr	R	R	R	–	nr	nr
Chlorine, Dry Gas	nr	nr	nr	nr	R	R	–	–	–	–
Chlorine, Wet Gas	nr	nr	nr	nr	R	R	–	–	–	–
Chlorine, Liquid	nr	nr	nr	nr	nr	nr	–	–	–	–
Chlorine, Water	nr	nr	R	R	R	R	R	–	nr	nr
Chromic Acid, Up to 5%	R	R	nr	nr	R	R	–	–	R	R
Copper Chloride	R	R	R	R	R	R	R	–	–	–
Copper Cyanide	R	R	R	nr	R	R	R	–	–	–
Copper Fluoride	R	R	R	nr	R	R	R	–	–	–
Copper Nitrate	R	R	R	R	R	R	R	–	–	
Copper Sulfate	R	R	R	R	R	R	R	–	–	–
Dechlorinated Brine Storage	R	R	–	–	R	R	R	–	–	–
Esters, Fatty Acid	nr	nr	R	R	R	R	R	–	–	–
Ferric Chloride	R	R	R	R	R	R	R	–	–	–
Ferrous Chloride	R	R	R	R	R	R	R	–	–	–
Fluoboric Acid	R	R	R	120°	R	R	–	–	–	–
Fluosilicic Acid, Up to 10%	nr	nr	nr	nr	R	R	–	–	nr	nr
Fluosilicic Acid, Up to 32%	nr	nr	nr	nr	R	100°	–	–	–	–

Chemical Compatibility Table

Chemical	Series									
	E		P		V		PU		N	
	Rigid PVC		Poly/Glass		Vinyl/Glass		Poly		Nylon	
	70°	160°F	70°	160°F	70°	160°F	70°	160°F	70°	160°F
Formic Acid, Up to 10%	R	R	nr	nr	R	R	R	–	nr	nr
Formic Acid, Up to 50%	R	R	nr	nr	R	100°	R	–	–	–
Gasoline, Aviation	R	nr	R	nr	R	R	R	–	–	–
Green Liquor, Pulp Mill	R	R	–	–	R	R	–	–	–	–
Hydrochloric Acid, Up to 15%	R	R	R	nr	R	R	R	–	–	–
Hydrochloric Acid, Up to 37%	R	R	R	nr	R	R	R	–	–	–
Hydrofluoric Acid,Up to 10%	R	R	nr	nr	R	150°	–	–	–	–
Hydrofluoric Acid, Up to 20%	R	nr	nr	nr	R	100°	–	–	–	–
Hydrogen Chloride Wet Gas	nr	nr	R	nr	R	R	nr	–	–	–
Hydrogen Sulfide Wet Gas	R	R	R	nr	R	R	R	–	–	–
Lactic Acid	R	R	R	nr	R	R	R	–	–	–
Lead Nitrate	R	R	–	–	R	R	R	–	–	–
Magnesium Hydroxide	R	R	nr	nr	R	R	R	–	R	R
Nickel Sulfate	R	R	nr	nr	R	R	R	–	–	–
Nitric Acid, Up to 5%	R	R	nr	nr	R	150°	R	–	–	–
Nitric Acid, Up to 35%	R	R	nr	nr	R	150°	R	–	–	–
Nitric Acid, Vapor	R	R	nr	nr	R	R	R	–	–	–
Perchloric Acid, Up to 10%	nr	nr	nr	nr	R	150°	R	–	nr	nr
Pickling Liquids, 3-5% H2S04	R	R	R	R	R	R	R	–	–	–
Phosphoric Acid	R	R	nr	nr	R	R	R	–	nr	nr
Super or Poly (115%, P20%)	R	R	nr	nr	R	R	R	–	–	–
Vapor or Condensate	R	R	nr	nr	R	R	R	–	–	–
Potassium Chloride	R	R	R	R	R	R	R	–	–	–
Potassium Nitrate	R	R	R	R	R	R	R	–	–	–
Potassium Persulfate	R	R	nr	nr	R	R	R	–	–	–
Silver Cyanide, Up to 5%	R	R	nr	nr	R	R	R	–	–	–
Sodium Hydroxide,Up to 25%	R	R	nr	nr	R	150°	R	–	–	–
Sodium Hydroxide, Up to 50%	R	R	nr	nr	R	180°	R	–	R	R
Sodium Hypochlorite, Up to 15%	R	R	nr	nr	R	150°	R	–	nr	nr
Sodium Nitrate	R	R	R	R	R	R	R	–	–	–
Sodium Sulfate	R	R	R	nr	R	R	R	–	–	–
Sodium Sulfide	R	R	nr	nr	R	R	R	–	–	–
Sulfuric Acid, Up to 25%	R	R	R	R	R	R	R	–	nr	nr
Sulfuric Acid, Up to 70%	R	R	nr	nr	R	R	R	–	nr	nr
Sulfuric Acid, Up to 75%	nr	nr	nr	nr	R	120°	R	–	nr	nr
Sulfuric Acid, Up to 80%	nr	nr	nr	nr	nr	nr	nr	–	nr	nr
Sulfuric Acid, Vapor	R	R	R	nr	R	R	R	–	–	–
Trichlorethylene, Fumes	nr	nr	nr	nr	R	120°	R	–	–	–
Trisodium Phosphate	R	R	R	nr	R	R	R	–	–	–
Urea	R	R	R	nr	R	150°	R	–	R	R
Vegetable Oils	R	R	R	R	R	R	R	–	R	R
Vinegar	R	R	R	R	R	R	R	R	R	R
White Liquor, Pulp Mill	R	R	–	–	R	R	R	–	–	–

Note

The recommendations contained in this table are made without guarantee of representation as to results. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Unistrut as to effects of such use or results to be obtained nor does Unistrut assume any liability arising out of the use by others of the products referenced in this table. Nor is the information herein to be construed as absolutely complete since additional information may be needed or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations. We suggest that you evaluate these recommendations and suggestions in your own laboratory prior to use. Our responsibility for claims arising from breach of warranty, negligence, or otherwise is limited to the purchase price of the material.

Legend

"nr" - "Not Recommended" for use

"R" - "Recommended"

"–" - no information available

1.0 SCOPE

1.1 This specification covers the requirements for the Unistrut Nonmetallic Channel Framing System.

2.0 MATERIAL

2.1 FRP channel shall be of pultruded glass-reinforced polyester or vinyl ester resin having the physical property values listed in this catalog.

2.2 Some accessories shall be of injection molded, 40% long glass fiber reinforced polyurethane, or nylon.

3.0 COMPOSITION

3.1 Glass-reinforced channel shall have a synthetic surfacing veil applied on exterior surfaces to improve weatherability and inhibit ultraviolet degradation. An ultraviolet stabilizer shall be incorporated in the resin formulation to further inhibit ultraviolet degradation.

4.0 STRUCTURAL DESIGN

4.1 Channel shall incorporate Unistrut's Aickinstrut flange profile design which allows full and positive interlocking contact of channel accessories and prohibits premature flange failure from torqued accessories.

4.2 Channel profile dimensions shall be:

1⅝" x 1⅝" x ¼" or
1½" x 1⅛" x ⅛".

4.3 All 1⅝" x 1⅝" channel profiles shall have a minimum pull out resistance of 1,000 pounds when load is applied over a ⅜" long section of the inside flanges.

4.4 Channel section lengths shall be supplied in 10' or 20' lengths (±⅛").

4.5 Universal Pipe Clamps shall have full interlocking contact with interior channel flanges to maximize pull-out resistance and be adjustable to accommodate a minimum ¾" variance in piping or conduit O.D. sizes.

5.0 STANDARDS

5.1 Glass-reinforced channels covered in this specification shall have a flame spread rating of 25 or less when tested per ASTM E84 and meet the requirements of UL 94V0 thereby qualifying them as Class 1 material in the Uniform Building Code.

5.2 Glass-reinforced channels covered in this specification shall comply with the requirements of ASTM D 3917 and ASTM D 4385 which govern the dimensional tolerance and visual defects of pultruded shapes.

6.0 GENERAL

6.1 Unistrut nonmetallic Channel Framing shall be furnished as a system which includes all the necessary fasteners, channel splice plates, brackets, sealants, hangers, pipe clamps, etc.

6.2 Nonmetallic fasteners shall be manufactured from long glass fiber reinforced polyurethane to ensure maximum strength and corrosion resistance.

6.3 All components of the Unistrut Channel Framing System shall be nonmetallic except where type 316 stainless steel hardware is used as part of the assembly.

6.4 The manufacturer shall not have had less than 10 years experience in manufacturing strut systems.

6.5 All products are manufactured in the United States of America.

SPECIAL METALS

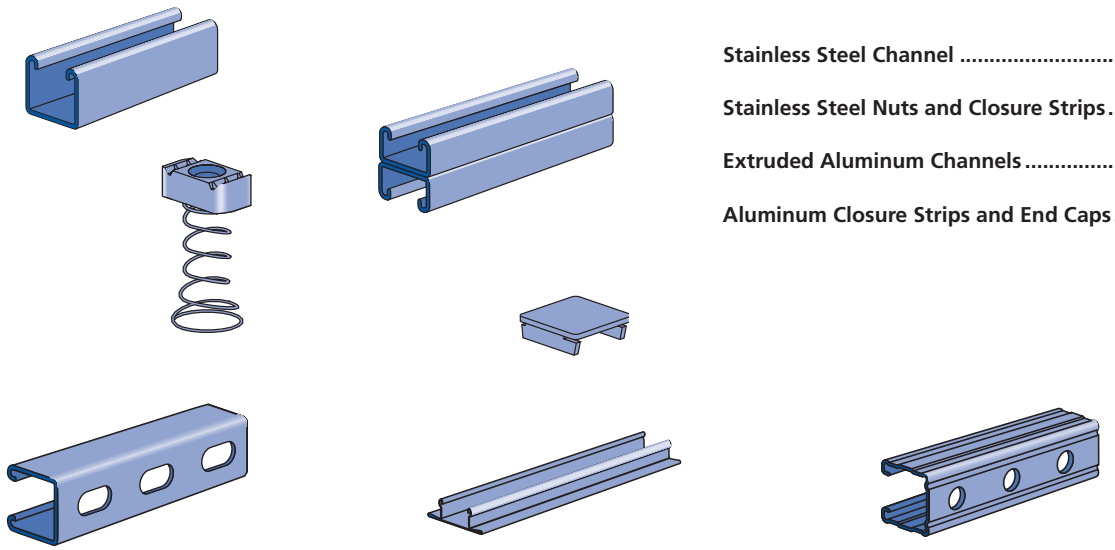

Stainless Steel Channel 206

Stainless Steel Nuts and Closure Strips 207

Extruded Aluminum Channels ..... 208 - 209

Aluminum Closure Strips and End Caps 209

MATERIAL

STAINLESS STEEL

Channels: ASTM A 240 (Type 304)

Sintered nuts: ASTM B783 (Type SS316N1-25)

Fittings:

ASTM A240 (Type 304 or Type 316) or ASTM A276 (Type 304 or Type 316)

Contact factory for specific material availability.

ALUMINUM

Channels (Extruded): ASTM B221 (Type 6063-T6)

Fittings: ASTM B209 (Type 1100F or Type 5052-H32)

Nuts: Stainless steel nuts are recommended for Aluminum channel

Material/Finish	Part Number Suffix	Example
Stainless Steel Type 304	*SS*	*P1109 SS*
Stainless Steel Type 316	*ST*	*P1109 ST*

LOAD DATA (BEAM & COLUMN)

To determine maximum allowable beam and column loading for channels in this section, multiply the load data in the appropriate mild steel channel sections of this catalog by the following factors:

Channel Material	Beam Load % Factor	Column Load % Factor
Extruded Aluminum	33%	33%
Stainless Steel	100%	100%

LOAD DATA (SLIP & PULL OUT)

EXTRUDED ALUMINUM

To determine nut slip resistance, multiply load data for appropriate nut by 75%. To determine nut pull-out load, multiply load data for appropriate nut by 50%.

STAINLESS STEEL

For design assistance, consult Unistrut customer engineering.

PRODUCT AVAILABILITY

Most fittings and channels shown in this catalog, are available in aluminum or stainless steel. Consult factory for ordering information.

DIMENSIONS

Imperial dimensions are illustrated in inches. Metric dimensions are shown in parenthesis or as noted. Unless noted, all metric dimensions are in millimeters and rounded to one decimal place.

Special Metals Pictorial Index

Atkore Unistrut

P1000 Series (12 gauge)

P1000 SS
Pg 206


P1001 SS
Pg 206

P1100 Series (14 gauge)

P1100 SS
Pg 206


P1101 SS
Pg 206

P3000 Series (12 gauge)

P3000 SS
Pg 206

P3300 Series (12 gauge)

P3300 SS
Pg 206

P3301 SS
Pg 206

P4000 Series (16 gauge)

P4000 SS
Pg 206

P6000 Series (19 gauge)

P6000 SS
Pg 206

P7000 Series (19 gauge)

P7000 SS
Pg 206

Closure Strips and End Caps

P3184 EA
Pg 209

P1280 EA, P4280 EA,
P5580 EA Pg 209

Stainless Steel Channel Nuts


P1006 - P1010
Pg 207

P4006 - P4010
Pg 207


P5506 U - P5510U
Pg 207

P4008UT
Pg 207

A1006 SS, A1008 SS
Pg 207

A4006 SS, A4008 SS
Pg 207

Extruded Aluminum Channels

P1000 EA
Pg 208

P1001 EA
Pg 208

P4000 EA
Pg 208

P4001 EA
Pg 208


P5500 EA
Pg 208

A1000 EA
Pg 208

A4000 EA
Pg 208

A4001 EA
Pg 209

P6000 EA
Pg 209

P6001 EA
Pg 209

P7000 EA
Pg 209

P7001 EA
Pg 209

P1000 Series

P1000



Wt/100 Ft: 190 Lbs (283 kg/100m)

P1001



Wt/100 Ft: 380 Lbs (566 kg/100m)

P1000HS

9/16" (14.3) Dia. Holes
1 7/8" (47.6) on Center



Wt/100 Ft: 185 Lbs (275 kg/100m)

P1000T

Slots are
1⅛" (28.6) x 9/16" (14.3)
2" (50.8) on Center



Wt/100 Ft: 185 Lbs (275 kg/100m)

P1100 Series

P1100



Wt/100 Ft :142 Lbs (211 kg/100m)

P1101



Wt/100 Ft : 284 Lbs (422 kg/100m)

P1100HS

9/16" (14.3) Dia. Holes
1 7/8" (47.6) on Center



Wt/100 Ft : 136 Lbs (202 kg/100 m)

P1100T

Slots are
1⅛" (28.6) x 9/16" (14.3)
2" (50.8) on Center



Wt/100 Ft: 136 Lbs (202 kg/100m)

P3000 Series

P3000



Wt/100 Ft: 170 Lbs (253 kg/100m)

P3000HS

9/16" (14.3) Dia. Holes
1 7/8" (47.6) on Center



Wt/100 Ft: 165 Lbs (112 kg/100m)

P3000T

Slots are
1⅛" (28.6) x 9/16" (14.3)
2" (50.8) on Center



Wt/100 Ft: 165 Lbs (112 kg/100m)

P3300 Series

P3300



Wt/100 Ft: 135 Lbs (201 kg/100m)

P3301



Wt/100 Ft: 270 Lbs (402 kg/100m)

P3300HS

9/16" (14.3) Dia. Holes
1 7/8" (47.6) on Center



Wt/100 Ft: 130 Lbs (193 kg/100m)

P3300T

Slots are
1⅛" (28.6) x 9/16" (14.3)
2" (50.8) on Center



Wt/100 Ft: 130 Lbs (193 kg/100m)

P4000 Series

P4000



Wt/100 Ft: 82 Lbs (122 kg/100m)

P4000HS

9/16" (14.3) Dia. Holes
1 7/8" (47.6) on Center



Wt/100 Ft: 79 Lbs (110 kg/100m)

P4000T

Slots are
1⅛" (28.6) x 9/16" (14.3)
2" (50.8) on Center



Wt/100 Ft: 79 Lbs (110 kg/100m)

P6000



Wt/100 Ft: 37 Lbs (55 kg/100m)

P7000



Wt/100 Ft: 36 Lbs (54 kg/100m)

P1184 — Closure Strip





Standard length 10 Ft.
Material: Stainless steel type 304.

Part Number	Use With Channel	"W" In (mm)	Wt/100 Ft Lbs (kg/m)
P1184 SS	P1000 P1100 P3300 P4000	1⅝ *41.3*	27 *40.2*

Channel Nut With Spring – Use with 1¼" Channel



Part number	Nut Size Thread		Wt/100 pcs Lbs *(kg)*	Use With
A1006-1420	¼"	-20	6 *(2.7)*	A1000
A1008	⅜"	-16	6 *(2.7)*	

Part number	Nut Size Thread		Wt/100 pcs Lbs *(kg)*	Use With
A4008	⅜"	-16	5 *(2.3)*	A3300, A4000

All Springs are Pre-Galvanized

Channel Nut Without Springs – Use with 1⅝" Channel



Part number	Nut Size Thread		Wt/100 pcs Lbs *(kg)*	Use With 1⅝" Channel
P3006-1420 SS	¼"	20	7 *(3.2)*	Any Channel
P3008 SS	⅜"	16	10 *(4.5)*	
P3010 SS	½"	13	12 *(5.4)*	P1000, P1100, P2000, P3000

* Domestic stainless steel nuts are available. To designate a domestic part, insert a "U" as the sixth character in the part number. Ex: P3008U SS or P3010U SS

Channel Nut With Spring – Use with 1⅝" Channel



Part number	Nut Size Thread		Wt/100 pcs Lbs *(kg)*	Use With 1⅝" Channel
P1006-1420*	¼"	20	7 *(3.2)*	P1000, P1100, P2000, P3000, P4400
P1008*	⅜"	16	10 *(4.5)*	
P1010*	½"	13	12 *(5.4)*	

Part number	Nut Size Thread		Wt/100 pcs Lbs *(kg)*	Use With 1⅝" Channel
P4006-1420*	¼"	20	7 *(3.2)*	P3300, P4000, P4100, P4520
P4008*	⅜"	16	9 *(4.1)*	
P4010*	½"	13	9 *(4.1)*	



Part number	Nut Size Thread		Wt/100 pcs Lbs *(kg)*	Use With 1⅝" Channel
P5506-1420*	¼"	20	7 *(3.2)*	P5000, P5500
P5508*	⅜"	16	10 *(4.5)*	
P5510*	½"	13	10 *(4.5)*	

* Domestic stainless steel nuts are available. To designate a domestic part, insert a "U" as the sixth character in the part number. Ex: P4006U 1420 SS or P1008U SS.

Top Spring Channel Nuts – Use with 1⅝" Channel



Part number	Nut Size Thread		Wt/100 pcs Lbs *(kg)*	Use With 1⅝" Channel
P4008UT SS*	⅜"	16	12 *(5.4)*	P3300, P4000, P4100, P4400, P4520
P1006TU1420SS*	¼"	-20	7 *(3.2)*	Any Channel
P1008TU SS*	⅜"	-16	10 *(4.5)*	
P1010TU SS*	½"	-13	12 *(5.4)*	Any Channel Except P3300, P4000, P4400, P4520, P4100

Top Spring stainless steel channel nuts are domestic

Note

Most fittings, as shown in this catalog are available in stainless steel or aluminum.
It is recommended that stainless steel channel nuts be used with aluminum channels.

P1000 EA

When used with P3184 EA.







Wt/100 Ft: 76 Lbs (113 kg/100 m)
Aluminum Type 6063-T6
Nominal Thickness .109" (2.8mm)

P1001 EA







Wt/100 Ft: 134 Lbs (199 kg/100 m)
Aluminum Type 6063-T6
12 Gauge Nominal Thickness .109" (2.8mm)

P4000 EA







Wt/100 Ft: 45 Lbs (67 kg/100 m)
Aluminum Type 6063-T6
Nominal Thickness .078" (2.0mm)

P4001 EA







Wt/100 Ft: 66 Lbs (98 kg/100 m)
Aluminum Type 6063-T6
Nominal Thickness .078" (2.0mm)

P5500 EA







Wt/100 Ft: 97 Lbs (144 kg/100 m)
Aluminum Type 6063-T6
Nominal Thickness .109" (2.8mm)

A1000 EA







Wt/100 Ft: 40 Lbs (60 kg/100 m)
Aluminum Type 6063-T6
Nominal Thickness .075" (1.9mm)

A4000 EA







Wt/100 Ft: 25 Lbs (37 kg/100 m)
Aluminum Type 6063-T6
12 Gauge Nominal Thickness .050" (1.3mm)
Standard Length 16 Ft.

A4001 EA







Wt/100 Ft: 40 Lbs (60 kg/100 m)
Aluminum Type 6063-T6
Nominal Thickness .078" (2.0mm)
Standard Length 16 Ft.

P6000 EA







Wt/100 Ft: 12 Lbs (18 kg/100 m)
Aluminum Type 6063-T6
Nominal Thickness .040" (1.0mm)
Standard Length 16 Ft.

P6001 EA







Wt/100 Ft: 20 Lbs (30 kg/100 m)
Aluminum Type 6063-T6
Nominal Thickness .040" (1.0mm)
Standard Length 16 Ft.

P7000 EA







Wt/100 Ft: 9 Lbs (13 kg/100 m)
Aluminum Type 6063-T6
Nominal Thickness .040" (1.0mm)
Standard Length 10 Ft.

P7001 EA







Wt/100 Ft: 17 Lbs (25 kg/100 m)
Aluminum Type 6063-T6
12 Gauge Nominal Thickness .040" (1.0mm)
Standard Length 10 Ft

P3184 EA — Closure Strip





Wt/100 Ft: 21 Lbs (31 kg/100 m)
Aluminum Type 6063-T6
Standard Length 10 Ft

P1280 EA, P4280 EA, P5580 EA — End Caps



Part Number	Use With Channel	Wt/100 Ft Lbs(kg/m)
P1280 EA	P1000 EA	3.5 *(1.6)*
P4280 EA	P4000 EA	1.5 *(0.7)*
P5500 EA	P5500 EA	4.9 *(2.2)*

PRIMEANGLE™

PrimeAngle™ 211
Accessories 212
PrimeAngle™ Technical Data ..... 213 - 215

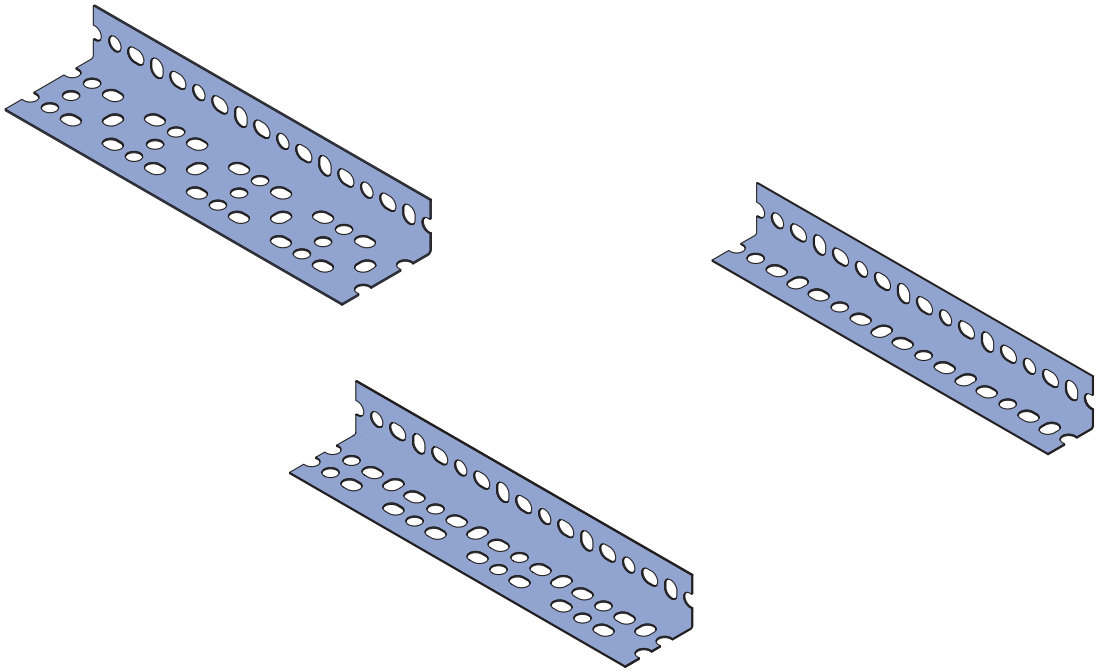

MATERIAL

STEEL: PLAIN

12 Gauge (.105" 1.0 mm) ASTM 1011 SS GR 33,
14 Gauge (.076) ASTM 1011 SS GR 33

STEEL: PRE-GALVANIZED

12 Gauge (.105" 1.0 mm) ASTM A653 GR 33,
14 Gauge (.076) ASTM A653 GR 33

FINISHES

Available in two durable, long-lasting finishes:

Pre-Galvanized (PG) or

Perma–Green III (GR) conforming to ASTM B633 Type III SC1.

STANDARD LENGTHS

Standard lengths are 10' and 12'. Slotted angle is shipped in ten-piece bundles complete with 75 pieces of ⅜" - 16 x ¾" hex head bolts and ⅜" nuts.

ORDERING INFORMATION:

When ordering, add the length or size and finish to the part number.

DIMENSIONS

Imperial dimensions are illustrated in inches. Metric dimensions are shown in parenthesis or as noted. Unless noted, all metric dimensions are in millimeters and rounded to one decimal place.

PA 158 (1⅝" x 1⅝" x 14 GA.) LIGHT DUTY PG

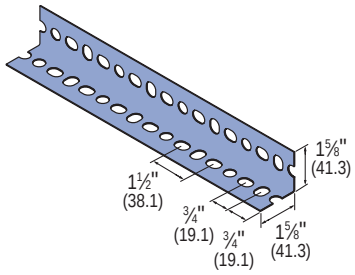

Note: Includes Serrated Nuts & Bolts

For those jobs where extra strength is not necessary. Ideal for light-duty shelving or racking.

Wt/100 Ft.: 66 lbs (29.9 kg)

PA 238 (1⅝" x 2⅜" x 14 GA.) MEDIUM DUTY PG

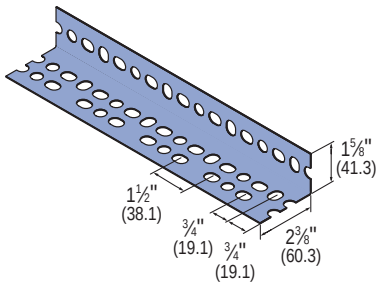

Note: Includes Serrated Nuts & Bolts

Perfect for the majority of framing needs, including shelving, racking and electrical or mechanical support jobs.

Wt/100 Ft: 80 lbs(36.3 kg)

PA 318 (1⅝" x 3⅛" x 12 GA.) HEAVY DUTY

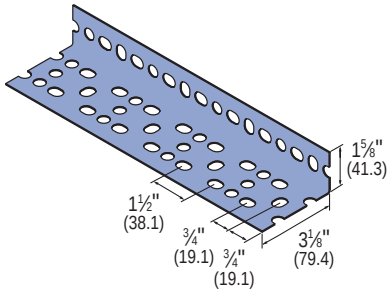

Note: Includes Serrated Nuts & Bolts

Suitable for balconies, ramps, large racks and shelving systems, as well as other structures with substantial load requirements.

Wt/100 Ft: 130 lbs (59.0 kg)

PA 1SNB

Serrated Nuts and Bolts



Wt/100 pcs: 7 lbs (3.2 kg)

Transverse Stiffeners

When supporting concentrated loads, the capacity of a pair of slotted-angle beams can be increased by the addition of transverse stiffeners. These should be placed immediately under the load bearing point. The slotted-angle segment used as the stiffener is bolted into place using a metal connector at each junction.

Beams that are 6' (182.9 cm) long or less require only one stiffener in the center of the span. Seven-foot beams need two stiffeners placed 2' (61.0 cm) from each end. Eight-foot beams require two stiffeners 2'6" (76.2 cm) from the ends. For beams with a nine-foot span, it is necessary to have three stiffeners at 2'3" (68.6 cm) intervals. Ten-foot beams need three stiffeners with 2'6" spacings.

For maximum effectiveness, transverse stiffeners should never be spaced more than 3'6" (106.7 cm) apart.

Note: All loads based on actual physical testing. Documentation available on request.

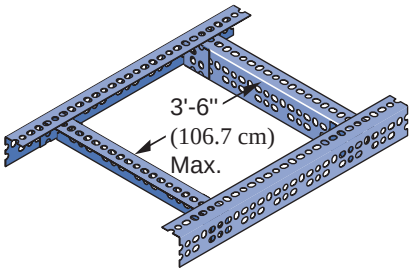

Beam Configurations

(See corresponding letters in table on following page for load data)

G – Two Single Pieces (Up)



H – Two Single Pieces (Level)



I – Two Single Pieces (Down)



J – Two Z-Sections



K – Two Narrow Channels



L – Two Broad Channels



M – Two T-Sections



N – Two I-Sections



O – Two J-Sections



Beam Configurations With Stiffeners

(See corresponding letters in table on following page for load data)

P – Single Pieces w/Stiffener



Q – T-Sections w/Stiffener



R – Z-Sections w/Stiffener



R – I-Sections w/Stiffener



Beam Load Calculations

The beam loading depends on which slotted angle is used and the manner in which the beam is constructed.The diagrams above show how individual slotted angle components can be combined to form a beam.The loading for each beam configuration is shown in the beam loading tables on the next page.

Example - Load "A"

Load "A" is supported by two 48" (121.9 cm) sections of PA-238 (1⅝" x 2⅜") (41.3mm x 60.3mm). The 48" row in the PA 238 table on next page indicates what each beam configuration will support. Since the columns are sorted from lowest to highest load, the first configuration that satisfies the requirement is "J" which will support 1,100 lbs (4.9 kN).



Example - Load "B"

Load "B" is supported by two 36" (91.4 cm) sections of PA-238 (1⅝" x 2⅜") (41.3mm x 60.3mm). The 36" row in the PA 238 table on next page indicates what each beam configuration will support. Since the columns are sorted from lowest to highest load, the first configuration that satisfies the requirement is "J" which will support 1,100 lbs (4.9 kN).



Example - Load "C"

Load "C" is supported by all four beam sections.The load is distributed uniformly on two 3' (91.4 cm) and two 4' (121.9 cm) beams which total 14' (426.7 cm) of supporting beam length. Dividing the 1,000 lbs. (4.5 kN) load by 14-feet equals 72 lbs. per foot (106.3 kg per meter). Using the two 4' (121.9 cm) longest (weakest) lengths, calculate the total weight as follows:



2 (beams) x 4' (length) x 72 lbs./ft. = 576 lbs. total wt.

2 (beams) x 121.9cm (length) x 106.3 kg/M = 25,915 kg total wt.

The 36" (91.4 cm) row in the PA 238 table on next page indicates what each beam configuration will support. Since the columns are sorted from lowest to highest load, the first configuration that satisfies the requirement is "J" which will support 830 lbs. (3.7 kN) and is adequate for this requirement. The 3-foot beams configured in the same manner will support the load because they are shorter and stronger.

Beam Loads

(See corresponding letters in table on previous page for configurations)

PA 158 — Light Duty, (1⅝" x 1⅝" x 14 ga.)



Span In. (cm)	G Lbs (kN)	H Lbs (kN)	I Lbs (kN)	P Lbs (kN)	L Lbs (kN)	R Lbs (kN)	M Lbs (kN)
24	550	830	830	920	1,600	1,700	1,840
61.0	*2.45*	*3.69*	*3.69*	*4.09*	*7.12*	*7.56*	*8.18*
36	370	560	560	610	1,070	1,130	1,230
91.4	*1.65*	*2.49*	*2.49*	*2.71*	*4.76*	*5.03*	*5.47*
48	280	420	420	460	800	850	920
121.9	*1.25*	*1.87*	*1.87*	*2.05*	*3.56*	*3.78*	*4.09*
60	220	330	330	370	640	680	740
152.4	*0.98*	*1.47*	*1.47*	*1.65*	*2.85*	*3.02*	*3.29*
72	180	280	280	310	530	570	610
182.9	*0.80*	*1.25*	*1.25*	*1.38*	*2.36*	*2.54*	*2.71*
84	•	240	240	260	460	490	530
213.4		*1.07*	*1.07*	*1.16*	*2.05*	*2.18*	*2.36*
96	•	210	210	230	400	430	460
243.8		*0.93*	*0.93*	*1.02*	*1.78*	*1.91*	*2.05*
108	•	•	•	•	360	380	410
274.3					*1.60*	*1.69*	*1.82*
120	•	•	•	•	320	340	370
304.8					*1.42*	*1.51*	*1.65*

PA 238 — Medium Duty, (1⅝" x 2⅜" x 14 ga.)



Span In. (cm)	G Lbs (kN)	H Lbs (kN)	I Lbs (kN)	P Lbs (kN)	J Lbs (kN)	L Lbs (kN)	R Lbs (kN)	M Lbs (kN)	K Lbs (kN)	Q Lbs (kN)	O Lbs (kN)	N Lbs (kN)
24	700	1,020	1,660	1,740	2,220	3,170	3,230	3,490	3,590	3,630	6,060	7,560
61.0	*3.11*	*4.54*	*7.38*	*7.74*	*9.88*	*14.10*	*14.37*	*15.52*	*15.97*	*16.15*	*26.96*	*33.63*
36	460	680	1,100	1,160	1,480	2,110	2,150	2,320	2,390	2,420	4,040	5,040
91.4	*2.05*	*3.02*	*4.89*	*5.16*	*6.58*	*9.39*	*9.56*	*10.32*	*10.63*	*10.76*	*17.97*	*22.42*
48	350	510	830	870	1,110	1,580	1,620	1,740	1,800	1,810	3,030	3,780
121.9	*1.56*	*2.27*	*3.69*	*3.87*	*4.94*	*7.03*	*7.21*	*7.74*	*8.01*	*8.05*	*13.48*	*16.81*
60	280	410	660	700	890	1,270	1,290	1,390	1,440	1,450	2,420	3,020
152.4	*1.25*	*1.82*	*2.94*	*3.11*	*3.96*	*5.65*	*5.74*	*6.18*	*6.41*	*6.45*	*10.76*	*13.43*
72	230	340	550	580	740	1,060	1,080	1,160	1,200	1,210	2,020	2,520
182.9	*1.02*	*1.51*	*2.45*	*2.58*	*3.29*	*4.72*	*4.80*	*5.16*	*5.34*	*5.38*	*8.99*	*11.21*
84	•	290	470	500	630	910	920	1,000	1,030	1,040	1,730	2,160
213.4		*1.29*	*2.09*	*2.22*	*2.80*	*4.05*	*4.09*	*4.45*	*4.58*	*4.63*	*7.70*	*9.61*
96	•	260	410	440	550	790	810	870	900	910	1,520	1,890
243.8		*1.16*	*1.82*	*1.96*	*2.45*	*3.51*	*3.60*	*3.87*	*4.00*	*4.05*	*6.76*	*8.41*
108	•	•	•	•	490	700	720	770	800	810	1,350	1,680
274.3					*2.18*	*3.11*	*3.20*	*3.43*	*3.56*	*3.60*	*6.01*	*7.47*
120	•	•	•	•	440	630	650	700	720	730	1,210	1,510
304.8					*1.96*	*2.80*	*2.89*	*3.11*	*3.20*	*3.25*	*5.38*	*6.72*

PA 318 — Heavy Duty, (1⅝" x 3⅛" x 12 ga.)



Span In. (cm)	G Lbs (kN)	H Lbs (kN)	I Lbs (kN)	P Lbs (kN)	J Lbs (kN)	L Lbs (kN)	R Lbs (kN)	M Lbs (kN)	K Lbs (kN)	Q Lbs (kN)	O Lbs (kg)	N Lbs (kg)
24	1,790	1,610	4,300	4,960	6,520	7,910	8,070	9,920	9,990	10,170	14,600	16,120
61.0	*7.96*	*7.16*	*19.13*	*22.06*	*29.00*	*35.19*	*35.90*	*44.13*	*44.44*	*45.24*	*64.94*	*71.71*
36	1,200	1,070	2,870	3,310	4,350	5,270	5,380	6,610	6,660	6,780	9,730	10,750
91.4	*5.34*	*4.76*	*12.77*	*14.72*	*19.35*	*23.44*	*23.93*	*29.40*	*29.63*	*30.16*	*43.28*	*47.82*
48	900	810	2,150	2,480	3,260	3,950	4,030	4,960	4,990	5,080	7,300	8,060
121.9	*4.00*	*3.60*	*9.56*	*11.03*	*14.50*	*17.57*	*17.93*	*22.06*	*22.20*	*22.60*	*32.47*	*35.85*
60	720	640	1,720	1,980	2,610	3,160	3,230	3,970	4,000	4,070	5,840	6,450
152.4	*3.20*	*2.85*	*7.65*	*8.81*	*11.61*	*14.06*	*14.37*	*17.66*	*17.79*	*18.10*	*25.98*	*28.69*
72	600	540	1,430	1,650	2,170	2,640	2,690	3,310	3,330	3,390	4,870	5,370
182.9	*2.67*	*2.40*	*6.36*	*7.34*	*9.65*	*11.74*	*11.97*	*14.72*	*14.81*	*15.08*	*21.66*	*23.89*
84	•	460	1,230	1,420	1,860	2,260	2,300	2,830	2,850	2,910	4,170	4,610
213.4		*2.05*	*5.47*	*6.32*	*8.27*	*10.05*	*10.23*	*12.59*	*12.68*	*12.94*	*18.55*	*20.51*
96	•	400	1,080	1,240	1,630	1,980	2,020	2,480	2,500	2,540	3,650	4,030
243.8		*1.78*	*4.80*	*5.52*	*7.25*	*8.81*	*8.99*	*11.03*	*11.12*	*11.30*	*16.24*	*17.93*
108	•	•	•	1,100	1,450	1,760	1,790	2,200	2,220	2,260	3,240	3,580
274.3				*4.89*	*6.45*	*7.83*	*7.96*	*9.79*	*9.88*	*10.05*	*14.41*	*15.92*
120	•	•	•	990	1,300	1,580	1,610	1,980	2,000	2,030	2,920	3,220
304.8				*4.40*	*5.78*	*7.03*	*7.16*	*8.81*	*8.90*	*9.03*	*12.99*	*14.32*

Column Loads

Column sections are calculated as described in the following example: (Assumes use of PA-238 1⅝" x 2⅜"(41.3mm x 60.3mm), material.)



Since all load areas are supported equally by the 4-columns, the calculations are based on a single-column section.

Section MN is one-fourth of "X", or 250 pounds (1.1 kN). Column section NP supports one-fourth of "Y" (250 pounds) plus the load supported by MN, or a total of 500 pounds (2.2 kN). Section PQ supports one-fourth of "Z" (250 pounds) plus the 500 pound load on section NP, or a total of 750 (3.3kN) pounds.

Column loads are based on free and unbraced column lengths. Since MN, NP and PQ are each 3' long, the load requirement is for a 36" section that will bear 750 pounds safely. A reference to the PA 238 table to the right indicates that all sections designated "A" will support 2,280 lbs. (10.1 kN) and meet the necessary requirements.

Note: To simplify assembly, we recommend using the same size material as for the horizontal members. This would be found in Table 2 to match the 14 gauge 1⅝" x 2⅜" (41.3mm x 60.3mm) material selected for the beams of this structure.

A – Single Piece



B – T-Section



B – Broad Channel Section



B – Narrow Channel Section



C – Uneven T-Section



C – Uneven Channel Section



D – Dual Channel Section



D – T-Channel Section



D – T-Channel Section



E – I-Section



F – Uneven I-Section



PA 158 (1⅝" x 1⅝" x 14 GA.)



Span In. (cm)	A Lbs (kN)	B Lbs (kN)
36	1,450	3,850
91.4	*6.45*	*17.13*
48	1,150	3,500
121.9	*5.12*	*15.57*
60	950	3,000
152.4	*4.23*	*13.34*
72	750	2,500
182.9	*3.34*	*11.12*

PA 238 (1⅝" x 2⅜" x 14 GA.)



Span In. (cm)	A Lbs (kN)	B Lbs (kN)	C Lbs (kN)	D Lbs (kN)	E Lbs (kN)	F Lbs (kN)
36	2,280	4,760	4,940	7,270	9,520	9,865
91.4	*10.14*	*21.17*	*21.97*	*32.34*	*42.35*	*43.88*
48	1,970	4,490	4,680	6,920	8,970	9,330
121.9	*8.76*	*19.97*	*20.82*	*30.78*	*39.90*	*41.50*
60	1,520	3,995	4,310	6,370	7,990	8,620
152.4	*6.76*	*17.77*	*19.17*	*28.34*	*35.54*	*38.34*
72	1,070	3,140	3,870	5,840	6,280	7,715
182.9	*4.76*	*13.97*	*17.21*	*25.98*	*27.93*	*34.32*
84	660	2,340	3,665	4,930	4,660	6,740
213.4	*2.94*	*10.41*	*16.30*	*21.93*	*20.73*	*29.98*
96	•	1,750	2,700	3,850	3,500	5,365
243.8		*7.78*	*12.01*	*17.13*	*15.57*	*23.86*
108	•	•	2,060	2,870	•	4,115
274.3			*9.16*	*12.77*		*18.30*
120	•	•	1,610	2,690	•	3,210
304.8			*7.16*	*11.97*		*14.28*

PA 318 (1⅝" x 3⅛" x 12 GA.)



Span In. (cm)	A Lbs (kN)	B Lbs (kN)	C Lbs (kN)	D Lbs (kN)	E Lbs (kN)	F Lbs (kN)
36	3,470	7,970	8,770	12,560	15,940	17,550
91.4	*15.44*	*35.45*	*39.01*	*55.87*	*70.90*	*78.07*
48	2,870	7,360	8,580	11,970	14,750	17,150
121.9	*12.77*	*32.74*	*38.17*	*53.25*	*65.61*	*76.29*
60	1,970	6,570	8,180	11,360	13,160	16,360
152.4	*8.76*	*29.22*	*36.39*	*50.53*	*58.54*	*72.77*
72	1,280	5,270	7,690	10,480	10,560	15,360
182.9	*5.69*	*23.44*	*34.21*	*46.62*	*46.97*	*68.32*
84	•	3,670	6,970	9,470	7,370	13,970
213.3		*16.32*	*31.00*	*42.12*	*32.78*	*62.14*
96	•	2,580	6,260	8,370	5,170	12,570
243.8		*11.48*	*27.85*	*37.23*	*23.00*	*55.91*
108	•	•	5,460	6,880	•	10,970
274.3			*24.29*	*30.60*		*48.80*
120	•	•	4,460	5,370	•	8,960
304.8			*19.84*	*23.89*		*39.86*

UNITED INTERLOCK® GRATING

United Interlock Plank Grating System from Unistrut, commonly known as Interlock Grating, fills a multitude of needs including flooring and walkways, mezzanines, stair treads, maintenance and staging platforms, scaffolding planks, architectural wall coverings and more. United Interlock Grating Systems meets your needs for strength, durability, safety and aesthetics.

Customers choose United Interlock Grating Systems for many reasons:

- Cost-effectiveness
- Easy-to-install product
- Quality assurance that comes from extensive load testing
- Strong design look of our plank grating

United Interlock Grating Applications include:

- Architectural wall coverings
- Catwalks, walkways and pedestrian ramps
- Maintenance and inspection walkways
- Ventilation covers for tanks and wells
- Mining and quarry tower decking
- Pumping and drilling platforms
- Subflooring
- Mezzanines
- Shelving
- Stairs

Ease of Installation 217

Plank Grating ..... 218 - 219

Accessories ..... 220 - 222

Heavy Duty Stair Treads 223

Design and Testing 224

Plank Loads and Deflections ..... 225 - 230

Architectural Specifications 231

Architectural Applications

Interlock Grating provides a functional and aesthetically appealing look to architectural applications. Aluminum gratings resist corrosion to give walls, ceilings, ledges, trim, flooring, and specialty projects a clean, lasting, high-tech look.

Interlocking plank grating works especially well in intensive-use areas. In addition to its durability, it is easy to clean and does not reflect sound like a solid surface.

Architects have often selected Interlock Grating because it protects lights, insulation support columns, wiring, and other fixtures. And, the panels allow authorized personnel to access the fixtures.

Ease of Installation

Contractors have reported installed cost savings of up to 75% with Interlock Grating. Many factors combine to make installation quick and easy:

1) The lightweight grating is easy to handle. One person can carry a 24' plank.
2) Interlock Grating is easy to install with a minimal number of laborers.
3) Interlock Grating's light weight reduces shipping costs.
4) The planks interlock with positive friction, eliminating costly welding and bolting in some cases.
5) Field modifications are easy. Interlock Grating can be cut to size, shape, and angle at the jobsite.
6) Interlock Grating requires fewer support structures.

United Interlock Grating strength-to-weight ratio allows it to withstand substantial loads while being easy to handle. The male-female legs of the roll-formed grating interlock securely, and double-male legs provide a safe finished edge for end planks.

Two standard surfaces are available: slotted-smooth and anti-skid. Anti-skid is the ideal choice when safe walking conditions are important. Die-formed teeth in the transverse ribs give you 360° of shoe-gripping traction even when the grating is wet, oily, muddy, or icy.

Interlock Grating Features

Maximizes performance and safety…

- Anti-skid surface provides 360° of slip resistance
- All sections made from structural-grade steel
- Roll-formed design provides superior strength
- Optional heel-toe side and end plates
- Open design prevents build-up of water, grease, oil and small debris

And gives you complete project versatility.

- 6", 9" and 12" plank widths allow design in 3" increments
- Standard lengths of 20' and 24', and special lengths up to 30', provide excellent design flexibility
- Choice of smooth punched, anti-skid punched or solid unpunched surfaces
- Four leg heights, and two material gauges meet a wide range of load, space and budget requirements

Punched Interlock Grating has an open area of 43% for 12" grating, 42% for 9" grating and 35% for 6" grating. This prevents dirt, debris, ice, and snow from building up on the surface and allows light and air to pass through. United Interlock steel grating is made from pre-galvanized steel which conforms to a G-90 thickness designation per ASTM A653. The aluminum grating is made from type 5052 aluminum with a thickness of 0.080".

Unpunched smooth surface grating is also available for special applications.

United Interlock Grating Systems are strong, economical, versatile, and easy to specify.

Variety of choices

- 6" and 9" standard-duty width
- 12" light-duty width
- 14 gauge and 18 gauge
- 1½", 2½", 3"(12" width only) and 4" (6" and 9" width only) leg heights
- 20' and 24' stock lengths
- Anti-skid, slotted-smooth punched surfaces and solid unpunched surface
- Double male and male-female leg shapes
- Steel (6", 9" or 12") and aluminum (6"or 9")

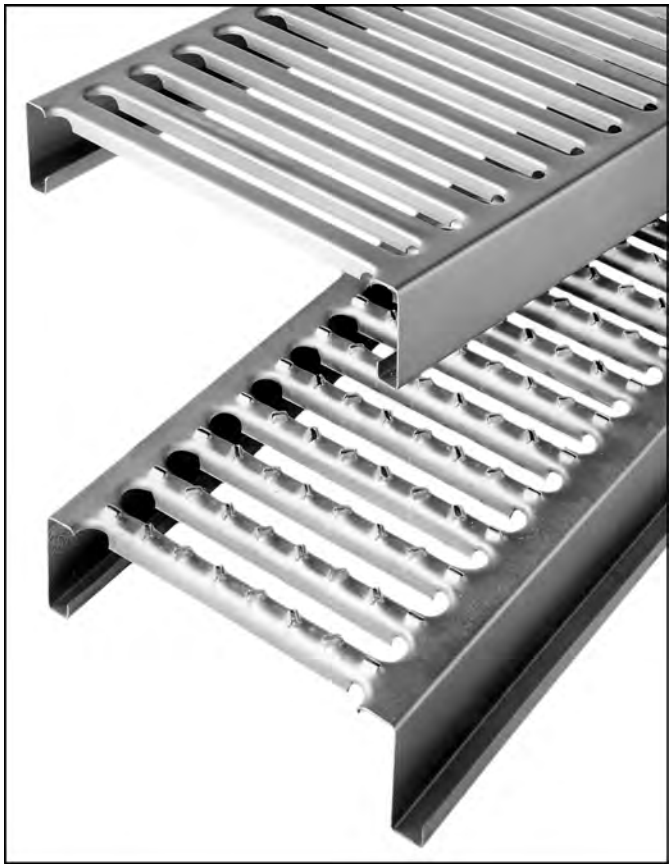

United Interlock® Grating Systems—6" and 9"

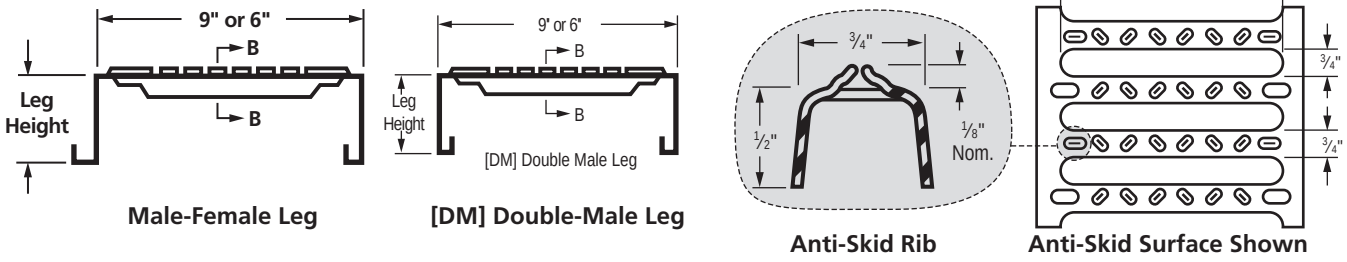

Male-Female Leg | [DM] Double-Male Leg | Anti-Skid Rib | Anti-Skid Surface Shown

6" Wide Planks (14 Ga, 18 Ga, 0.080 Aluminum)							
Leg Height	Leg Shape	Finish Material	Slotted, Smooth	Anti-Skid	Un-punched	Wt. Lbs./Ft	Wt. Lbs./Ft²
1½"	DM	PG 14 Ga.	G61141	G61142	G61143	2.7	5.4
	MF		G62141	G62142	G62143	2.7	5.4
2½"	DM	PG 14 Ga.	G61241	G61242	G61243	3.4	6.8
	MF		G62241	G62242	G62243	3.4	6.8
	DM	PG 18 Ga.	G61281	G61282	G61283	2.2	4.4
	MF		G62281	G62282	G62283	2.2	4.4
	DM	AL 0.080"	G61221	G61222	G61223	1.2	2.3
	MF		G62221	G62222	G62223	1.2	2.3
4"	DM	PG 14 Ga.	G61341	G61342	G61343	4.2	8.4
	MF		G62341	G62342	G62343	4.2	8.4

9" Wide Planks (14 Ga, 18 Ga, 0.080 Aluminum)							
Leg Height	Leg Shape	Finish Material	Slotted, Smooth	Anti-Skid	Un-punched	Wt. Lbs./Ft	Wt. Lbs./Ft²
1½"	DM	PG 14 Ga.	G91141	G91142	G91143	3.5	4.7
	MF		G92141	G92142	G92143	3.5	4.7
2½"	DM	PG 14 Ga.	G91241	G91242	G91243	4.0	5.3
	MF		G92241	G92242	G92243	4.0	5.3
	DM	PG 18 Ga.	G91281	G91282	G91283	2.7	3.6
	MF		G92281	G92282	G92283	2.7	3.6
	DM	AL 0.080"	G91221	G91222	G91223	1.5	2.0
	MF		G92221	G92222	G92223	1.5	2.0
4"	DM	PG 14 Ga.	G91341	G91342	G91343	4.8	6.4
	MF		G92341	G92342	G92343	4.8	6.4

Note: Standard grating lengths are 20' or 24'; DM–Double Male, MF–Male-Female
Unpunched smooth surface grating is also available for special applications. Contact Unistrut for more information.

United Interlock® Grating Systems—12"

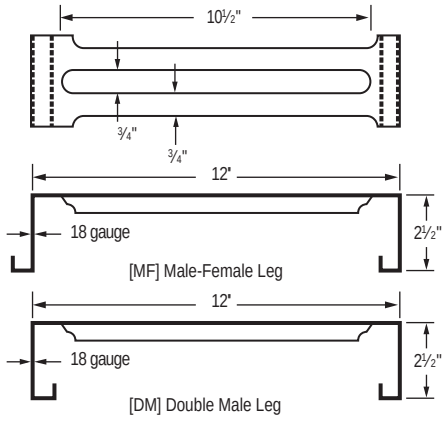

12" Wide Planks, 18 Gauge				
Leg Height	Leg Shape	Finish Material	Slotted, Smooth	Anti-Skid
2½"	DM	PG 18 Gauge	G 11281	G 11282
3"	DM	PG 18 Gauge	G 11583	Contact Factory

For Light Traffic Applications

Ideal for mezzanines and other large-area applications, extra-wide 12" interlocking plank grating is designed to simplify installation and reduce the cost of mezzanines, flooring, decking, staging platforms, Roofwalks® and similar applications. With a 43% open area, it allows water, light and air to pass through.

With its extra width, Unistrut 12" wide plank grating covers more area with fewer planks, lowering installation costs. Its high strength-to-weight ratio—18 gauge, 2½" and 3" leg height—makes it ideal for covering large, light-traffic areas. Its snap-together friction fit make it easy to install, with no welding or bolting required.

Made of pre-galvanized steel, it's maintenance-free and long lasting. Specifiers can choose a smooth or anti-skid surface to meet a wide variety of application needs.

Filler Panel

Part No.*	Description
G31183 PG	3" Wide x 1½" Leg Height
G31283 PG	3" Wide x 2½" Leg Height
G31383 PG	3" Wide x 4" Leg Height

Provided in standard lengths of 10' and 12'.

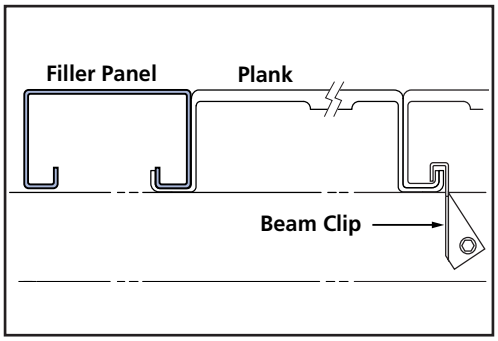

Carrier Plate

Part No.*	Description
G603 PG	10 ga.- for 9" wide heavy duty stair treads (9/16" hole and 1½" x 9/16" slot)
G618 PG	10 ga. for 10½" wide stair treads (9/16" hole and 1½" x 9/16" slot)
G642 PG	10 ga. for 11" wide stair treads (9/16" hole and 1½" x 9/16" slot)

Provides easy attachment of stair treads to support structures and stringers.

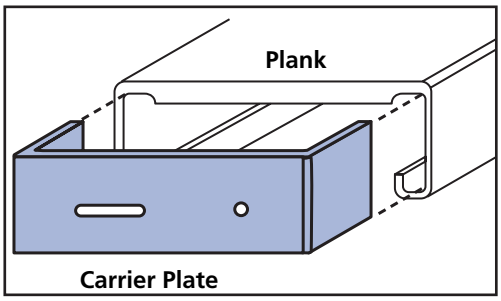

Heel/Toe Side Plates – 6½" and 8" heights

Part No.*	Description
G631 PG*	14 ga. x 6½" high x 24' long
G621 PG	14 ga. x 8" high x 12' long

Forms a curb along grating length that defines a structure's side edge, and helps contain loose objects.

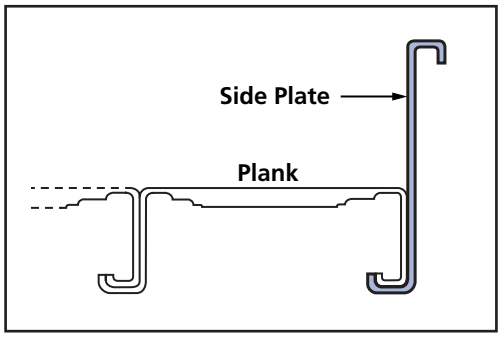

*Part numbers shown are for galvanized. Most accessories are also available in aluminum.

Heel/Toe End Plates – 6½" and 8" heights

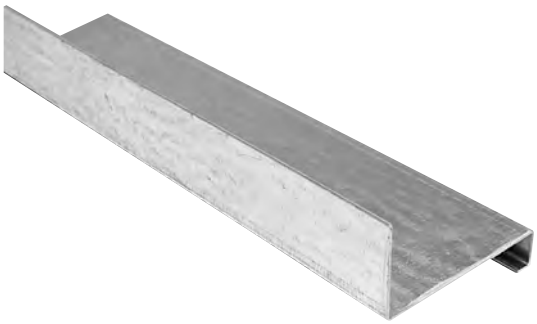

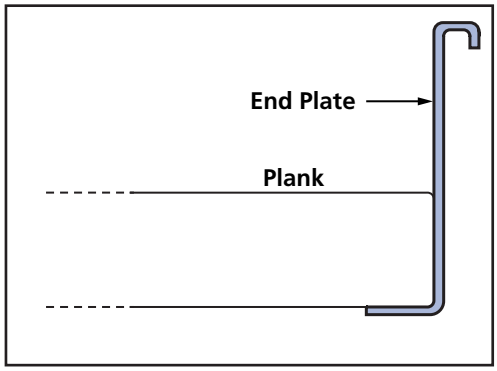

Part No.*	Description
G622 PG	14 ga. x 6½" high x 12' long
G623 PG	14 ga. x 8" high x 12' long

Forms a curb along grating ends that defines a structure's edge, and helps contains loose objects.

Hold Down Clip

Part No.	Description
G639 PG	1½" leg height
G607 PG*	2½" leg height
G620 PG	4" leg height

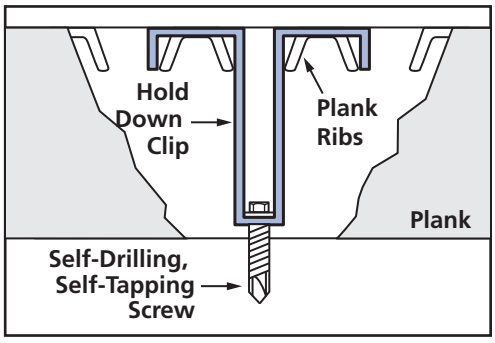

A 16 gauge attachment for fastening grating to support structure below. Attaches through top side of grating.

"J" Bolt/Nut Lock Washer

Part No.*	Description
G600 EG	5/16" x 2½"

Attachment for fastening panels to supporting members from underside of grating.

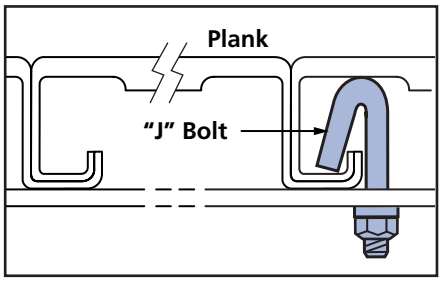

*Part numbers shown are for galvanized. Most accessories are also available in aluminum.

Grating Beam Clamp

Part No.*	Description
G640 EG	Beam clamp

Attaches grating to structural I-beams.
Requires no welding or drilling.

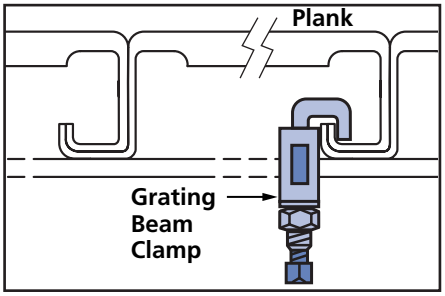

Light Gauge Beam Clip

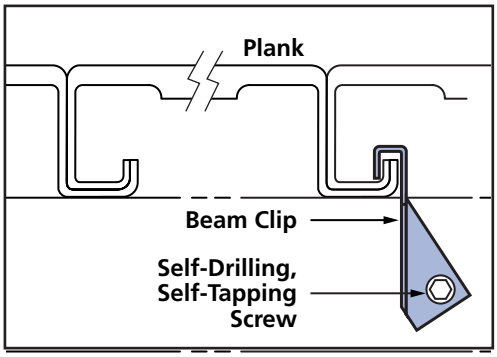

Part No.*	Description
G124 EG	Light Gauge Beam Clip

Quickly attaches grating to rack or shelving beams.

Requires self-drilling, self-tapping screw—GHTS 012075 EG (not included).

Recessed Washer

EG

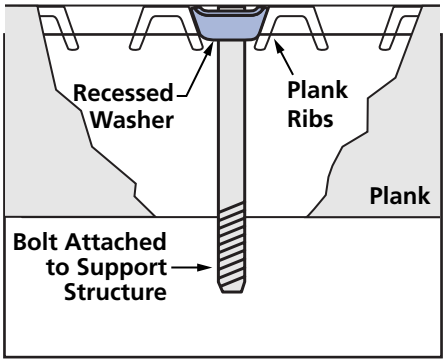

Part No.*	Description
G714 EG	1⅛" x 1⅛" 12 gauge square washer

Holds down grating from above. Eliminates trip points.

*Part numbers shown are for galvanized. Most accessories are also available in aluminum.

Heavy-Duty Stair Treads

Anyone who has slipped on a stairway can appreciate the safety of the anti-skid stair treads. Those who have tried to clean solid-surface stairs can appreciate our maintenance-free slotted design, which is both rust-resistant and self-cleaning.

United's stair treads make it easy for you to meet OSHA regulations. Factors to consider when selecting stair treads include loads, impact, frequency of use, and future use. Our 10½" and 11" tread features a checker-plate nosing that strengthens the tread and increases the width of the basic 9" tread.

The failure loading data shown below indicates ultimate failure in pounds at various spans. A 3½" diameter load was applied to the outer edge of a 9" wide stair tread at the center of the span. 6" wide stair treads are also available.

The stair treads can also be used with Unistrut Metal Framing as shown here to create a stair with guide rail

9" Stair Tread

14 gauge x 2½" x 9" Completely galvanized, welded 10 gauge end plates

Part No.*	Length (in.)
G 900-24 PG	24
G 900-36 PG	36
G 900-48 PG	48



10½" Stair Tread

14 gauge x 2½" x 10½", Completely galvanized, welded 10 gauge end plates

Part No.*	Len. (in.)
G 901-24 PG	24
G 901-36 PG	36
G 901-48 PG	48

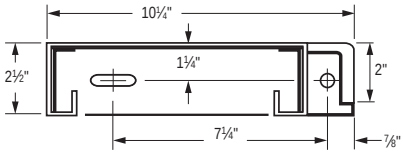

11" Stair Treads

14 gauge x 2½" x 11" Completely galvanized, welded 10-gauge end plates

Part No.*	Len. (in.)
G 904-24 PG	24
G 904-36 PG	36
G 904-48 PG	48

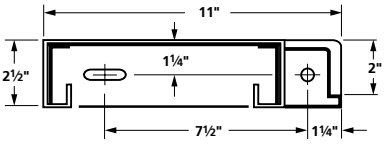

Allowable Loads: Interlock Grating Stair Treads—Galvanized Steel—3 Widths			
Width	Distance Between Supports (feet)		
	2	3	4
9"	880	760	640
10½"	1,730	1,360	1,020
11"	1,730	1,360	1,020

Note: Values shown provide a Safety Factor of 2.5

Design Considerations

Designers must consider both uniform and concentrated loads. Design considerations are most critical where loads are concentrated on a small area. As the area of the application gets larger, the reactions approach those of uniform loads.

Point (Concentrated) Loads

Point loads should be distributed over a minimum of two transverse ribs, regardless of what size or gauge plank grating is utilized.

Good design practice for point loading plank grating employs a "foot" plate at the load point with a minimum dimension of 3" x 3". This plate will assure that the point load has been distributed over the two transverse-rib minimum.

Maximum point load per rib on 12" x 18 ga. steel plank grating is 185 lbs. As a result, through the use of the required 3" x 3" "foot" plate, a maximum design load for the minimum-dimension foot plate is 370 lbs. Higher loads can be supported by the transverse ribs. However, larger "foot" plates will then be required to distribute the higher loads over additional ribs.

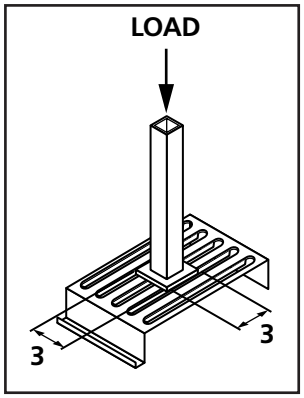

Testing

Unistrut is dedicated to the research, development and testing of all our manufactured products. The United Interlock Grating System has been tested in accordance with section 6 of the American Iron and Steel Institute's (AISI) Specifications for the Design of Cold Formed Steel Structural Members.

Tests for allowable loads were performed on product randomly selected from stock. These tests were run on simple spans with no end restrictions, over a 2" end bearing. Concentrated loads were applied across the plank with a 3" bearing, while uniform loads were applied by stacking narrow strips of sheet steel uniformly over the plank surface. Concentrated load tests for galvanized steel grating were run on all strength combinations for spans of 2', 3', 4', 5', 6', 7', 8', 10', 12', 14', 16' and 18'. Uniform load tests for galvanized steel were run on spans of 2', 3', 4', 6', 8' and 10'.

Concentrated load results are the same for 6" and 9" wide planks.

Loads and Deflection – 6" Planks

6" x 14 Gauge	Leg Height	Codes	Distance Distance Between Supports (Feet)															
			2	2.5	3	3.5	4	4.5	5	5.5	6	6.5	7	8	9	10	12	14
	1½"	UL	1,232	788	548	402	293	204	150	113	86	68	54	–	–	–	–	
		UD	0.05	0.08	0.12	0.16	0.20	0.22	0.25	0.27	0.30	0.32	0.35	–	–	–	–	–
		CL	616	493	411	352	308	274	234	193	162	138	119	–	–	–	–	–
		CD	0.04	0.06	0.10	0.13	0.17	0.21	0.25	0.27	0.30	0.32	0.35	–	–	–	–	–
	2½"	UL	4,886	3,296	2,150	1,601	1,257	924	734	597	501	431	369	263	204	150	84	47
		UD	0.15	0.17	0.18	0.22	0.26	0.36	0.41	0.45	0.47	0.52	0.61	0.81	0.89	1.13	1.33	1.42
		CL	2,443	2,060	1,612	1,400	1,257	1,040	917	820	752	700	647	525	460	374	250	165
		CD	0.17	0.17	0.17	0.20	0.22	0.25	0.29	0.34	0.40	0.46	0.55	0.66	0.79	0.90	1.07	1.18
	4"	UL	5,261	4,016	3,147	2,321	1,755	1,520	1,307	1,019	858	738	648	548	420	342	215	165
		UD	0.08	0.10	0.11	0.13	0.16	0.16	0.17	0.23	0.27	0.33	0.40	0.52	0.65	0.82	1.07	1.18
		CL	2,630	2,510	2,360	2,080	1,755	1,710	1,633	1,400	1,288	1,200	1,134	1,094	980	854	643	577
		CD	0.13	0.14	0.15	0.17	0.18	0.19	0.20	0.23	0.26	0.30	0.33	0.45	0.57	0.69	0.91	1.26

6" x 18 Gauge	Leg Height	Codes	Distance Between Supports (Feet)															
			2	2.5	3	3.5	4	4.5	5	5.5	6	6.5	7	8	9	10	12	14
	2½"	UL	2,472	1,664	1,220	881	663	516	414	342	284	237	197	164	134	102	66	41
		UD	0.14	0.15	0.16	0.21	0.26	0.31	0.36	0.38	0.44	0.47	0.49	0.79	0.89	1.12	1.37	1.58
		CL	1,236	1,040	915	770	663	580	518	470	426	385	344	327	300	255	200	140
		CD	0.12	0.14	0.16	0.18	0.21	0.24	0.28	0.29	0.30	0.37	0.46	0.61	0.74	0.91	1.20	1.50

6" Aluminum (0.080)	Height	Codes	Distance Between Supports (Feet)														
			2	2.5	3	3.5	4	4.5	5	5.5	6	6.5	7	7.5	8	9	10
	2½"	UL	2,676	1,590	1,065	840	706	600	517	412	313	277	255	210	177	–	–
		UD	0.20	0.30	0.35	0.40	0.47	0.55	0.63	0.78	1.01	1.09	1.20	1.4	1.66	–	–
		CL	1,338	925	825	755	706	630	575	515	469	435	410	385	355	–	–
		CD	0.16	0.20	0.25	0.31	0.36	0.45	0.54	0.67	0.81	0.90	0.99	1.12	1.27	–	–

Code Key:
UL = Uniform Load (pounds per square foot)
UD = Deflection under uniform load (Inches)
CL = Concentrated Load (pounds)
CD = Deflection under concentrated load (Inches)

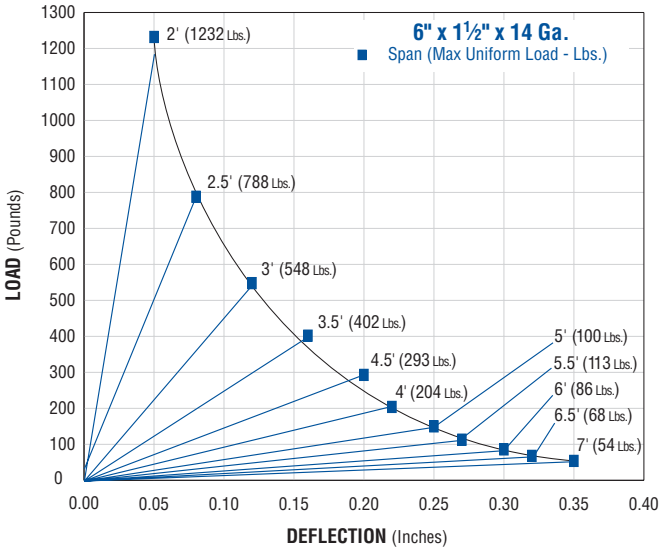
6" x 1½" x 14 Ga.
Span (Max Uniform Load - Lbs.)
2' (1232 Lbs.)
2.5' (788 Lbs.)
3' (548 Lbs.)
3.5' (402 Lbs.)
4' (204 Lbs.)
4.5' (293 Lbs.)
5' (100 Lbs.)
5.5' (113 Lbs.)
6' (86 Lbs.)
6.5' (68 Lbs.)
7' (54 Lbs.)
LOAD (Pounds)
DEFLECTION (Inches)

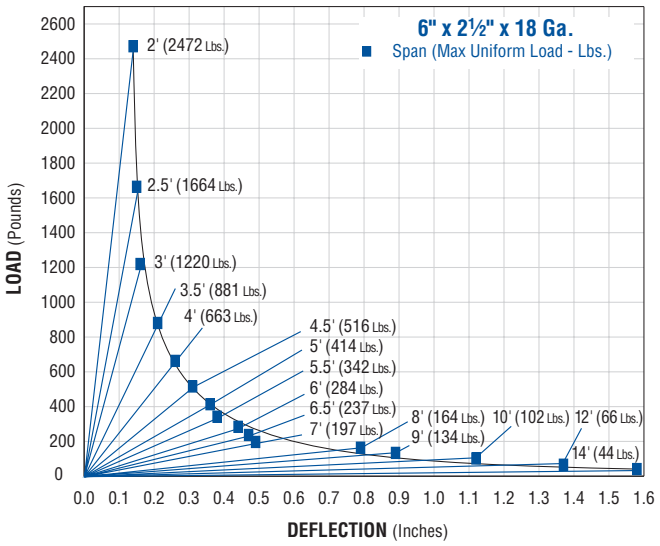
6" x 2½" x 18 Ga.
Span (Max Uniform Load - Lbs.)
2' (2472 Lbs.)
2.5' (1664 Lbs.)
3' (1220 Lbs.)
3.5' (881 Lbs.)
4' (663 Lbs.)
4.5' (516 Lbs.)
5' (414 Lbs.)
5.5' (342 Lbs.)
6' (284 Lbs.)
6.5' (237 Lbs.)
7' (197 Lbs.)
8' (164 Lbs.)
9' (134 Lbs.)
10' (102 Lbs.)
12' (66 Lbs.)
14' (44 Lbs.)
LOAD (Pounds)
DEFLECTION (Inches)

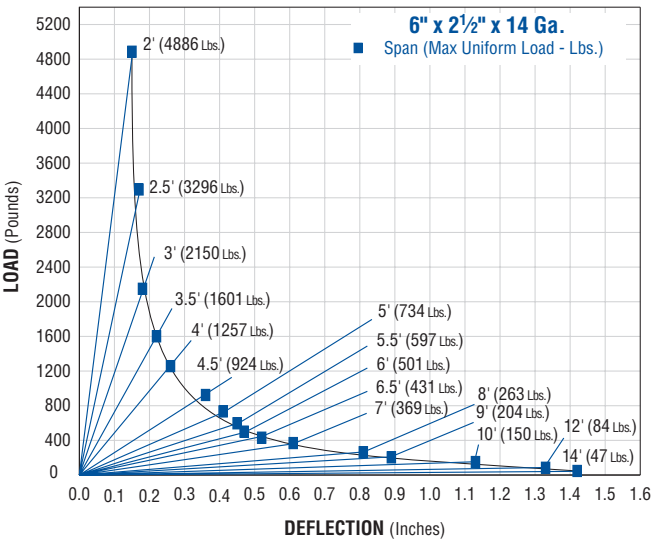
6" x 2½" x 14 Ga.
Span (Max Uniform Load - Lbs.)
2' (4886 Lbs.)
2.5' (3296 Lbs.)
3' (2150 Lbs.)
3.5' (1601 Lbs.)
4' (1257 Lbs.)
4.5' (924 Lbs.)
5' (734 Lbs.)
5.5' (597 Lbs.)
6' (501 Lbs.)
6.5' (431 Lbs.)
7' (369 Lbs.)
8' (263 Lbs.)
9' (204 Lbs.)
10' (150 Lbs.)
12' (84 Lbs.)
14' (47 Lbs.)
LOAD (Pounds)
DEFLECTION (Inches)

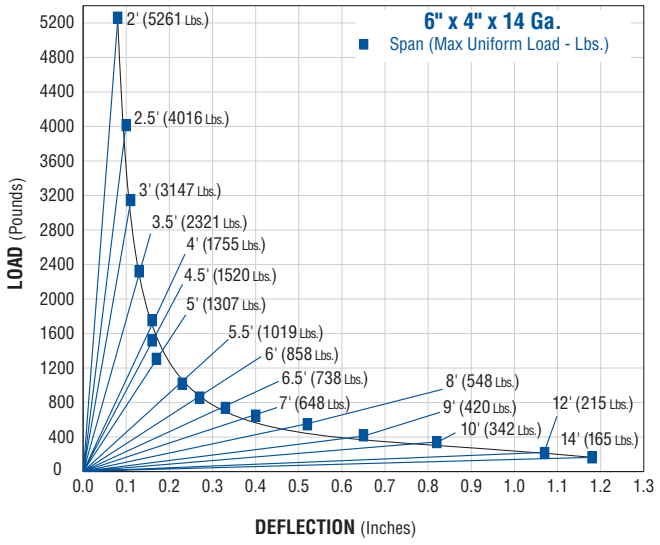
6" x 4" x 14 Ga.
Span (Max Uniform Load - Lbs.)
2' (5261 Lbs.)
2.5' (4016 Lbs.)
3' (3147 Lbs.)
3.5' (2321 Lbs.)
4' (1755 Lbs.)
4.5' (1520 Lbs.)
5' (1307 Lbs.)
5.5' (1019 Lbs.)
6' (858 Lbs.)
6.5' (738 Lbs.)
7' (648 Lbs.)
8' (548 Lbs.)
9' (420 Lbs.)
10' (342 Lbs.)
12' (215 Lbs.)
14' (165 Lbs.)
LOAD (Pounds)
DEFLECTION (Inches)

Loads and Deflection – 9" Planks

	Leg Height	Codes	Distance Between Supports (Feet)															
			2	2.5	3	3.5	4	4.5	5	5.5	6	6.5	7	8	9	10	12	14
9" x 14 Gauge	1½"	UL	821	525	365	268	195	136	100	75	57	45	36	–	–	–	–	–
		UD	0.05	0.08	0.12	0.16	0.2	0.22	0.25	0.27	0.3	0.32	0.35	–	–	–	–	–
		CL	612	488	405	346	286	222	179	145	118	98	82	–	–	–	–	–
		CD	0.04	0.06	0.10	0.13	0.16	0.18	0.20	0.22	0.24	0.26	0.28	–	–	–	–	–
	2½"	UL	3257	2197	1433	1067	838	616	489	398	334	287	246	175	136	100	56	31
		UD	0.15	0.17	0.18	0.22	0.26	0.36	0.41	0.45	0.47	0.52	0.61	0.81	0.89	1.13	1.33	1.42
		CL	2439	2055	1606	1393	1249	1031	907	810	740	687	632	509	441	355	228	135
		CD	0.12	0.14	0.14	0.18	0.21	0.29	0.33	0.36	0.38	0.42	0.49	0.65	0.71	0.90	1.06	1.14
	4"	UL	3507	2667	2098	1547	1170	1013	871	679	572	492	432	365	280	228	143	110
		UD	0.08	0.1	0.11	0.13	0.16	0.16	0.17	0.23	0.27	0.33	0.4	0.52	0.65	0.82	1.07	1.18
		CL	2625	2494	2353	2022	1745	1699	1621	1387	1273	1184	1117	1076	923	831	615	544
		CD	0.06	0.08	0.09	0.10	0.13	0.13	0.14	0.18	0.22	0.26	0.32	0.42	0.52	0.66	0.86	0.94

	Leg Height	Codes	Distance Between Supports (Feet)															
			2	2.5	3	3.5	4	4.5	5	5.5	6	6.5	7	8	9	10	12	14
9" x 18 Gauge	2½"	UL	1,648	1,109	813	587	442	344	276	228	189	158	131	109	89	68	44	27
		UD	0.14	0.15	0.16	0.21	0.26	0.31	0.36	0.38	0.44	0.47	0.49	0.79	0.89	1.12	1.37	1.58
		CL	1,236	1,040	915	770	663	580	518	470	426	385	344	327	300	255	200	140
		CD	0.12	0.14	0.16	0.18	0.21	0.24	0.28	0.29	0.30	0.37	0.46	0.61	0.74	0.91	1.2	1.5

	Leg Height	Codes	Distance Between Supports (Feet)												
			2	2.5	3	3.5	4	4.5	5	5.5	6	6.5	7	7.5	8
9" Aluminum (0.080)	2½"	UL	1784	1060	710	560	471	400	345	275	209	185	170	140	118
		UD	0.20	0.30	0.35	0.40	0.47	0.55	0.63	0.78	1.01	1.09	1.20	1.40	1.66
		CL	1337	992	797	732	704	672	643	563	466	446	441	388	348
		CD	0.16	0.24	0.28	0.32	0.38	0.44	0.50	0.62	0.81	0.87	0.96	1.12	1.33

Code Key: UL = Uniform Load (pounds per square foot)
UD = Deflection under uniform load (Inches)
CL = Concentrated Load (pounds)
CD = Deflection under concentrated load (Inches)

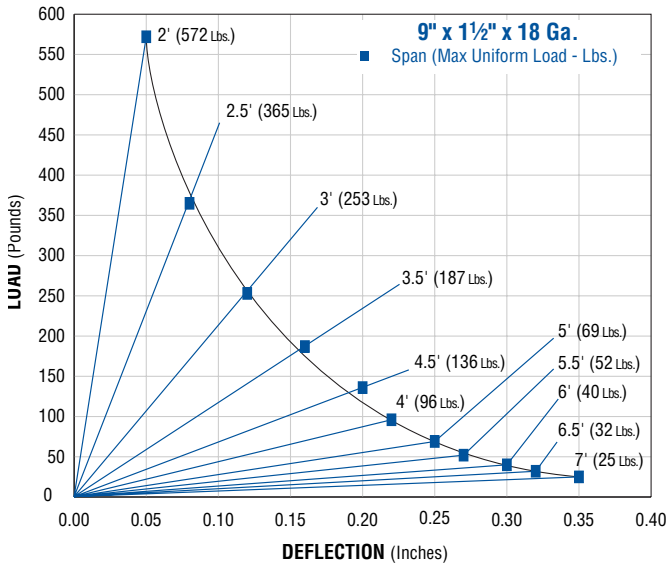
9" x 1½" x 18 Ga.
Span (Max Uniform Load - Lbs.)
LUAU (Pounds)
DEFLECTION (Inches)
2' (572 Lbs.)
2.5' (365 Lbs.)
3' (253 Lbs.)
3.5' (187 Lbs.)
4' (96 Lbs.)
4.5' (136 Lbs.)
5' (69 Lbs.)
5.5' (52 Lbs.)
6' (40 Lbs.)
6.5' (32 Lbs.)
7' (25 Lbs.)

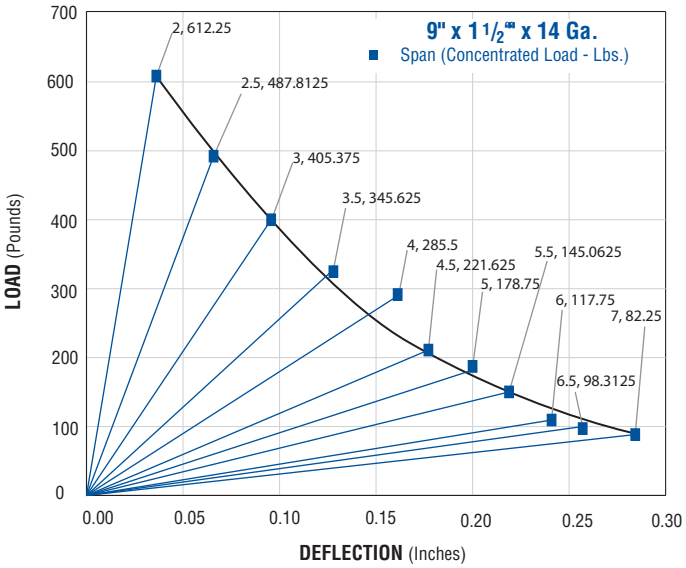
9" x 1 1/2"" x 14 Ga.
Span (Concentrated Load - Lbs.)
LOAD (Pounds)
DEFLECTION (Inches)
2, 612.25
2.5, 487.8125
3, 405.375
3.5, 345.625
4, 285.5
4.5, 221.625
5, 178.75
5.5, 145.0625
6, 117.75
6.5, 98.3125
7, 82.25

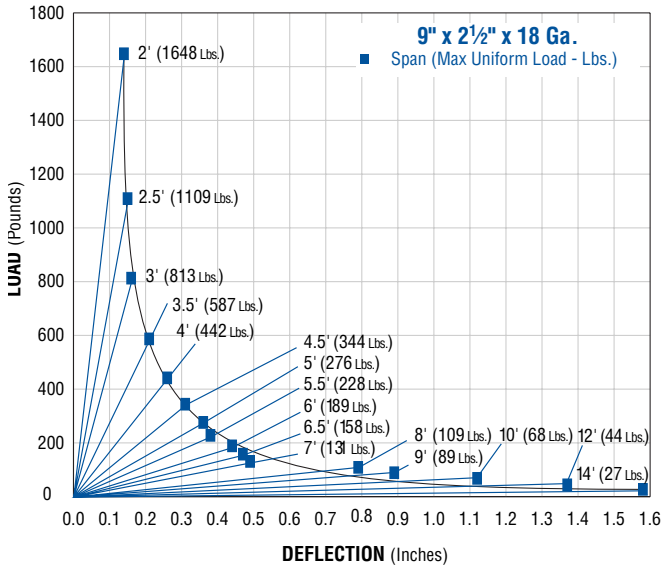
9" x 2½" x 18 Ga.
Span (Max Uniform Load - Lbs.)
LUAU (Pounds)
DEFLECTION (Inches)
2' (1648 Lbs.)
2.5' (1109 Lbs.)
3' (813 Lbs.)
3.5' (587 Lbs.)
4' (442 Lbs.)
4.5' (344 Lbs.)
5' (276 Lbs.)
5.5' (228 Lbs.)
6' (189 Lbs.)
6.5' (158 Lbs.)
7' (131 Lbs.)
8' (109 Lbs.)
9' (89 Lbs.)
10' (68 Lbs.)
12' (44 Lbs.)
14' (27 Lbs.)

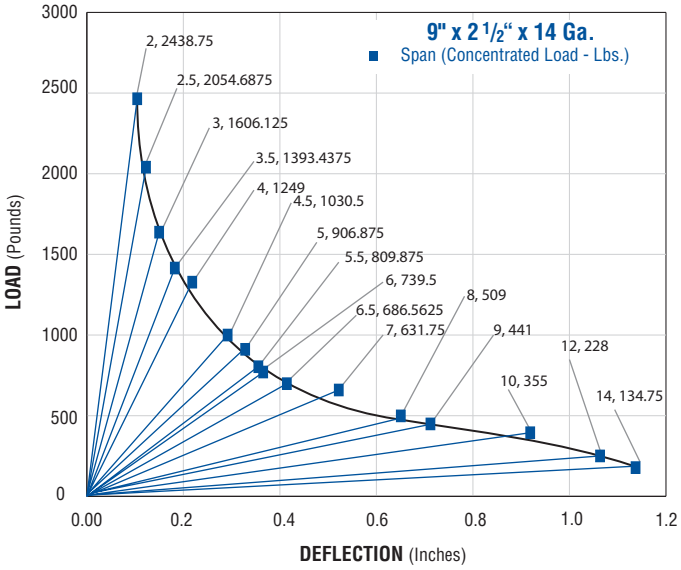
9" x 2 1/2" x 14 Ga.
Span (Concentrated Load - Lbs.)
LOAD (Pounds)
DEFLECTION (Inches)
2, 2438.75
2.5, 2054.6875
3, 1606.125
3.5, 1393.4375
4, 1249
4.5, 1030.5
5, 906.875
5.5, 809.875
6, 739.5
6.5, 686.5625
7, 631.75
8, 509
9, 441
10, 355
12, 228
14, 134.75

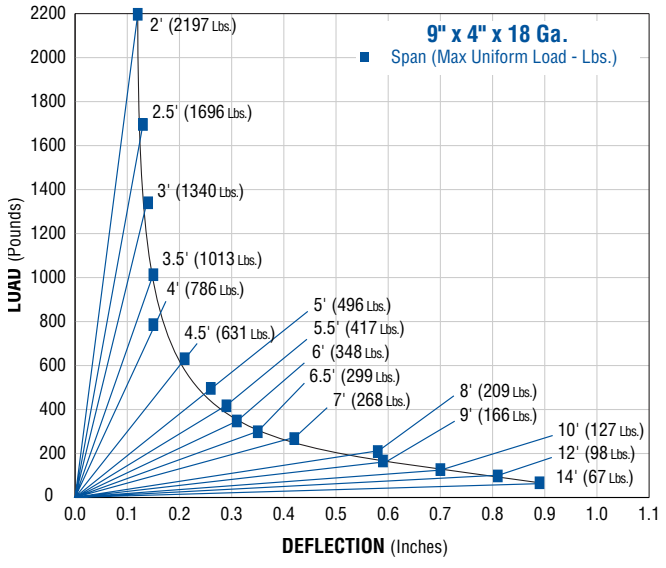
9" x 4" x 18 Ga.
Span (Max Uniform Load - Lbs.)
LUAU (Pounds)
DEFLECTION (Inches)
2' (2197 Lbs.)
2.5' (1696 Lbs.)
3' (1340 Lbs.)
3.5' (1013 Lbs.)
4' (786 Lbs.)
4.5' (631 Lbs.)
5' (496 Lbs.)
5.5' (417 Lbs.)
6' (348 Lbs.)
6.5' (299 Lbs.)
7' (268 Lbs.)
8' (209 Lbs.)
9' (166 Lbs.)
10' (127 Lbs.)
12' (98 Lbs.)
14' (67 Lbs.)

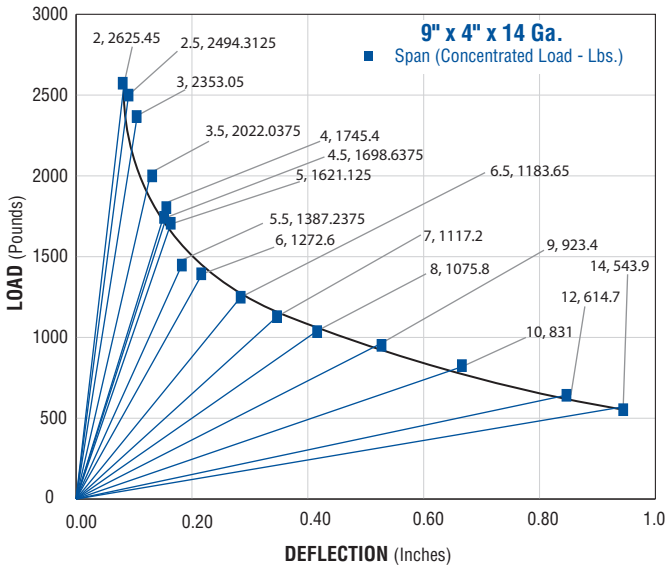
9" x 4" x 14 Ga.
Span (Concentrated Load - Lbs.)
LOAD (Pounds)
DEFLECTION (Inches)
2, 2625.45
2.5, 2494.3125
3, 2353.05
3.5, 2022.0375
4, 1745.4
4.5, 1698.6375
5, 1621.125
5.5, 1387.2375
6, 1272.6
6.5, 1183.65
7, 1117.2
8, 1075.8
9, 923.4
10, 831
12, 614.7
14, 543.9

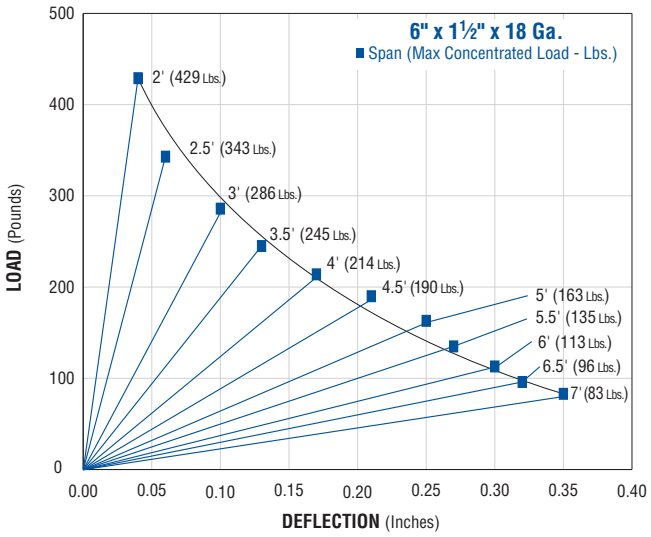
6" x 1½" x 18 Ga.
Span (Max Concentrated Load - Lbs.)
2' (429 Lbs.)
2.5' (343 Lbs.)
3' (286 Lbs.)
3.5' (245 Lbs.)
4' (214 Lbs.)
4.5' (190 Lbs.)
5' (163 Lbs.)
5.5' (135 Lbs.)
6' (113 Lbs.)
6.5' (96 Lbs.)
7' (83 Lbs.)
LOAD (Pounds)
DEFLECTION (Inches)

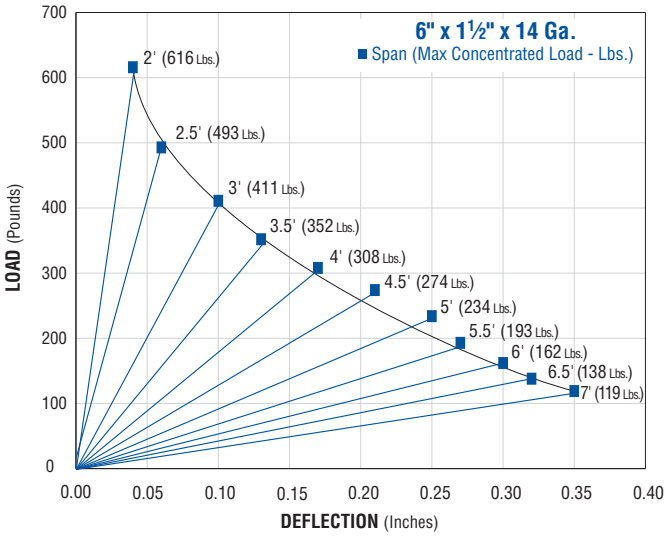
6" x 1½" x 14 Ga.
Span (Max Concentrated Load - Lbs.)
2' (616 Lbs.)
2.5' (493 Lbs.)
3' (411 Lbs.)
3.5' (352 Lbs.)
4' (308 Lbs.)
4.5' (274 Lbs.)
5' (234 Lbs.)
5.5' (193 Lbs.)
6' (162 Lbs.)
6.5' (138 Lbs.)
7' (119 Lbs.)
LOAD (Pounds)
DEFLECTION (Inches)

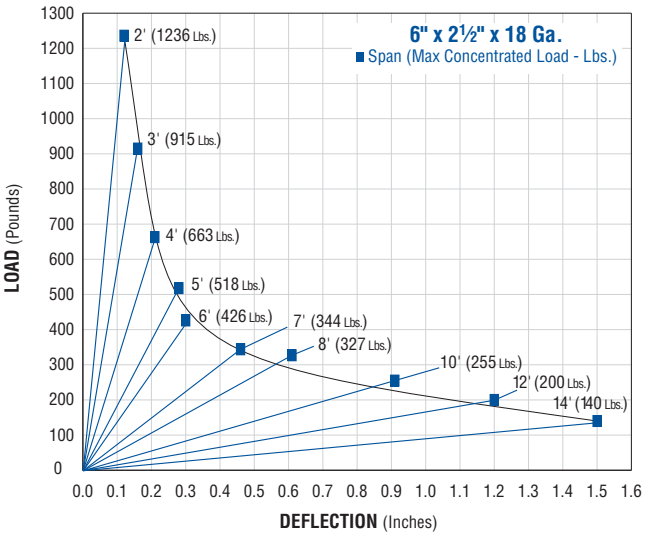
6" x 2½" x 18 Ga.
Span (Max Concentrated Load - Lbs.)
2' (1236 Lbs.)
3' (915 Lbs.)
4' (663 Lbs.)
5' (518 Lbs.)
6' (426 Lbs.)
7' (344 Lbs.)
8' (327 Lbs.)
10' (255 Lbs.)
12' (200 Lbs.)
14' (140 Lbs.)
LOAD (Pounds)
DEFLECTION (Inches)

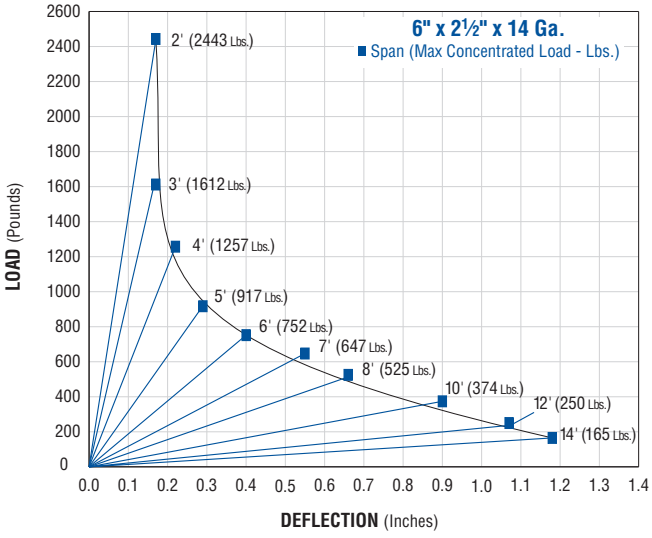
6" x 2½" x 14 Ga.
Span (Max Concentrated Load - Lbs.)
2' (2443 Lbs.)
3' (1612 Lbs.)
4' (1257 Lbs.)
5' (917 Lbs.)
6' (752 Lbs.)
7' (647 Lbs.)
8' (525 Lbs.)
10' (374 Lbs.)
12' (250 Lbs.)
14' (165 Lbs.)
LOAD (Pounds)
DEFLECTION (Inches)

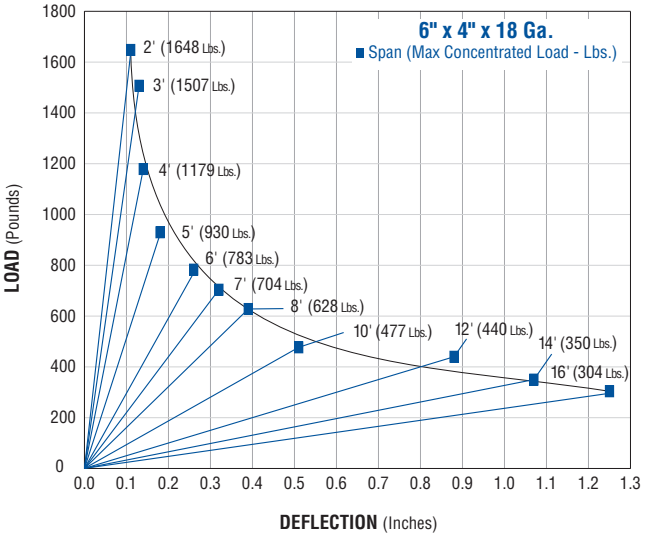
6" x 4" x 18 Ga.
Span (Max Concentrated Load - Lbs.)
2' (1648 Lbs.)
3' (1507 Lbs.)
4' (1179 Lbs.)
5' (930 Lbs.)
6' (783 Lbs.)
7' (704 Lbs.)
8' (628 Lbs.)
10' (477 Lbs.)
12' (440 Lbs.)
14' (350 Lbs.)
16' (304 Lbs.)
LOAD (Pounds)
DEFLECTION (Inches)

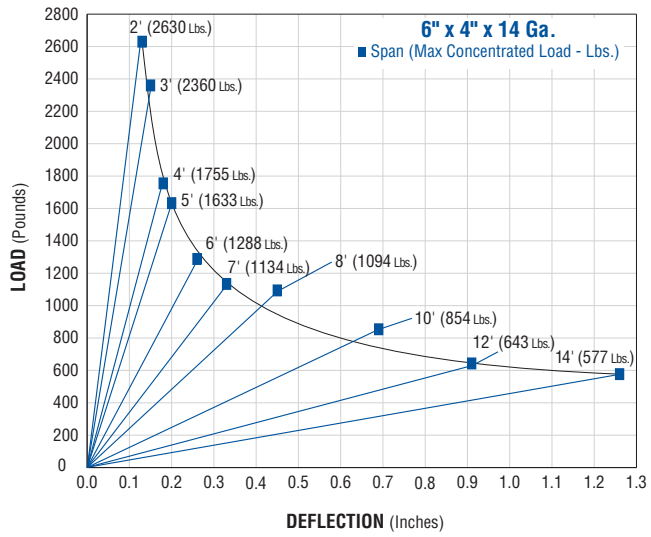
6" x 4" x 14 Ga.
Span (Max Concentrated Load - Lbs.)
2' (2630 Lbs.)
3' (2360 Lbs.)
4' (1755 Lbs.)
5' (1633 Lbs.)
6' (1288 Lbs.)
7' (1134 Lbs.)
8' (1094 Lbs.)
10' (854 Lbs.)
12' (643 Lbs.)
14' (577 Lbs.)
LOAD (Pounds)
DEFLECTION (Inches)

12" x 18 Gauge	Leg Height	Codes	Distance Between Supports (Feet)												
			2	2.5	3	3.5	4	4.5	5	5.5	6	6.5	7	7.5	8
	2½"	UL	750	600	500	370	285	225	180	150	127	–	–	–	–
		UD	0.04	0.07	0.11	0.16	0.20	0.25	0.31	0.37	0.44	–	–	–	–
		CL	559	559	558	480	421	372	330	301	276	–	–	–	–
		CD	0.03	0.06	0.09	0.13	0.16	0.20	0.25	0.30	0.35	–	–	–	–

Code Key: UL = Uniform Load (pounds per square foot)
UD = Deflection under uniform load (Inches)
CL = Concentrated Load (pounds)
CD = Deflection under concentrated load (Inches)

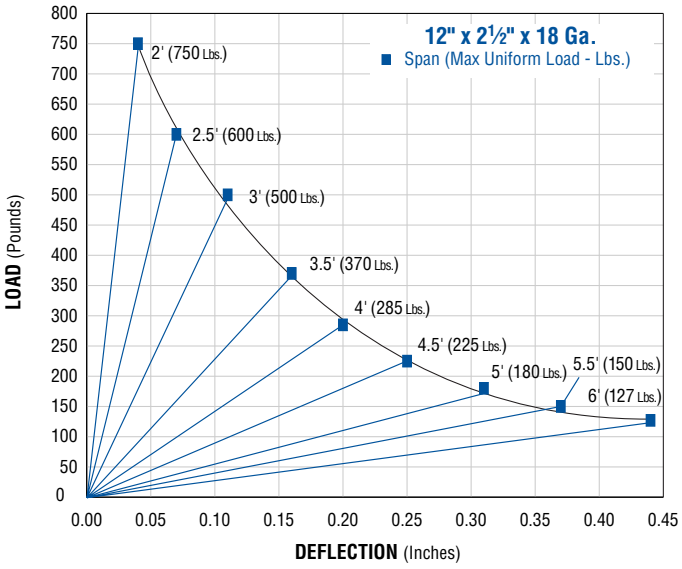

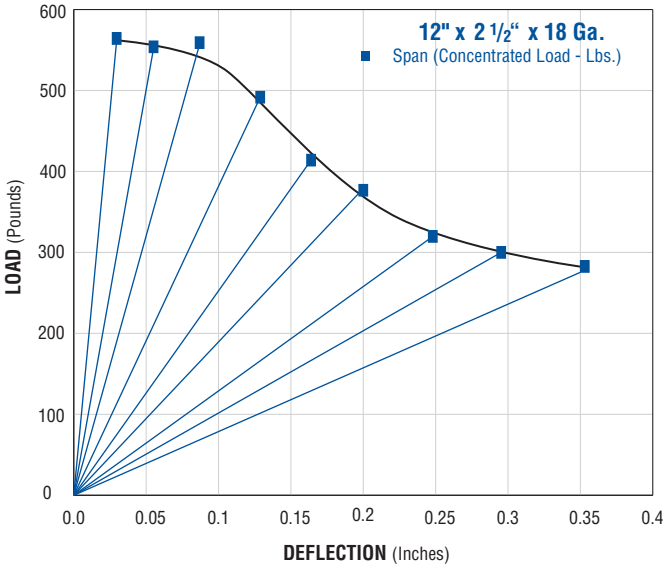

1. GENERAL

1.1 Scope of Work

A. Provide all material and labor required for the interlocking plank grating as indicated in the contract documents.

1.2 Related Work Specified Elsewhere

A. Structural Steel

B. Cold Formed Metal Framing

C. Metal Fabrications

1.3 Quality Assurance

A. Material shall be provided by a qualified contractor with at least five (5) years experience in the manufacture of interlock grating. Contractor shall demonstrate experience in projects of similar scope.

B. Anti-Skid surfaced grating shall conform to Federal Specification RR-G-1602A.

C. The Grating shall be designed to withstand the following load criteria:

1. Uniform Live Load_____ psf.
2. Concentrated Load _____ lbs.

D. Contractor shall certify that grating has been tested, indicating maximum allowable uniform and concentrated loads, with a factor of safety of 2, per AISC, Section 6.

E. If product is required in nuclear and/or safety related application, it shall be supplied under the requirements of nuclear specification 10CFR 50 appendix B.

1.4 Submittals

A. Contractor shall submit shop drawings showing grating layout, support structure and detailed sections depicting assembly.

2. PRODUCTS

2.1 Acceptable Manufacturer

A. In order to define the requirements for quality, function, sizes, gauges, surfaces, etc., these material specifications designate manufacturers, brands and other pertinent data that describe the minimum product standards of the products that conform to the project's requirements.

B. Products of other manufacturers may also be acceptable, provided that such products are equivalent to, or better than, those specified and, further, that use of such substitute products will not involve additional cost to owner due to possible required changes to accommodate them.

C. The alternate (substitute) product must be a proven equivalent to that specified by submitting technical data, test reports, samples, typical details, comparative layout and engineering calculations for evaluation.

D. The acceptance of an alternate (substitute) product is at the discretion of the owner or his agents, whose decision shall be final.

2.2 Products

A. Grating shall be United Interlock Plank Grating System, as manufactured by Unistrut, 16100 S. Lathrop Ave., Harvey, IL 60426 (U.S.A.), Phone (800) 468-9510.

B. Materials shall conform to ASTM A653, Grade A with a Class G-90 coating.

C. Material shall be _____ gauge. With a leg height of _____inches.

D. The surface pattern shall provide a minimum of 35% but not more than 42% open area. Openings shall be a minimum of 4" long and a maximum of ¾" width. The surface shall be _____.

1. Anti-Skid surface shall provide 360° positive traction and be made of tapered self-cleaning teeth, approximately ⅛" high.
2. Anti-Skid surface teeth shall have slots approximately 1/16" wide by ⅜" long, uniformly spaced with a minimum of 60 and a maximum of 80 teeth per square foot.

3. INSTALLATION

3.1 Site Examination

A. Contractor shall examine the support structure, work area and conditions for the grating installation. If the supports, area or conditions are not satisfactory, installation shall not commence until satisfactory conditions are present.

3.2 Erection

A. Grating shall be installed as detailed on the approved shop drawings.

B. Grating shall be installed in single, unspliced sections for all requirements to 20' lengths.

C. Grating shall interlock, with male-female legs providing a lock prohibiting horizontal movement. The outside leg of all members shall be male.

D. Connections of grating to support elements shall be by bolting, clamping, screwing, welding or use of a manufacturers approved hold-down clip.

ROOFWALKS®

Roofwalks® Planks 233
Hardware for Membrane, Foam or Coated Roof..... 233
Standing Seam Installation 233

PROTECT ROOFS FROM BIGFOOT WITH ROOFWALKS® ROOFTOP WALKWAYS

Roofwalk walkways are your low-cost solution to damage caused by rooftop foot traffic. On membrane, built-up, foam and coated roofs, they protect against puncture, abrasion and wear. On standing-seam metal roofs, workers of all sizes – even the Bigfoots of the world – can walk safely on the anti-skid surface without causing seam distortion, "dishing" or harmful stress to roof panels. Steel planks are strong yet light-weight, making installation quick and easy. Thanks to special system hardware, no roof penetration is required for anchoring. Roofwalks are versatile and adapt to any roofing system.

ROOFWALKS® SYSTEMS WILL…

- Provide a safe walkway for rooftop traffic
- Protect the roof from foot traffic
- Resist weather in either galvanized steel or aluminum finish
- Attach to all metal standing-seam roofs (including metric)

ROOFWALKS® SYSTEMS WILL NOT…

- Penetrate rooftop surface (except on rib roofs)
- Trap water …like rubber pads will
- Curl causing trip hazards …like rubber pads will
- Disappear in snow …like rubber pads will
- Rot or disintegrate …like wood or patio blocks will

Roofwalk Grating Planks

18 gauge

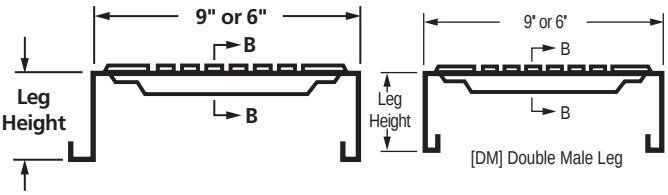

Male-Female Leg

Double-Male Leg

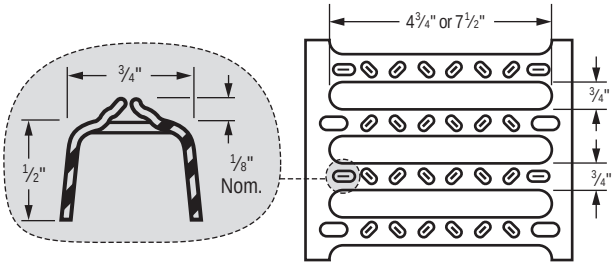

Anti-Skid Rib

Anti-Skid Surface Shown

Interlocking Planks 20' or 24' planks in 6", 9" or 12" widths roll formed from 18 gauge galvanized steel (G-90 coating). Planks available with double-male or male-female leg shapes. Anti-Skid surface and 2½" leg height, standard.

Roofwalk Grating (20' & 24' Stock Lengths) Leg Height: 2½"; Finish: PG; Surface: Anti-Skid			
Part No.	**Plank Width**	**Leg Shape**	**Weight Lbs./Ft.**
G 91282	9"	DM	2.7
G 92282		MF	2.7
G 61281	6"	DM	2.3
G 62281		MF	2.3
G 11282	12"	DM	3.2
G 12282		MF	3.2

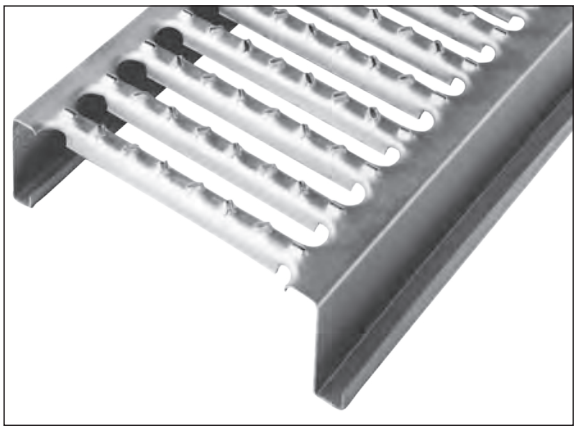

Membrane / Composite Installation

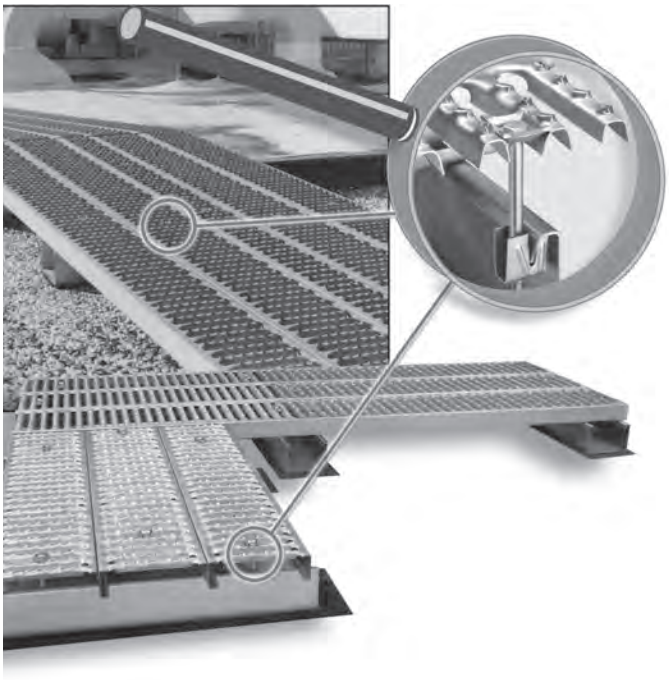

Installation on a membrane roof uses the support stands or the Unipier® sleeper support as a mounting platform.

Refer to our website (www.unistrut.com) for detailed installation instructions and a description of the mounting hardware used.

Standing Seam Installation

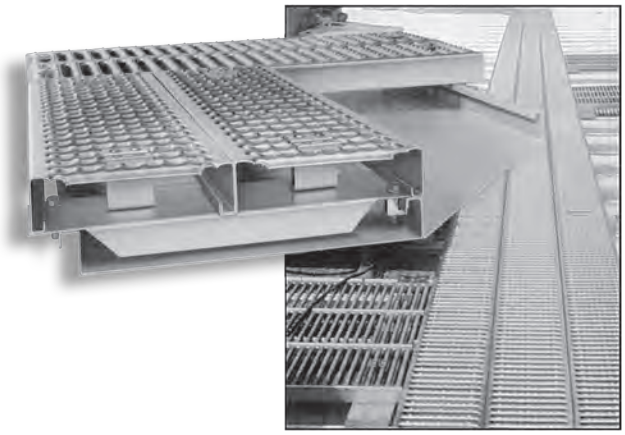

Installation on a standing seam roof uses a custom support plate specifically designed for each manufacturers standing seam roof to form a mounting platform.

The mounting hardware also depends on the specific standing seam roof. Refer to our website (www.unistrut.com) for detailed installation instructions and a description of the mounting hardware used.

PRODUCT INDEX

004M007 thru 034M040 114
004T008 thru 098N106, 009N012 thru 106N114 113
1.5 Pipe Strap 158
1.5 Pipe Support 158
1.5 Spacer 160
100 199
1000E 194
10-DS 163
10-H 163
10PU 193
12-BS 158
12PU 193
16-BS 157
16-BS 158
16-H 163
16-H Base 161
16-H-DB 163
2.5-CS 157
2.5-CS-7 157
2.5-SB-H 162
3-R Spacer 160
3-R-2 158
3-R-2 Pipe Strap 158
3-R-4 158
3-R-4 Pipe Strap 158
3-RAH 159
3-RAH 160
3-RAH Pipe Strap 159
4-RAH-7 160
5-R 158
5-RAH 159
5-SB-H 162
6-DS, 6-DSA 163
6-H 163
6-H Base 161
6-RAH 159
6-RAH Pipe Strap 159
8-DS, 8-DS-DB, 8-DSA 163
8-H 163
8-H Base 161
8-H-DB 163
8-RAH 159
8-RAH Pipe Strap 159
8-SB-H, 8-SB-HD ..... 162 200-3827 thru 200-3843 195
20-BS 157
20-BS-7 157
20E-5000 195
20N 200
20P-1000, 20V-1000 191
20P-1100, 20V-1100 191
20P-1200, 20V-1200 191
20P-1300, 20V-1300 191
20P-2000 SST, 20V-2000 SST 190
20P-2000, 20V-2000 190
20P-2100 SST, 20V-2100 SST 192
20P-2100, 20V-2100 190
20P-2200 SST, 20V-2200 SST 192
20P-2200, 20V-2200 190
20P-2300 SST, 20V-2300 SST 192
20P-2300, 20V-2300 190
20P-2500, 20V-2500 196
20P-2502, 20V-2502 196
20P-2504, 20V-2504 196
20P-2506, 20V-2506 196
20P-2508, 20V-2508 196
20P-2510, 20V-2510 196
20P-2512, 20V-2512 196
20P-2514, 20V-2514 196
20P-2516, 20V-2516 196
20P-2518, 20V-2518 196
20P-2520, 20V-2520 196
20P-2522, 20V-2522 196
20P-2524, 20V-2524 196
20P-2526, 20V-2526 197
20P-2528, 20V-2528 197
20P-2530, 20V-2530 197
20P-2534, 20V-2534 197
20P-2540, 20V-2540 197
20PU 193
20PU 197
24-BS-4 157
200-4101 199
200-4217 thru F200-4343 193
250E 194
250PU 194
312PU 193
375E 194
375PU 200
375PU-000 thru F375PU-300 194
375PU-CN 193
375PU-CNHD 193
375PU-FN-000 194
500E-999 194
500PU 193
500PU 193
500PU 200
500PU-000 194
500PU-FN-000 194
50PU 197
50PU-500SP 194
625E-999 19
625PU 193
625PU-000 thru F625PU-350 194
625PU-125 194
625PU-FN-000 194
750E-999 194
750PU 194
750PU-FN-000 194
AIC-EC 195
CVHPU 199
PCR 198
PS 198
RGBC 200
UB 195
A1000 171
A1000 EA 208
A1001 171
A1001A 172
A1001B 172
A1001C 172
A1006 175
A1007 175
A1008 175
A1026 176
A1031 176
A1036 176
A1047 177
A1063 175
A1065 175
A1066 176
A1068 176
A1184 175
A1184P 175
A1191 175
A1280 175
A1325 176
A1326 176
A1458 176
A2084 176
A2110 176
A2126 176
A2223 176
A2227 176
A2324 176
A2345 176
A2472 176
A2492 177
A2494 177
A2608 thru A2617 177
A3006 175
A3007 175

A3008 175
A3016 175
A3300 173
A3301 173
A3347 177
A4000 EA....208
A4001 EA....209
A4006 175
A4007 175
A4008 175
A4280 175
A5007 175
A5008 175
CG-10 thru CG-40 116
CL04 thru CL18 114
CN04 thru CN34 115
Deck Plates 12 SS....160
Deck Plates 18 SS....160
G 11282 233
G 12282....233
G 61281....233
G 62281....233
G 91282....233
G 92282....233
G11281 219
G12281....219
G124....222
G31183 thru G31383 220
G600 thru G639....221
G603 thru G642....220
G61141 thru G61143 219
G61181 thru G61183 219
G61221 thru G61223....219
G61241 thru G61243....219
G61281 thru G61283....219
G61341 thru G61343....219
G61381 thru G61383....219
G62141 thru G62143....219
G62181 thru G62183....219
G62221 thru G62223....219
G62241 thru G62243....219
G62281 thru G62283....219
G62341 thru G62343....219
G640....222
G714....222
G900 thru G904....223
G91141 thru G91143 219
G91181 thru G91183 219
G91221 thru G91223....219
G91241 thru G91243....219
G91281 thru G91283....219
G91341 thru G91343....219
G91381 thru G91383....219
G92141 thru G92143....219
G92181 thru G92183....219
G92221 thru G92223....219
G92241 thru G92243....219
G92281 thru G92283....219
G92341 thru G92343....219
G92381 thru G92383....219
HCSS....74
HFLW....75
HFMS 74
HHCS 74
HHXN 75
HLKW 75
HOCW 76
HRCN 75
HRMS 74
HSHS....74
HSQN 75
HSQN050 144
HTHR....75
HT04 thru HT34....115
J1205 thru J1280....117
K1062 76
K1063 76
K1064 76
LS 410 106
LS 500 106
M2037....133
M2050....133
M2137....133
M2150....133
M2250....133
M2350....133
M24....144
M2506....144
M2508....144
M2510....144
M2512....144
M2523....144
M2524....144
MU025 thru MU400 111
P1000 24
P1000 DS 24
P1000 EA....208
P1000 H3, P1000 HS, P1000 KO, P1000 SL...24
P1000 SS 206
P1000 T, P1000 WT 24
P1000HS SS 206
P1000T SS 206
P1001 24
P1001 3 27
P1001 A, P1001 A3, P1001 B, P1001 B3.....27
P1001 C, P1001 C3, P1001 C41, P1001 D3....27
P1001 EA....208
P1001 SS 206
P1001 T 27
P1003 27
P1004 A 27
P1006-0832 73
P1006-1024 73
P1006-1420 73
P1006T1420 73
P1007 73
P1008 73
P1008T 73
P1009 73
P1010 73
P1010T 73
P1012 73
P1012S....73
P1016 73
P1023 73
P1023S....73
P1024 73
P1024S....73
P1026 82
P1028 82
P1029 84
P1031 82
P1033 83
P1034 83
P1035 84
P1036 81
P1037 83
P1038 83
P1043A....88
P1044 88
P1045 86
P1046A....88
P1047 87
P1048, P1049, P1050 88
P1062 81
P1063 81
P1064 81
P1065 81
P1066 81
P1067 81
P1068 82
P1075 91
P1100 30
P1100 HS, P1100 KO, P1100 SL....30
P1100 SS....206
P1100 T 30
P1100 WT....30
P1100HS SS....206
P1100T SS 206

P1101 30
P1101 A, P1101 B, P1101 C 30
P1101 SS 206
P1109 thru P1126 108
P1130 85
P1131 85
P1180 61
P1180W 132
P1184 P 60
P1186, P2105 thru P2110 85
P1201 103
P1202 103
P1203 103
P1204 thru P1208 103
P1211 thru P1217 109
P1271S 98
P1272S 100
P1280 61
P1280 EA 209
P1280A 61
P1280W 132
P1281 82
P1282 82
P1283 82
P1290 84
P1291 84
P1315 82
P1320 87
P1325 83
P1326 83
P1334 81
P1346 83
P1347 86
P1354 104
P1354A 104
P1356 82
P1357 84
P1358 82
P1359 84
P1363A thru P1363E 87
P1376 87
P1376A 87
P1377 87
P1379S 100
P1380 81
P1380 A 81
P1381 84
P1382 84
P1383 88
P1386 100
P1425 thru P1431 109
P1430 110
P1453 86
P1454 86
P1455 87
P1458 82
P1479A thru P1479E 86
P1498 83
P1499 83
P1538A thru P1538D 83
P1546, P2094 thru P2100 85
P1563 thru P1573 109
P1579 84
P1593 91
P1640 97
P1648S thru P1653S 97
P1654A thru P1661A 97
P1690 thru P1697 129
P16F 134
P1703 145
P1704 145
P1713 84
P1723 82
P1726 82
P1727 84
P1728 84
P1730 86
P1732 88
P1734 86
P1736 86
P1737 88
P1747 83
P1750 83
P1753, P1754 128
P1769 90
P1771 90
P1773 91
P1775 91
P1777 91
P1787 thru P1795 130
P1796S 98
P1821 83
P1822 83
P1823 83
P1834 102
P1834A 102
P1843 104
P1873 82
P1887 90
P1924 81
P1925 81
P1934 84
P1941 81
P1944 103
P1950 82
P1953 82
P1956 84
P1957 84
P1959 81
P1960 81
P1961 81
P1962 82
P1964 81
P1973 88
P1985S 100
P1986S 100
P2000 33
P2000 HS, P2000 KO, P2000 SL, P2000 T, P2000 WT 33
P2001 33
P2001 A 33
P2001 B 33
P2001 C 33
P2008 thru P2020 109
P2024 thru P2070-84 110
P2070 110
P2072 SQ 90
P2072, ...90
P2072A SQ 90
P2072A, ...90
P2073 SQ 90
P2073, ...90
P2073A SQ 90
P2073A, ...90
P2079 81
P2101 thru P2104 85
P21H 134
P2223 89
P2224 89
P2225 89
P2226 89
P2227 89
P2228 89
P2229 89
P2230 89
P2231, P2232 93
P2231A, P2232A 93
P2233, P2234 93
P2233A, P2234A 93
P2235 84
P2237 88
P2243 119
P2245 89
P2260 thru P2270 85
P2280 61
P2280A 61
P2280W 132
P2324 81
P2325 81

P2326 88
P2328 88
P2329 88
P2341 R-L 89
P2343 R-L 89
P2344 R-L 89
P2345 89
P2346 89
P2347 89
P2348 90
P2354 R-L 103
P2355 R-L 103
P2360 86
P2378 74
P2379 74
P2380 74
P2381 74
P2382 74
P2398S 97
P2401S 97
P2403S 97
P2405S 97
P2407 61
P2407 145
P2452 94
P2453 90
P2454 103
P2458-18 thru P2458-36 94
P2459-36 thru P2459-96 94
P2469 86
P2471 81
P2472 R-L 89
P2473 88
P2474-1 thru P2474-4 118
P2475 118
P2476 119
P2481 119
P2482 119
P2484 85
P2484W 85
P2485 76
P2485K 76
P2486 76
P2490 81
P2491 R-L thru P2493 R-L 91
P2494 R-L thru P2499 R-L 92
P2500 R-L thru P2503 R-L 92
P2513 thru P2516 93
P2513A thru P2516A 93
P2521 131
P2521 132
P2522 130
P2534-50, P2534-75 129
P2535 130
P2536 130
P2537 131
P2539 131
P2540 132
P2540A 132
P2541 132
P2542 thru P2546 92
P2547 thru P2551 91
P2552 133
P2558 110
P2558 110
P2600 112
P2602 131
P2626 82
P2645A thru P2645H 129
P2645H 129
P2647A thru P2647F 129
P2649A thru P2649H 128
P2655 103
P2674 97
P2675 95
P2676 96
P2677 96
P2679-4, -6 & -8 96
P2682 96
P2749 102
P2749N 102
P2750 102
P2750N 102
P2751 102
P2751N 102
P2755 131
P2756 131
P2757 131
P2784 95
P2785 98
P2786 98
P2787 98
P2800 87
P2801 132
P2802 132
P2803 132
P2815 94
P2815D 94
P2820 136
P2821 136
P2822 136
P2823 136
P2824-6,-9,-12 98
P2855 131
P2856 131
P2857 131
P2859 61
P2860 61
P2862 81
P2863 81
P2864 81
P2865 144
P2867 98
P2867A, P2867B 98
P2868 99
P2868A, P2868B 99
P2893 99
P2894 99
P2895 99
P2896 99
P2897 95
P2898 96
P2899 96
P2900 133
P2901 133
P2902 133
P2903 133
P2904 133
P2920 136
P2921 136
P2922 136
P2923 136
P2924 136
P2928 136
P2929 136
P2930 136
P2932 136
P2940 136
P2941, P2942 90
P2944, P2945, P2946, P2947 92
P2949 102
P2950 102
P3000 36
P3000 SS 206
P3000 HS, P3000 KO, P3000 SL, P3000 T, P3000 WT 36
P3000HS SS 206
P3000T SS 206
P3001 36
P3006 73
P3007 73
P3008 73
P3009 73
P3010 73
P3013 73
P3016 73
P3045 86
P3047 87
P3087 100

P3088 100
P3116 133
P3165 144
P3170 144
P3184 60
P3184 EA....209
P3184 F 60
P3184 P....60
P3245 144
P3246 141
P3249 142
P3250 142
P3251 142
P3252 142
P3253 142
P3254 142
P3255 142
P3256 142
P3257 142
P3257A....142
P3258 142
P3259 142
P3260 142
P3261 142
P3262 142
P3263 142
P3264 142
P3265 142
P3266 142
P3267 142
P3268 142
P3269 142
P3270 142
P3280 61
P3280 145
P3280W....132
P3300 39
P3300 HS 39
P3300 SL....39
P3300 SS 206
P3300 T, P3300 WT 39
P3300HS SS 206
P3300T SS 206
P3301 39
P3301 SS 206
P3345 86
P3349 143
P3350 143
P3351 143
P3352 143
P3353 143
P3354 143
P3355 143
P3356 143
P3357 143
P3357A....143
P3358 143
P3359 143
P3360 143
P3361 143
P3362 143
P3363 143
P3364 143
P3365 143
P3366 143
P3367 143
P3368 143
P3369 143
P3370 143
P3380 61
P3380 145
P3409 thru P3417....111
P3521 131
P3539 131
P3663 145
P3700 145
P3703 145
P3704 145
P3712 P....60
P3754 141
P3922 thru P3926....131
P4000 42
P4000 SS 206
P4000 EA....211
P4000 HS 42
P4000 SL....42
P4000 T, P4000 WT 42
P4000HS SS 206
P4000T SS 206
P4001 42
P4001 EA....208
P4003 42
P4004 42
P4006 73
P4007 73
P4008 73
P4009 73
P4010 73
P4010T....73
P4012 73
P4023 73
P4043 88
P4045 86
P4047 87
P4100 45
P4100 HS 45
P4100 SL....45
P4100 T, P4100 WT 45
P4101 45
P4101 T 45
P4280 61
P4280 EA....209
P4280W....132
P4376 87
P4376A....87
P4377 87
P4400 48
P4400 HS 48
P4400 SL....48
P4400 T, P4400 WT 48
P4401 48
P4520, P4520 HS, P4520 SL, P4520 T,
P4520 WT....51
P4521 51
P4663 145
P4703 145
P4908 73
P5000 54
P5000 HS, P5000 KO, P5000 SL, P5000 T,
P5000 WT....54
P5001 54
P5021 132
P5077 87
P5280 61
P5280W....132
P5500 57
P5500 EA....208
P5500 HS, P5500 KO, P5500 SL, P5500 T,
P5500 WT....57
P5501 57
P5506 73
P5506-1420....73
P5507 73
P5508 73
P5509 73
P5510 73
P5521 131
P5521 thru P5580....132
P5537 131
P5539 131
P5543 88
P5545 86
P5547 87
P5560 86
P5577 87
P5580 61
P5580 EA....209
P5580W....132
P6000 180

P6000 EA....209
P6000 SS....206
P6001....180
P6001 EA....209
P6001A, P6001B, P6001C....181
P6006....184
P6013....184
P6026....185
P6028....185
P6031....185
P6036....185
P6045....186
P6047....186
P6048....186
P6062....184
P6065....184
P6066....184
P6067....184
P6068....185
P6069....185
P612....86
P6127 thru P6129....187
P6184 P....184
P6186....186
P6280....184
P6281 thru P6283....185
P6325....185
P6326....185
P6331....186
P6332....187
P6334....185
P6346....185
P6347....187
P6353....187
P6356A, P6358A....184
P6357....185
P6359....185
P6376....186
P6376A....186
P6377....186
P6379 S....187
P6380....185
P6380A....185
P6386....187
P6453....186
P6454....186
P6455....187
P6458....185
P6546....186
P6579....185
P6726A....184
P6737....186
P6805 thru P6810....187
P6887....185
P6924....184
P6925....184
P6962....184
P6973....187
P7000....182
P7000 EA....209
P7000 SS....206
P7001....182
P7001 EA....209
P7006....184
P7008 thru P7020....187
P7045....186
P7047....186
P7108 thru P7110....186
P7235....185
P7280....184
P7324....184
P7325....184
P7376....187
P7376A....187
P7377....187
P8000....95
P8001....95
P9000....65
P9010....68
P9011....68
P9012....68
P9013....69
P9014....69
P9200....65
P9207....68
P9209....68
P9324....68
P976....87
PA 158....215
PA 1SNB....212
PA 238....215
PA 318....215
PFL050T....101
PLF9037 thru PLF9100....101
PUX1234 thru PUX41810....116
RSS4....153
SLR100....149
SLR200....149
SPF® 100....104
SPF® 200....104
SPF® 300....105
SPF® 400....105
UB1⁄2PA thru UB12PA....115
UP-BK....155
UP-MPDS....155
UP-SPSS....155
WEEB - WMC....149

LIMITED WARRANTY

Unistrut® warrants for a period of one year from the date of shipment or completion of installed work, as applicable, that the products or services will be free from defects in workmanship and materials at the time of delivery to the carrier. No warranty is given for products or components that have been (i) manufactured by companies other than Unistrut; (ii) subject to misuse, improper installation, corrosion, or negligence; (iii) disassembled, modified or repaired by unauthorized persons; (iv) used in any manner contrary to Unistrut's instructions or recommendations; or (v) subject to (1) corrosion beyond normal weathering; (2) corrosion caused by disruption of any product coating after production; (3) corrosion occurring at points in the product that have been drilled, cut or welded; or (4) corrosion occurring in unusual or highly corrosive soil, environmental or industrial conditions (in case of corrosion under this subsection (v)(4), Unistrut's limited obligation is to ensure that the product complies with its published specifications).

UNISTRUT DISCLAIMS ALL OTHER WARRANTIES, WHETHER EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ANY WARRANTY THAT THE PRODUCTS WILL CONFORM TO ANY SAMPLES, ANY WARRANTY THAT THE PRODUCTS WILL NOT DISCOLOR OR THE TEXTURE OR FINISH WILL NOT CORRODE OR DETERIORATE, AND ANY WARRANTY REGARDING ANY ANCILLARY SERVICES RENDERED.

REMEDY AND LIMITATION OR LIABILITY

If the products do not comply with the warranties set forth in these Terms, Buyer must provide prompt written notice to Unistrut of the non-conformance in reasonably sufficient detail (and such other detail as Unistrut requests) and must comply with Unistrut's instructions and policies regarding the nonconforming product. Buyer must provide such notice within the warranty period. Unistrut's liability will terminate upon expiration of the warranty period. Unistrut's sole liability for non-conforming products will be to repair or replace the non-conforming product or return the purchase price paid therefore, at Unistrut's sole option. Buyer will bear all disassembly, shipment and reinstallation costs of repaired or replaced products. IN NO EVENT WILL UNISTRUT BE LIABLE IN CONTRACT, TORT, STRICT LIABILITY OR OTHERWISE FOR INCIDENTAL, INDIRECT, SPECIAL OR CONSEQUENTIAL DAMAGES, REGARDLESS OF WHETHER UNISTRUT WAS INFORMED OF THE POSSIBILITY OF SUCH DAMAGES, AND IN NO EVENT WILL UNISTRUT'S LIABILITY EXCEED AN AMOUNT EQUAL TO THE SALES PRICE OF THE PRODUCTS.

NEW

UNISTRUT® DEFENDER™

CORROSION-RESISTANT PRODUCT LINE

UNISTRUT DEFENDER **VS.** **HOT-DIP GALVANIZED**

1,000 HOURS CONTINUOUS SALT SPRAY TEST RESULTS

Unistrut Defender has 3X the performance of traditional Hot-Dip Galvanized products*

A breakthrough in corrosion resistance for the metal framing industry. Unistrut is proud to introduce a new, corrosion-resistant patent pending product line called Unistrut Defender. Scan the QR code below to watch a quick video showing Unistrut Defender's revolutionary self-healing properties, salt spray test, and more. For more information contact your local sales rep or visit unistrut.us.



View video

unistrut.us

Atkore Unistrut

* Based on average ASTM B117 salt spray test results from an independent, accredited test laboratory.

Atkore™

Allied Tube & Conduit ▲ **AFC Cable Systems** ▲ **Heritage Plastics** ▲ **Unistrut**
Unistrut Construction ▲ **Cope** ▲ **US Tray** ▲ **Calbrite** ▲ **Calbond** ▲ **Kaf-Tech**
Columbia-MBF ▲ **Eastern Wire + Conduit** ▲ **ACS/Uni-Fab** ▲ **Cii**
Power-Strut ▲ **Calconduit** ▲ **Razor Ribbon** ▲ **Calpipe Security**
Vergokan ▲ **Flexicon** ▲ **Marco**

Atkore
16100 South Lathrop Avenue
Harvey, IL 60426

TOLL FREE / 800-882-5543
FAX / 708-339-7814

atkore.com/unistrut

Want to join a company that helps you build the mindset, skill set and tool set for success? Visit us at atkore.com/careers

©2021 Atkore Inc. All rights reserved. US-CAT-5499-2102