
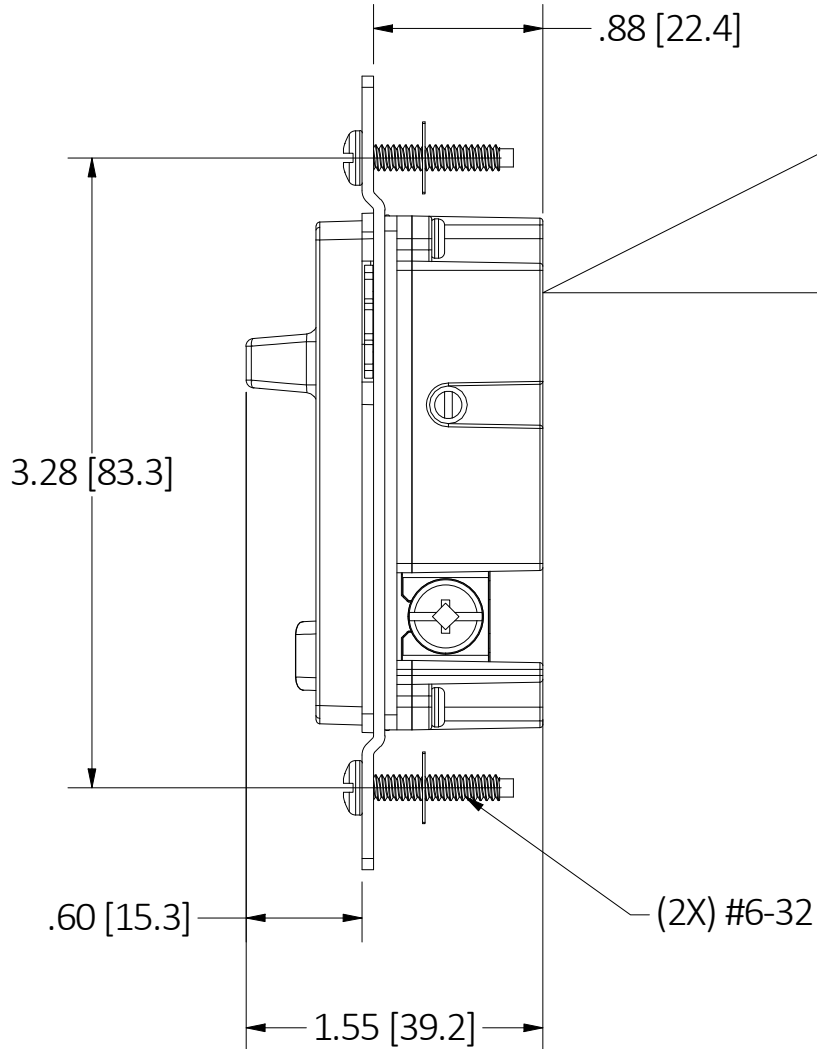


M-14555

1

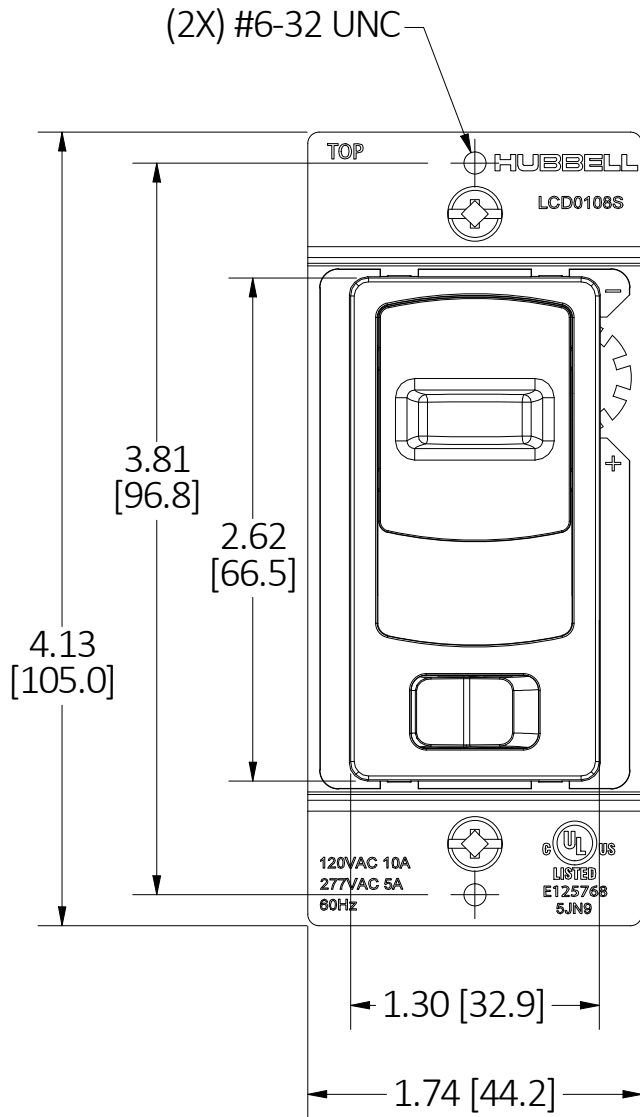

NOTES:

- INPUT RATING: 120-277VAC, 60Hz;
SWITCH TYPE: SINGLE POLE & 3-WAY.
RATING: LED/CFL/ELECTRONIC SELF-BALLASTED 120VAC 10A OR 277VAC 5A.
TERMINAL TYPE: SCREW TERMINAL (BACK & SIDE).
TERMINAL CAPACITY: #14-#12.
WIRE NUT PROVIDED.
- ALL DIMENSIONS ARE IN INCHES [mm].

CAT.#	DESCRIPTION	COLOR
LCD0108SW	DIM SLIDER SP&3W 0-10V LED WH	WHITE
LCD0108SI	DIM SLIDER SP&3W 0-10V LED IV	IVORY
LCD0108SLA	DIM SLIDER SP&3W 0-10V LED LA	LIGHT ALMOND

LIST OF PARTS		
DESCRIPTION	MATERIAL	FINISH
ROCKER	THERMOPLASTIC	COLOR PER CAT.#
SLIDER	THERMOPLASTIC	COLOR PER CAT.#
FACE COVER	THERMOPLASTIC	COLOR PER CAT.#
BASE	THERMOPLASTIC	BLACK
YOKE	ALUMINUM	
TERMINALS	BRASS	
MOUNTING SCREW	STEEL	Zn PLATE
GR. SCREW	STEEL	Zn PLATE + GREEN DYE
BLACK SCREW	STEEL	Zn PLATE + BLACK DYE
BRASS SCREW	STEEL	BRASS PLATE

1	NEW RELEASE PER DCN#220711021929. D.LI		8/24/22
REV	DESCRIPTION	APP	DATE
THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE. DIMENSIONS ARE IN INCHES [mm].			
TITLE SLIDER DIMMER, SP/3WAY 0-10V LED CFL			
		WIRING DEVICE-KELLEMS HUBBELL INCORPORATED SHELTON, CT	
TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ± .01 .XXX = ± .005 ANGLE TOL. ±2°		DR. BY D.LI CHK. BY	SCALE 1 : 1 DATE 6/8/22