


M-14470

1

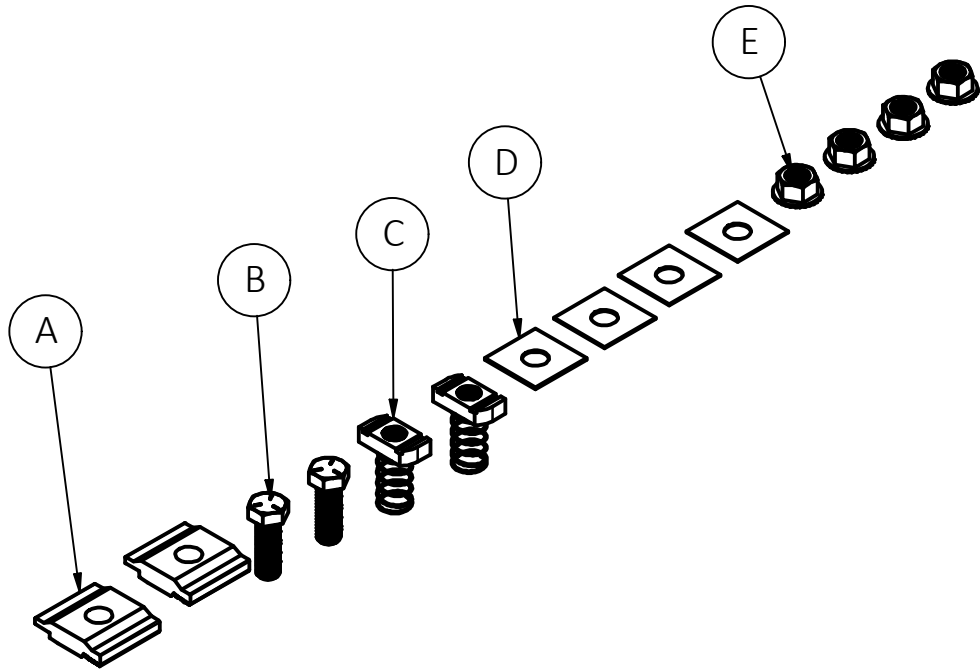

CATALOG NUMBER	THREADED ROD DIA (in [mm])	A	B	C	D	E
LHC38	.38 [9.5]	(2) CLIP	(2) BOLT, 1/4 [6.4] X 1-1/2 [38.1]	(2) SPRING NUT, .25 [6.4]	(4) WASHER, .38 [9.5] HOLE	(4) NUT, .38 [9.5]
LHC12	.50 [12.7]	(2) CLIP	(2) BOLT, 1/4 [6.4] X 1-1/2 [38.1]	(2) SPRING NUT, .25 [6.4]	(4) WASHER, .50 [12.7] HOLE	(4) NUT, .50 [12.7]

- NOTES:
- 1. ALL DIMENSIONS ARE IN INCHES AND [MILLIMETERS].
 - 2. COMPLETE ASSEMBLY CONSISTS OF ALL ITEMS LISTED IN TABLE ABOVE.
 - 3. INSTALL IN ACCORDANCE WITH NEMA STANDARD VE-2 "CABLE TRAY INSTALLATION GUIDELINES".
 - 4. THIS KIT IS DESIGNED FOR USE WITH CLASS 1 CABLE TRAY SYSTEMS ONLY.
 - 5. THREADED RODS, HANGER CHANNEL AND FASTENERS FOR ATTACHMENT TO STRUCTURE ARE SUPPLIED SEPARATELY.
 - 6. FOR USE WITH LSE SERIES CEILING SUPPORT CHANNEL, SUPPLIED SEPARATELY.

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
CLIP	ALUMINUM	
BOLT	STEEL	ZINC PLATED
SPRING NUT	STEEL	ZINC PLATED
WASHER	STEEL	ZINC PLATED
NUT	STEEL	ZINC PLATED

1	RELEASED PER DCN211102014008	AD	11/2/21
REV	DESCRIPTION	APP	DATE
THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE. DIMENSIONS ARE IN INCHES [mm].			
TITLE HARDWARE KIT, SINGLE CHANNEL, LADDER TRAY			
WIRING DEVICE-KELLEMS HUBBELL INCORPORATED SHELTON, CT			
TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ± .01 .XXX = ± .005 ANGLE TOL. ±2°		DR. BY AD	SCALE 1 / 4
		CHK. BY SBW	DATE 10/13/21