



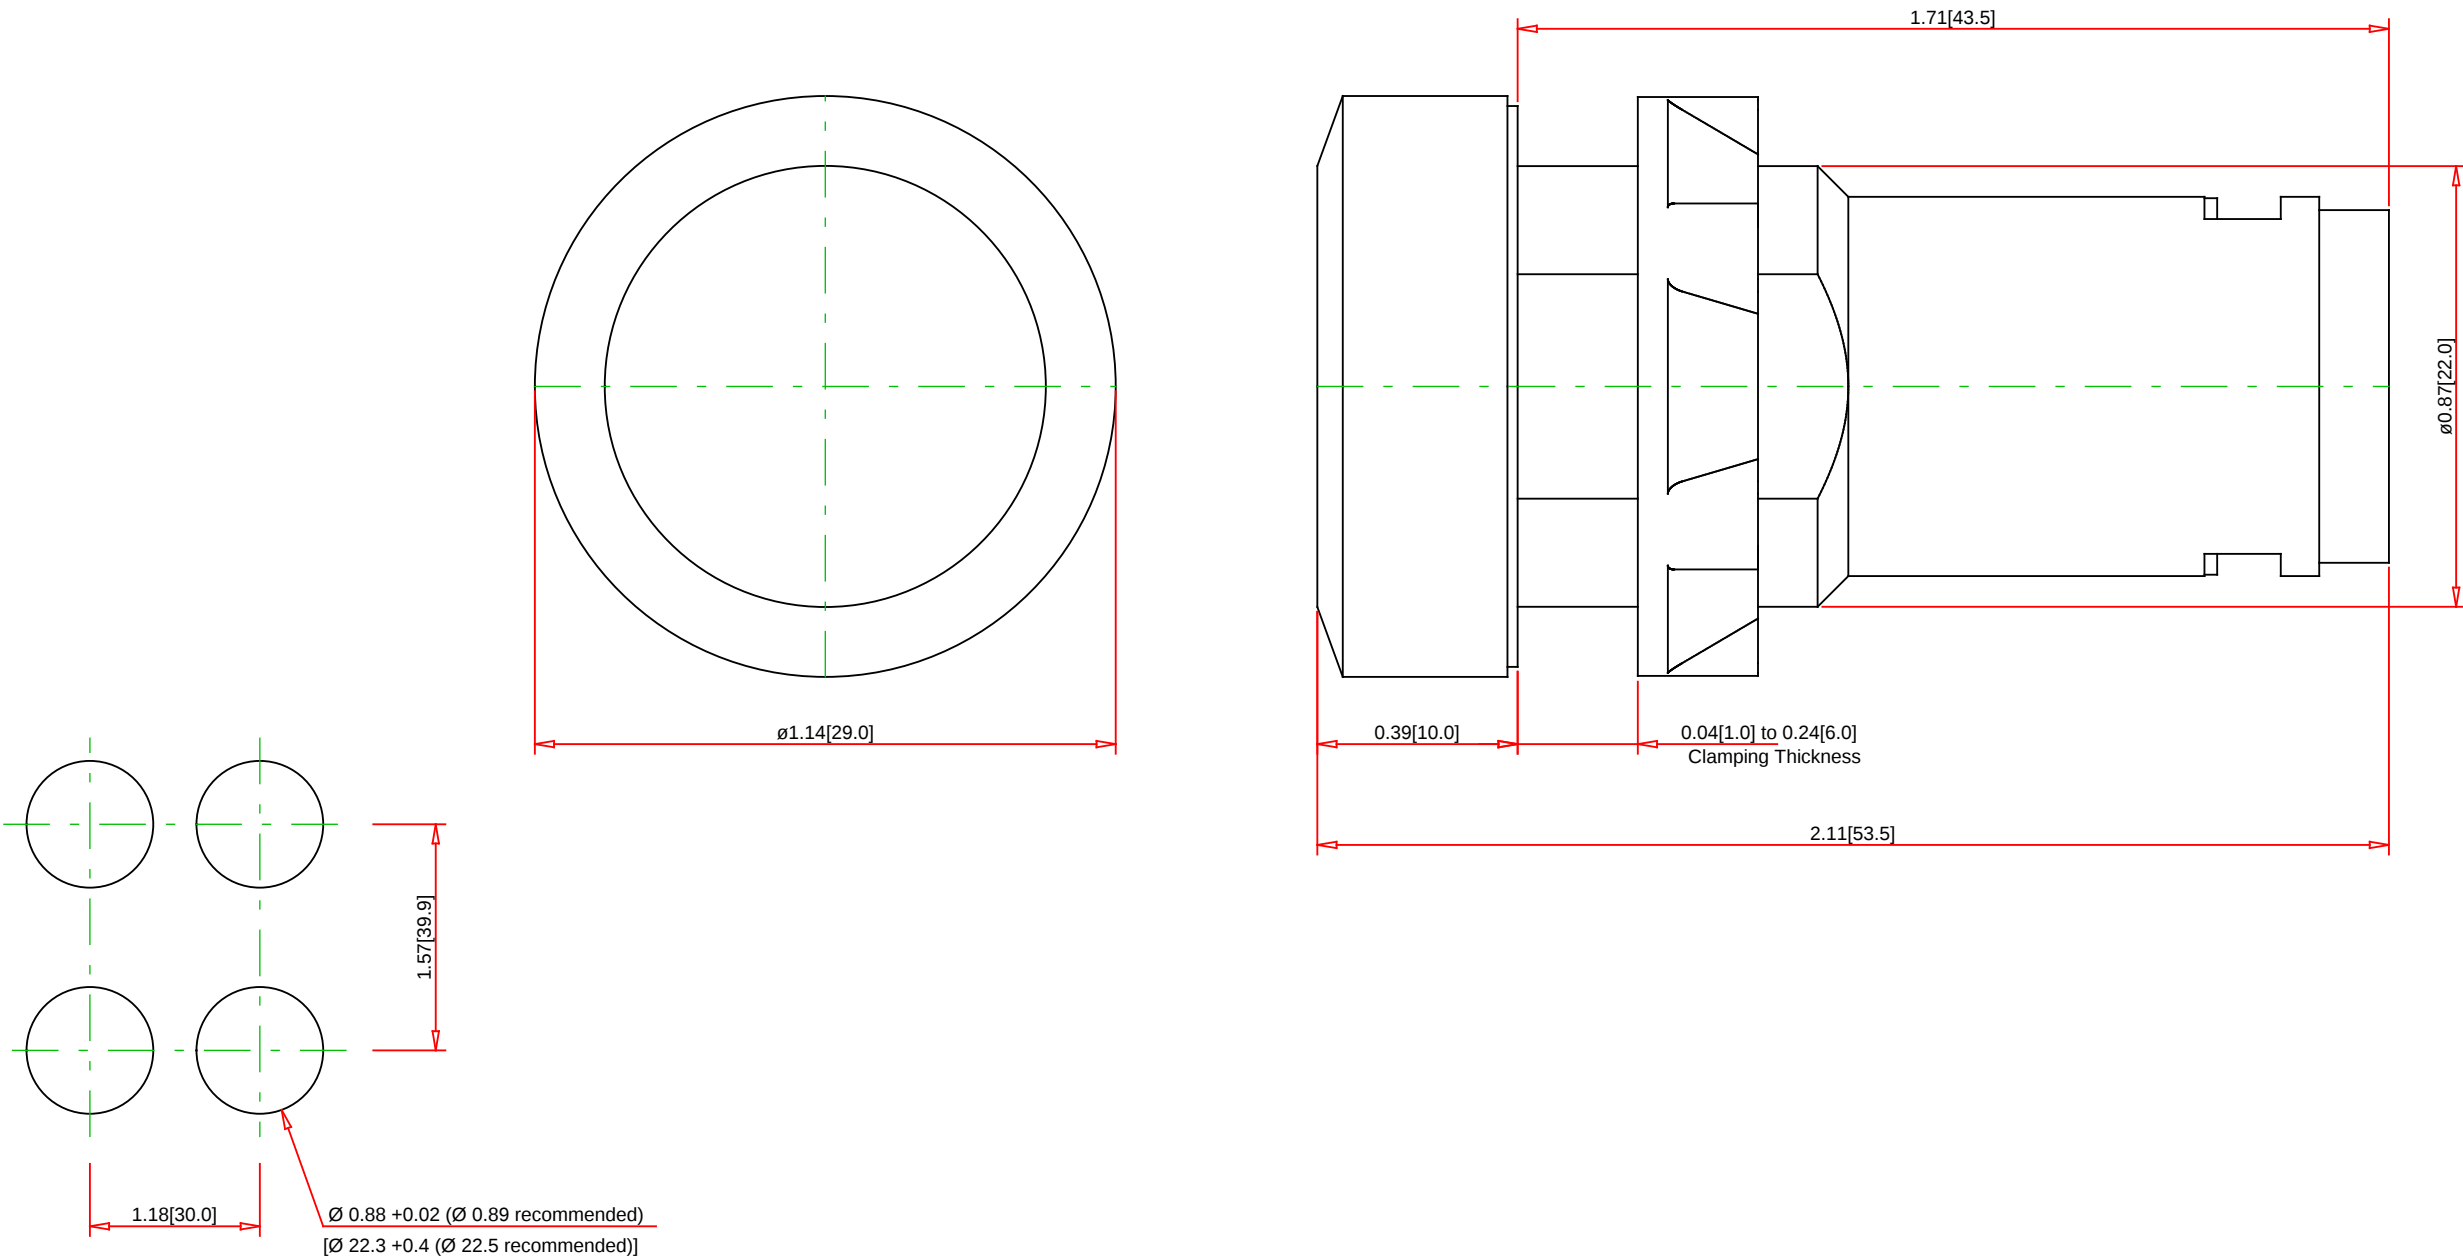

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

XB5EVB6

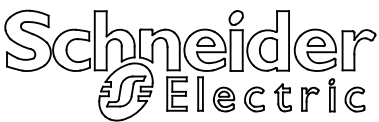

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 877 342 5173
Email: CCC@us.schneider-electric.com

Technical Information:

Supply Voltage (Input): 24VAC/DC, 50/60 Hz
Supply Voltage Limits: 21.6-26.4 VAC 19.2-30 VDC
Current Rating: 18mA
Surge Withstand: 1 kV conforming to IEC 61000-4-5
Bulb Type: Protected and Integrated LED
Ambient Air Temp. (for storage): -40°C to 70°C
Ambient Air Temp. (for operation): -25°C to 70°C
Conformity to Standards: EN/IEC 60947-1, EN/IEC 60947-5-1, UL508, CSA C22-2 n°14, IEC 61000-4-2, IEC 61000-4-3, IEC 6100-4-4, UL, FCC, CSA, CE

Description:
Vibration Resistance:
Shock Resistance:

IK degree of Protection:
Degree of Protection:
Electric Service Life:

Specification:
22mm Monolithic Pilot light, complete, 24V, Blue
5 gn (f=12....500 Hz) conforming to IEC 60068-2-6
34 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27,
50 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27
IK05 conforming to IEC 50102
IP66 conforming to IEC 60529, NEMA 4X, NEMA 13
100,000 hours at rated voltage and at 25°C