


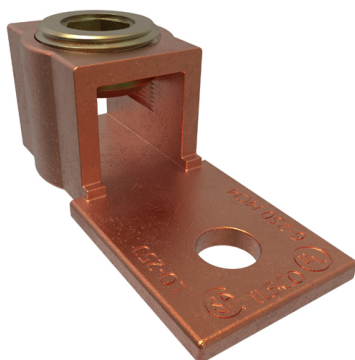

SKU: LO-250

UPC: 0783669569834

Features & Benefits:

Description: Copper Mechanical Lug, Conductor Range 250-6, 1 Port, 1 Hole, 3/8in Bolt Size, Seamless, UL, CSA

Specs

Additional Class Attributes

Connection	Mechanical
Contains DE-OX®	No
Mounting Hole Type	Thru
Number of Conductors	1
Number of Mounting Holes	1
Number of Poles	1
Number of Ports / Wireways	1

Dimensions

Dimension G (IN)	0.437
Dimension G (mm)	11.0998
Drive Size Main	3/8
Drive Type Main	Internal Hex
Height (IN)	0.88
Height BX (IN)	2
Height (mm)	22.352
Length (IN)	2.275
Length (mm)	57.785
Mounting Hole Diameter (IN)	0.328
Mounting Hole Diameter (mm)	8.3312
Tang Length (IN)	1.25
Tang Length (mm)	31.75
Tang Thickness (IN)	0.125
Tang Thickness (mm)	3.175
Tang Width (IN)	0.985
Tang Width (mm)	25.019
Weight (LB)	0.196
Weight BX (LB)	5.0595
Width (IN)	0.985
Width BX (IN)	6.1875
Width (mm)	25.019

Material and Finish

Conductor Material	Copper
Connector Finish	NA
Insulation	NA
Material	Copper

Wire Binding Hardware Finish
Wire Binding Hardware Material

Bright Dip
Brass

Additional Technical Specifications

Conductor Type Stranded

Bolt and Screw Sizes

Mounting Bolt/Stud Size 5/16
Number of Wire Binding Screws per Port 1
Wire Binding Screw Size 13/16
Wire Binding Torque 375

General

Bag Quantity 1
Carton Quantity Description STD PACK QTY 25
Direct Burial No
Dual Rated No
NEMA Code S-588-3
UPC Code 78366956983

Testing Standards

CSA File Number LR-29601
CSA Standard C22.2 No. 65-03
Prop65 Compliance This product is in compliance with Prop65. It is not known to contain any chemicals associated with this regulation
ROHS Indicator IND
UL Control Number 453G
UL / CULUS Specification UL 486A/B Listed
UL File Number E6207

Environment and Temperature

Temperature Rating 90°C

Color

Color Copper

Conductor Ranges

Conductor Range AL Solid (Secondary, tap, load) NA
Conductor Range AL Stranded (Primary, run, main, line) NA
Conductor Range AL Stranded (Secondary, tap, load) NA
Conductor Range CU Solid (Primary, run, main, line) NA
Conductor Range CU Solid (Secondary, tap, load) NA
Conductor Range CU Stranded (Primary, run, main, line) 250 kcmil - 6 Str
Conductor Range CU Stranded (Secondary, tap, load) NA
Conductor Range AL Solid (Primary, run, main, line) NA
Wire Combinations NA

Voltage

Voltage Rating

35 kV