

Product data sheet

Specifications



analog input module Modicon Quantum - 8 I Ni / Pt 100, 200, 500, 1000

140ARI03010

⚠ Discontinued on: Dec 31, 2022

⚠ To be end-of-service on: Dec 31, 2030

⚠ Discontinued - Service only

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range of Product	Modicon Quantum automation platform
Product or Component Type	Analogue input module

Complementary

Analogue input number	8
Input type	Differential
Addressing requirement	9 input words
Analogue input type	Temperature probe - 100...450 °C Pt 100, Pt 200, Pt 500, Pt 1000 Temperature probe - 200...850 °C Pt 100, Pt 200, Pt 500, Pt 1000 Temperature probe - 60...180 °C Ni 100, Ni 200, Ni 500, Ni 1000 Temperature probe 0.5 mA Ni 100, Ni 200, Ni 500, Ni 1000 Temperature probe 2.5 mA Pt 100, Pt 200, Ni 100, Ni 200
Analogue input resolution	13 bits
Input impedance	>= 10 MOhm
Absolute accuracy error	0.1 °C
Linearity error	+/- 0.01 % full scale +/- 0.5 °C
Accuracy drift according to temperature	+/- 0.5 °C 77 °F (25 °C) +/- 0.9 °C 32...140 °F (0...60 °C)
Isolation between channels and bus	1780 V AC 47...63 Hz 60 s 2500 V DC 60 s
Isolation between channels	300 Vrms AC
Update time	1200 ms 3 wires 640 ms 2 wires/4 wires
Fault type	Broken wire Overtacking scale
Marking	CE
Local signalling	for bus communication is present (Active) 1 LED (green) for external fault 1 LED (red) for channel is turned on 8 LEDs (green) for channel fault 8 LEDs (red)
Bus current requirement	200 mA
Power dissipation in W	1 W
Module format	Standard

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Product Weight	0.7 lb(US) (0.3 kg)
----------------	---------------------

Environment

Standards	UL 508 CSA C22.2 No 142
Product Certifications	FM Class 1 Division 2 cUL
Resistance to electrostatic discharge	4 kV contact IEC 801-2 8 kV on air IEC 801-2
Resistance to electromagnetic fields	9.1 V/m (10 V/m) 80...1000 MHz IEC 801-3
Ambient air temperature for operation	32...140 °F (0...60 °C)
Ambient Air Temperature for Storage	-40...185 °F (-40...85 °C)
Relative Humidity	95 % without condensation
Operating altitude	<= 16404.2 ft (5000 m)

Ordering and shipping details

Category	US1PC2118155
Discount Schedule	PC21
GTIN	3595861133167
Returnability	No
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.85 in (4.7 cm)
Package 1 Width	6.50 in (16.5 cm)
Package 1 Length	12.36 in (31.4 cm)
Package 1 Weight	15.5 oz (440.0 g)

Contractual warranty

Warranty	18 months
----------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better

 Materials and Substances	
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov


Use Again

 Repack and remanufacture	
WEEE	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings

Racks for Modules Mounting

Dimensions of Modules and Racks

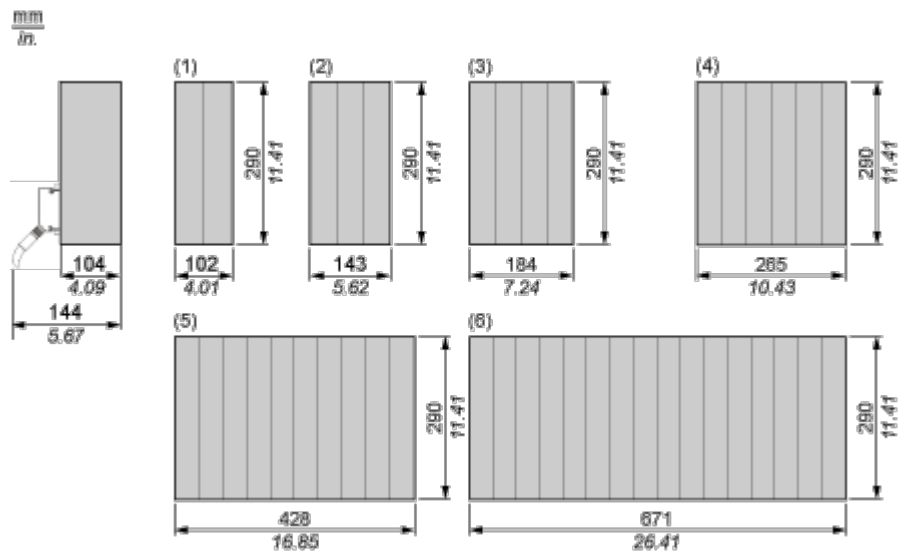

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

Connections and Schema

RTD Input 8-Channel Module

Wiring Diagram

