


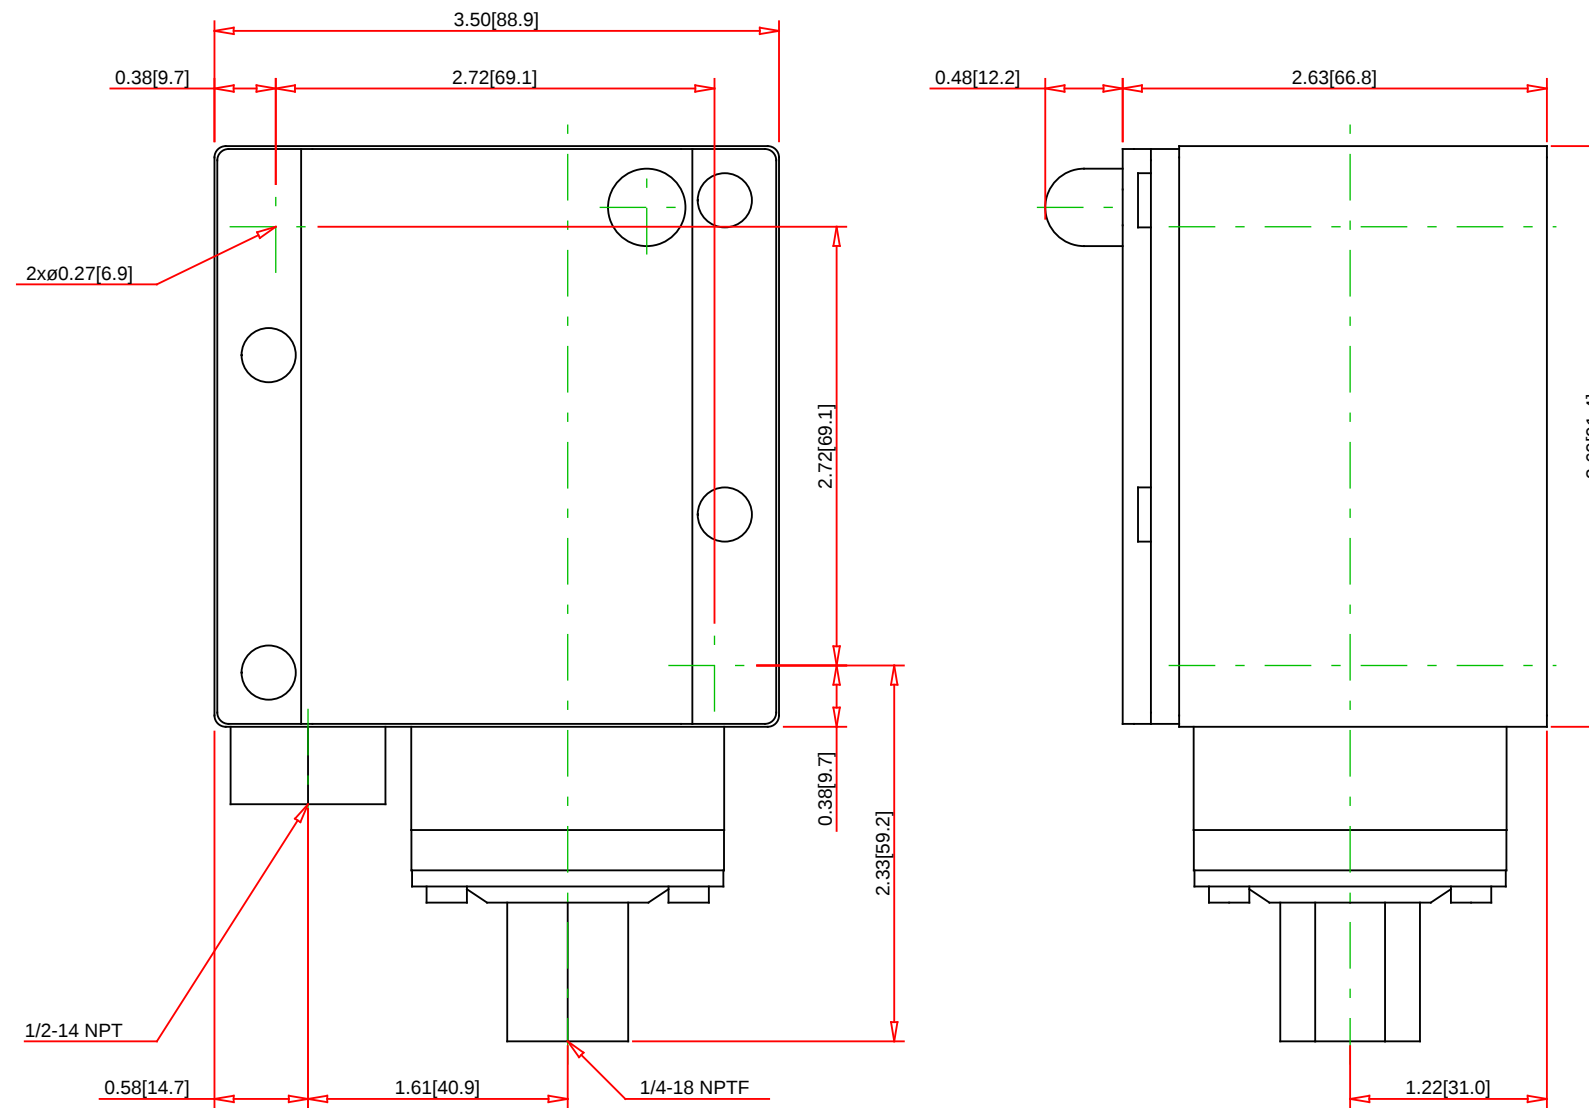

Note:

- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

9012GAW5G17



Telemechanique

Sensors

Telemechanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:		Specification:	
Fluid Characteristics:	Hydraulic oil, noncorrosive liquids, air, noncorrosive gas	Description:	NEMA Square D Electromechanical Pressure Switches, Control Circuit Rated, 9012G
Enclosure Rating:	NEMA 4/4X/13	Pressure Range:	3.0 to 150 psi
Certifications:	UL / CSA / CE	Max. Allowable Pressure:	475 psi
RoHS:	No	Differential Type:	Adjustable
Precision:	+/- 1% of adjustable range 1 million operations	Output:	SPDT Contacts
Ambient air temp. for operation:	-10 to 185°F (-23 to 85°C)	Electrical Connection:	0.5 in NPT Conduit Entrance
Vibration Resistance:	50 g	Differential:	6.0 to 30 psi
Repeat Accuracy:	0.4% of the adjustable range	Fluid Connection:	0.25 in 18 NPTF
Operating rate:	<= 120 operating cycles/min	Actuator Type:	diaphragm
Weight:	2.98 lb	Rated Supply voltage:	240VAC - 3 A, 120VAC - 6 A, 250 VDC - 0.27 A
		Continuous Current Rating:	10A