



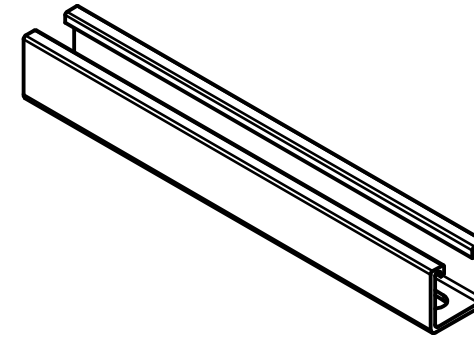

A diagram showing a horizontal bar with six oval shapes inside. An arrow points to the second oval from the left.



Diagram illustrating the width dimension of the cable tray. The width is labeled as W (NOMINAL CABLE TRAY WIDTH + 12 [304.8]).



CATALOG NUMBER	W CHANNEL WIDTH (in [mm])	NOMINAL CABLE TRAY WIDTH (in [mm])
LSE12	24 [609.6]	12 [304.8]
LSE18	30 [762.0]	18 [457.2]
LSE24	36 [914.4]	24 [609.6]

1. ALL DIMENSIONS ARE IN INCHES AND [MILLIMETERS].
2. COMPLETE ASSEMBLY CONSISTS OF ONE CHANNEL ONLY. ALL FASTENERS ARE SUPPLIED SEPARATELY.
3. INSTALL IN ACCORDANCE WITH NEMA STANDARD VE-2 "CABLE TRAY INSTALLATION GUIDELINES".
4. THIS CHANNEL IS TYPICALLY USED FOR THE ASSEMBLY OF TRAPEZE-TYPE CABLE TRAY SUPPORTS.
5. USE LHC SERIES SUPPORT HARDWARE KIT, SINGLE CHANNEL, SUPPLIED SEPARATELY.

[illegible]

1	RELEASED PER DCN211102014008	AD	11/2/21
REV	DESCRIPTION	APP	DATE

THE DESIGN AND DIMENSIONS OF THE
PRODUCT SHOWN ON THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT NOTICE.
DIMENSIONS ARE IN INCHES [mm].

TITLE

CEILING SUPPORT CHANNEL, LADDER TRAY



WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ± .01 .XXX = ± .005 ANGLE TOL. ±2'	DR. BY	AD	SCALE	1 / 2
	CHK. BY	SBW	DATE	10/13/21