
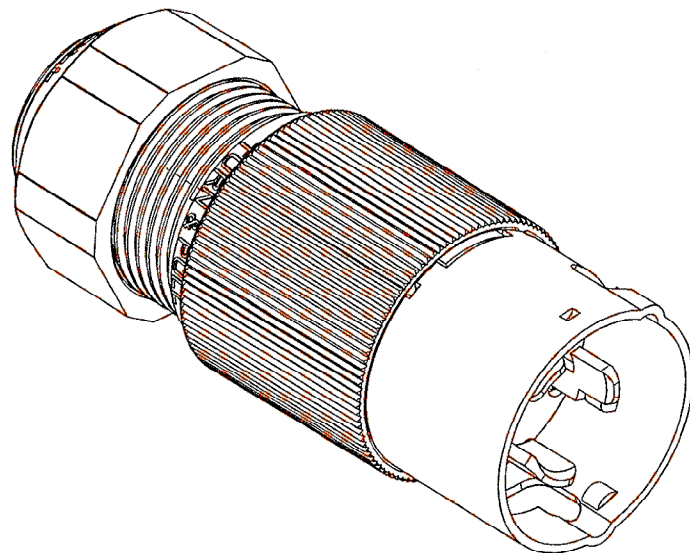

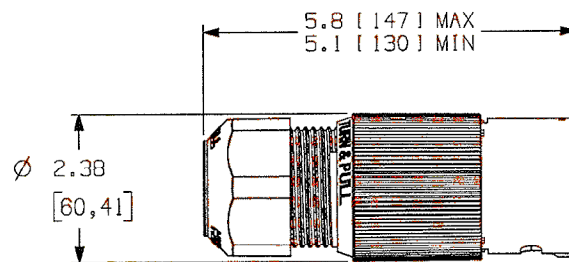


M-11725 2



- NOTES: UNLESS OTHERWISE SPECIFIED
 1. UL & CSA CERTIFIED.
 2. DIMENSIONS IN INCHES [mm]
 3. TOLERANCES: $\pm .10$

CATALOG NO.	RATING	CONDUCTOR & CABLE RANGE
CS8265L	50A 250V	8/3+10/1 TO 4/4 .83-1.25 [21.1-31.8]

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
HOUSING	NYLON	
CONTACT HOLDER	NYLON	
CONTACT COVER	NYLON	
NUT	PBT	
SHROUD	STAINLESS STL	NICKEL
DUST SHIELD	RUBBER	
CONTACTS	BRASS	
ASSY RIVETS	BRASS	
DIVIDER	POLYCARBONATE	
TERMINALS	ALUMINUM	TIN
TERMINAL SCREWS	STEEL	TIN
ASSY SCREWS	STEEL	ZINC

2	REVISED PARTS LIST PER DCN# 18362	MAM	10/19/2011
1	RELEASE PER DCN #18943	WRV	08/09/10
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE
 PRODUCT SHOWN ON THIS DRAWING ARE
 SUBJECT TO CHANGE WITHOUT NOTICE

TITLE
 PLUG

TOLERANCES UNLESS OTHERWISE SPECIFIED	WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT	
FRACTIONS $\pm 1/64$	DR. BY WRV	APP. BY
DECIMALS $\pm .005$	TR. BY	SCALE 1:2
ANGLES $\pm 2^\circ$	CHK'D BY TLS	DATE 09/09/10

CODE 74545

DIMENSION SHEET FOR CAT. NO.

REPAIRABLE ☐ NON-REPAIRABLE ☐

B

M-11725

2