

Product data sheet

Specifications

SQUARE D



Contactor, Definite Purpose, 20A, 2 pole, 3 HP at 230 VAC, 1 phase, 208/240 VAC 60 Hz 220 VAC 50 Hz coil, UL Listed

8910DPA12V09U1

Discontinued

Discontinued on: Jul 12, 2021

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Product or Component Type	Definite Purpose Contactor
Line Rated Current	20 A
Number of Poles	2P
Pole contact composition	2 NO
Range of Product	DPA

Complementary

Maximum Horse Power Rating	3 hp 230 V AC, 1 phase 1.5 hp 115 V AC, 1 phase
Locked rotor rated current	100 A 460 V AC 80 A 575 V AC 120 A 277 V AC
[Ue] rated operational voltage	600 V AC
[Uc] control circuit voltage	208...240 V AC 60 Hz 220 V AC 50 Hz
Phase	1 phase
Electrical Connection	Binder head

Environment

Product Certifications	UL Listed CSA
------------------------	------------------

Ordering and shipping details

Category	US1CP1B21341
Discount Schedule	CP1B
GTIN	00785901837947
Returnability	No
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Contractual warranty

Warranty	18 months
----------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)


[How we assess product sustainability >](#)

Use Better

 Materials and Substances	
EU RoHS Directive	Compliant

Technical Illustration

Dimensions

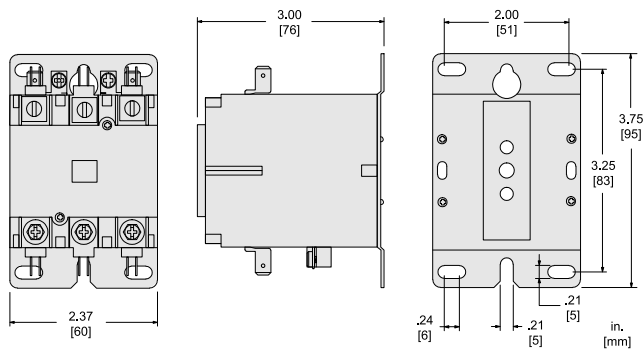

ALL DIMENSIONS ARE APPROXIMATE.
REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.