
Specifications





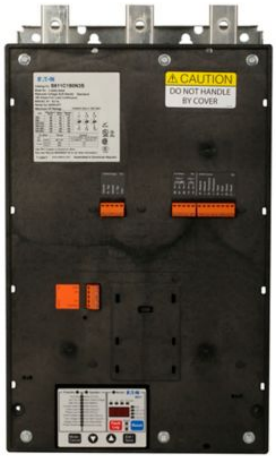

Eaton S611C180N3S

S611 Soft starter, Non-combination, Inline or Inside-the-Delta wiring configuration, Frame C, 180A, Three-pole, 600V, 150 hp, Three-phase, IP20, Modbus with communication options

General specifications	
PRODUCT NAME	Eaton S811+/S801+ soft starter
CATALOG NUMBER	S611C180N3S
UPC	786685480350
PRODUCT LENGTH/DEPTH	21.01 in
PRODUCT HEIGHT	8.57 in
PRODUCT WIDTH	11.58 in
PRODUCT WEIGHT	33 lb
WARRANTY	Eaton Selling Policy 25-000, one (1) year from the date of installation of the Product or eighteen (18) months from the date of shipment of the Product, whichever occurs first.
CERTIFICATIONS	UL Listed IEC 60947-4-2 CSA Certified IEC 60947-2 UL 1077 CSA Std. C22.2 No.235
PRODUCT TYPE	Soft starter

Powering Business Worldwide

Product specifications

AMPERAGE RATING	180A
HORSEPOWER	150 hp
NUMBER OF POLES	Three-pole
PHASE	Three-phase
TYPE	Non-combination
VOLTAGE RATING	600 V
WIRING CONNECTION	Inline or Inside-the-Delta wiring configuration
FRAME SIZE	C
COMMUNICATION	Modbus with communication options
PROTECTION	IP20

Resources

CATALOGS	eaton-drives-soft-starter-catalog-ca04020001zen-us.pdf Solid-State Motor Control, Reduced Voltage Motor Starters, Volume 6, Tab 1
MULTIMEDIA	Soft Starter DS7 up to 32 A Soft Starter Product Family Overview Soft starter DS7 up to 200 A
SPECIFICATIONS AND DATASHEETS	Eaton Specification Sheet - S611C180N3S

PROJECT NAME:	
PROJECT NUMBER:	
PREPARED BY:	
DATE:	

Eaton Corporation plc Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2026 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.