Product specifications

Eaton C22G25

Catalog Number: C22G25

Eaton Bussmann series low voltage 22 x 58 mm cylindrical/ferrule fuse, rated at 690 Volts AC, 25 Amps, 80 kA Breaking capacity, class gG/gL, without indicator, compatible with a CH22 Modular fuse holder

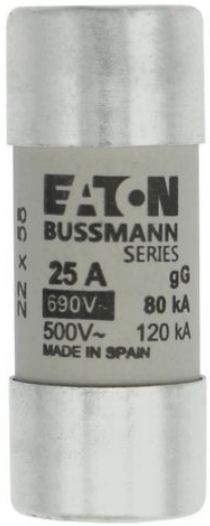

General specifications

Product Name
Eaton Bussmann series low voltage cylindrical fuse

Catalog Number
C22G25

Model Code
CYLINDRICAL FUSE 22 x 58 25A GG 690V AC

UPC
051712754453

EAN
5027590495370

Product Length/Depth
58 mm

Product Height
22.2 mm

Product Width
22.2 mm

Product Weight
53.9 g

Warranty
1 year limited

Compliances
CE Marked
GoST-R
RoHS Compliant

Certifications
IEC 60269

Powering Business Worldwide

defaultTaxonomyAttributeLabel

Type

fuse

Application

for industrial applications

for general purpose use

Amperage Rating

25 A

Fuse size

22 x 58 mm

Current type

AC

Breaking capacity

80 kA

Frequency rating - max

62 Hz

Frequency rating - min

45 Hz

Rated voltage AC

690 V

Class

Class C gL/gG

Fuse type

C22G

Utilization category

gG (cable protection/equipment protection)

Fuse indicator

Other

Watt losses

3.3 W

Connection

Ferrule end x ferrule end

Construction size

22 mm x 58 mm

Fuse shape

Resources

Catalogs

CA134002EN

eaton-product-overview-for-machinery-catalogue-ca08103003zen-en-us.pdf

Bussmann series complete full line catalog no. 1007

Compliance information

CE C08G, C08M, etc cylindrical fuselinks

UKCA C08G, C08M, etc cylindrical fuselinks

Technical data sheets

720115 Cylindrical fuses

Cylindrical

Voltage type

AC

Suitable for

CH22 Modular fuse holder

Material

Ceramic

Mounting method

22 x 58 mm CH Modular fuse holder

Release characteristic

Other

Quantity

10

Voltage rating

690 V

Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2024 Eaton. All Rights Reserved.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Eaton.com/socialmedia