

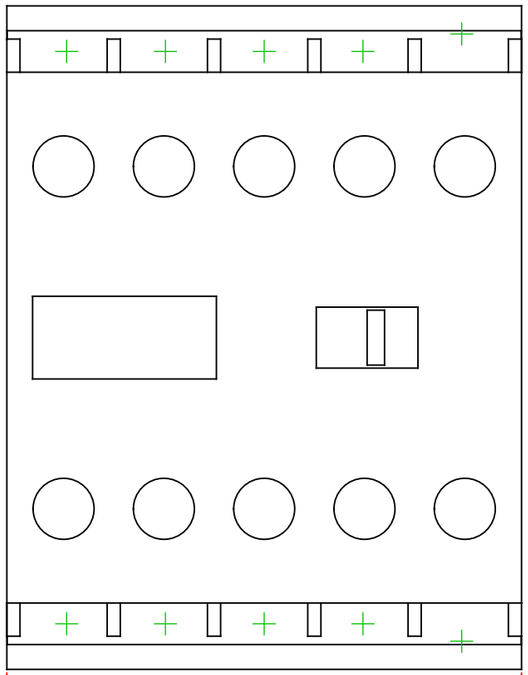


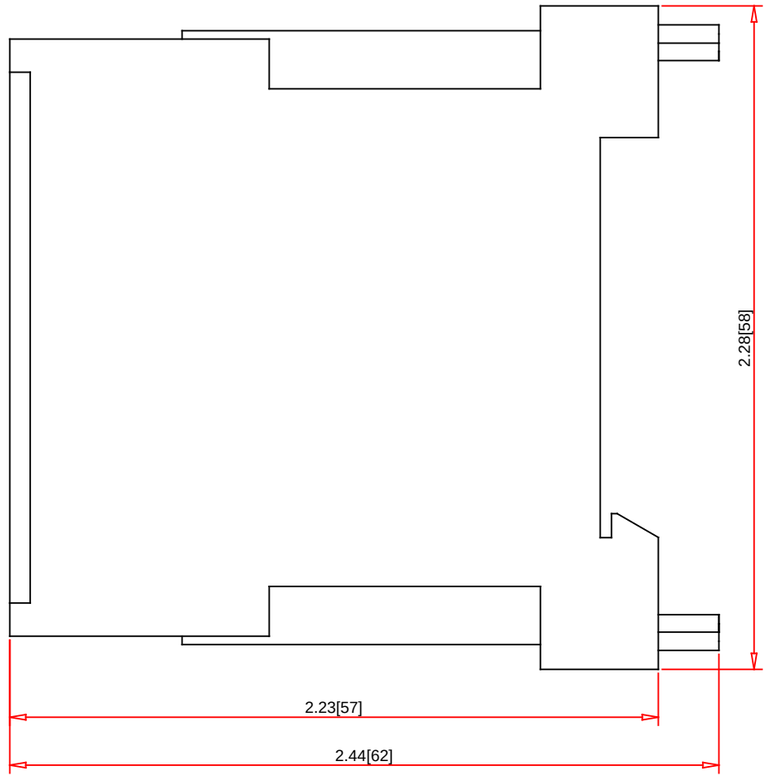

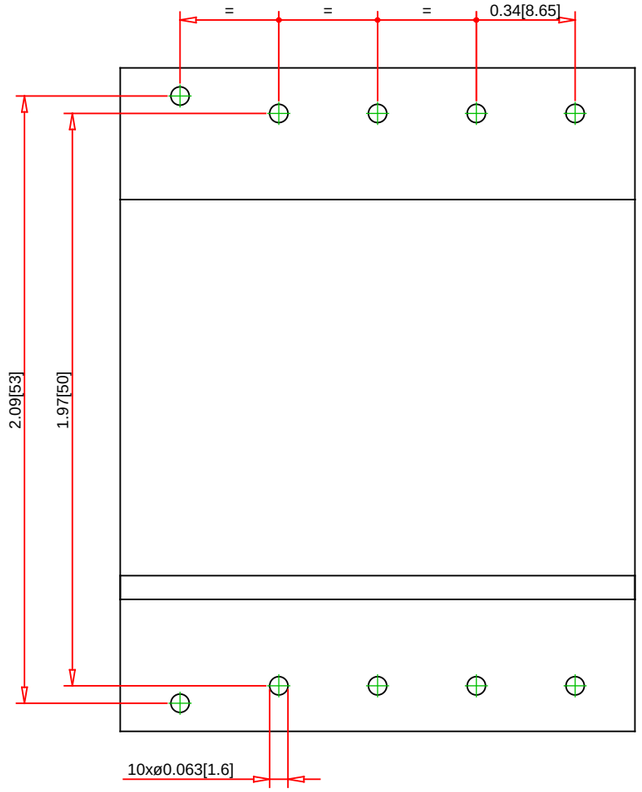

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

LP4K12105BW3

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone:+1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:

Rating:	600V / 12A
UL File/CCN:	E164353 / NKCR
CSA File:	LR43364 3211 03
Meets Standards:	IEC 60647-1-1
Weight:	0.58 lb (0.22 kg)
Termination Method:	Screw Terminal for Wire Connections or Solder Pins for Printed Circuit Board Connections
Wire Size:	Power: #12 - #18 AWG Control: #12 - #18 AWG
Terminal torque:	Power: 7 lb-in (0.8 Nm) Control: 7 lb-in (0.8 Nm)
Mounting Hwd.:	Printed Circuit Board - See 2D Sales Drawing

Specification:

Description	TeSys K Non-reversing Contactor
Type	TeSys K IEC Contactor - 12A - 24Vdc Coil
Voltages Code:	BW3 at 24VDC
Coil Consumption:	Inrush 1.8 W Sealed 1.8 W

Single Phase		Three Phase			
115V	230V	200V	230V	460V	575V
0.5 HP	1.5 HP	3 HP	3 HP	7.5 HP	10 HP