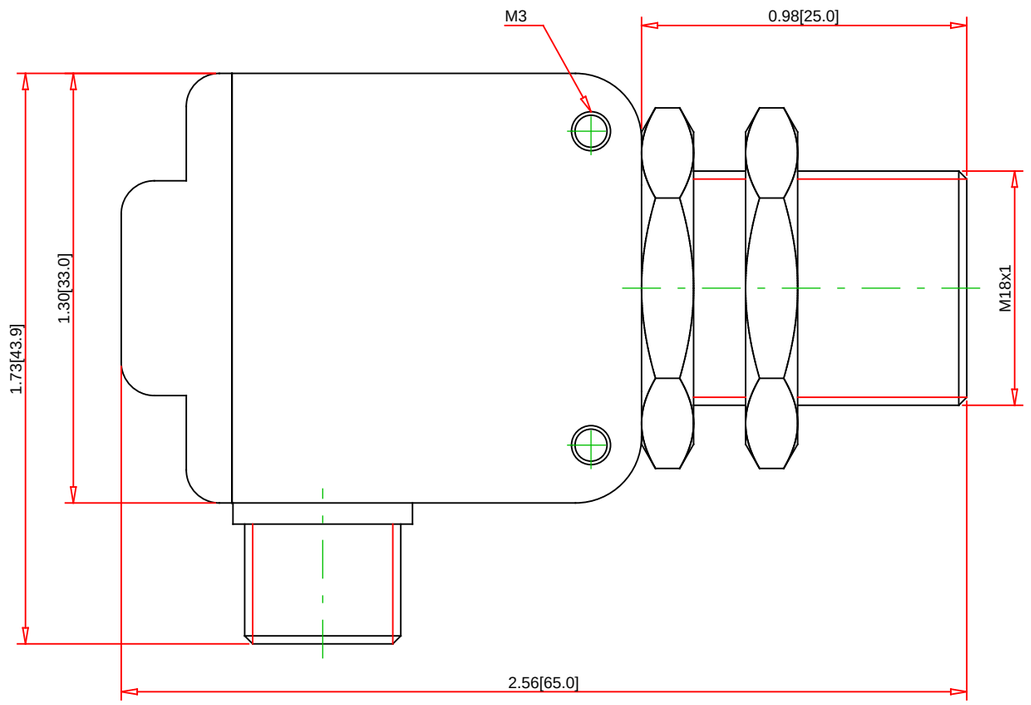


Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

XUN0AKSNM12T

Telemecanique Sensors

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Diffuse with Background Suppression:	120.0 mm (4.68 in)
Diffuse:	
Polarized Retroreflective:	
Thru Beam:	
Retroreflective:	
Circuit Type:	
Output Mode:	
Power:	DC
Voltage Range:	12-24 VDC
Max Load:	
Max Switching Frequency :	
Temp Range:	
NEMA Type:	4X (indoor use only)
IP Rating:	67
Standards:	UL, CE Rohs

Specification:

Sensor Type:	Thru-Beam Transmitter
Description:	Photoelectric, Thru-Beam Transmitter, 18 mm Dual-Mount Snout, 12-24 VDC
Body Style:	Dual-Mount Snout
Diameter:	
Housing Material:	Plastic - PBT
Face Material:	PMMA
Adjustment:	
Cable Size:	
Connector Type:	4-pin M12
Special Features:	