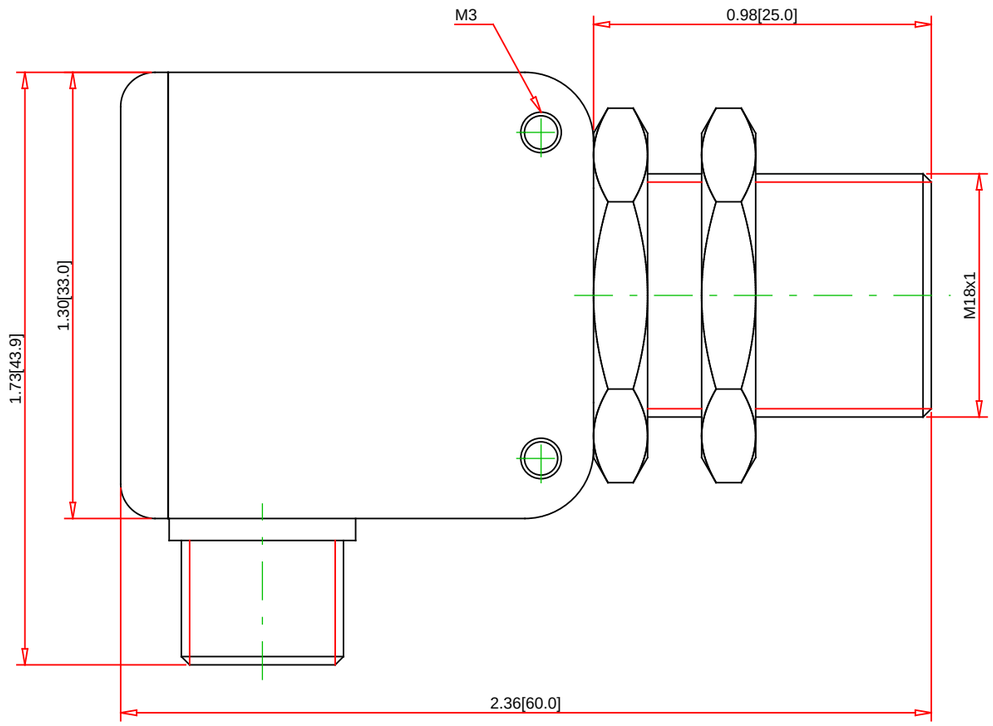


Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

VM1PPI0000Q

Telemecanique Sensors

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Sensing Window:	
Far Limit:	
Sensing Range:	50.8 to 508 mm (2.0 to 20.0 in)
Circuit Type:	Normally Open
Output Mode:	PNP
Volts Type:	DC
Voltage Range:	12-24 VDC
Max Load:	100 mA
Current Consumption:	40 mA
Sonic Frequency:	300 kHz
Temp Range:	-30° to 70° C (-22° to 158° F)
NEMA Type:	4X (indoor use only)
IP Rating:	IP67
Standards:	UL, CE Rohs

Specification:

Sensor Type:	Ultrasonic Sensor
Description:	Ultrasonic Sensor, Dual-Level - Pump-in Latch, 18 mm snout Dual Mount, 12-24 VDC
Body Style:	Dual Mount
Diameter:	
Housing Material:	
Face Material:	Glass Epoxy
Field Configurable:	No
Functionality:	
Cable Size:	
Connector Type:	M12
Special Features:	Tamper Proof with PB100 Pushbutton Accessory