Product data sheet

Specifications



To be discontinued

basic analog output kit, Modicon STB, 4 to 20mA, 2O, 10 bits

STBACO1225K

To be discontinued on: Dec 1, 2027

To be end-of-service on: Dec 31, 2035

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Modicon STB distributed I/O solution
Product or Component Type	Basic analog output kit
Kit composition	STBXBA1000 base STBACO1225 module STBXTS2100, 6-terminal spring clamp connector STBXTS1100, 6-terminal screw type connector
Product Compatibility	Power distribution module STBPDT3100/3105 Mounting base STBXBA1000
Analogue input number	0
Analogue output number	2

Complementary

Analogue output current	0.02 A
Update time	25 ms
Conversion time	900 ms
Analogue output type	Current 4...20 mA
Height	0.5 in (13.9 mm)
Width	5.05 in (128.3 mm)
Depth	2.8 in (70 mm)

Environment

Marking	CE
Relative humidity	95 % 140 °F (60 °C) without condensation

Ordering and shipping details

Category	US1PC3218215
Discount Schedule	PC32
GTIN	3595863948790
Returnability	Yes
Country of origin	ID

Packing Units

Unit Type of Package 1	PCE

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Nbr. of units in pkg.	1
Package 1 Height	1.06 in (2.7 cm)
Package 1 Width	3.1 in (8.0 cm)
Package 1 Length	5.1 in (13.0 cm)
Package weight(Lbs)	4.8 oz (136.0 g)
Unit Type of Package 2	S02
Number of Units in Package 2	28
Package 2 Height	5.9 in (15 cm)
Package 2 Width	11.8 in (30 cm)
Package 2 Length	15.7 in (40 cm)
Package 2 Weight	10.507 lb(US) (4.766 kg)
Unit Type of Package 3	P06
Number of Units in Package 3	448
Package 3 Height	29.5 in (75.0 cm)
Package 3 Width	23.6 in (60.0 cm)
Package 3 Length	31.5 in (80.0 cm)
Package 3 Weight	174.2 lb(US) (79 kg)

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**16 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**7 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**0 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**9 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**0 kg CO2 eq.**
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances

Packaging made with recycled cardboard	**No**
Packaging without single use plastic	**No**
SCIP Number	**6830dd70-e4bc-47df-85c7-e41f888576f4**
EU RoHS Directive	Compliant By Exemption
REACh Regulation	Reference contains Substances of Very High Concern above the threshold
California proposition 65	**WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**

Use Longer

Lifetime extension

Repair	**No**


Use Again

Repack and remanufacture

Circularity Profile	End of Life Information
Take-back	**No**

Dimensions Drawings

Dimensions

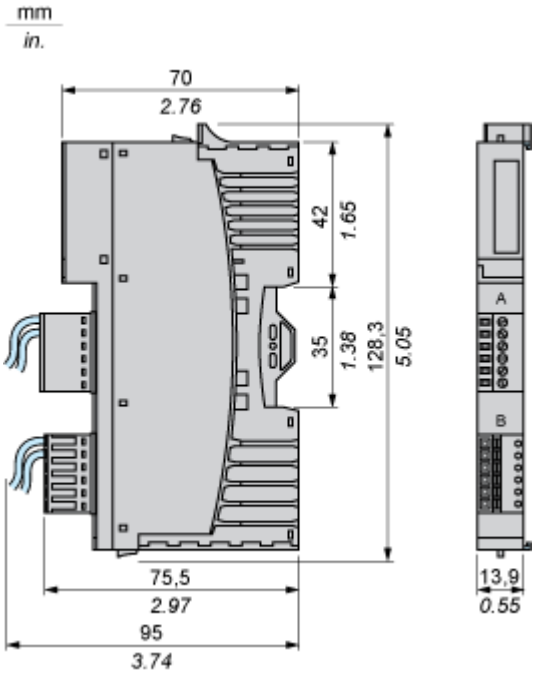


Connections and Schema


Wiring Diagrams

Examples

2 isolated analog actuators, external 24 VDC power supplies

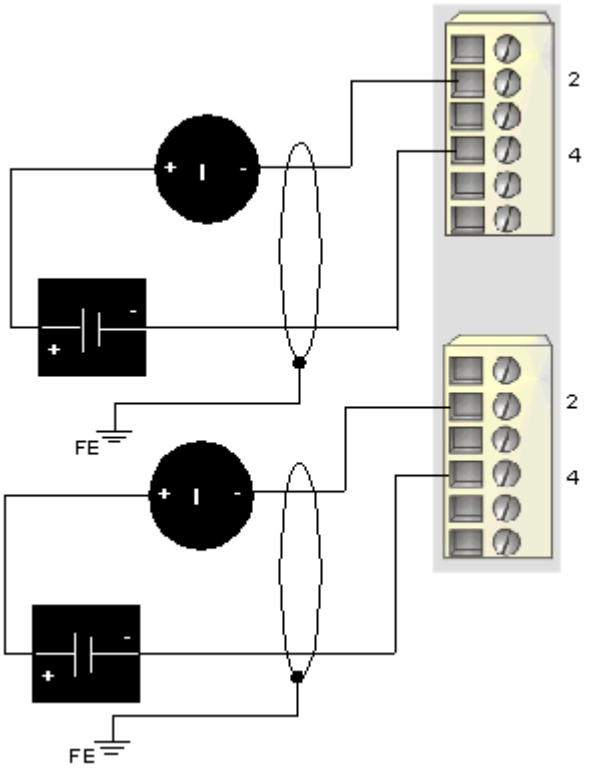

2 non-isolated analog actuators, 24 VDC supplied by the PDM

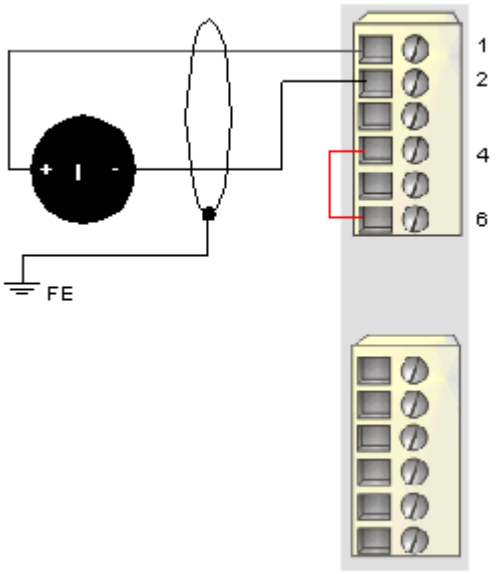

Pin	Top Connections	Bottom Connections
1	+24 VDC from actuator bus for field device accessories	+24 VDC from actuator bus for field device accessories
2	output to actuator 1	output to actuator 2

Pin	Top Connections	Bottom Connections
3	no connection	no connection
4	output channel return	output channel return
5	no connection	no connection
6	field power return (to the module)	field power return (to the module)