

Product data sheet

Specifications



standard digital output kit, Modicon STB, 24V DC, 2 relay output

STBDRA3290K

⚠ To be discontinued on: Dec 1, 2027

⚠ To be end-of-service on: Dec 31, 2035

⚠ To be discontinued

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range of Product	Modicon STB distributed I/O solution
Product or Component Type	Standard digital output kit
Kit composition	STBXTS1100, 5-terminal screw type connector STBXBA2000 base STBXTS2110, 5-terminal spring clamp connector STBDRA3290 module
Product Compatibility	I/O base STBXBA3000 Power distribution module STBPDT3100/3105
Range Compatibility	Logic/motion controller - Modicon M262 Modicon M580 Third party
Device Application	Industrial Application
Discrete output number	2
Discrete output logic	Positive logic (source)/negative logic (sink)
Discrete output voltage	24 V ACrelay 115...230 V DC

Complementary

Discrete output number	2 relay at 24 V AC at 115...230 V DC
Discrete output current	7000 mA
Response time on output	< 10 ms off to on < 10 ms on to off
Typical current consumption	55 mA 5 V DC
Electrical Connection	Screw terminal
Height	1.1 in (28.1 mm)
Width	5.05 in (128.3 mm)
Depth	2.8 in (70 mm)
Product Weight	0.29 lb(US) (0.13 kg)

Environment

IP Degree of Protection	IP20
Marking	CE

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Product certifications	FM Class 1 Division 2 UL CSA
Standards	IEC 61131-2
Relative humidity	95 % 140 °F (60 °C) without condensation
Operating altitude	<= 6561.68 ft (2000 m)
Pollution degree	2
Shock resistance	30 gn 11 msIEC 88 reference 2-27

Ordering and shipping details

Category	US1PC3218215
Discount Schedule	PC32
GTIN	3595863949131
Returnability	No
Country of origin	ID

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.575 in (4.000 cm)
Package 1 Width	2.953 in (7.500 cm)
Package 1 Length	5.118 in (13.000 cm)
Package weight(Lbs)	6.949 oz (197.000 g)
Unit Type of Package 2	S02
Number of Units in Package 2	20
Package 2 Height	5.906 in (15.000 cm)
Package 2 Width	11.811 in (30.000 cm)
Package 2 Length	15.748 in (40.000 cm)
Package 2 Weight	9.590 lb(US) (4.350 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better

Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
SCIP Number	6830dd70-e4bc-47df-85c7-e41f888576f4
EU RoHS Directive	Compliant By Exemption
REACH Regulation	Reference contains Substances of Very High Concern above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer


Lifetime extension	
Repair	No

Use Again

Repack and remanufacture	
Take-back	No

Dimensions Drawings

Dimensions

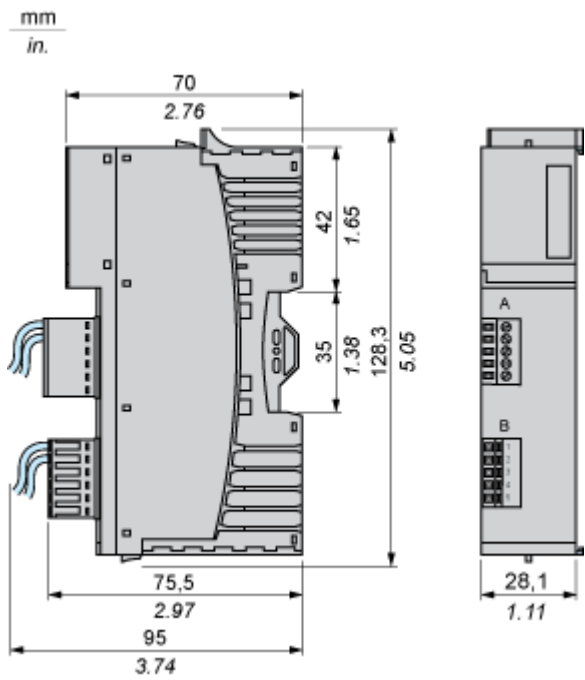


Connections and Schema

Wiring Diagram

Example

4 two-wire actuators

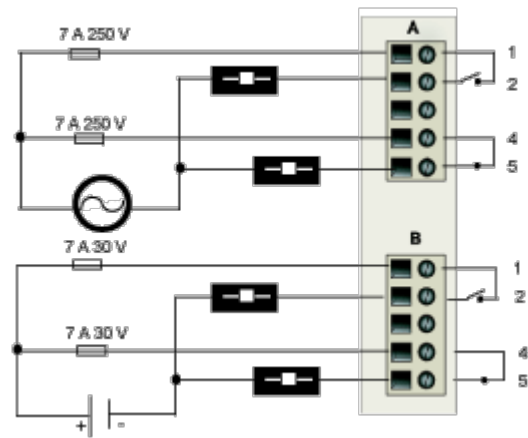

Pin	Top Connector	Bottom Connector
1	N.O. connection for relay 1	N.O. connection for relay 2
2	N.O. connection for relay 1	N.O. connection for relay 2
3	no connection	no connection
4	N.C. connection for relay 1	N.C. connection for relay 2
5	N.C. connection for relay 1	N.C. connection for relay 2