# Product data sheet

Specifications



## Push-to-test pilot light head, Harmony 9001SK, plastic, without cap, 30mm, 110...120V

9001SKT1

**Product availability: Stock - Normally stocked in distribution facility**

## Main

| | |
|---|---|
| **Range of Product** | Harmony 9001SK |
| **Product or Component Type** | Head for push-to-test pilot light |
| **Light block supply** | Via transformer 110 V AC 50/60 Hz<br>Via transformer 120 V AC 50/60 Hz |

## Complementary

| | |
|---|---|
| **Bezel material** | Plastic |
| **Mounting diameter** | 1.2 in (30 mm) |
| **Shape of signaling unit head** | Round |
| **Cap/operator or lens colour** | Without cap |
| **Bulb base** | BA 9s |
| **Operating Mode** | Push-to-test |
| **[Us] rated supply voltage** | 110...120 V |
| **Light block supply** | Via integral transformer |
| **Contacts type and composition** | 1 C/O |
| **Supply frequency** | 50...60 Hz |
| **Size** | 30 mm |
| **Light source** | Incandescent bulb |

## Environment

| | |
|---|---|
| **Protective treatment** | TC |
| **IP Degree of Protection** | IP65/IP66 |

## Ordering and shipping details

| | |
|---|---|
| **Category** | US10CS121429 |
| **Discount Schedule** | 0CS1 |
| **GTIN** | 785901513582 |
| **Returnability** | Yes |
| **Country of origin** | MX |

## Packing Units

| | |
|---|---|
| **Unit Type of Package 1** | PCE |
| **Nbr. of units in pkg.** | 1 |

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

| | |
|---|---|
| **Package 1 Height** | 2.000 in (5.080 cm) |
| **Package 1 Width** | 2.200 in (5.588 cm) |
| **Package 1 Length** | 4.500 in (11.430 cm) |
| **Package weight(Lbs)** | 7.199 oz (204.100 g) |
| **Unit Type of Package 2** | S01 |
| **Number of Units in Package 2** | 14 |
| **Package 2 Height** | 5.906 in (15.000 cm) |
| **Package 2 Width** | 5.906 in (15.000 cm) |
| **Package 2 Length** | 15.748 in (40.000 cm) |
| **Package 2 Weight** | 6.740 lb(US) (3.057 kg) |
| **Unit Type of Package 3** | P06 |
| **Number of Units in Package 3** | 448 |
| **Package 3 Height** | 29.528 in (75.000 cm) |
| **Package 3 Width** | 23.622 in (60.000 cm) |
| **Package 3 Length** | 31.496 in (80.000 cm) |
| **Package 3 Weight** | 233.331 lb(US) (105.837 kg) |

## Contractual warranty

| | |
|---|---|
| **Warranty (in months)** | 18 |

## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

### Environmental footprint

| | |
|---|---|
| Environmental Disclosure | Product Environmental Profile |

## Use Better

### Materials and Substances

| | |
|---|---|
| Packaging made with recycled cardboard | Yes |
| Packaging without single use plastic | Yes |
| EU RoHS Directive | Compliant |
| REACh Regulation | Reference contains Substances of Very High Concern above the threshold |
| California proposition 65 | WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |

## Use Longer

### Lifetime extension

| | |
|---|---|
| Repair | No |


## Use Again

### Repack and remanufacture

| | |
|---|---|
| Circularity Profile | End of Life Information |
| Take-back | No |
| WEEE Label | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |

Offer Marketing Illustration

**Product benefits / Features**

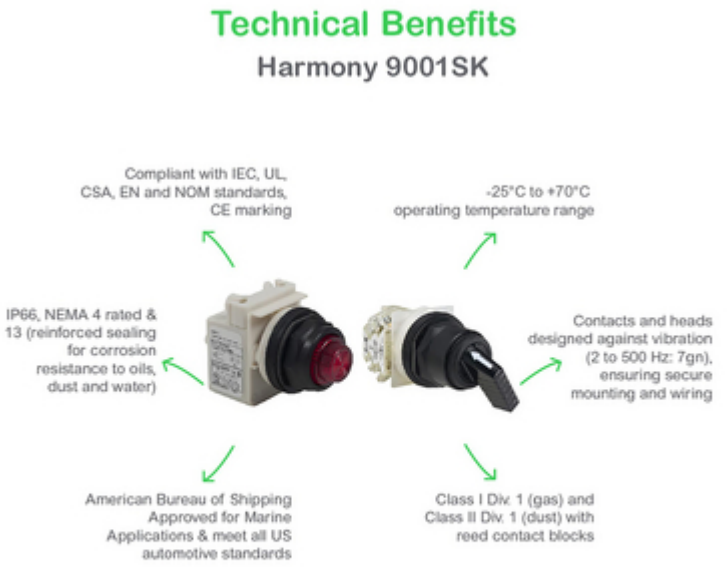

Offer Marketing Illustration

**Product benefits / Features**

