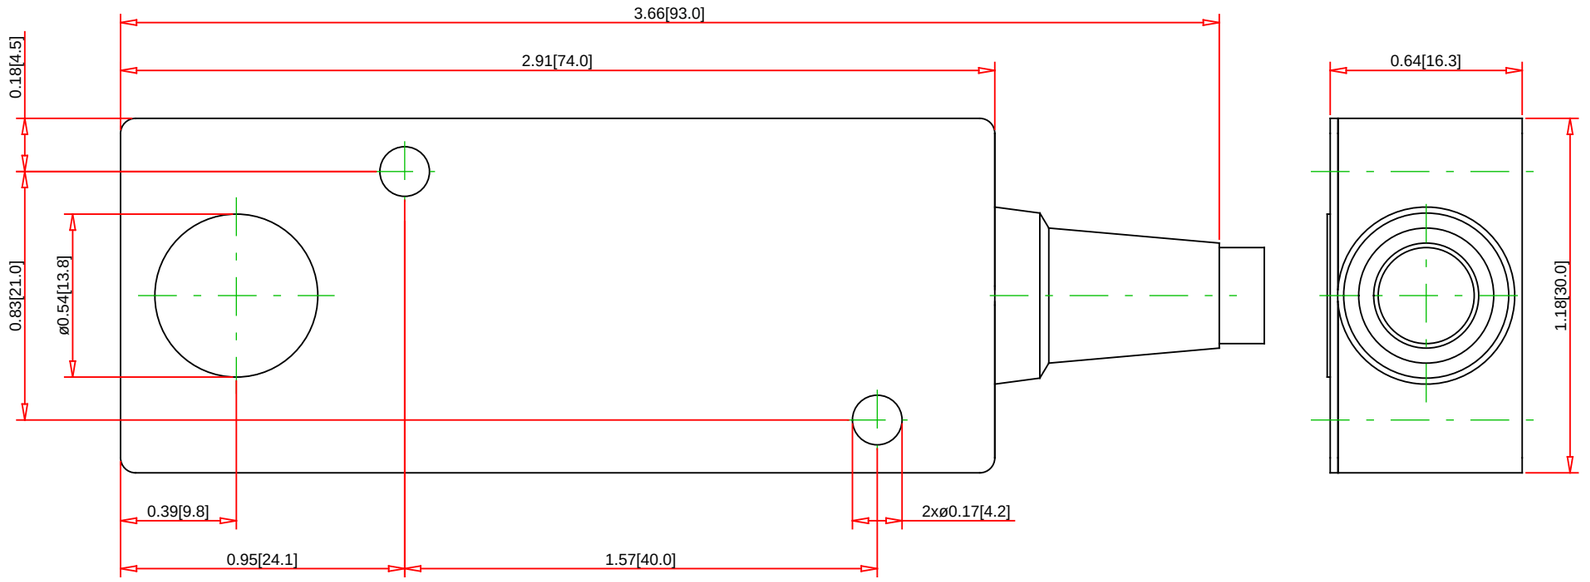


Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

SM606A21600FP

Telemecanique Sensors

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Sensing Window:	25.4 mm (1.0 in)
Far Limit:	50.8 mm (2.0 in)
Sensing Range:	
Circuit Type:	
Output Mode:	Inverse 0 to 10 V
Volts Type:	DC
Voltage Range:	15-24 VDC
Max Load:	1k ohm
Current Consumption:	50 mA
Sonic Frequency:	500 kHz
Temp Range:	0° to 60° C (32° to 140° F)
NEMA Type:	4X (indoor use only)
IP Rating:	IP67
Standards:	UL, CE Rohs

Specification:

Sensor Type:	Ultrasonic Sensor
Description:	Ultrasonic Sensor, Analog - Voltage (V), Subcompact Flat Profile, 15-24 VDC
Body Style:	Subcompact Flat Profile
Diameter:	
Housing Material:	0
Face Material:	Silicone Rubber
Field Configurable:	No
Functionality:	
Cable Size:	3.0 m (10 ft)
Connector Type:	
Special Features:	