
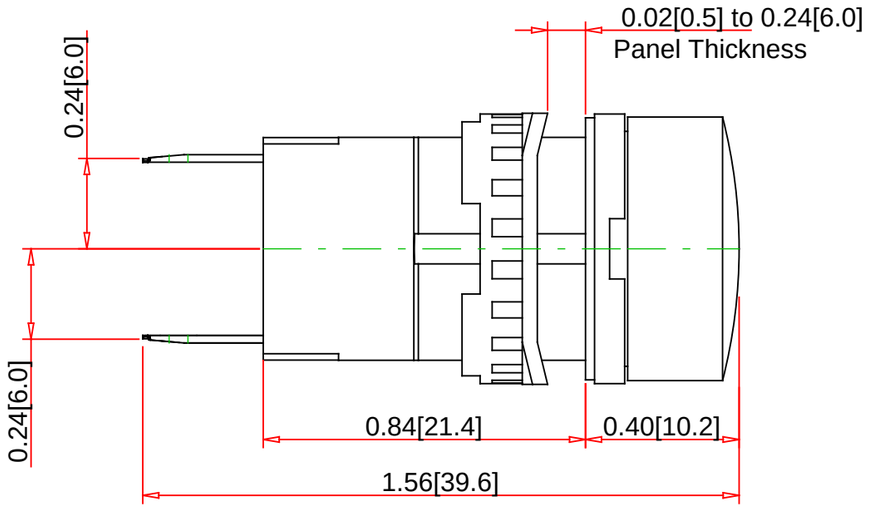


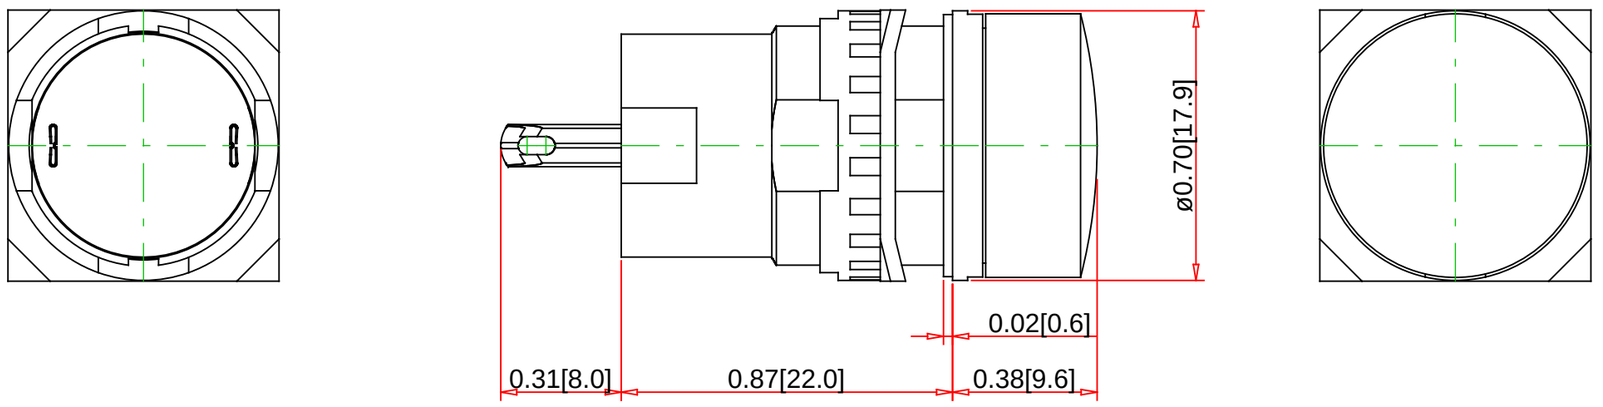

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

XB6EAV4BP

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone:+1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:

Degree of Protection:	IP 65
Storage Temperature Range:	-40 to +70 °C
Operating Temperature Range:	-10 to +55 °C
Contact Type:	
AC Supply Utilization Category:	
Certifications:	IEC 60947-1, IEC 60947-5-1, JIS C 4520, JIS C 852, UL 508, CSA C22.2 No 14

Specification:

Description:	Pilot Light, Round, red, 24V,
Vibration Resistance:	1 mm (10...55 Hz)
Mechanical Shock Resistance:	10 gn (duration = 11 ms) for half sine wave acceleration
Mechanical Life (in operating cycles):	NA