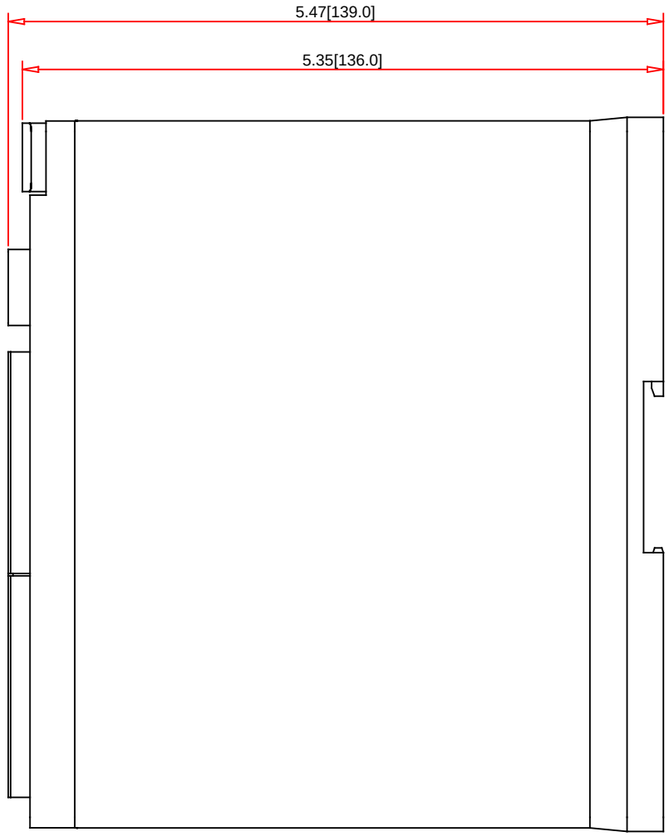

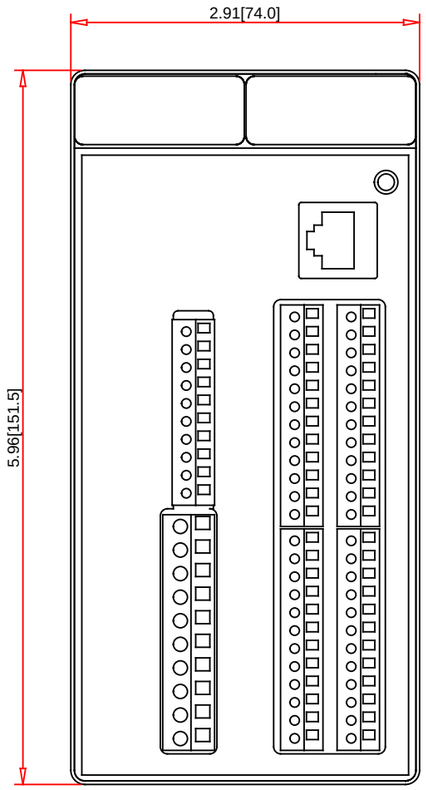

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

XPSMC32ZC

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone:+1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:

UL File/CCN:	E164353 / NKCR
CSA File/Class:	LR44087 / 3211 03
CE:	Yes
RoHS:	Yes

Specification:

Description:	
Voltage:	24 VDC
Terminal Type:	Screw or Spring
Terminal Block:	Removable
Safety Contacts - Standard:	6 Solid State, 2 Relay Outputs with two contacts each
Safety Contacts - Time Delay:	Via Internal Timers
Auxiliary Contacts:	
Solid State Outputs:	
Timing Range:	