360P4W



Color: Yellow

UPC Code: 07847783807

Brand Features

Leviton's pin and sleeve devices are easy to use. Matching amperage and voltage requirements is literally as easy as matching colors and telling time. The amperage rating is related to the size of the device; devices of the same amperage are the same size. The voltage rating is related to the location of the ground sleeve on the female device and the number of conductors. This location is based on a clock face with the key-way at the 6 o'clock position. The ground sleeve is positioned at a specific hour location, depending on the device's voltage rating.

Item Description

60 Amp, 125 Volt, 2P, 3W, North American-Rated Pin &Sleeve Plug, Industrial Grade, IP67, Watertight - YELLOW

Technical Information

Electrical Specifications

Amperage: 60 A

Current Interrupting: Certified for current interrupting at full rated current

Dielectric Voltage: 2000V for 1 min.

Endurance: Up to 1000 connects and disconnects, under load, at full rated current and voltage

Insulation Resistance: 500V for 1 min; >= 5M

Pole: 2

Temperature Rise: Max 30C after 50 cycles OL at 150 percent rated current

Voltage: 125 VAC

Wire: 3

Environmental Specifications

Corrosion Resistance: Ferrous parts immersed in 20°C, 10 percent ammonium chloride solution for 10 min

Flammability: Rated V-0 per UL 94

IP Rating: IP67/IP69K

Moisture Resistance: Per UL 1682, immersed for 24 hours in 5cm of 25°C water

Material Specifications

Body Material: Valox 357

Contact Carrier: Reinforced Nylon

External Cord Clamp Assembly: Valox 357

External Screws: Acid-Proof S/S

Gland Cap: Valox 357

Grommet/Gasket: Chloroprene

Internal Cord Clamp Assembly: Thermoplastic

Internal Screws: Zinc-plated steel

Locking Ring: Valox 357

Phase and Ground Pins: Brass

Terminal Screws: Steel

Mechanical Specifications

Cable Secureness: Force: 150lb, Torque: 1.0 ft-lb, Max Disp: <= 3/32"

Cord Range: .670 - 1.625

Crush Test: 250lbs for 1 min after -25°C for 6 hrs

Impact Resistance: Drop from 30" 8 times after conditioning to -25°C for 6 hrs

Minimum Withdrawal Force: 15lbs

Product Features

Color: Yellow

Configuration: North American

Device Type: Plug

Standards and Certifications

CE Marking: Per low voltage directives 73/23/EEC, 93/68/EEC

CSA Certified: C22.2 No 182.1

IEC Rating: 60309-1 and 60309-2

UL Listed: 1682 and 1686

Warranty: 2-Year Limited

Dimensional Diagram

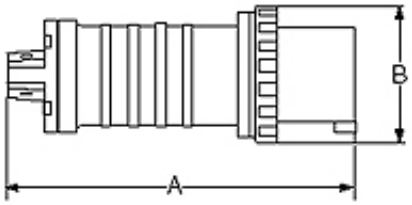

UNIT	A	B
inch	10.83	4.49
mm	275	114

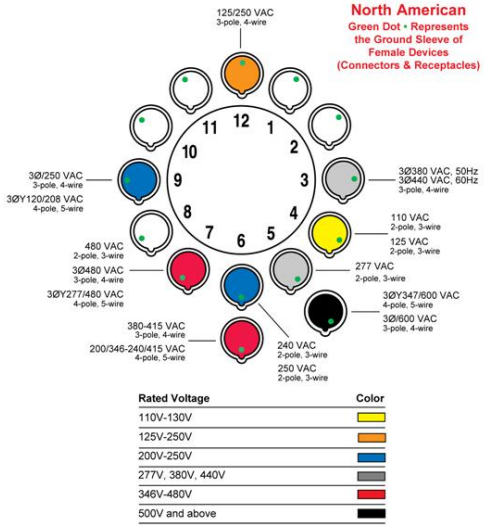

Rated Voltage	Color
110V-130V	
125V-250V	
200V-250V	
277V, 380V, 440V	
346V-480V	
500V and above	

SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
JOB NUMBER:		

Leviton Manufacturing Co., Inc.
201 North Service Road, Melville, NY 11747
Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.
165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 · FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.
Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · www.leviton.com.mx

ISO 9001 REGISTERED Quality Manufacturer

Visit our Website at: www.leviton.com
© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

Leviton has a global presence.
If you would like to know where your local Leviton office is located please go to:
www.leviton.com/international/contacts/