

Color: Orange

UPC Code: 07847707725

Country Of Origin: Mexico

NEMA: L22-20R



2520-IG

Brand Features

Leviton's Industrial Grade Locking Devices are built to provide unparalleled quality and superior performance in the most severe industrial settings. Leviton combines the best materials available with superior production standards to produce a broad selection of Locking Devices of unmatched flexibility and dependability.

Item Description

20 Amp, 277/480 Volt 3-Phase Y, NEMA L22-20R, 4P, 5W, Flush Mtg Locking Receptacle, Industrial Grade, Isolated Ground, V-0-MAX - ORANGE

Technical Information

AC Horsepower Ratings

At Rated Voltage: 5 HP

Electrical Specifications

Current Limiting: Full Rated Current

Dielectric Voltage: Withstands 2000V per UL498

Temperature Rise: Max 30C after 250 cycles OL at 200 percent rated current

Phase: 3-Phase WYE

Environmental Specifications

Environment: Corrosive

Flammability: Rated V-2 per UL 94

Operating Temperature: -40°C to 60°C

Material Specifications

Base Material: Nylon

Body Material: Valox 357

Clamp Nuts: Nickel-Plated Brass

Cover Material: Valox 357

Face Material: Nylon

Ground Clips: Nickel-Plated Brass

Ground Contacts: Brass

Grounding Screw: Chromated Brass

Line Contacts: Brass .040 Thick

Strap Material: Nickel-Plated Brass

Terminal Clamps: Zinc-Plated Brass

Terminal Screws: Brass 10-32

Mechanical Specifications

Product ID: Ratings and NEMA I.D. permanently marked on device

Terminal Accom.: 14-8 AWG

Terminal ID: Brass-Hot, Green-Ground, White-Neutral

Product Features

Amperage: 20 A

Base Material: Nylon

Brand: V-0-Max

Color: Orange

Face Material: Nylon

Feature: Isolated Ground

Grounding: Isolated Ground

NEMA: L22-20R

Pole: 4

Standards and Certifications: UL/CSA

Strap Material: Nickel-Plated Brass

Termination: Back & Side

Voltage: 277/480 VAC

Warranty: Lifetime Limited

Wire: 5

Standards and Certifications

ANSI: C-73

CSA: C22.2 No. 42

NEMA: WD-6

NOM: 057


UL: 498

UL Fed Spec: W-C-596


Warranty

Warranty: Lifetime Limited

Dimensional Diagram

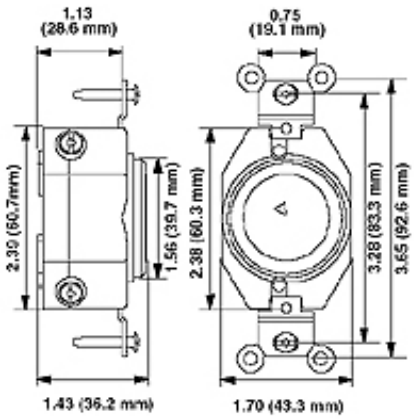

Wiring Diagram

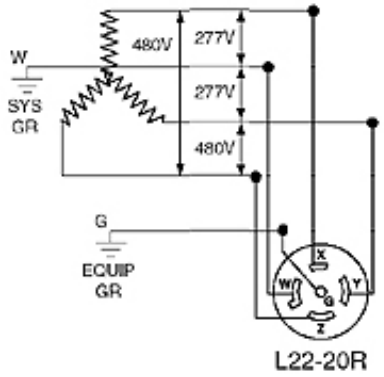

SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
JOB NUMBER:		

Leviton Manufacturing Co., Inc.
201 North Service Road, Melville, NY 11747
Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.
165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 · FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.
Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · www.leviton.com.mx

ISO 9001 REGISTERED Quality Manufacturer

Visit our Website at: www.leviton.com
© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

Leviton has a global presence.
If you would like to know where your local Leviton office is located please go to:
www.leviton.com/international/contacts/