
Data Sheet | Item Number: 852-1328


Industrial Managed Switch; 6-Port 1000BASE-T; 2-Slot 1000BASE-SX/LX; MAC Security

https://www.wago.com/852-1328



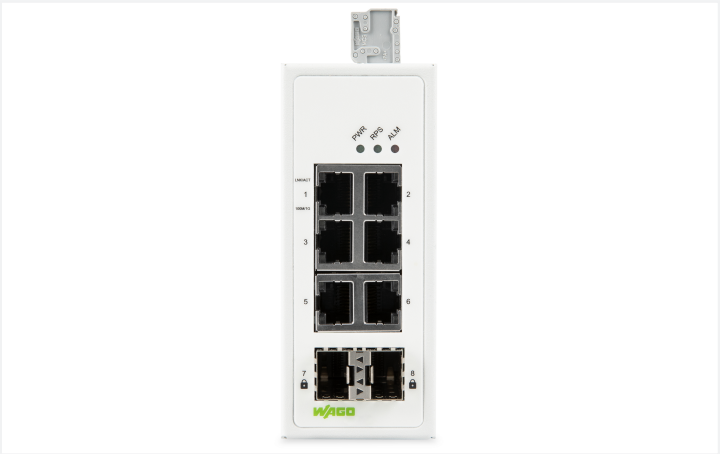

Similar to illustration

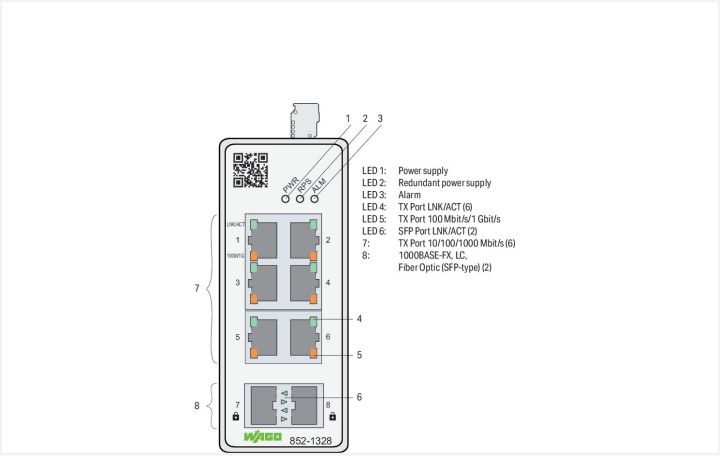

The configurable 852-1328 Industrial ETHERNET Switch is equipped with six 10/100/1000BASE-T ports and two 1000BASE-SX/LX SFP ports (SFP modules are optional). Data encryption complies with IEEE802.1AE (MAC Security Standard) for communication via SFP slots (ports 7 and 8). This functionality, combined with compact dimensions, makes WAGO's managed switch ideal for retrofitting network security during operation of the automation system. The customer application remains unchanged. The optional authentication of the other participants in the network is port-specific in accordance with IEEE 802.1X and RADIUS server.
Packaged in a rugged housing, this switch offers a redundant power supply.

Features:

- Web-based (HTTP(S))
- Configuration and diagnostics via SNMPv3
- Redundant DC power supply
- Supply voltage range: 9 … 48 VDC
- Full compliance with IEEE802.3, 802.3u, 802.3z, 802.3x, 802.3ab, 802.1p, 802.1X, 802.1Q and 802.1AE standards
- Non-blocking, store-and-forward switching
- Auto-negotiation at all 10/100/1000BASE-T ports
- Auto-MDI/MDIX (crossover) at all 10/100/1000Base-T ports
- SNMP v1/v2c/v3

Technical data

Switching mode	Store-and-forward; non-blocking
Number of 1 Gb/s ports	6
Number of 1 Gb/s ports SFP	2
Communication standards	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3ab 1000BASE-T IEEE 802.3z 1000BASE-SX/LX IEEE 802.3x Flow Control IEEE 802.1p Prioritization IEEE 802.1X Port Authentication IEEE 802.1Q VLAN Tagging IEEE 802.1AE MAC Security
Redundancy function	Redundant DC power supply
Configuration options	Web-based (HTTP(S)) SNMPv1/v2c/v3
Diagnostics	Modbus TCP; Port status; Syslog; SNMP traps
MAC table (size)	16000 addresses
Supply voltage	9 … 48 VDC
Power consumption (max.)	5.8 W
Current consumption (max.)	640 mA
ESD (contact/air discharge)	8 KV / 15 KV
Transmission rate	Copper cable: 10/1000 Mbit/s; Fiber optic:1000 Mbit/s
Indicators	Device: LED (PWR, RPS) green: Power supply (primary), redundant power supply (secondary); LED (ALM) red: Alarm; LED (LNK/ACT, 100) green, LED (OFFLINE) red: Status fiber optic ports; per port: LED(100M/1G, LNK/ACT) green: Status 100 Mbit/s/1 Gbit/s, LNK/ACT ports 1 … 6; LED ports 7, 8 green: Fiber optic port status

Connection Data

Connection technology: communication/fieldbus	Copper cable: 6 x RJ-45; Fiber optic: 2 x SFP slots (e.g., with SFP module and LC fiber-optic connector)
Connection technology: supply	1 x Built-in male connector: 231-435/001-000; included female connector (*MCS* Connectors): 2231-105/026-000

Physical data

Width	45.3 mm / 1.783 inches
Height	110 mm / 4.331 inches
Depth	92 mm / 3.622 inches

Mechanical data

Mounting type	DIN-35 rail

Material data

Fire load	0 MJ
Weight	453 g

Continued on next page

Environmental requirements

Ambient temperature (operation)	-20 … +70 °C
Ambient temperature (storage)	-40 … +80 °C
Protection type	IP30
Note on protection type	Use per UL 61010: Indoor
Pollution degree	2 per UL 61010
Relative humidity	≤ 95 % (at ≤ 55 °C; ≤ 50 % at 55 … 70 °C)
Vibration resistance	Per IEC 60068-2-6
Shock resistance	per IEC 60068-2-27
EMC immunity to interference	per EN 61000-6-2
EMC emission of interference	per EN 55011, 55024, 55032 (Class A + B), 61000-6-3, -4

Commercial data

PU (SPU)	1 pcs
Packaging type	Box
Country of origin	TW
GTIN	4055143978415
Customs tariff number	85176200000

Product Classification

UNSPSC	43222612
ETIM 9.0	EC000734
ETIM 10.0	EC000734
ECCN	5A992.C

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

General approvals

Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03083
KC National Radio Research Agency	Article 58-2, Clause 3	MSIP-REM-W43-ISW852
UL Underwriters Laboratories Inc.	UL 62368-1	E482462

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Continued on next page

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 852-1328

Documentation

Manual

Product Manual Industrial Managed Switch	V 1.3.0 25.03.2025	pdf 12710.38 KB	

System Description

Industrial Switches – General Product Information	pdf 1873.93 KB	

Bid Text

852-1328	xml 7.70 KB	
852-1328	docx 35.16 KB	

CAD/CAE-Data

CAD data

2D/3D Models 852-1328

CAE data

EPLAN Data Portal 852-1328

Runtime Software

Firmware

0852-1328, Industrial-Managed-Switch	V 02 30.08.2021	zip 9128.03 KB	

1 Compatible Products

1.1 Optional Accessories

1.1.1 Cables and connectors

1.1.1.1 Connector plug



Item No.: 750-979/000-011
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 22; Strain relief



Item No.: 750-979/000-021
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 24; Strain relief



Item No.: 750-979/000-012
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 22; Strain relief



Item No.: 750-979/000-022
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 24; Strain relief



Item No.: 750-977/000-011
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22



Item No.: 750-978/000-011
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22; Strain relief



Item No.: 750-977/000-021
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24



Item No.: 750-978/000-021
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24; Strain relief

Continued on next page

1.1.1.1 Connector plug



Item No.: 750-977/000-012
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22



Item No.: 750-978/000-012
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22; Strain relief



Item No.: 750-977/000-022
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24



Item No.: 750-978/000-022
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24; Strain relief



Item No.: 750-979/000-013
Connector PROFINET; RJ-45; Cat. 6A; angled; AWG 22; Strain relief



Item No.: 750-977/000-013
Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22



Item No.: 750-978/000-013
Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22; Strain relief



Item No.: 750-976
PROFINET RJ-45 connector, IP20; ETHERNET 10/100 Mbit/s; for field assembly

1.1.2 Interface module

1.1.2.1 Interface module



Item No.: 289-195
Interface module; RJ-45; IDC technology; Cat. 6; in mounting carrier; with shield connection

1.1.3 Plug

1.1.3.1 SFP module



Item No.: 852-1210
SFP Module 1000BASE; LX Single-Mode 1310 nm LC; 10 km; Extended temperature range; Digital Diagnostics Monitoring; silver-colored



Item No.: 852-1200
SFP Module 1000BASE; SX Multi-Mode 850 nm LC; 0.55 km; Extended temperature range; Digital Diagnostics Monitoring; silver-colored



Item No.: 852-1280
SFP Module 1000BASE; ZX Single-Mode 1550 nm LC; 80 km; Extended temperature range; Digital Diagnostics Monitoring; silver-colored



Item No.: 852-202
SFP Module 100BASE; FX Multi-Mode 1310 nm LC; 2 km; DDM; Extreme; silver-colored



Item No.: 852-201/107-002
SFP Module 100BASE; FX Multi-Mode 1310 nm LC; 2 km; silver-colored



Item No.: 852-201/107-030
SFP Module 100BASE; LX Single-Mode 1310 nm LC; 30 km; silver-colored

1.1.4 Power supply

1.1.4.1 Power Supply



Item No.: 787-1602
Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 1 A output current; NEC Class 2; DC OK signal



Item No.: 787-1632
Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 10 A output current; TopBoost; DC OK contact



Item No.: 787-1606
Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 2 A output current; NEC Class 2; DC OK signal



Item No.: 787-1622
Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 5 A output current; TopBoost; DC OK contact



Item No.: 787-1635
Switched-mode power supply; Classic; 1-phase; 48 VDC output voltage; 10 A output current; TopBoost; DC OK contact



Item No.: 787-1623
Switched-mode power supply; Classic; 1-phase; 48 VDC output voltage; 2 A output current; DC OK signal



Item No.: 787-1633
Switched-mode power supply; Classic; 1-phase; 48 VDC output voltage; 5 A output current; TopBoost; DC OK contact