Field Side Connection Module

0 ... 230 V AC/DC

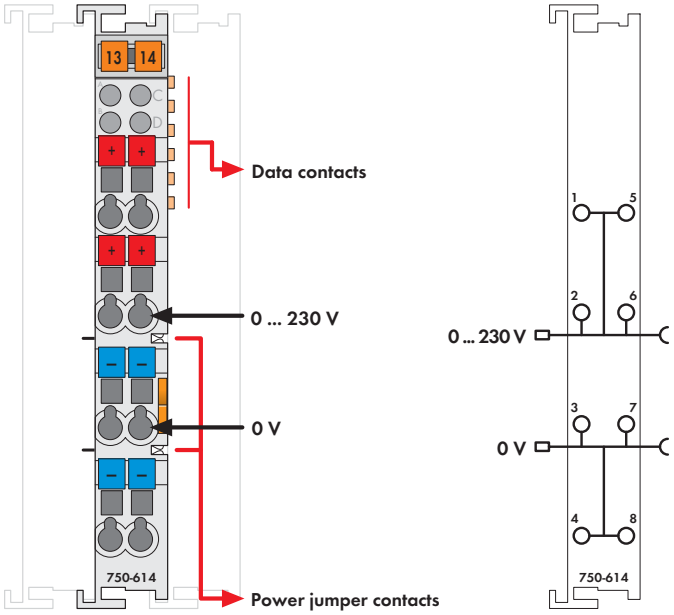


Fig. 750 Series
Delivered without miniature WSB markers

This module allows additional + and - voltage connection points (up to 4 additional), eliminating external terminal blocks.

Note: Ground (earth) or shield (screen) connection is discontinued at this point.

Description	Item No.	Pack. Unit
Field Side Connection	**750-614**	1
Field Side Connection (without connector)	**753-614**	1

Accessories		Item No.	Pack. Unit
	**753 Series Connectors**	**753-110**	25
	Coding elements	**753-150**	100
	**Miniature WSB Quick marking system**		
	plain	**248-501**	5
	with marking	see Section 11	

Approvals

Conformity marking	CE
Korea Certification	
Marine applications	ABS, BV, DNV, GL, KR, LR, NKK, PRS, RINA
UL 508	
ANSI/ISA 12.12.01	Class I, Div. 2, Grp. ABCD, T4
TÜV 07 ATEX 554086 X	I M2 Ex d I Mb, II 3 G Ex nA IIC T4 Gc, II 3 D Ex tc IIIC T135°C Dc
IECEx TUN 09.0001 X	Ex d I Mb, Ex nA IIC T4 Gc, Ex tc IIIC T135°C Dc

Technical Data

Voltage via power jumper contacts (max.)	0 V ... 230 V AC/DC
Current via power jumper contacts (max.)	10 A AC/DC
Wire connection	CAGE CLAMP®
Cross sections	0.08 mm² ... 2.5 mm² / AWG 28 ... 14
Strip lengths, 750/753 Series	8 ... 9 mm / 0.33 in
	9 ... 10 mm / 0.37 in
Width	12 mm
Weight	45.5 g
EMC immunity of interference	acc. to EN 61000-6-2, marine applications
EMC emission of interference	acc. to EN 61000-6-3, marine applications