Catalog Number:	U3849-O-200-100
Item Description:	320A 4T RL HD LVR PED
UPC Code:	784572463196



Brand Name:	Milbank
Type:	Ringless Meter Socket
Application:	Meter Socket With Main
Standard:	UL Listed
Voltage Rating:	Up to 240 Volts Alternating Current
Amperage Rating:	320 Ampere Continuous
Phase:	1 Phase
Frequency Rating:	60 Hertz
Number Of Cutouts:	2
Cutout Size:	200 Ampere Main Breaker, 100 Ampere Main Breaker
Cable Entry:	Underground
Terminal:	3/8 Inch Stud Line Side and Double Mechanical Load Side Connector
Mounting:	Pedestal
Enclosure:	Type 3R, G90 Galvanized Steel with Powder Coat Finish

Additional Specifications:

Number of Jaws:4 Terminal


Hub Opening and Closing Plates:Plain Top


Bypass Provision:Lever Bypass


Number Positions:1 Position

Utility requirements may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must always be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	4	5/16 SOLID K.O.
B	4	1, 1¼, 1½, 2, 2½ CONC. K.O.

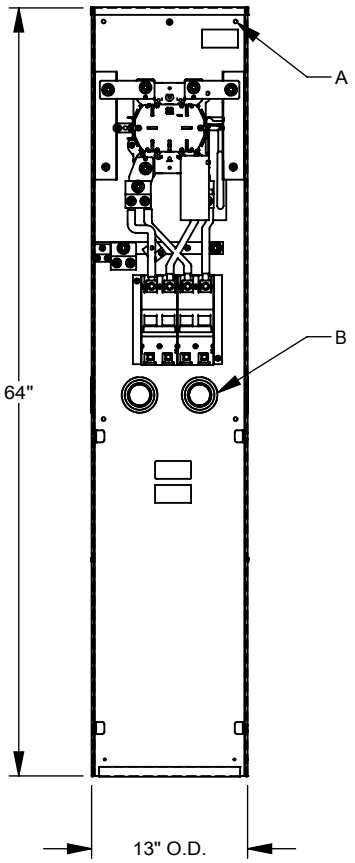

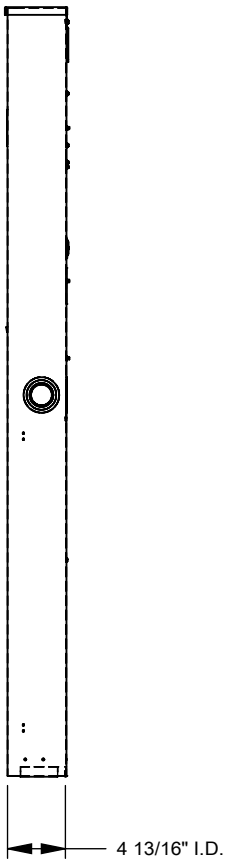

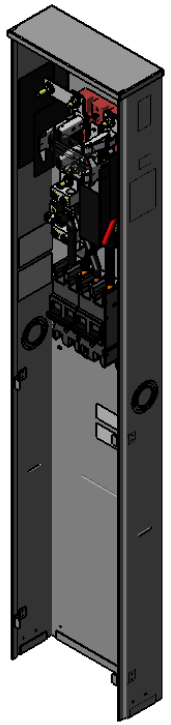



MILBANK®
ENERGY AT WORK

Version:

1

All dimensions are +/- 1/16".
Drawing views are not to scale.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.