Special Use Products



RR151CHWTR



RR1510W



RJ650BKTR



Dividers



RJ600



RDS50



RS100W



RS101W

Special Use Products

Description	Color	Tamper-Resistant (15A 125V NEMA 5-15R UL/CSA)	Tamper-Resistant (20A 125V NEMA 5-20R UL/CSA)
Clock Hanger/Recessed Single Receptacle, Tamper-Resistant, 2 pole, 3 wire, grounding, side wire terminations	Brass	**RR151CHBSTR**	**RR201CHBSTR**
	Stainless Steel	**RR151CHSSTR**	**RR201CHSSTR**
	Ivory (Nylon)	**RR151CHITR**	**RR201CHITR**
	White (Nylon)	**RR151CHWTR**	**RR201CHWTR**
Recessed Duplex Receptacle, Tamper-Resistant, 2 pole, 3 wire, grounding, side wire terminations	Ivory	**RR1510I**	—
	Light Almond	**RR1510LA**	—
	White	**RR1510W**	—
JLOAD® Multimedia Outlet, Provides power, Cat. 5e and coaxial in a single gang box. Requires RJ600 Box. Includes decorator frame, one Cat. 5e, one F-connector and one power receptacle 125V with voltage dividers*.	Black	**RJ650BKTR**	**RJ620BKTR**
	Gray	**RJ650GYTR**	**RJ620GYTR**
	Ivory	**RJ650ITR**	**RJ620ITR**
	Light Almond	**RJ650LATR**	**RJ620LATR**
	White	**RJ650WTR**	**RJ620WTR**
JLOAD® Multimedia Outlet, Includes decorator frame with two open ports for custom configuration and one power receptacle 125V with voltage dividers*.	Black	**RJ65BKTR**	**RJ62BKTR**
	Gray	**RJ65GYTR**	**RJ62GYTR**
	Ivory	**RJ65ITR**	**RJ62ITR**
	Light Almond	**RJ65LATR**	**RJ62LATR**
	White	**RJ65WTR**	**RJ62WTR**
JLOAD® Multimedia Box, 3 inches deep with seven ½-inch knockouts, non-metallic sheathed cable clamps on each side. Screw in mounting to stud.	Steel	**RJ600**	**RJ600**

*Note: *Dividers provided for use with the RJ600, RF515 series and RU200 series boxes. RF408 required for use with the RF400 series floor boxes.*
See page X-10 for snap fit inserts.
See pages X-21 to X-26 for floor boxes and under cabinet power distribution options.
See page Tech-10 for Tamper-Resistant description.

Door Switch with Cover Plate and Box

Description	"ON" when Door is Open	"OFF" when Door is Open
Rating	3A 125V AC	3A 125V AC
Zinc Plated Steel	**RDS50***	**RDS30***

*Note: *Not UL Listed.*

Dimensions

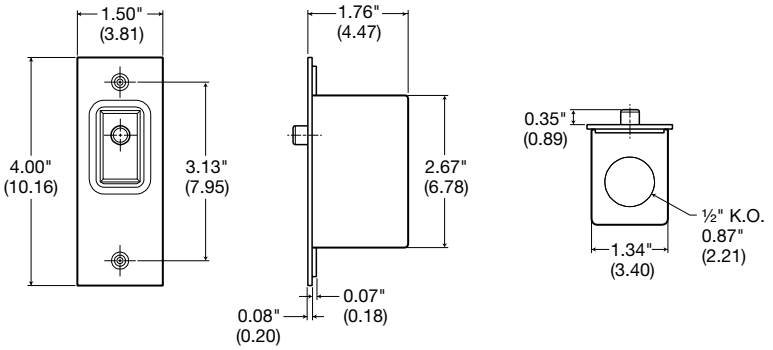

In-Line Cord Switches

Description	Mini For Use with Flat Lamp Cord	Heavy Duty
Rating	6A 125V AC	6A 125V AC, 1/6 HP
Wire	#18 AWG SPT 1 and SPT 2	#18 to #16 AWG SPT 1 and SPT 2
Ivory	—	**RS101I**
White	**RS100W**	**RS101W**

Dimensions in Inches (mm)