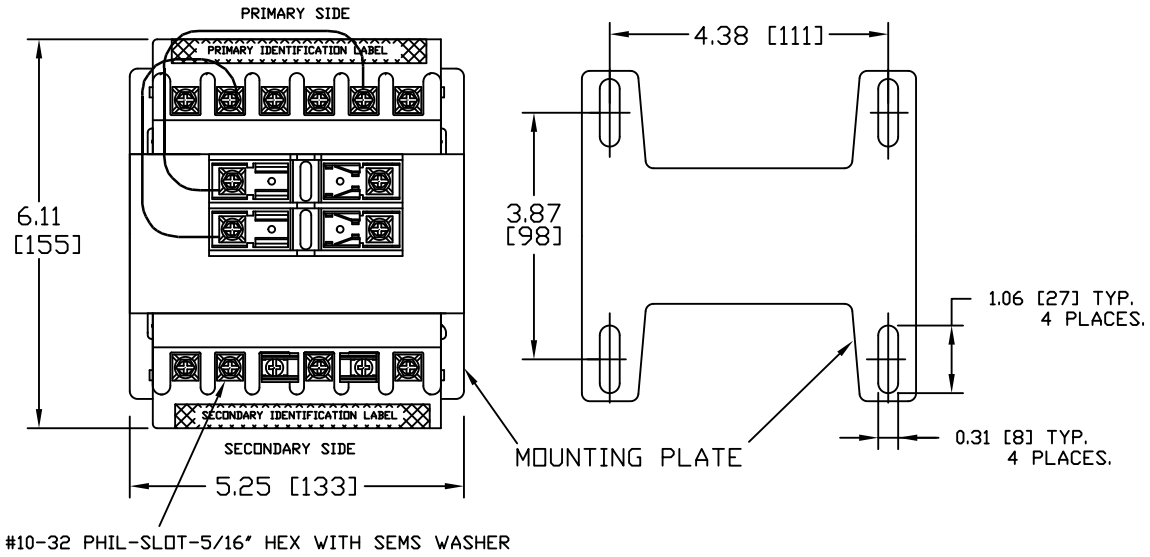

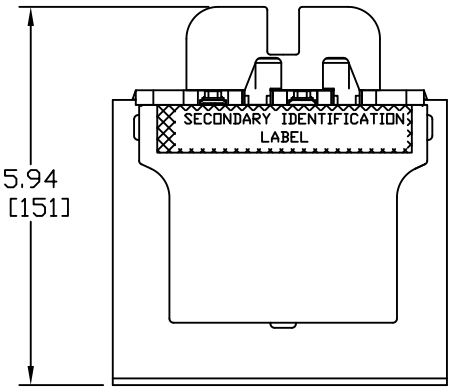


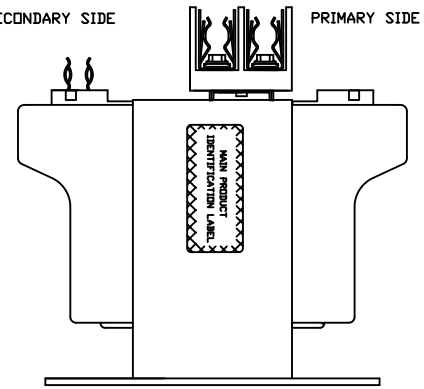

| Transformer Specifications | |
|---|---|
| PRIMARY VOLTAGE(S) | 230x460 (TRIPLE RATED) |
| SECONDARY VOLTAGE(S) | 115 |
| RATED V.A. | 500 |
| RATED FREQUENCY | 50/60 |
| INSULATION CLASS | 130 |
| AGENCY APPROVALS | UL, CUL |
| ESTIMATED WEIGHT | 17.4 LBS |




INTERNALLY JUMPERED TO FUSE TERMINAL

## CONNECTION DIAGRAM




NOTE:
1. ALL MEASURMENTS IN INCHES (MM)

| REV | ECO | DESCRIPTION | BY | ENG | DATE |
|---|---|---|---|---|---|
| | | | | | |
| | | | | | |
| | | | | | |
| BRAND | | | | | |

| | NAME | DATE |
|---|---|---|
| DRAWN | AJP | 11-11-11 |
| CHECKED | AJP | 11-11-11 |
| ENG APPR. | AJP | 11-11-11 |

Acme Electric
MENOMONEE FALLS, WI 53051 USA

TITLE: ICT

SCALE: 1:1

SHEET 1 OF 1

SIZE B | DWG. NO. TB500B008F4 | REV A

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ACME ELECTRIC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ACME ELECTRIC IS PROHIBITED.

DO NOT SCALE DRAWING