
YAV26L2TC14FX, Cu Compression, 2-Hole, 1/4" Stud, 5/8" Spacing, Standard Barrel, 2/0 Flex

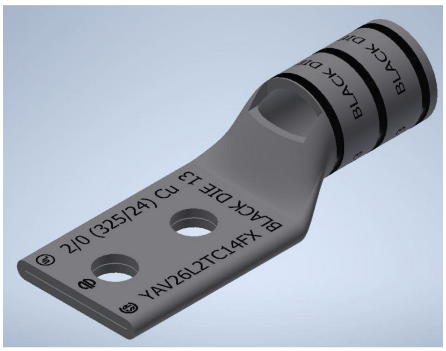

By Burndy
Catalog # YAV26L2TC14FX

2/0 Flex G,H,I,K,M,DLO, 2/0 AWG, CU, 2 Hole, 1/4 Stud, 5/8 IN Spacing, Standard Barrel, Inspection WIndow

Features

- Electro-tin plated unless otherwise specified to reduce galvanic corrosion (bimetallic) and resist corrosive elements
- Connectors are clearly marked with stamping and barrel color coding
- For applications greater than 2000 Volts consult cable manufacturer for voltage stress relief instructions

Application

Wire Termination

Specifications

Buy American Compliant	No
Certification - cULus	No
EU RoHS Indicator	Yes
Certification - UL Recognized	No
Industry Standard(s)	UL 486A-486B
Certification - ETL	No
Standards - RoHS Compliance Status	CM
Certification - CSA Approved	Yes
UL Listed	Yes

Conductor

Conductor - Material	COPPER
Wire Size	2/0 AWG
Conductor - Copper Str Size	"2/0 AWG"
Conductor - Copper Flex I Size Range	2/0 AWG
Conductor - Copper Flex K Size	"2/0 AWG"
Conductor - Copper Flex K Size Range	2/0 AWG
Conductor - Copper Flex M Size	"2/0 AWG"
Conductor - Copper Flex M Size Range	2/0 AWG
Conductor - Copper Solid Size	2/0 AWG
Conductor - Copper Solid Size Range	2/0 AWG
Conductor - Copper Str Compact Size	"2/0 AWG"
Conductor - Copper DLO Size	2/0 AWG
Conductor - Copper DLO Size Range	2/0 AWG
Conductor - Copper Flex G Size	"2/0 AWG"
Conductor - Copper Str Navy Size	125
Conductor - Copper Flex G Size Range	2/0 AWG
Conductor - Copper Str Navy Size Range	125 (61) Navy
Conductor - Copper Flex H Size	"2/0 AWG"
Conductor Size	2/0 AWG
Conductor - Copper Str Size Range	2/0 AWG
Conductor - Copper Flex H Size Range	2/0 AWG
Conductor Type	CODE/FLEX
Conductor - Copper Flex I Size	"2/0 AWG"
Conductor - CopperWeld Str Size	2/0 WELD
Conductor - CopperWeld Str Size Range	2/0 WELD

Configuration

Physical Attribute - Number of Holes	2
Connector Type	STANDARD BARREL

Current

Voltage - Maximum	35000
Voltage Rating	35 kV

Dimensions

Dimension - Outside Diameter inch	0.63 in
Dimension - L Length Overall mm	65 mm
Dimension - Pad Width inch	0.93 in
Dimension - Hole Size fraction	1/4
Dimension - Hole Size inch	0.27
Dimension - Hole Size mm	6.9 mm
Dimension - Strip Length inch	13/16 in
Dimension - Stud Size fraction	1/4
Dimension - B Length fraction	13/16 in
Dimension - B Length inch	0.81 in
Dimension - Z inch	0.34 in
Physical Attribute - Tongue Angle	Straight
Dimension - Bolt Hole Size inch	0.27 in

Dimension - Bolt Size fraction	1/4
Dimension - Bolt Size inch	0.25
Dimension - Length Overall inch	2.56 in
Dimension - N inch	0.31 in

General

Die Index	13
Trade Name	HYLUG™
Sub Brand	HYLUG
Color Code	Black
Plated	Y
Feature - Barrel Type	Standard
Feature - Barrel Style	Chamfered;Skived
Type	Standard Barrel, Tin Plated
UPC 12 Digit	781810035733
UPC 14 Digit GTIN	00781810035733

Material	COPPER
Plating Type	Tin
Finish Type	Tin-Plated
UPC	781810035733

Logistics

Minimum Pack Quantity	1
Carton Quantity	50
Pallet Quantity	23200

Operational

Temperature Rating	194

Product Assets

Catalog [English]
Installation Manual [English]
Installation Manual [English]

© 2025 Hubbell Incorporated. All rights reserved