



Concrete Ring, Welded, 3-1/2 in. Deep,
Double Row 1/2 & 3/4 in. KO's

By RACO
Catalog # 273

Concrete Ring, Welded, 3-1/2 in. Deep, Double Row 1/2 & 3/4 in.
KO's

Features

- Flat sides provide excellent contact for locknuts
- External ears are used to nail the ring to the wood form
- Top cover is removable for before-pour work
- Ears on inside of box are for fixtures
- Waxed fixture ears prevent concrete from interfering with the threads
- A variety of covers are available
- Cover plate must be ordered separately with all RACO® concrete rings
- Used in high-rise construction
- 49.3 cu. in. capacity
- Not designed for ceiling fan support, the maximum support load for a static fixture is 50 lbs


Specifications

Certified Listed	UL Listed
Buy American Compliant	No
EU RoHS Indicator	Contact Manufacturer

Configuration

Knockouts	• 1/2 in • 3/4 in
-----------	---

Dimensions

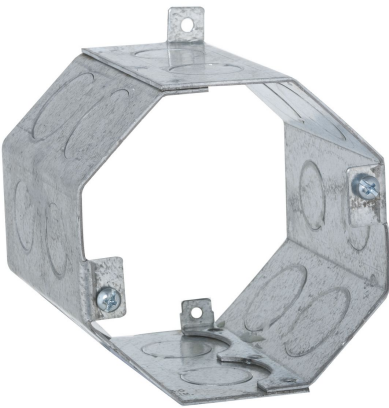

Cubic Capacity	43.0 cu.in
Fixture Lbs.	50 lb.
Depth	3.5 in
Width	4 in
Weight	0.907 lb.
Height	4 in

General

Wiring System	Conduit
Color	Gray
Type	Concrete Ring
Material	Steel
Drawn or Welded	Welded
UPC	050169002735

Logistics

Packaging Type	No Packaging
Carton Quantity	20
Pallet Quantity	1200

Product Assets

- [Catalog \[English\]](#)
[Catalog \[English\]](#)
[Catalog Page \[English\]](#)