1/2 in. REDI-LOC® Series AC/MC Duplex Cable Connector

By RACO
Catalog # 2715

1/2 in. REDI-LOC® AC/MC Duplex Cable Connector

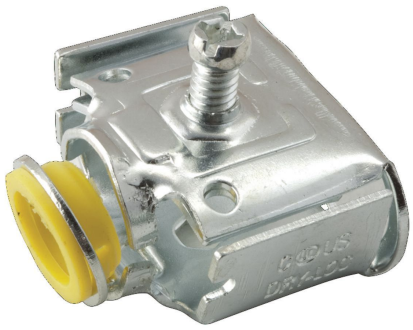

Features

- Tri-head screw/clamp design can accommodate two runs of MCI, AC, and HCF cable. Connector can be installed by using a slotted, Phillips, or Robertson.
- Preassembled anti-short bushing will not fall out during installation.
- Reusable design - installation can be reversed just as easily as it was originally installed.
- Made from steel, and nylon (bushing).
- Zinc electro plated for corrosion protection.
- Tri-lingual (English, Spanish, and French) installation instructions included in each unit carton.

Specifications

Certified Listed	cULus
Buy American Compliant	Contact Manufacturer
EU RoHS Indicator	Contact Manufacturer
Buy America(n) Qualified	Contact Manufacturer

Conductor

Cable Size	• MCI: AL .450 - .545 • MCI: Steel .425 - .550 • MCC: AL .380 - .550 • MCC: AC 14-1 to 12-3 w/Grnd., Alum. and Steel

Dimensions

Package Length	6.250 in
Package Width	4.500 in
Package Weight	3.125 lb.
Trade Size	1/2 in
Package Height	4.250 in
Length	1.625 in
Width	1.688 in
Weight	0.125 lb.
Height	1 in
Dimensions	1.625 in x 1.688 in x 1 in

General

Fitting Type	Connectors
Series	REDI-LOC® Series
Conduit Type	Armored Cable/Metal Clad (AC/MC)
Material	Steel
UPC	050169027158

Logistics

Minimum Pack Quantity	25
Carton Quantity	250
Pallet Quantity	10000

Product Assets

Catalog [English]
Catalog [English]

© 2026 Hubbell Incorporated. All rights reserved