
1/2 in. Liquidtight Straight Connector, Uninsulated

By RACO
Catalog # 3402

1/2 in. Liquidtight Straight Connector, Uninsulated

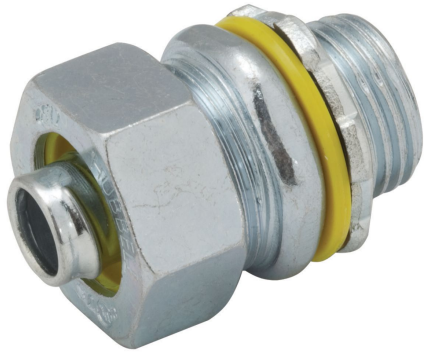

Features

- Use with flexible metallic liquidtight conduit and Type B flexible nonmetallic liquidtight conduit
- Zinc-electroplated for added corrosion protection
- Noninsulated
- Innovative split gland-ring assures a perfect seal, preventing pullouts
- Available in trade sizes 3/8 in. through 4 in.
- Sealing washer and heavy-duty locknut included
- All components are reusable

Specifications

Certified Listed	• UL Listed • CSA Certified
Buy American Compliant	Contact Manufacturer
Environmental Conditions	Wet Location
EU RoHS Indicator	Contact Manufacturer
Hazardous Rating(s)	• Class I, Division 2 • Class II Division 1 & 2 • Class III, Division 1 & 2
Industry Standard(s)	UL 514B
Buy America(n) Qualified	Contact Manufacturer

Dimensions

Package Length	8.500 in
Package Width	6.100 in
Package Weight	8.550 lb.
Trade Size	1/2 in
Package Height	3.700 in
Length	1.313 in
Width	1.313 in
Weight	0.171 lb.
Height	1.813 in
Dimensions	1.313 in x 1.313 in x 1.813 in

General

Fitting Type	Connectors
Insulation Type	Uninsulated
Conduit Type	Liquidtight
Material	Steel/Malleable Iron
UPC	050169034026

Logistics

Carton Quantity	200
Pallet Quantity	12000

Product Assets

Catalog [English]
Catalog [English]
Catalog Page [English]
Catalog Page [English]

© 2026 Hubbell Incorporated. All rights reserved