OptiChannel

Duplex Fiber Patch Cords, Riser
SC to SC, Multimode, OM3

Features

- Precision Zirconia Ferrule, PC Polish
- 100% Tested, Heat Cured Epoxy Termination
- Available in Lengths 1 to 10 meters
- Custom Lengths Quoted to Order

Ordering Information


Description	Cable Type	Catalog Number	UPC
Fiber Patch Cord, Riser, Duplex, SC to SC, OM3, 2M	Duplex Zipcord, OM3, Aqua	**DFRCSCSCE2MM**	662620329253

Standards

TIA-568.3
TIA-604-FOCIS
Telcordia GR-326-CORE
TIA-492AAAC (OM3, Bend Tolerant)
ANSI/ICEA S-83-596
TIA-598

Specifications

Overall Length	2 meters (6.56 ft)
Ferrule Material	Zirconia Ceramic
Cable Diameter	2.0 mm to 3.0 mm
Mated Pair Insertion Loss	< 0.50 dB (0.35 dB Typical)
Mated Pair Return Loss	> 26 dB
Polarity	A-B

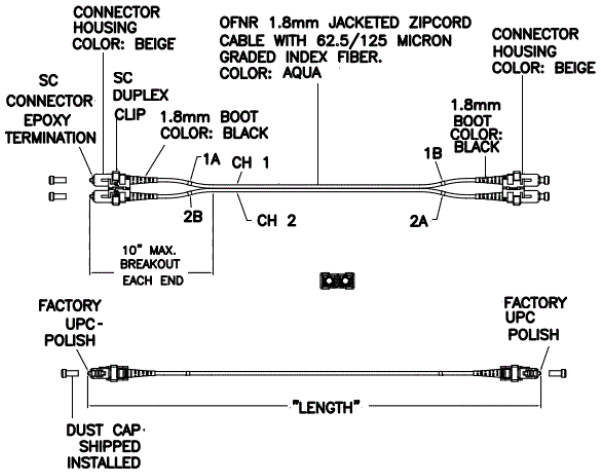

Performance

Mechanical	
Mating Durability	500 Cycles, < 0.75dB
Minimum Bend Radius	30 mm (1.2 in.)
Operating Temperature Range	0C to 70C (32F to 158F)
Tensile Rating, Short Term	11.24 Lb (50 N)

Applications

10 Gbps/25 Gbps Fiber Channel
Backbone/Horizontal Distribution Interconnect
Data Center Equipment Interconnect

Accessories

Fiber Microscope, 200X	**OFSCOPE2**
Fiber Cleaning Kit	**OFCLEANKT1**
Fiber Wipes Dispenser, 90 Sheets	**OFWIPES90**
Fiber Cleaning Fluid, 3 Oz.	**OFCLEANER3OZ**

Online Resources

Customer Use Drawing
eCatalog

Printed in U.S.A. Specifications subject to change without notice.

Hubbell Premise Wiring