15 and 20 Ampere, 125 Volts



SNAP*Connect*® GFCI LED Hospital Grade ●

Description	Color	Catalog Number	
Hospital Grade SNAPConnect GFCI LED, self-grounding staple, requires connector below, sold separately.	Black	-	**SNAPGF83BLK**
	Brown	-	**SNAPGF83**
	Gray	-	**SNAPGF83GRY**
	Ivory	**SNAPGF82I**	**SNAPGF83I**
	Light Almond	**SNAPGF82LA**	**SNAPGF83LA**
	Red	**SNAPGF82R**	**SNAPGF83R**
	White	**SNAPGF82W**	**SNAPGF83W**



SNAPGF83R

SNAP*Connect*® GFCI LED Hospital Grade ● Tamper and Weather Resistant


Description	Color	Catalog Number	
Hospital Grade SNAPConnect GFCI TR/WR, self-grounding staple, requires connector below, sold separately.	Black	-	**SNAPGFTW83BLK**
	Brown	-	**SNAPGFTW83**
	Gray	**SNAPGFTW82GRY**	**SNAPGFTW83GRY**
	Ivory	**SNAPGFTW82I**	**SNAPGFTW83I**
	Light Almond	**SNAPGFTW82LA**	**SNAPGFTW83LA**
	Red	**SNAPGFTW82R**	**SNAPGFTW83R**
	White	**SNAPGFTW82W**	**SNAPGFTW83W**




SNAPGFTW83I

Note: GFCI type receptacles should not be used in critical care patient areas or for electrical life support equipment applications because of the possibility of power interruption. All GFCI receptacles are furnished with a matching color thermoplastic wallplate, 20 amp feed-through capability.

SNAP*Connect*® USB Charger Hospital Grade ● Duplex Receptacles

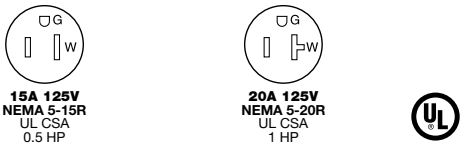


Description	Color	Catalog Number	
Hospital Grade SNAP*Connect* USB Charger, Tamper-Resistant Style Line® decorator duplex receptacle, 15 or 20 Amp, 125 Volt AC with one type A & one type-C USB port, 3 Amp up to 9 Volt USB output.	Black	**SNAP8200UACBK**	**SNAP8300UACBK**
	Brown	**SNAP8200UAC**	**SNAP8300UAC**
	Gray	**SNAP8200UACGY**	**SNAP8300UACGY**
	Ivory	**SNAP8200UACI**	**SNAP8300UACI**
	Light Almond	**SNAP8200UACLA**	**SNAP8300UACLA**
	Red	**SNAP8200UACR**	**SNAP8300UACR**
	White	**SNAP8200UACW**	**SNAP8300UACW**




SNAP8300UACW

SNAP*Connect*® Surge Protection Hospital Grade ● Tamper-Resistant Receptacle with Power Indicating LED

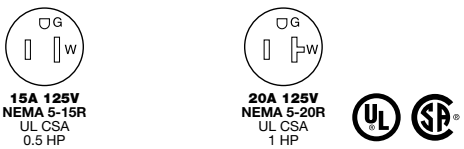


Description	Color	Catalog Number	
Hospital Grade SNAP*Connect* Surge supression, Tamper-Resistant, smooth face, duplex receptacle.	Blue	**SNAP8262S**	**SNAP8362S**
	Gray	**SNAP8262GYS**	**SNAP8362GYS**
	Ivory	**SNAP8262IS**	**SNAP8362IS**
	Light Almond	**SNAP8262LAS**	**SNAP8362LAS**
	Red	**SNAP8262RS**	**SNAP8362RS**
	White	**SNAP8262WS**	**SNAP8362WS**



SNAP8262S

SNAP*Connect*® Right Angle Pigtailed Connector

Description	Wire Type	General Use	Assembled in USA
Clear right angle terminal with 6 inch leads #12 AWG THHN/THWN-2; Polycarbonate housing material.	Solid	**SNAP1RA**	**SNAP1RNA**
	Stranded	**SNAP2RA**	**SNAP2RNA**
Clear right angle terminal with 6 inch leads #12 AWG THHN/THWN-2; Polycarbonate housing material with WAGO terminals.	Solid	**SNAP1RAM2**	**SNAP1RNAM2**
	Stranded	**SNAP2RAM2**	**SNAP2RNAM2**



SNAP1RA

Note: See page Tech-10 for Tamper-Resistant, Weather Resistant and LED Power Indicators descriptions.

Dimensions in Inches (mm)