BRYANT®

# Switches and Lighting Controls, Combination Devices, Residential Grade, 2) Three Way Toggles, Self Grounding, 15A 120V AC, Side Wired, Light Almond

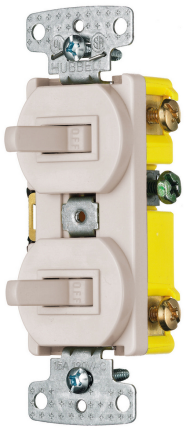

By Bryant
Catalog # RC303LA

Two 3-Way Toggle Self Grounding Combination Device 15A

## Features

- Quiet snap action mechanism
- Self-grounding staple is standard
- Elongated strap with continuous plaster ears

## Application

Residential

## Performance

Environmental - Operating temperature - -20°C to 60°C

## Specifications

| | |
|---|---|
| Environmental Conditions | Indoor Dry Unless Protected By Additional Means |
| EU RoHS Indicator | Yes |
| Industry Standard(s) | UL Listed |

## Conductor

| | |
|---|---|
| Number Of Poles | 2) Three Way |

## Configuration

| | |
|---|---|
| Contact Configuration | Two Position |

## Current

| | |
|---|---|
| Current Rating | 15 A |
| Amperage Rating | 15 A |
| Voltage Rating Description | 120 VAC |
| Current / Amperage Rating | 15 A |
| Connectivity | Side Wired |
| Contact Rating | 15A |
| Wattage | 1800 |
| Voltage Rating | 120 VAC |

## Dimensions

| | |
|---|---|
| Display Size | Standard Size |

## General

| | |
|---|---|
| Item Type | Traditional Switch Combo Devices |
| Material - Mounting Hardware | Mounting Screws |
| UPC | 883778119101 |

## Logistics

| | |
|---|---|
| Carton Quantity | 10 |

## Operational

| | |
|---|---|
| Action | Snap Switch |
| Actuator | Toggle |
| Operating Cycles | 30,000 Minimum |
| Operating Temperature | Max Continuous- 60 Degrees C, Minimum- -20 Without Impact |

## Product Assets

Catalog [English]
Catalog [English]
Catalog Page [English]



© 2026 Hubbell Incorporated. All rights reserved