

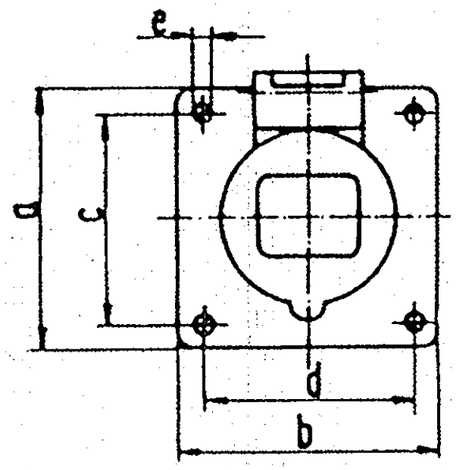


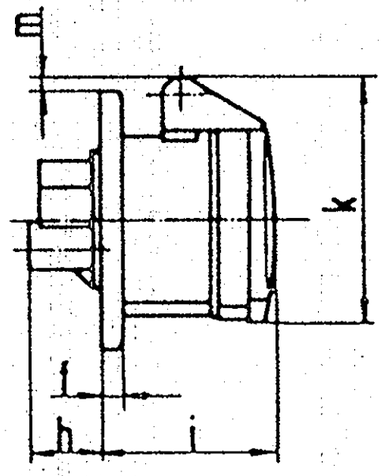



built-in opening

	16 AMPERE						32 AMPERE						63 AMPERE						16A OR 20A C320R6SVL	
	3 WIRE		4 WIRE		5 WIRE		3 WIRE		4 WIRE		5 WIRE		3 WIRE		4 WIRE		5 WIRE		3 WIRE	
KEY	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES
a	62	2.42	75	2.93	75	2.93	75	2.93	75	2.93	75	2.93							75	2.93
b	62	2.42	75	2.93	75	2.93	75	2.93	75	2.93	75	2.93							75	2.93
c	47	1.85	60	2.34	60	2.34	60	2.34	60	2.34	60	2.34							60	2.34
d	47	1.85	60	2.34	60	2.34	60	2.34	60	2.34	60	2.34							60	2.34
eØ	5.5	.21	5.5	.21	5.5	.21	5.5	.21	5.5	.21	5.5	.21							5.5	.21
f	7	.27	7	.27	7	.27	8	.31	8	.31	8	.31							7	.27
h	17	.66	26	1.01	17	.66	36	1.41	36	1.41	19	.74							17	.66
i	51	1.99	53	2.07	53	2.07	62	2.42	62	2.42	62	2.42							51	1.99
k	70	2.73	80	3.12	85	3.32	90	3.51	90	3.51	98	3.82							70	2.73
lØ	45	1.76	45	1.76	55	2.15	60	2.34	60	2.34	60	2.34							45	1.76
m	10	.39	7	.27	11.5	.46	12	.47	12	.47	17	.66							3.5	.14

SERIES I CATALOGS
SPLASHPROOF RECEPTACLES

16A	32A	16A OR 20A	30A OR 32A
C316R4S	C332R4S	C320R6SVL	C332R6SVLM2
C316R6S	C332R6S	C316R6SVLM2	
C416R6S			
C516R6S	C532R6S		

SERIES II CATALOGS
SPLASHPROOF RECEPTACLES

20A	30A
C520R6S	C530R6S


DIMENSIONS IN INCHES & MM

Ø = DIAMETER


SUB	REVISIONS
2	ADD CAT. C532R6S DCN4033-3 GK CP 9/13/96
3	7/9/01 RELOCATED Ø FROM d TO e; ADDED "16A OR 20A" COLUMN PER DCN 8680 RCM DVB
4	16A 3 WIRE NOW MM 62 2.42 / 47 1.85 / 10 .39 WAS MM 75 2.93 / 60 2.34 / 3.5 .14 ADD 16A OR 20A C320R6SVL DCN8757 7/17/01 GPK JD TCM
5	9/9/03 ADDED "30A OR 32A" COLUMN; ADDED "C316R6SVLM2" TO "16A OR 20A" COLUMN PER DCN 11099 RCM JVD
6	6/16/16 ADDED SERIES II CATALOGS SPLASHPROOF RECEPTACLES TABLE PER DCN 22119 JZW JZW

DRAFT SPECIFICATIONS

DRAFT - X° MAX DRAFT UNLESS OTHERWISE SPECIFIED, INTERPRETED AS FOLLOWS:

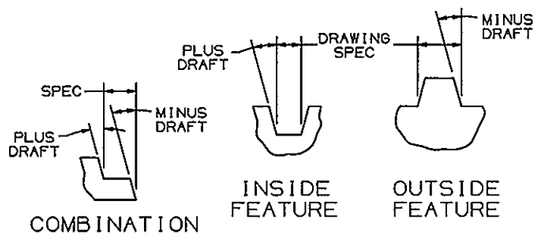

"IN ACCEPTING OUR DRAWINGS OR BLUEPRINTS FOR QUOTATION OR OTHER PURPOSES, YOU AGREE NOT TO DISCLOSE TO OTHERS THE IDEAS, INFORMATION OR DESIGNS THEREIN SHOWN, AND THAT YOU WILL MAKE NO USE OF OUR DRAWINGS OR BLUEPRINTS OR OF THE IDEAS, INFORMATION OR DESIGNS THEREIN SHOWN WITHOUT OUR PERMISSION."



ISO STANDARD FOR 3rd ANGLE PROJECTION

DO NOT SCALE DRAWING
USE DIMENSIONS ONLY

TITLE
PIN & SLEEVE
SPLASHPROOF RECEPTACLES

TOLERANCES UNLESS OTHERWISE SPECIFIED
.XX = ±.01
.XXX = ±.005
.XXXX = ±.0025
ANGLE TOL. ± 1°

WIRING DEVICE DIVISION
HUBBELL INCORPORATED
BRIDGEPORT, CT.

DR. BY G.K | APP. BY
PROJECT NO. | TR. BY | SCALE NONE
CHK. BY CHIP P. | DATE 3/12/96

DR. NO.
M-7450

SHEET 1 OF 1