


ITEM NO.	DESCRIPTION	QTY.
1	ST CONNECTOR DUST CAP	4
2	ST CONNECTOR NUT	4
3	1.8mm ST CONNECTOR BOOT	4
4	1.8mm DUPLEX CABLE	A/R

CATALOG NO.	DESCRIPTION	LENGTH	CABLE JACKET COLOR
DFPCSTSTS1SM	SINGLEMODE ST–ST DUPLEX PATCH CORD	1 METER	YELLOW
DFPCSTSTS2SM	SINGLEMODE ST–ST DUPLEX PATCH CORD	2 METER	YELLOW
DFPCSTSTS3SM	SINGLEMODE ST–ST DUPLEX PATCH CORD	3 METER	YELLOW
DFPCSTSTS5SM	SINGLEMODE ST–ST DUPLEX PATCH CORD	5 METER	YELLOW
DFPCSTSTS10SM	SINGLEMODE ST–ST DUPLEX PATCH CORD	10 METER	YELLOW

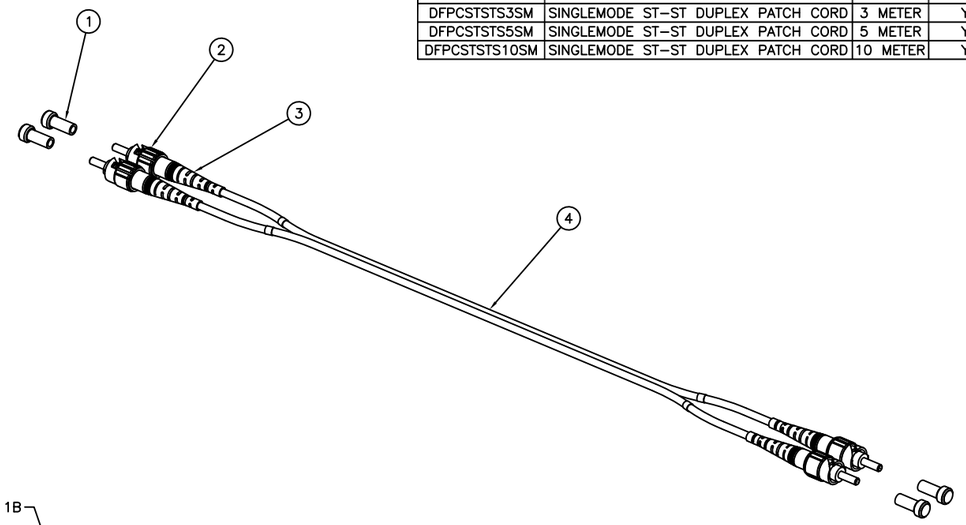

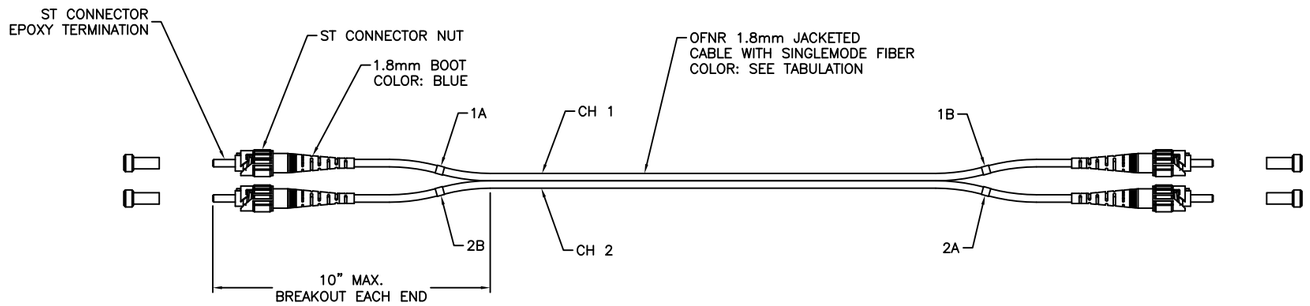

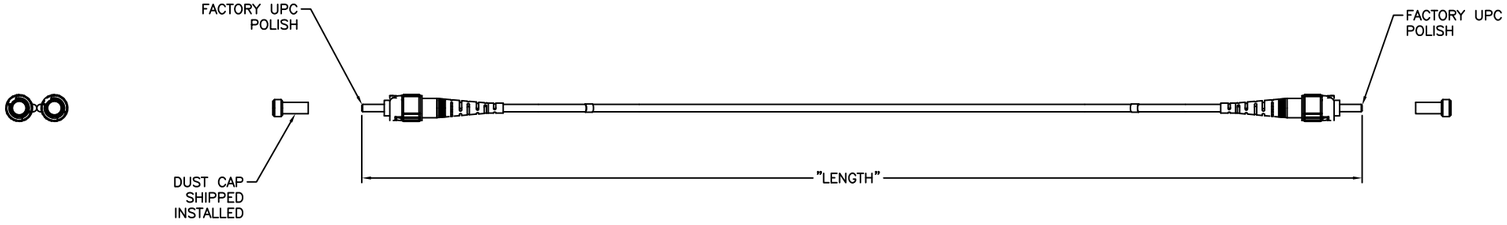

NOTES:

1. CONNECTOR OPTICAL, MECHANICAL AND ENVIRONMENTAL PERFORMANCE MEETS TIA/EIA 568–B.3 SPECIFICATIONS.
2. CONNECTOR USES A PC RADIUS TIP ZIRCONIA CERAMIC FERRULE.
3. CONNECTOR NUT IS NICKEL PLATED ZINC DIE CAST.
4. OPTICAL INSERTION LOSS AND RETURN LOSS TEST DATA INCLUDED IN EACH BAGGED PATCH CORD.
5. CABLE MARKINGS TO IDENTIFY CHANNEL (1 OR 2) AND EACH END (A OR B).
6. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

REV.	ECN	DATE	DESCRIPTION	CHG BY	APPD BY
B	6159	9/27/07	REDUCED CABLE JACKET DIAMETER	CD	

Created on AUTOCAD

DIMENSIONING AND TOLERANCE PER ANSI Y14.5M–1982
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (MM).
TOLERANCES
.XX = ±.01 (.25)
.XXX = ±.005 (.127)
.XXXX = ±.0025 (.0635)
ANGLE TOL ±1°

IN ACCEPTING OUR DRAWINGS, BLUEPRINTS, OR SUPPORTING DOCUMENTATION FOR QUOTATION OR OTHER PURPOSES, YOU AGREE NOT TO DISCLOSE TO OTHERS THE IDEAS, INFORMATION, OR DESIGNS SHOWN HEREIN, AND THAT YOU WILL MAKE NO USE OF SAME WITHOUT PERMISSION

PROJECT REFERENCE:

MATERIAL:

DRAWN BY: PAUL S. MAGUIRE 02/12/03

CHECKED BY: CINDY TALBOT 04/24/03

APPROVED BY: CINDY TALBOT 04/24/03

Hubbell Premise Wiring
HUBBELL INCORPORATED (Delaware)
14 Lord's Hill Road, Stonington, Connecticut 06378

TITLE: FIBER PATCH CORDS ASSY, SINGLEMODE ST-ST DUPLEX

SIZE: D | DRAWING NO.: C11311 | REV.: B

SCALE: 1/1 | SHEET 1 OF 1