
CATALOG NUMBER	COLOR	DESCRIPTION
SJ6	SILVER	SHEILDED CAT 6 JACK
SJ624	SILVER	SHEILDED CAT 6 JACK - 24PK

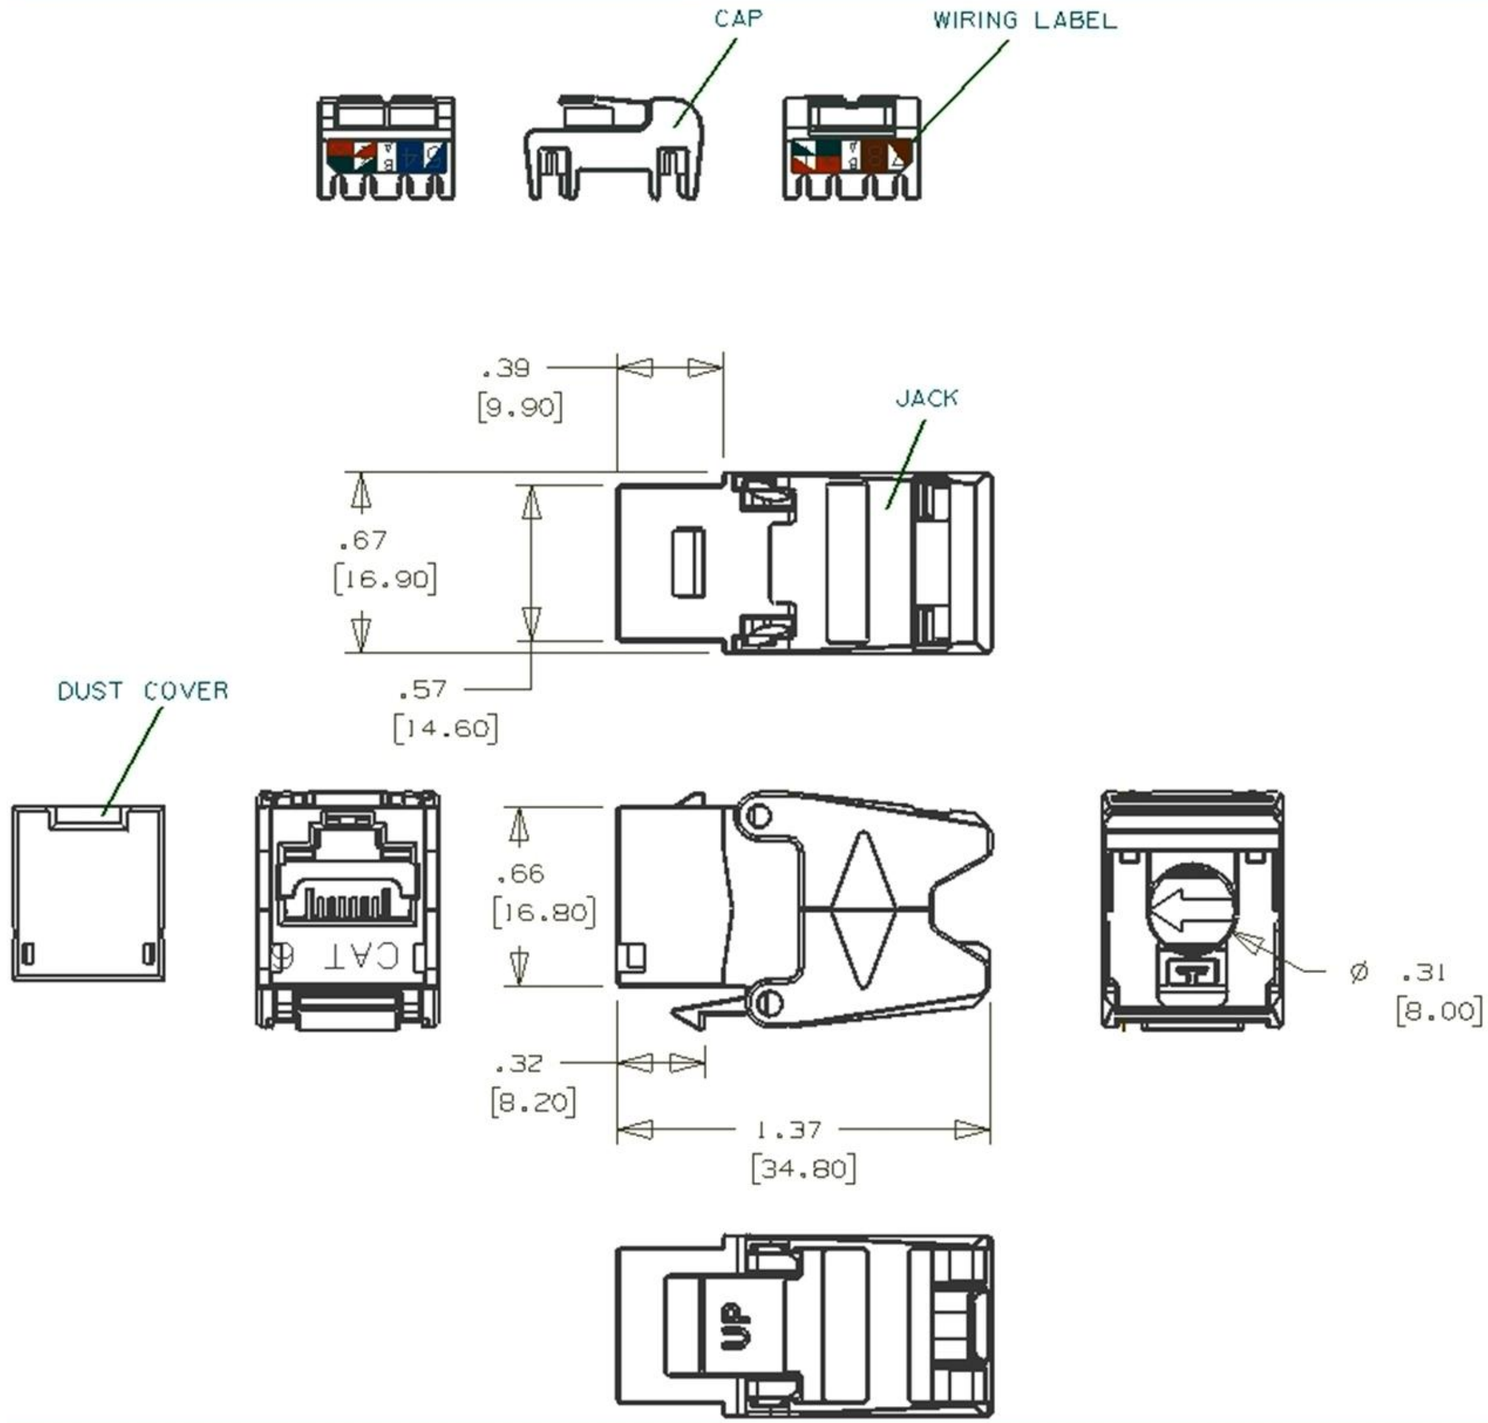

NOTES:
1. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
2. MEET ALL REQUIREMENTS SPECIFIED IN CONNECTING
   HARDWARE REQUIREMENT OF:
   TIA 568.C.2 CATEGORY 6 AND ISO/IEC 60603-7-5 CATEGORY 6
   MECHANICAL -
   INSERTION /EXTRACTION : 750 CYCLES MINIMUM
   IDC WIRE GAUGE : 22 ~ 24 AWG
   PHYSICAL
   HOUSING : ZINC - ALLOY FULLY SHIELDED

REV.	ECN	DATE	DESCRIPTION	CHG BY	APPD BY
B	21420	3-30-16	UPDATED DIMENSIONS		DMP
A	19595	2-23-15	RELEASED FOR PRODUCTION	DMP	

Created on INVENTOR

DIMENSIONING AND TOLERANCE PER ANSI Y14.5M-1982
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (MM).
TOLERANCES.XX = ±.01 (.25)
.XXX = ±.005 (.127)
.XXXX = ±.0025 (.0635)
ANGLE TOL ±1°

IN ACCEPTING OUR DRAWINGS, BLUEPRINTS, OR SUPPORTING DOCUMENTATION FOR QUOTATION OR OTHER PURPOSES, YOU AGREE NOT TO DISCLOSE TO OTHERS THE IDEAS, INFORMATION, OR DESIGNS SHOWN HEREIN, AND THAT YOU WILL MAKE NO USE OF SAME WITHOUT PERMISSION

PROJECT REFERENCE: 2014-030
MATERIAL: SEE NOTES
DRAWN BY: D. PECK
CHECKED BY:
APPROVED BY:

Hubbell Premise Wiring
HUBBELL INCORPORATED (Delaware)
23 CLARA DRIVE, SUITE 103 MYSTIC, CT 06355

TITLE: CAT 6 SHIELDED JACK

SIZE: C | DRAWING NO.: HWS14484C | REV.: A
SCALE: NTS | SHEET 1 OF 1