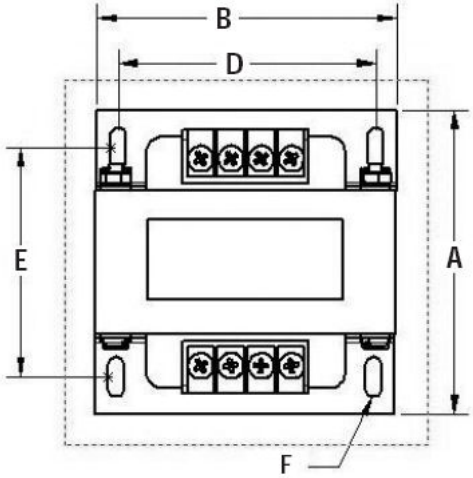



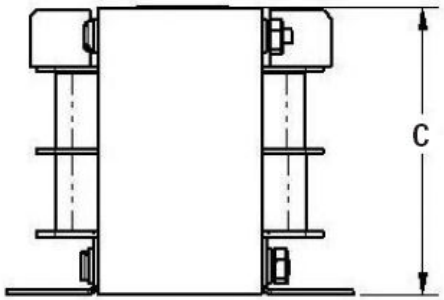

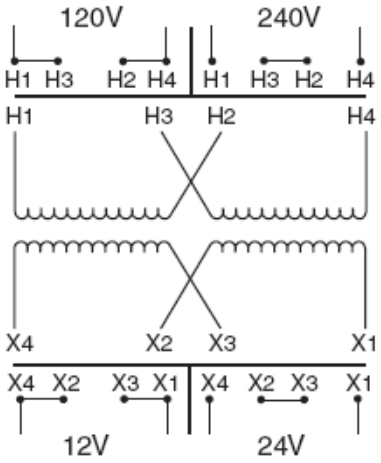

VA	CATALOG NUMBER	VOLTAGE		WIRING DIAGRAM	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
50	**TB1-81141**	120 x 240	12/24		4 Lbs	1ϕ	50/60 Hz

Winding Rise:	80°C
Insulation:	130°C
Windings:	CU

TYPICAL PERFORMANCE DATA

Standards:	UL/CSA

Markings:	

Industrial Control Transformer

Typical Efficiency·	
Full Load Losses	
No Load Losses	

A	B	C	D	E	F				
4.23	3.00	2.70	2.50	2.13	.22 x .50				

Revisions

Primary Fuse Block

PL-112700

Secondary Fuse Kit

NA

ACME ELECTRIC

Type No.

Date:	April 19, 2010

					A	PRINTS TO	**CONTROL 7**	