
TredTrak® Systems

Improves Pedestrian Safety by Decreasing Risk of Tripping


- High density polyurethane construction supports heavy loads and is weather resistant
- Modular interlocking design for easy installation, breakdown and storage
- Safety surface pattern reduces slipping and skidding
- High visibility safety blue and yellow colors



HBLTRED5B

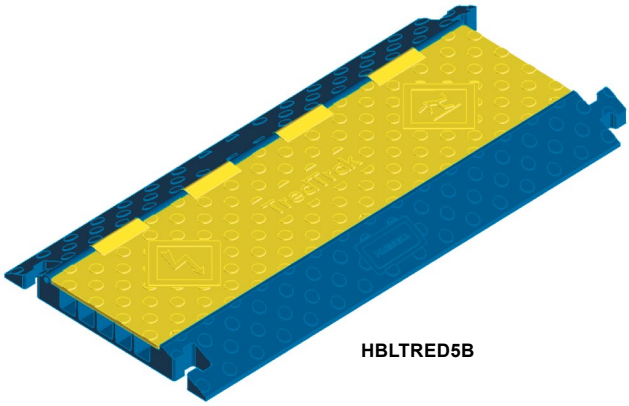


HBLTRED5YB

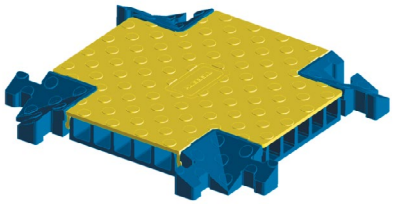


HBLTRED5XB

TredTrak® Systems	A	B	C	D	E		
		Trak			Channel		
Description	Length in. (mm)	Width in. (mm)	Height in. (mm)	Width in. (mm)	Height in. (mm)	Weight lbs. (kg)	Catalog Number
5 Channel TredTrak®, blue and yellow.	36.0" (914)	17.5" (445)	1.95" (50)	1.30" (33)	1.30" (33)	21.15 (9.6)	**HBLTRED5B**
5 Channel TredTrak® end caps (pair only), yellow.	5.75" (146)	17.5" (445)	1.95" (50)	1.30" (33)	1.30" (33)	6.40 (2.9)	**HBLTRED5ECB** (Female end)
	5.75" (146)	17.5" (445)	1.95" (50)	1.30" (33)	1.30" (33)	6.40 (2.9)	(Male end)
5 Channel TredTrak® female end caps (2 females), yellow.	5.75" (146)	17.5" (445)	1.95" (50)	1.30" (33)	1.30" (33)	6.40 (2.9)	**HBLTRED5ECFB**
5 Channel "X" fitting, blue and yellow.	17.5" (445)	17.5" (445)	1.95" (50)	1.30" (33)	1.30" (33)	14.25 (6.5)	**HBLTRED5XB**
5 Channel "Y" fitting, blue and yellow.	17.5" (445)	17.5" (445)	1.95" (50)	1.30" (33)	1.30" (33)	13.95 (6.3)	**HBLTRED5YB**


TredTrak (Top view)

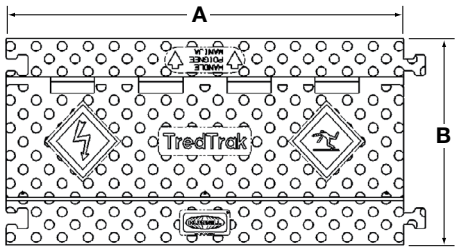


End Caps



"X" Fitting



"Y" Fitting



TredTrak (Side view)



Specifications

Material	Polyurethane.
Operating Temperature	-40°F to +120°F (-40°C to +49°C).
Hinge Material	Reinforced fiberglass.
Safety Symbols	Per ANSI Z535.3.

Load Capacity

Product	Test Fixture Footprint Inches (mm)	Tire Load lbs. +/- 20%		Axle Load lbs. +/- 20%	
		70°F (21°C)	120°F (49°C)	70°F (21°C)	120°F (49°C)
TredTrak	6.9" x 17.3" (175 X 439)	10,500	6,500	21,000	13,000
"X" Fitting	6.9" x 17.3" (175 X 439)	2,900	2,300	5,800	5,600
"Y" Fitting	6.9" x 17.3" (175 X 439)	2,900	2,300	5,800	5,600

Dimensions in Inches (mm)