SINCE 1945

KEYSTONE

LIGHT MADE EASY®

XFiT

OUTDOOR FIXTURES



MAY 2023

XFiT Outdoor Fixtures

Keystone's line of highly efficient LED outdoor lighting solutions.

Keystone has a solution for your entire building, inside and out. We're expanding our popular line of XFit fixtures and heading outdoors to meet your lighting needs for building exteriors, parking lots, pathways and general outdoor areas. Look for our Color Select and Power Select technology on many of these new fixtures, allowing you to field select from multiple color temperatures or lumen outputs with a simple switch.

Count on Keystone to bring you well-designed, versatile products that allow for dramatic SKU/stocking reductions and help contractors save time with easy installation, while providing customers with dramatic energy savings.

4 Floodlights
8 High Power Floodlights
12 Sports Lights
16 Bullet Floodlights
20 RGBW Linear Wall Washers
24 Slim Wall Packs
28 Traditional Wall Packs
32 Full Cutoff Wall Packs
36 Adjustable Wall Packs
40 Small Wall Packs
44 Canopy Light Fixtures
48 Area Lights with Optic Swap
56 Dusk-to-Dawn Fixtures
60 Catalog Numbers and Product Specs

XFIT | Floodlight Fixtures

Powerful, efficient LED lighting with incredible versatility



DLC LISTED PREMIUM | >80 CRI | 50,000 HOUR LIFETIME | IP65 RATED | 5 YEAR WARRANTY

Two mounting options included with every fixture




COLOR SELECT TECHNOLOGY

Adjustable: 3000K / 4000K / 5000K



BUILT-IN DUSK-TO-DAWN PHOTOCELL

With activation, automatically turns on/off when daylight is available for increased energy savings



BUILT-IN 120-277V KEYSTONE LED DRIVER

Provides 0-10V dimming & ample surge protection for increased versatility and reliability



CONSOLIDATE SKUs WITH INCLUDED INTERCHANGEABLE MOUNTING OPTIONS

Yoke & knuckle mount included for 15W, 35W, & 60W; slipfitter & trunnion mount included for 75W & 100W ensures universal fit

Return to Table of Contents

Floodlight Fixtures

COLOR SELECT








FEATURES AND BENEFITS

- Easy installation with included mounts
- Protected from the elements with IP65 rating
- Die-cast aluminum housing

15W Floodlight:
Ground Mount at 6″ above horizontal; 8′ from wall

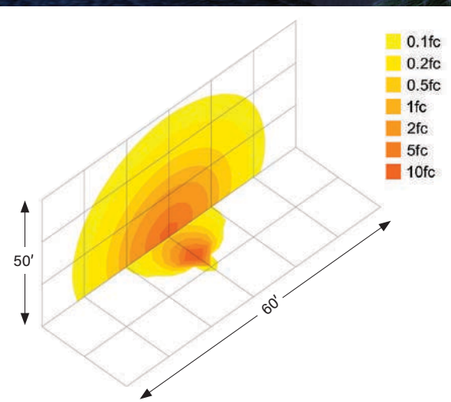




SHOWN IN BRONZE
WITH YOKE MOUNT



SHOWN IN WHITE
WITH KNUCKLE MOUNT





PROTECTIVE TRANSLUCENT PLUG PROVIDES EASY ACCESS TO PHOTOCELL AND COLOR TEMPERATURE DIP SWITCHES

Return to Table of Contents



DLC LISTED PREMIUM

>80 CRI

50,000 HOUR LIFETIME

IP65 RATED

5 YEAR WARRANTY

XFIT | High Power Floodlights

An adjustable bright light ideal for larger spaces

POWER AND COLOR SELECT TECHNOLOGY

Reduce SKUs, increase flexibility with field-adjustable power output and color temperature

DUSK-TO-DAWN PHOTOCELL INCLUDED

With activation, automatically turns on/off when daylight is available for increased energy savings

BUILT-IN 120-277V OR 277-480V KEYSTONE LED DRIVER

Provides 0-10V dimming & ample surge protection for increased versatility and reliability

MOUNTS INCLUDED

Package features both trunnion and slipfitter mounts for easy installation

High Power Floodlights

POWER SELECT

COLOR SELECT








140W HIGH POWER FLOOD

FEATURES AND BENEFITS

- Easy installation with included heavy-duty slipfitter and trunnion mounts
- Glare shield and lens kits for multiple beam angles available
- Protected from the elements with IP65 rating
- Die-cast aluminum housing
- High-voltage (480V) options available



Includes Keystone
NEMA ANSI C136.10-2010
3-pin twist-lock photocell



COLOR & POWER
SELECT SWITCHES



SHOWN IN
WHITE WITH
TRUNNION MOUNT




GLARE SHIELD



3-PIN TWIST-LOCK
PHOTOCELL ACCESSORY

140W 5000K Building Mount:
Building exterior mounted at 30'.

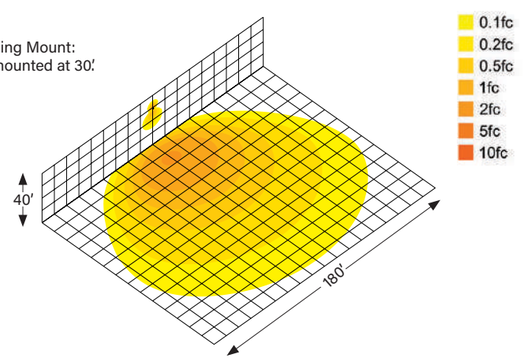

0.1fc
0.2fc
0.5fc
1fc
2fc
5fc
10fc

Return to Table of Contents



IP65 RATED

UL CERTIFIED

DLC LISTED PREMIUM

RoHS Compliant

5 YEAR WARRANTY

XFiT | Sports Light

A powerful, easy-to-install sports light with remote driver capability



REMOTE MOUNT DRIVER

Detachable driver box simplifies installation and maintenance; can be mounted remotely up to 164 feet (50m) from fixture



PRECISION OPTICS


Lenses ensure uniform, proper lighting; available in multiple beam angle options



COMPLIMENTARY LAYOUTS

Our free service recommends correct number of fixtures and their exact placement for aiming guidelines


Sports Light

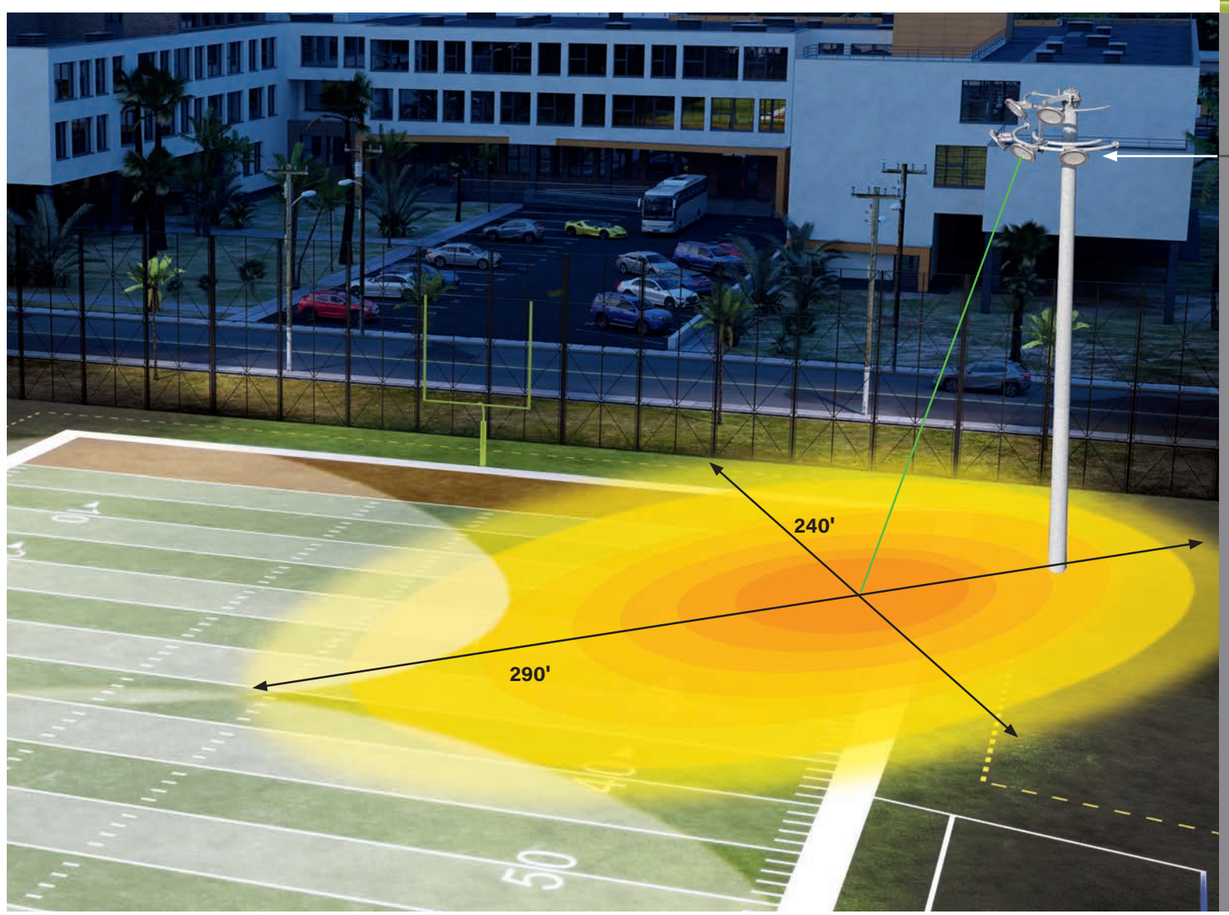




FEATURES AND BENEFITS

- Heavy-duty die-cast aluminum housing for a durable and modern aesthetic
- Precision-crafted optics ensure uniform lighting
- Designed for install as a single assembly or with remote driver box up to 164′ (50m) away, allowing for installation flexibility

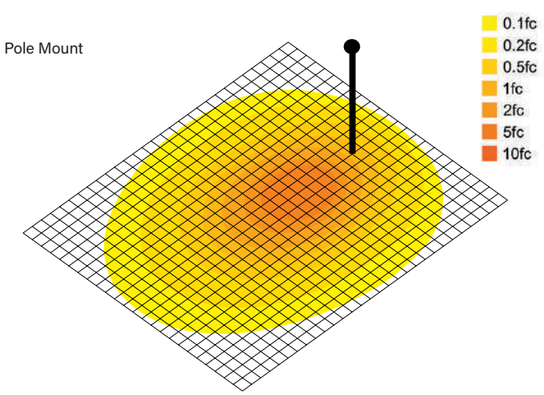



MULTIPLE LENS OPTIONS:
30° STANDARD; 20° & 40° OPTIONAL

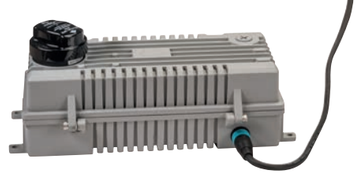

REMOVABLE REMOTE DRIVER BOX
FOR INSTALLATION FLEXIBILITY



SHOWN WITH INCLUDED
GLARE SHIELD

Return to Table of Contents

XFiT | Bullet Floodlights

Unique and versatile LED bullet floodlights with a sleek, modern design



POWER SELECT TECHNOLOGY

Three (3) different power outputs help reduce SKUs and increase flexibility



COLOR SELECT TECHNOLOGY

Adjustable: 3000K / 4000K / 5000K

BUILT-IN DUSK-TO-DAWN PHOTOCELL

With activation, automatically turns on/off when daylight is available for increased energy savings

EASILY ADJUSTABLE OPTICS

Additional optic lens, included in the box, can be installed using convenient twist on/off lens cap

CERTIFIED | DLC LISTED PREMIUM | TRUSTED NB WARRANTY | IP65 RATED | 5 YEAR WARRANTY




Additional optic lens and accessories included

Return to Table of Contents

Bullet Floodlights

POWER SELECT

COLOR SELECT

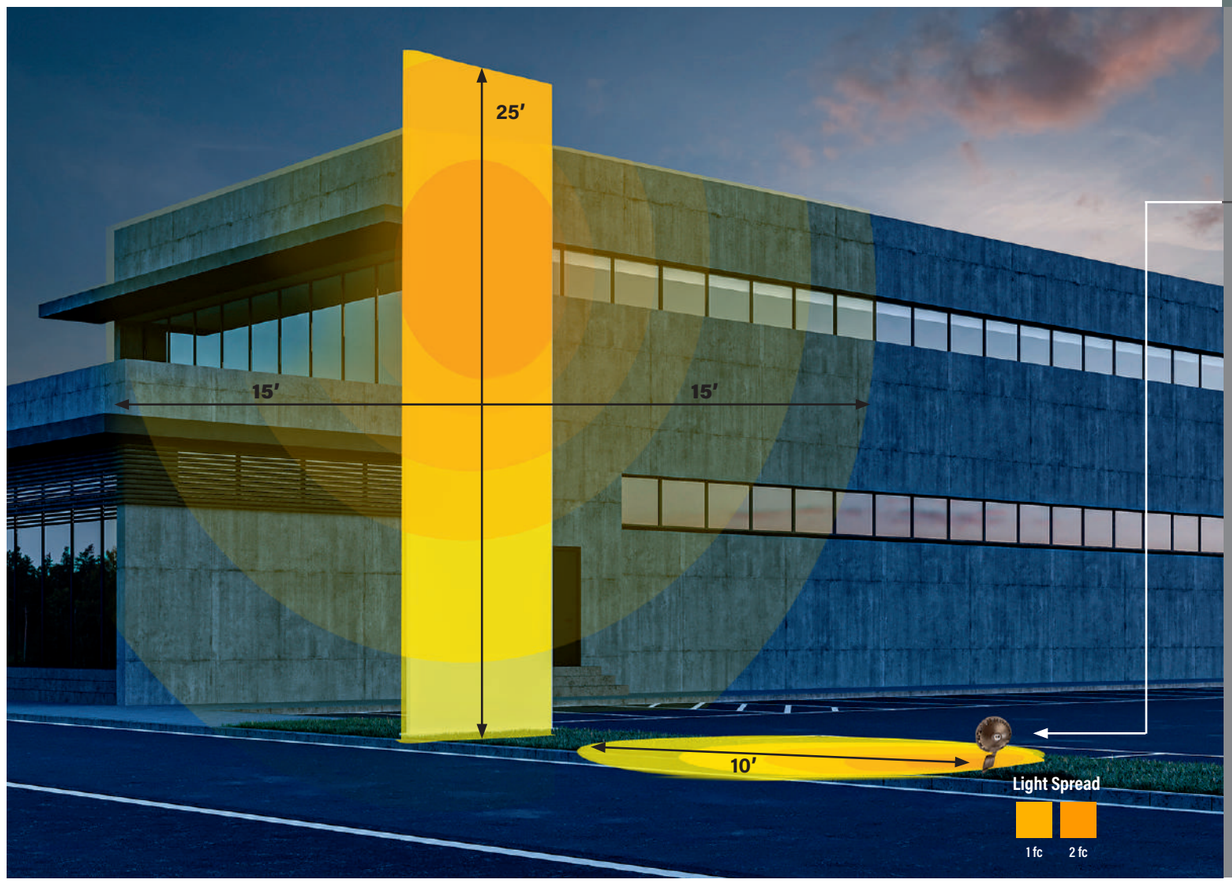






25W WITH PRE-INSTALLED KNUCKLE MOUNT


FEATURES AND BENEFITS

- Built-in glare shield and lens to light your subjects consistently
- Two optic lenses included in one box:
  - NEMA 4H x 4V
  - NEMA 3H x 3V
- Protected from the elements with IP65 rating
- Fits easily into pre-installed knuckle mount

25W Bullet Floodlight:
Aimed 45° above horizontal
10′ from building
6″ above ground; 4x4 optics

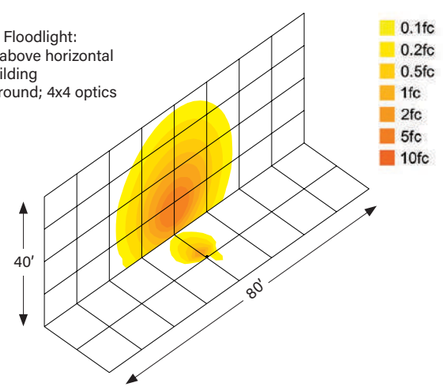


25W Bullet Floodlights:
Quantity: 3
Aimed 60° above horizontal
15′ from pole
6″ above ground; 3x3 optics

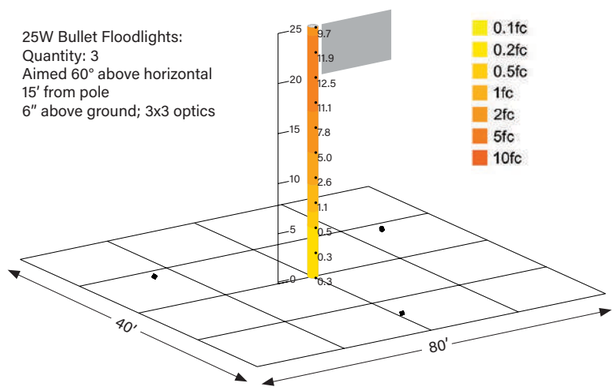



SHOWN IN WHITE

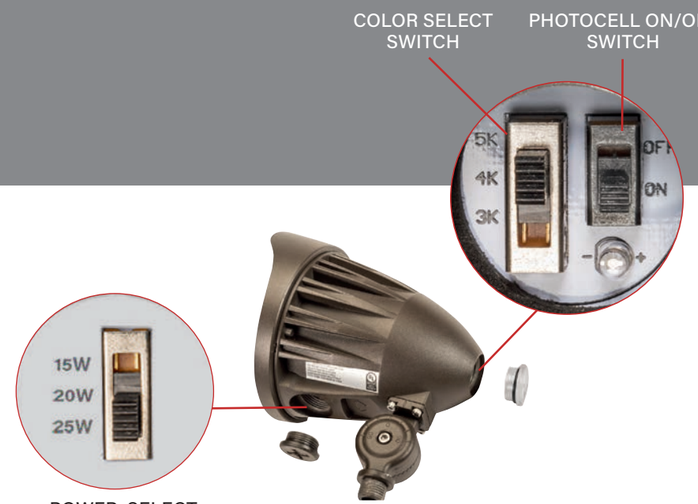


POWER SELECT SWITCH

Return to Table of Contents

mistik | RGBW Linear Wall Washer

Full RGBW capability that installs and programs in minutes

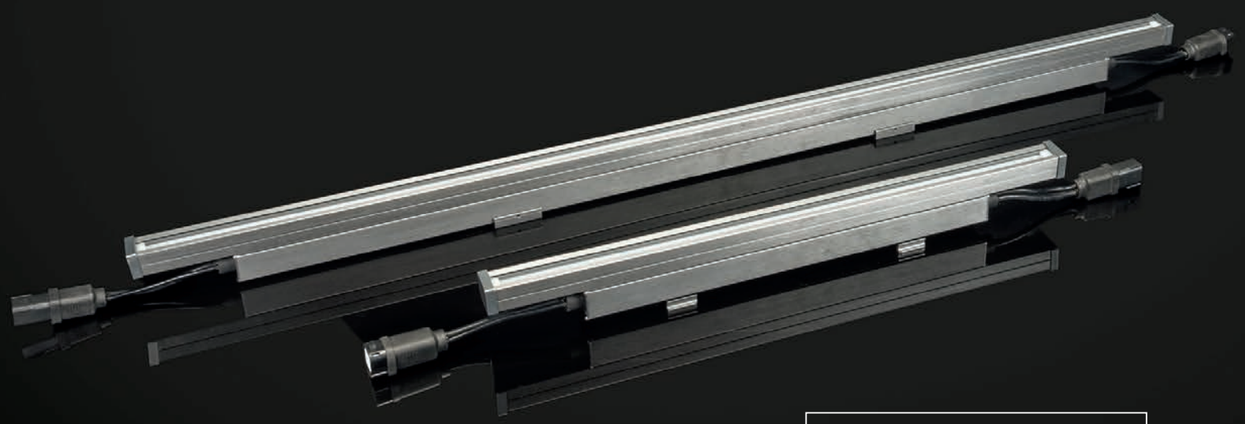



SmartLoop controller used for enabling connected light bars

CERTIFIED · DMX 512 · RDM REMOTE DATA MANAGEMENT · TRUSTED WARRANTY · IP66 RATED · 5 YEAR WARRANTY



SMART LOOP WIRELESS CONTROL

RGBW color control, sequencing, and scheduling commissions and edits in minutes with reliable Bluetooth mesh connectivity



DMX AND RDM COMPATIBLE

Allows for compatibility with all industry-proven full-scale DMX512-based control solutions



SIMPLE INSTALLATION

Just plug and play; daisy-chain fixtures end to end, either with or without optional linking cable accessories

RGBW Linear Wall Washer








FEATURES AND BENEFITS


- Control flexibility with SmartLoop, using Keystone SmartLoop Controller, or with DMX with the DMX connection cord
- SmartLoop app provides simple DIY programming that can easily be given to building owner/facility management
- Linkable with up to 40 fixtures in one series
- Rotatable hinges allow for easy positioning
- Medium distribution pattern



12W 2′ Wall Washers

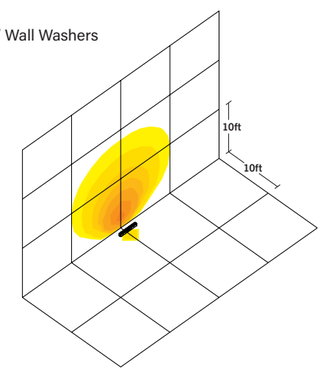

24W 4′ Wall Washers

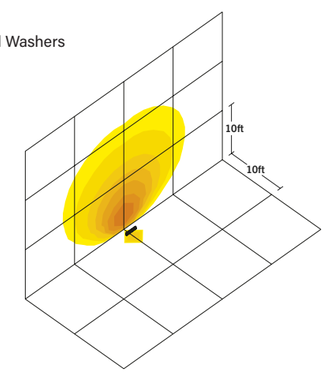



MOUNTING BRACKETS
ALLOW EASE OF INSTALL



LINKING CORD SET
FOR DMX CONTROL

DMX 512 RDM REMOTE DATA MANAGEMENT



SMART LOOP WIRELESS
CONTROLLER AVAILABLE WITH
NEMA 5-15P OR 3-WIRE INPUT




COMMISSION AND
PROGRAM IN MINUTES
WITH SMART LOOP APP

Return to Table of Contents

XFiT | Slim Wall Pack

Selectable technology; slim, low-profile design

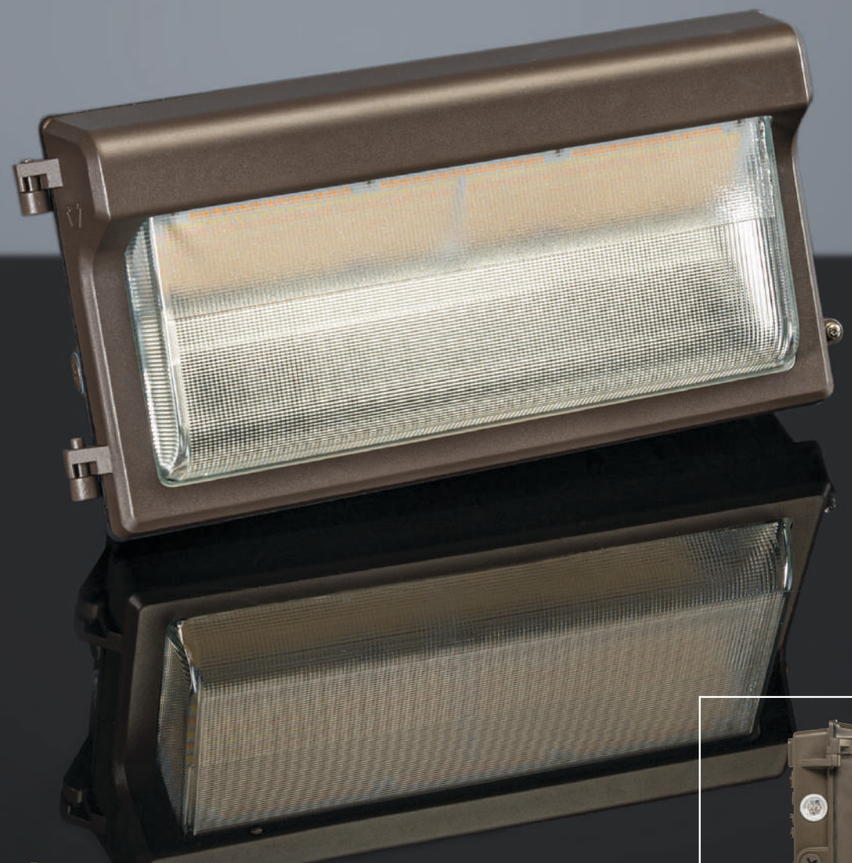



CERTIFIED · DLC LISTED PREMIUM · TRUSTED NB WARRANTY · 5 YEAR WARRANTY



SLIM DESIGN

Slim, low-profile design that matches footprint and distribution of legacy HID wall packs. Optimized for one-for-one replacements



SIMPLE MAINTENANCE

Easily accessible compartment makes Keystone 0–10V dimming LED driver simple to service



POWER AND COLOR SELECT TECHNOLOGY

Reduce SKUs, increase flexibility with field-adjustable power output and color temperature




BUILT-IN DUSK-TO-DAWN PHOTOCELL

With activation, automatically turns on/off when daylight is available for increased energy savings

Slim Wall Packs

POWER SELECT

COLOR SELECT

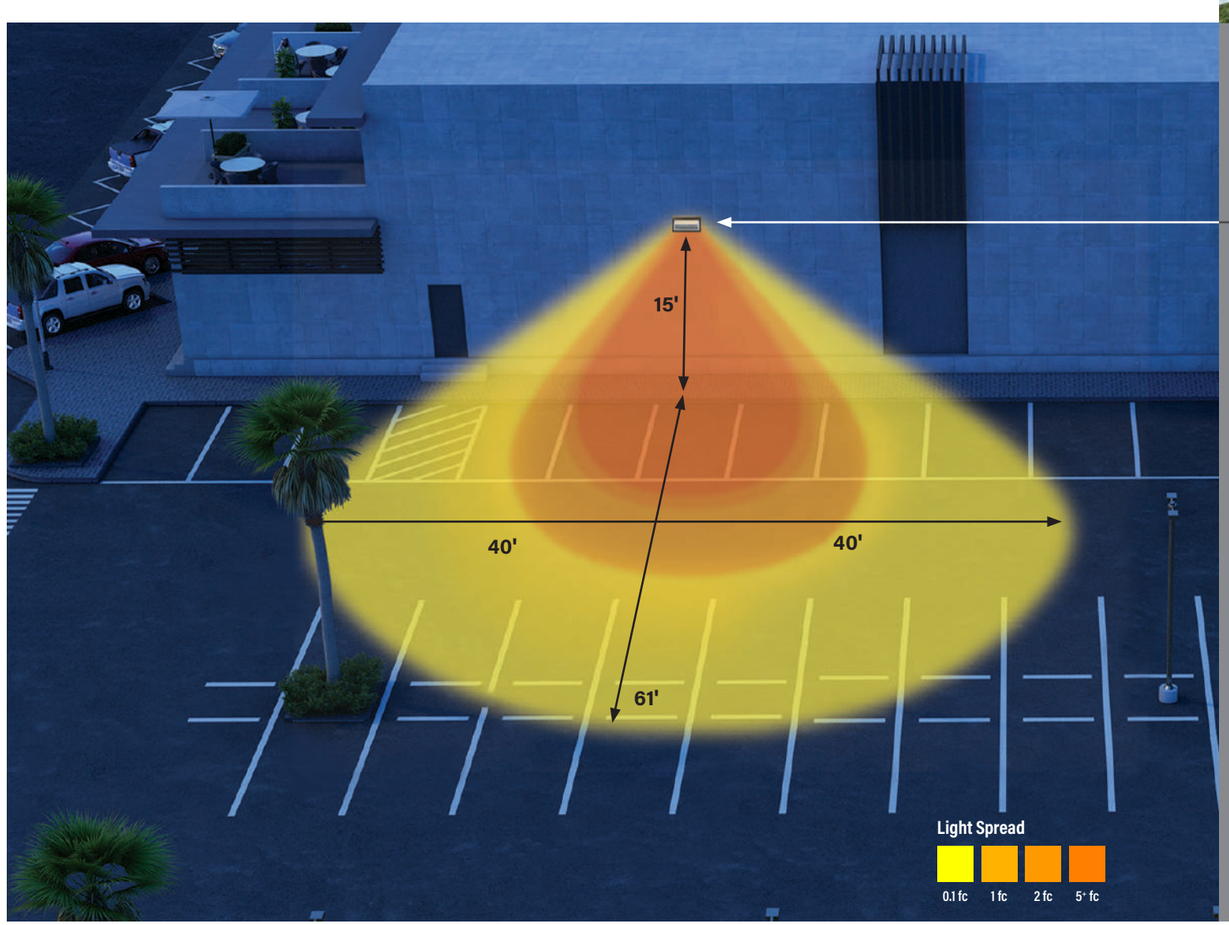






FEATURES AND BENEFITS


- Slim, low-profile design matches footprint of existing legacy fixture, so no need to repaint to fix outline
- UL Certified for wet locations; IP65 rated
- Heavy-duty die-cast aluminum housing
- Covers footprint of mid-size HID wall packs
- Built-in dusk-to-dawn photocell behind translucent 3/4" threaded plug with anti-yellowing agent



PROTECTIVE TRANSLUCENT SWITCH PLUG TO ACCESS PHOTOCELL AND COLOR TEMPERATURE DIP SWITCHES

35W Slim WP: Building exterior mounted at 15'

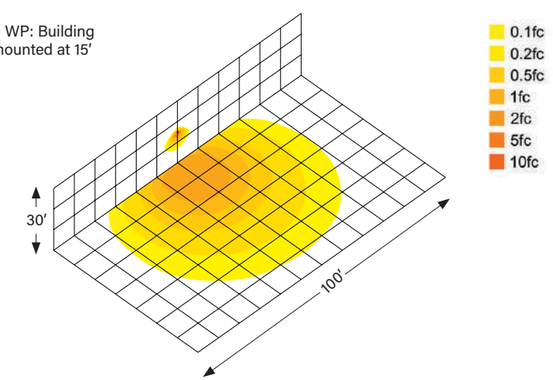



POWER SELECT SWITCH

SIDE OPENING FOR EASY ACCESS



35% SMALLER DEPTH THAN LEGACY WALL PACKS

Return to Table of Contents

XFIT | Traditional Wall Pack

Match appearance of legacy HID fixtures while covering same footprint





DLC LISTED PREMIUM | >80 CRI | 50,000 HOUR LIFETIME | IP65 RATED | 5 YEAR WARRANTY




COLOR SELECT TECHNOLOGY

Adjustable: 3000K / 4000K / 5000K



BUILT-IN DUSK-TO-DAWN PHOTOCELL

With activation, automatically turns on/off when daylight is available for increased energy savings



BUILT-IN 120-277V KEYSTONE LED DRIVER

Provides 0-10V dimming & ample surge protection for increased versatility and reliability




EASY INSTALLATION

Five (5) KO access points (4 sides and 1 back) and captive screws included

Traditional Wall Packs

COLOR SELECT

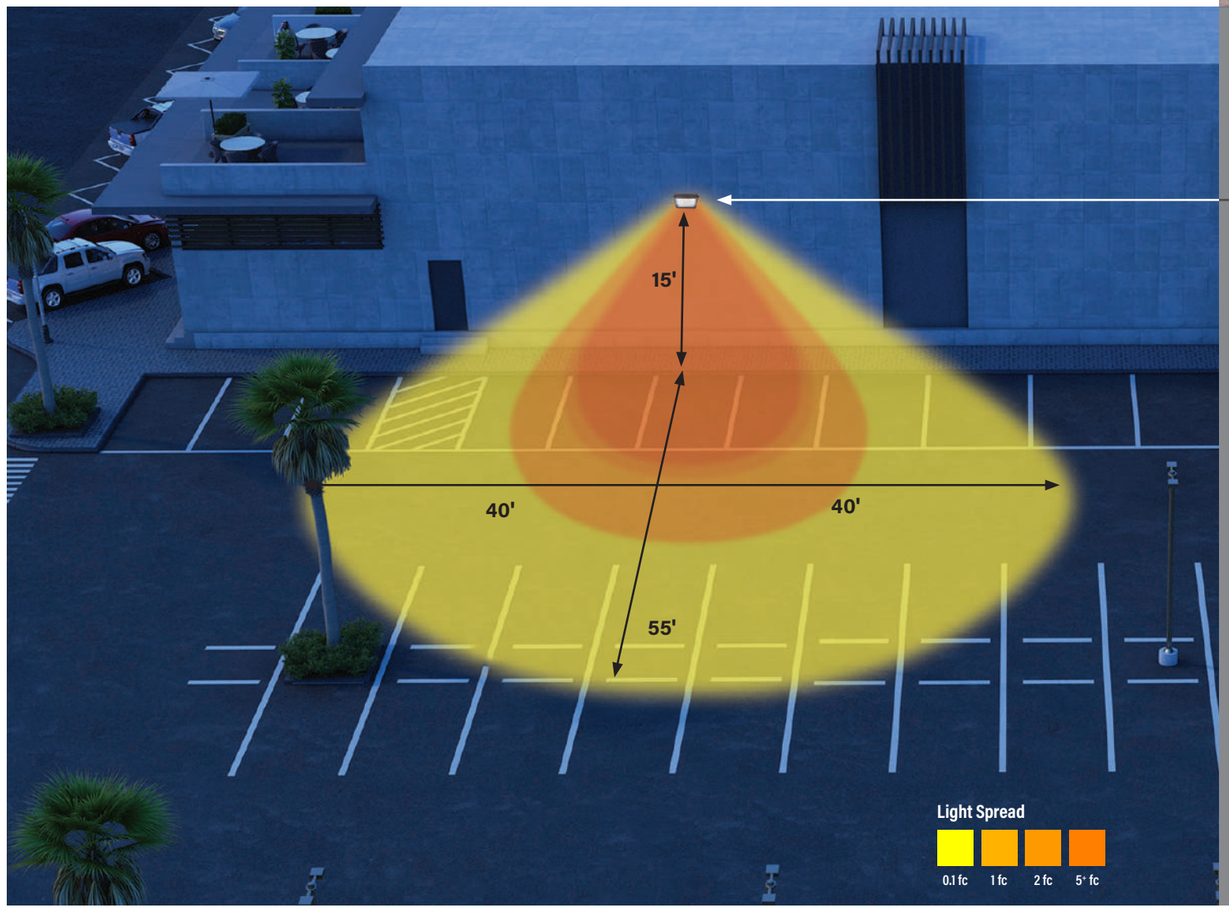






35W TRADITIONAL
WALL PACK FEATURING
BOROSILICATE GLASS LENS

FEATURES AND BENEFITS

- Photocell with 0-10V dimming
- Provides uniform light distribution with advanced optical lens technology
- Fits existing legacy product footprint (14" & 17")
- Designed with two dip switches (for photocell and color temperature adjustment) protected by a translucent plug
- Borosilicate glass lens is high-impact resistant and prevents discoloration over time

35W Traditional WP:
Building exterior
mounted at 15'

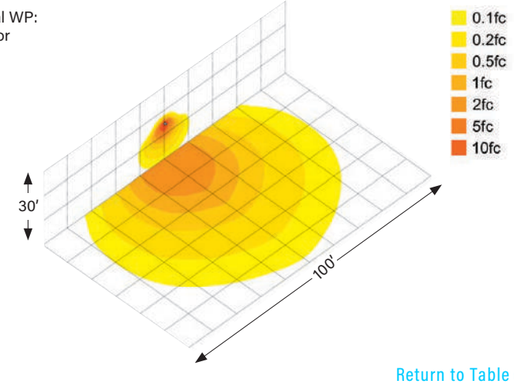



SIDE OPENING FOR EASY ACCESS



SHOWN IN
WHITE



SHOWN IN
BRONZE



PROTECTIVE TRANSLUCENT
SWITCH PLUG TO ACCESS
PHOTOCELL AND COLOR
TEMPERATURE DIP SWITCHES

Return to Table of Contents

XFIT | Full Cutoff Wall Packs

Optimize light distribution and improve appearance of building exteriors





DLC LISTED PREMIUM | >80 CRI | 50,000 HOUR LIFETIME | IP65 RATED | 5 YEAR WARRANTY

CONTEMPORARY APPEARANCE

Features architectural full cutoff design

OPTIMIZE LIGHT DISTRIBUTION

Light the same area with fewer fixtures


BUILT-IN 120-277V KEYSTONE LED DRIVER


Provides 0-10V dimming & ample surge protection for increased versatility and reliability

Full Cutoff Wall Packs



40W Full Cutoff WP:
Building exterior mounted at 15'

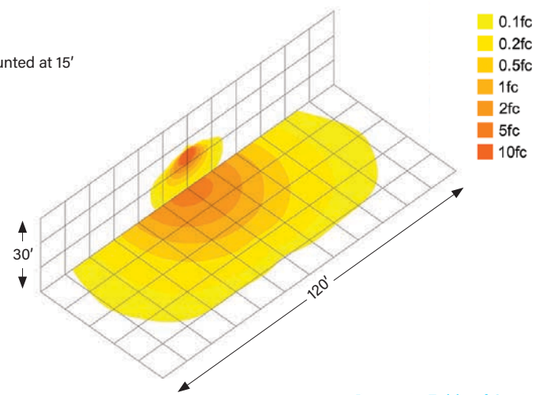

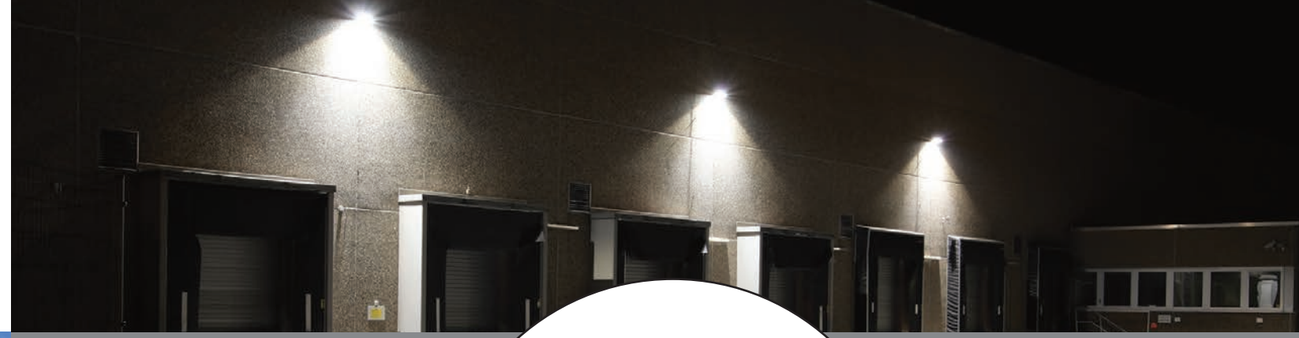



60W FULL CUTOFF

FEATURES AND BENEFITS

- Eliminates undesirable sky glow and glare with dark-sky friendly performance
- Covers the existing footprint of mid-size legacy HID fixtures with an updated design, while hiding any unsightly marks and fading
- Increases control and energy efficiency with photocell accessory (available separately)
- Provides wide light distribution with advanced optical lens technology, ideal for increased fixture spacing and uniformity



SIDE OPENING FOR EASY ACCESS



HEAVY-DUTY DIE-CAST ALUMINUM HOUSING FEATURES MODERN AESTHETICS

Return to Table of Contents



XFiT | Adjustable Wall Packs

A rugged light with an adjustable axis that directs illumination

FIELD-ADJUSTABLE FLEXIBILITY

Positions along a 0˚-90˚ axis to illuminate areas missed by traditional forward throw wall packs

POWER SELECT TECHNOLOGY

Three (3) different power outputs help reduce SKUs and increase flexibility

COLOR SELECT TECHNOLOGY

Adjustable: 3000K / 4000K / 5000K

BUILT-IN 120-277V KEYSTONE LED DRIVER


Provides 0-10V dimming & ample surge protection for increased versatility and reliability

UL CERTIFIED · DLC LISTED PREMIUM · TRUSTED NLB WARRANTY · IP65 RATED · 5 YEAR WARRANTY

Adjustable Wall Packs

POWER SELECT

COLOR SELECT

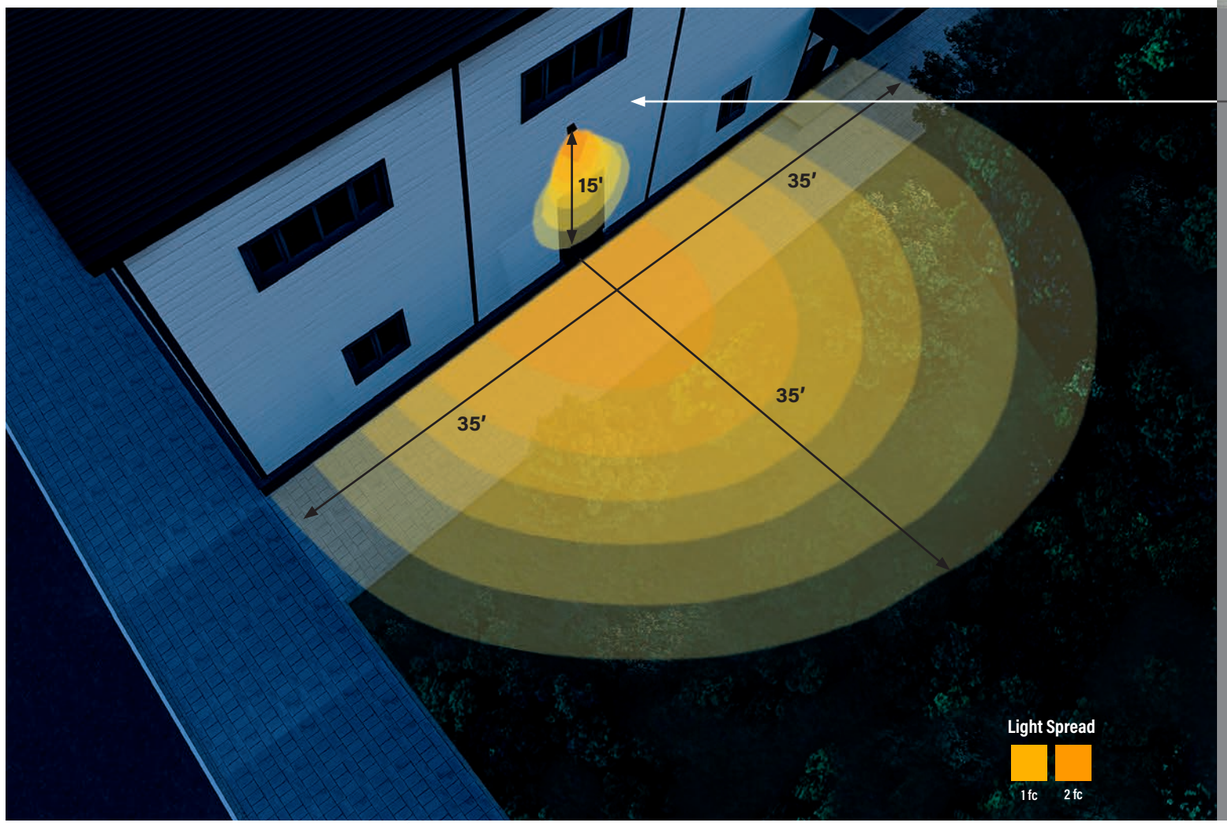







FEATURES AND BENEFITS

- Built-in dusk-to-dawn photocell, when activated, automatically turns on/off when daylight is available, helping increase energy savings
- Heavy-duty die-cast aluminum housing for enhanced thermal performance and reliability
- Protected from the elements with IP65 rating

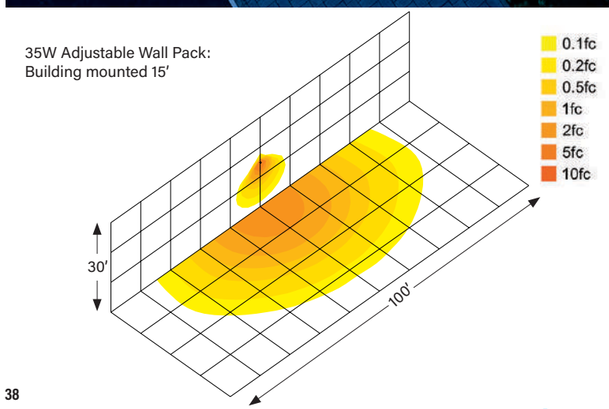

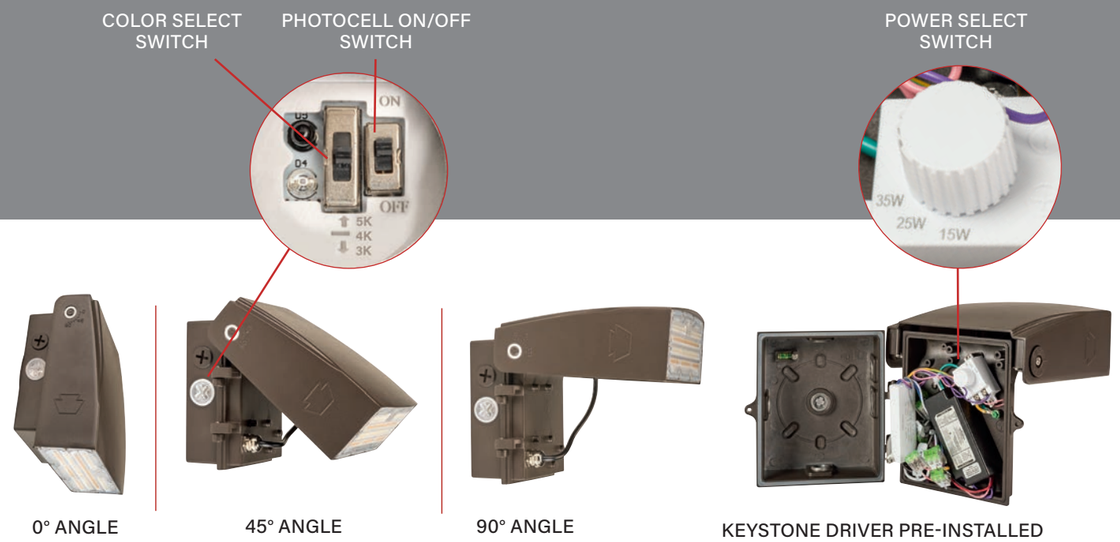

Return to Table of Contents



XFIT Small Low Profile Wall Packs

Flexible mounting virtually anywhere with a compact design




COLOR SELECT TECHNOLOGY (ON SELECT MODELS)

Adjustable: 3000K / 4000K / 5000K



BUILT-IN DUSK-TO-DAWN PHOTOCELL

With activation, automatically turns on/off when daylight is available for increased energy savings



BUILT-IN 120-277V KEYSTONE LED DRIVER

Provides 0-10V dimming & ample surge protection for increased versatility and reliability

DLC LISTED PREMIUM

>80 CRI


50,000 HOUR LIFETIME

IP65 RATED

5 YEAR WARRANTY

Small Low Profile Wall Packs

COLOR SELECT

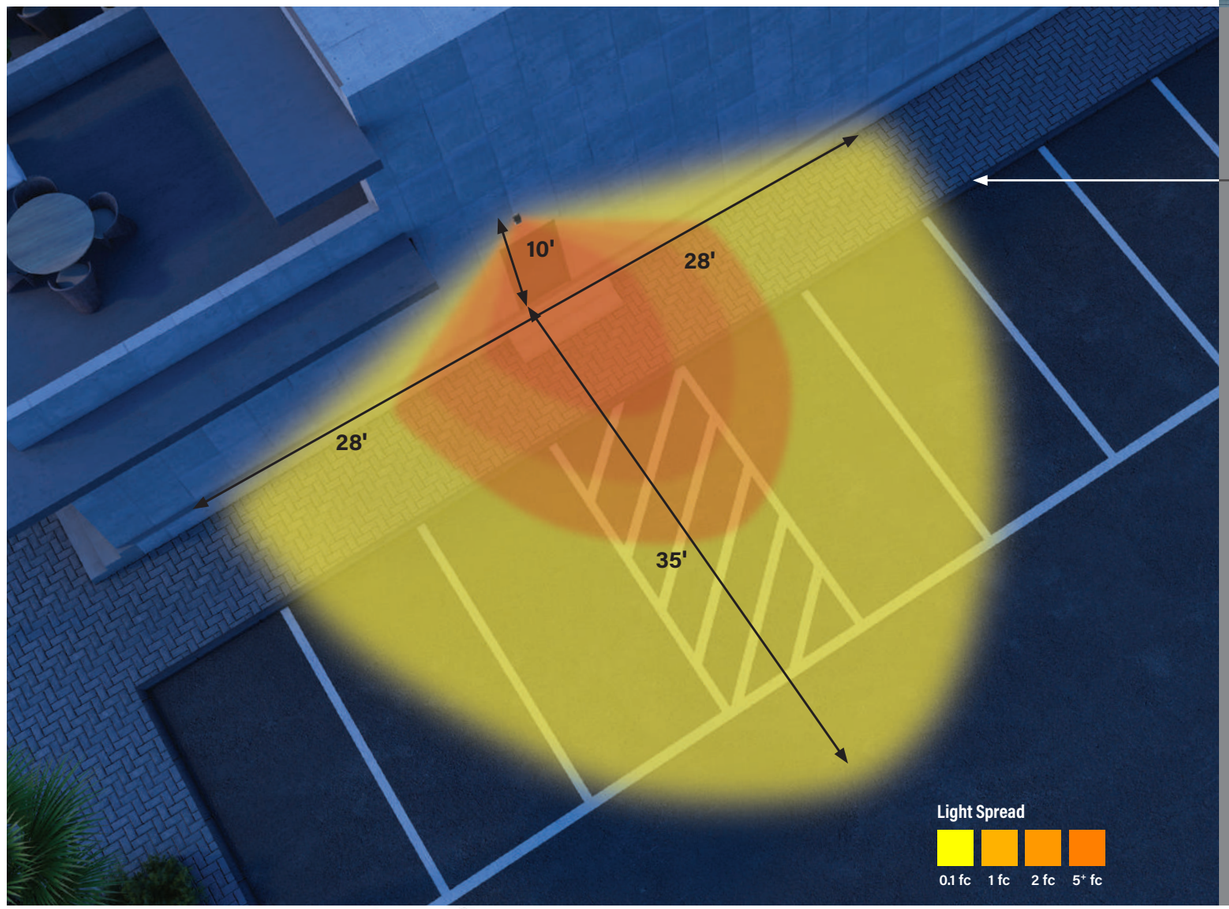






20W SMALL LOW PROFILE

FEATURES AND BENEFITS

- Meets general safety and security illumination needs with a uniform vertical and horizontal light distribution pattern
- Ensures reliable operation with a Keystone LED dimming driver
- Provides ADA compliance with low-profile housing (less than 4″ deep)
- Reduces glare at low mounting height applications with advanced poly carb lens technology
- Designed with two dip switches (protected by a translucent plug) to disable the photocell and adjust color temperature as needed

20W Small Wall Pack: Building exterior mounted at 10′

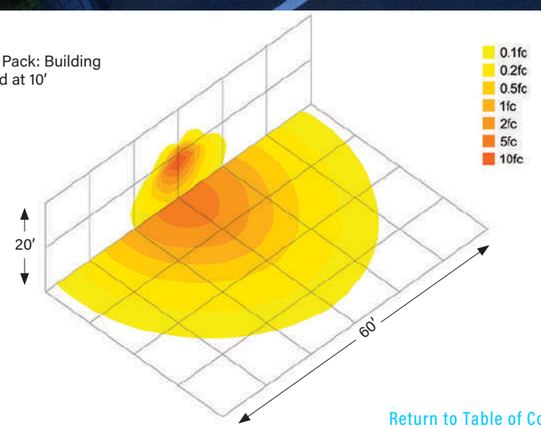



SHOWN IN BRONZE



SHOWN IN WHITE



SHOWN IN BLACK



PROTECTIVE TRANSLUCENT SWITCH PLUG TO ACCESS PHOTOCELL AND COLOR TEMPERATURE DIP SWITCHES

Return to Table of Contents

XFIT | Canopy Fixtures

Versatility and durability for covered outdoor applications



CERTIFIED

DLC LISTED PREMIUM

TRUSTED NB WARRANTY

IP65 RATED

5 YEAR WARRANTY

POWER AND COLOR SELECT TECHNOLOGY

Reduce SKUs, increase flexibility with field-adjustable power output and color temperature

DUSK-TO-DAWN PHOTOCELL INCLUDED

Automatically turns on/off when daylight is available for increased energy savings

SIMPLE INSTALLATION

Innovative fixture bracket allows for hands-free wiring and installation


SMART LOOP COMPATIBLE

Works with screw-in Keystone SmartLoop RF controllers for easy smart fixture operation

Canopy Fixtures

POWER SELECT

COLOR SELECT

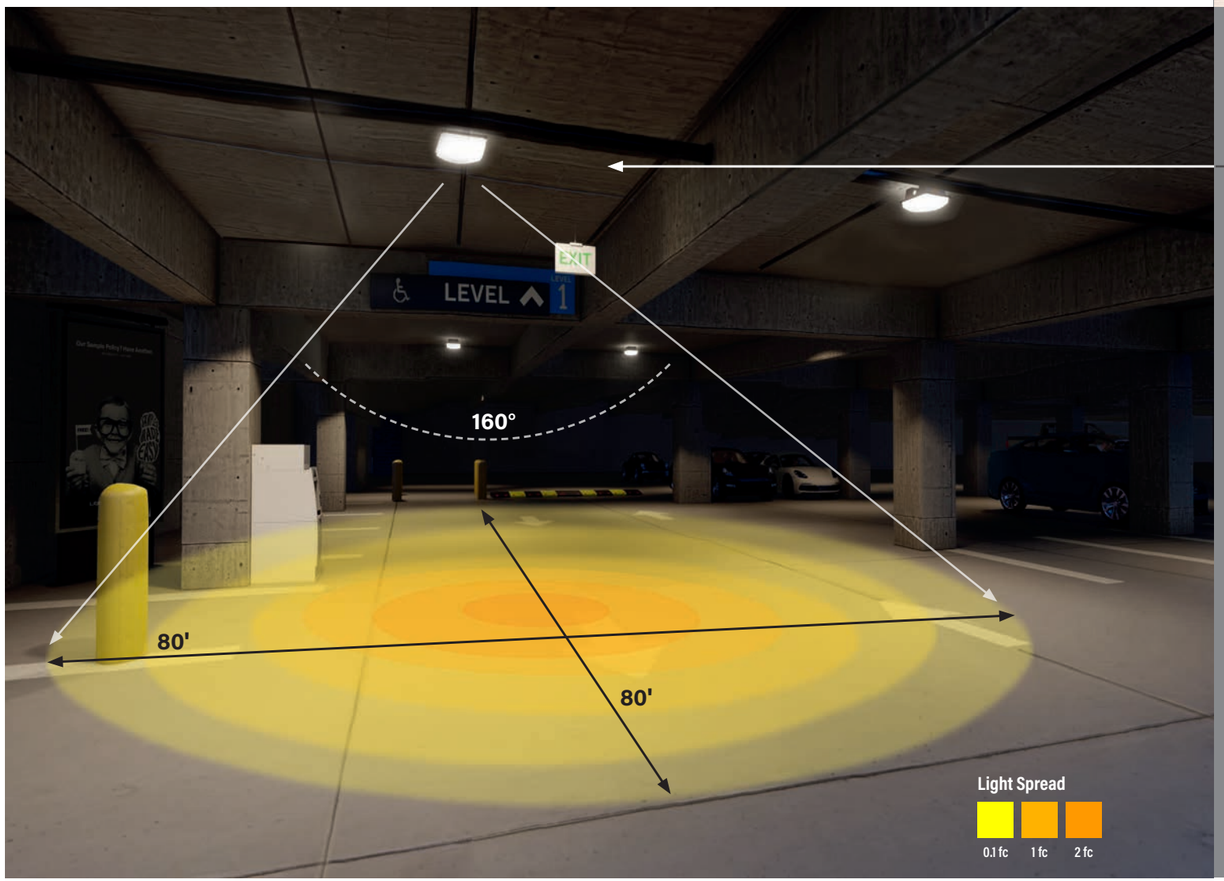






FEATURES AND BENEFITS

- Heavy-duty die-cast aluminum housing with a modern aesthetic
- Suitable for standard junction box mounting or 3/4" NPT pendant mounting
- Impact-resistant polycarbonate diffuser with 160° parking garage distribution
- Powered by Keystone LED 0-10V dimming driver
- Protected from the elements with IP65 rating

40W 160° distribution canopy
at 12.5' mounting light

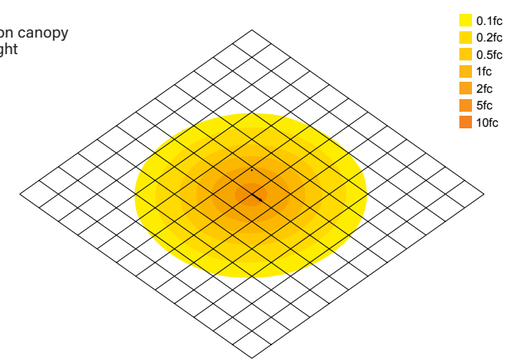



SHOWN IN WHITE



BRACKET ALLOWS FOR HANDS-FREE WIRING AND INSTALLATION



SMART PORT SCREW-IN SENSOR CAPABILITY

OPTIONAL 110° DISTRIBUTION DIFFUSER AVAILABLE

Return to Table of Contents



Area Lights with optic swap

One versatile fixture that does it all

XFit Area Lights with OpticSwap simplify installation, contracting, and distribution. With OpticSwap, lens optics can be switched out without tools, simply by undoing two clasps. And as part of Keystone's all-in-the-box kitted stocking special, distributors can make area lights a stockable item and contractors don't need to rely on custom orders.

With multiple lenses and Power and Color Select technology, XFit Area Lights with Optic Swap can meet the demands of numerous jobs.

DLC LISTED PREMIUM · >80 CRI · 50,000 HOUR LIFETIME · IP65 RATED · 5 YEAR WARRANTY

OPTIC SWAP LENS SWITCHABILITY

Field-install optic lenses in seconds while keeping an IP65 rating, no tools required

POWER SELECT TECHNOLOGY (on select models)

Three (3) different power outputs help reduce SKUs and increase flexibility

COLOR SELECT TECHNOLOGY (on select models)

Three (3) different color temperatures provide the right light for your project

BUILT-IN 120-277V KEYSTONE LED DRIVER WITH HIGH-VOLTAGE OPTIONS

All area lights equipped with 0-10V dimming driver and ample surge protection


SMART PORT COMPATIBLE

Works with contractor-friendly screw-in motion sensors easily field-installed with no wiring


Area Lights with optic swap

POWER SELECT


COLOR SELECT

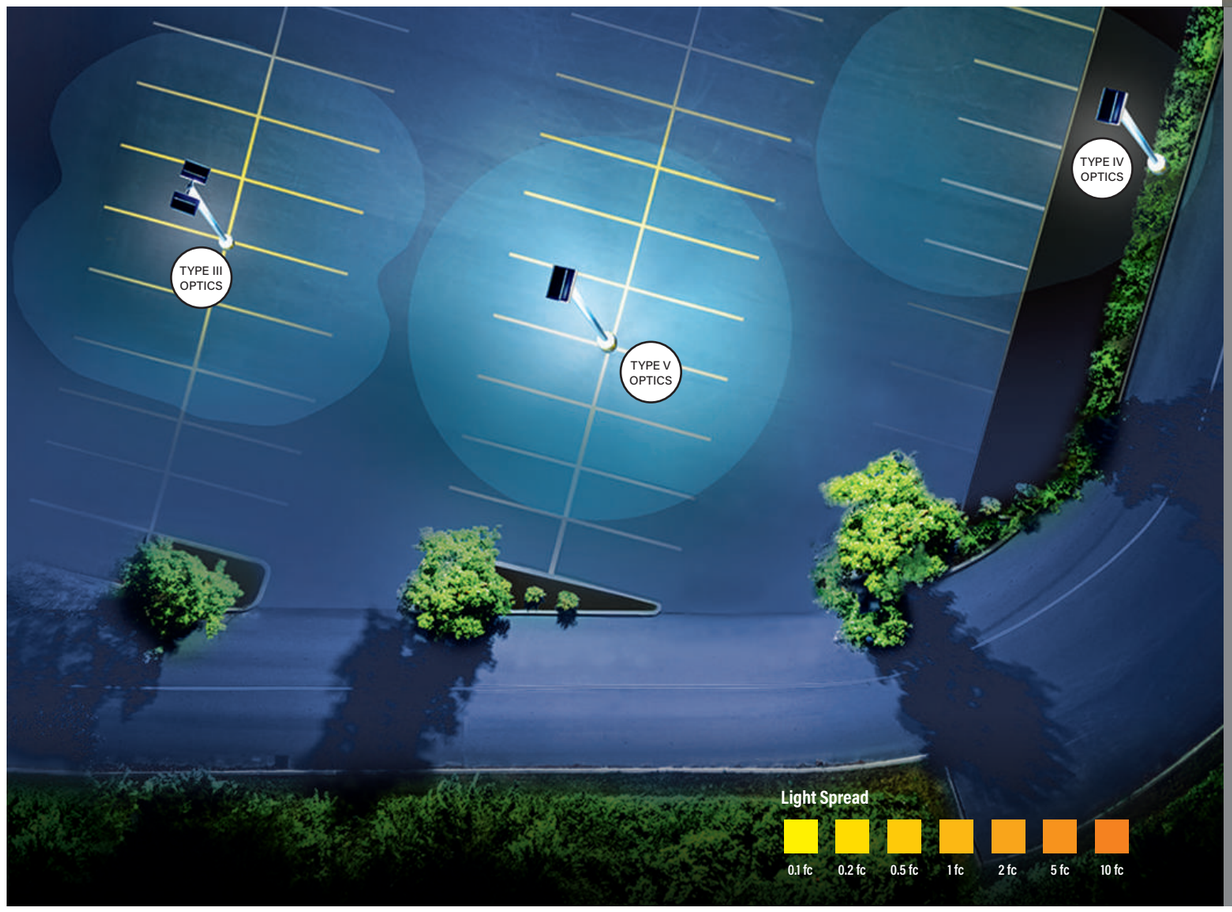


TYPE III OPTICS



TYPE IV OPTICS



TYPE V OPTICS








290W AREA LIGHT

optic swap

- Easy access—simply undo 2 clasps
- No tools, no screws needed
- Change in seconds
- Maintains IP65 rating


FEATURES AND BENEFITS:

- Keystone LED dimming driver ensures reliable operation
- Designed with two dip switches (protected by a translucent plug) to disable photocell and adjust color temperature as needed
- Compact low-profile design delivers high-performance illumination and improves application site aesthetics
- Heavy-duty die-cast aluminum housing with ample heat sinking for enhanced thermal performance
- Dark Sky friendly performance, eliminates undesirable sky glow

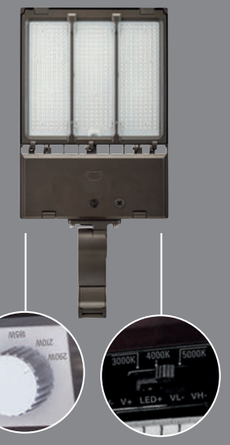

POWER SELECT SWITCH

COLOR SELECT SWITCH

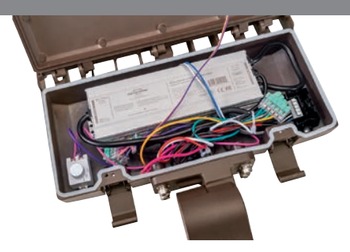

SHOWN OPEN WITH KEYSTONE DRIVER



MOTION SENSOR (OPTIONAL)



PHOTOCELL WITH 7-PIN NEMA TWIST-LOCK RECEPTACLE

Return to Table of Contents

Stocking Special Options

All the components you need
in one simple package.



140W Selectable Wattage Package

- Power Select field-adjustable wattage options: 140W / 100W / 70W
- Color Select field-adjustable color temperatures: 3000K / 4000K / 5000K
- Includes pre-installed adjustable pole mount or slipfitter mount
- Type III, IV, and V fixture optics
- Integrated NEMA 7-pin twist-lock receptacle with 3-pin photocell and shorting cap
- 6kV built-in plus 10kV external surge protection
- Available in bronze and white
- Ideal for multi-headed pole applications



PACKAGE INCLUDES:

Fixture with pre-installed adjustable pole mount or slipfitter mount, 3 lenses, daylight sensor and shorting cap

Return to Table of Contents

290W Selectable Wattage Package

- Power Select field-adjustable wattage options: 290W / 210W / 185W
- Color Select field-adjustable color temperatures: 3000K / 4000K / 5000K
- Includes pre-installed adjustable pole mount or slipfitter mount
- Type III, IV, and V fixture optics
- Integrated NEMA 7-pin twist-lock receptacle with 3-pin photocell and shorting cap
- 6kV built-in plus 10kV external surge protection
- Available in bronze and white
- Ideal for single-headed and general applications



PACKAGE INCLUDES:

Fixture with pre-installed adjustable pole mount or slipfitter mount, 3 lenses, daylight sensor and shorting cap

Area Lights Project Options

Customize your fixture package
in 4 easy steps

POWER SELECT

COLOR SELECT



1. Select Fixture

SMALL:
70W / 9800 LUMENS
110W / 14000 LUMENS



MEDIUM:
140W / 19600 LUMENS




LARGE:
210W / 29400 LUMENS
290W / 40600 LUMENS




2. Select Optic


TYPE II

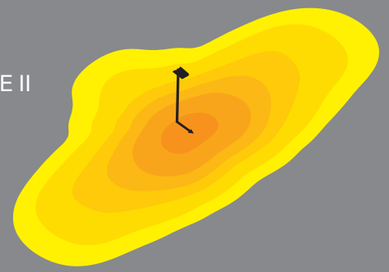


TYPE III



TYPE IV

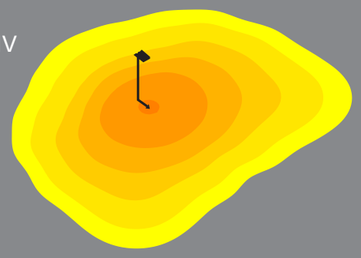

TYPE V

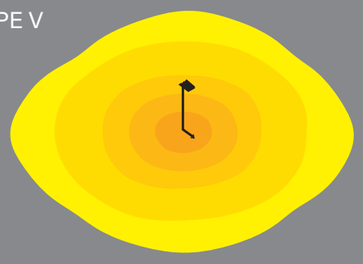

3. Select Mount

ADJUSTABLE POLE MOUNT



FIXED POLE MOUNT



SLIPFITTER MOUNT



TRUNNION MOUNT



4. Select Sensor

MOTION SENSOR



DAYLIGHT SENSOR



Select Additional Accessories:


- GLARE SHIELDS - Page 78
- POLE ACCESSORIES - Page 79

Please consult with representative for pairing mounts and accessories before ordering.



XFIT | Dusk-to-Dawn Lights

Functional style to withstand the rigors of commercial applications



COLOR SELECT TECHNOLOGY (ON SELECT MODELS)

Adjustable: 3000K / 4000K / 5000K



POWER SELECT TECHNOLOGY (ON SELECT MODELS)

Reduce SKUs and increase both flexibility and convenience with field-adjustable power outputs (3 options)



BUILT-IN DUSK-TO-DAWN PHOTOCELL

With activation, automatically turns on/off when daylight is available for increased energy savings




122°F / 50°C MAX AMBIENT TEMPERATURE


Designed to handle harsh conditions with ample heat sinking

DLC LISTED PREMIUM | >80 CRI | 50,000 HOUR LIFETIME | IP65 RATED | 5 YEAR WARRANTY

Dusk-to-Dawn Lights

COLOR SELECT

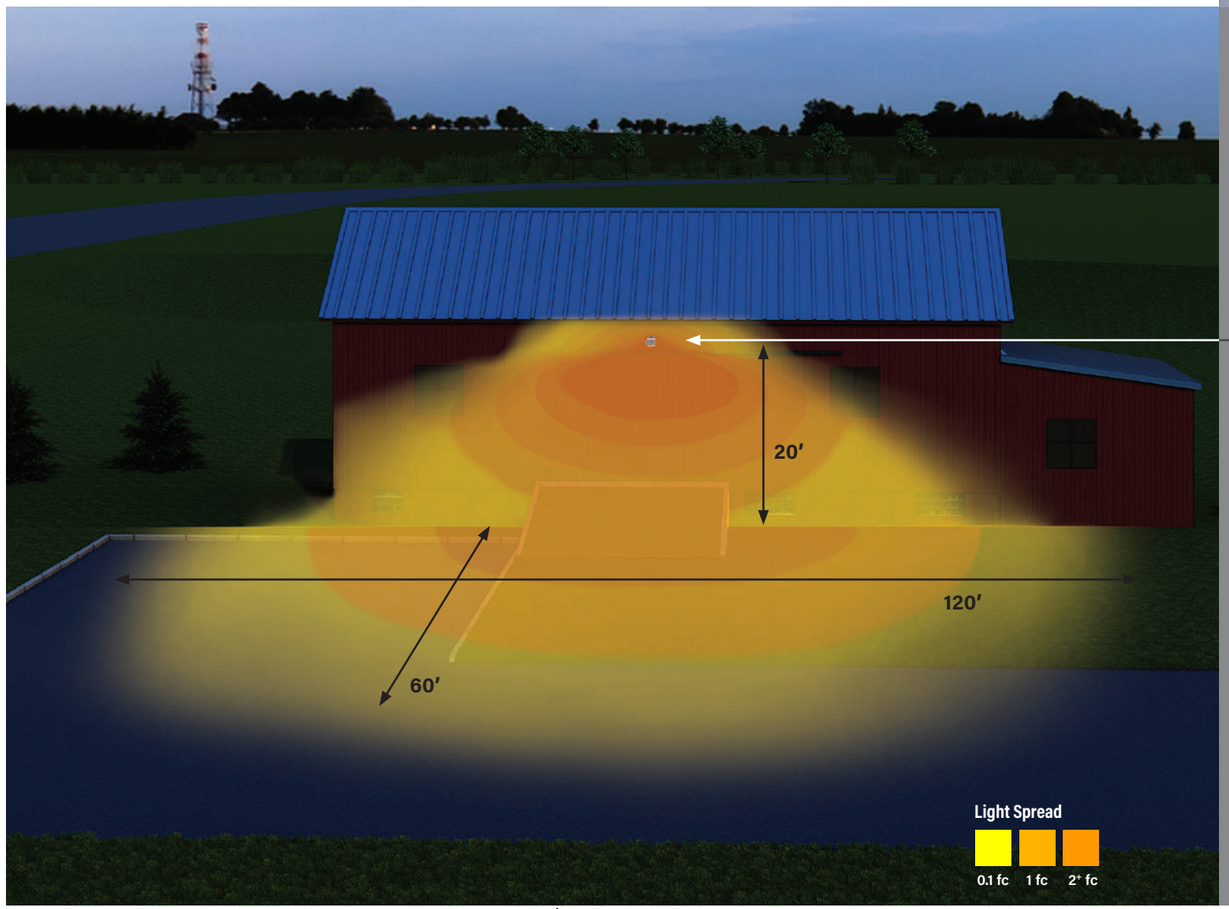


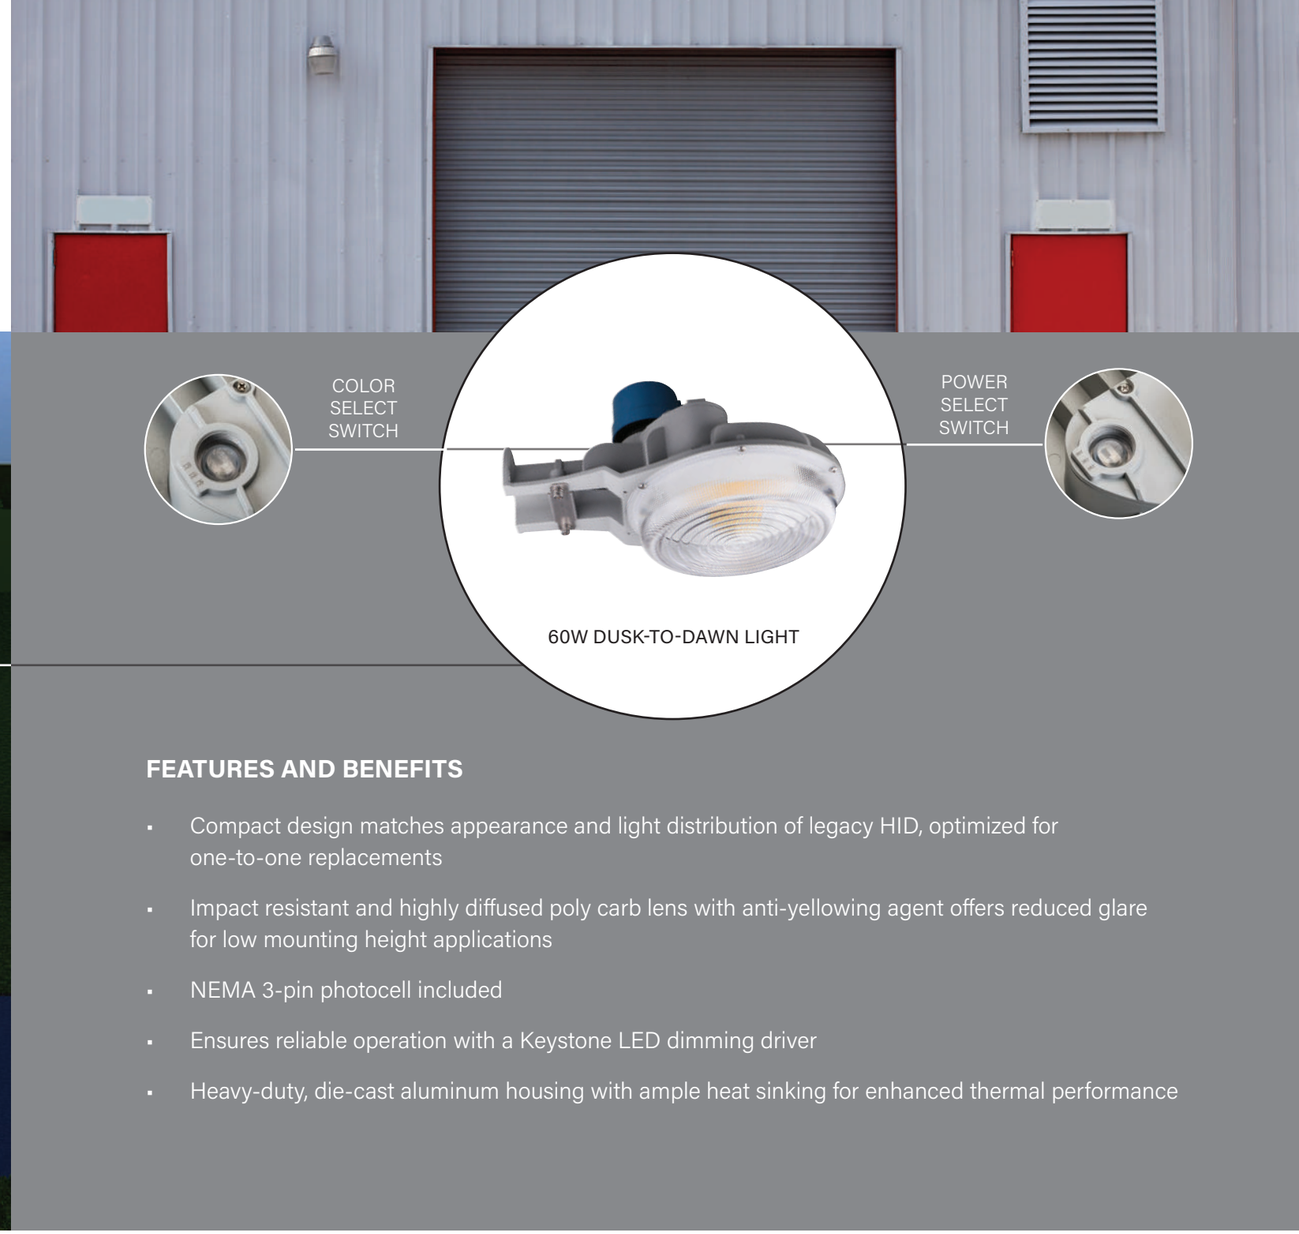

FEATURES AND BENEFITS

- Compact design matches appearance and light distribution of legacy HID, optimized for one-to-one replacements
- Impact resistant and highly diffused poly carb lens with anti-yellowing agent offers reduced glare for low mounting height applications
- NEMA 3-pin photocell included
- Ensures reliable operation with a Keystone LED dimming driver
- Heavy-duty, die-cast aluminum housing with ample heat sinking for enhanced thermal performance

60W Dusk-to-Dawn Light:
Barn exterior mounted at 20′

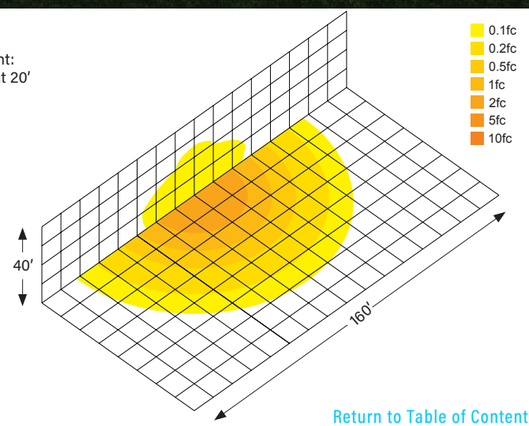



IMPACT-RESISTANT AND HIGHLY DIFFUSED POLYCARB LENS




DUSK-TO-DAWN FIXTURE WITH PHOTOCELL INCLUDED

Return to Table of Contents

Color Selection Ordering Guide

All lamps and fixtures in our catalog are available in a variety of color temperatures. While reviewing options, the guide below will help you identify the final product ID needed to order.

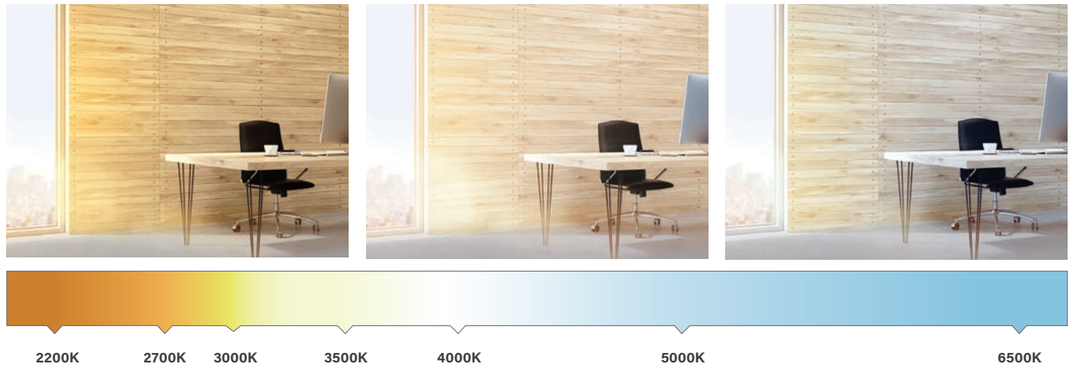

When a Keystone product has a catalog number that uses an "xx," it indicates that several color temperatures are available. The color temperatures for that product are noted in the accompanying chart.

Below is a quick reference guide to Keystone's color offering and how to easily select and order the right product for your job.

To order, simply replace the "xx" with the first two numbers from the corresponding color temperature.

Example:
To order a 4000K color temperature product, replace the "xx" in the catalog number with the two-digit number represented above the Kelvin desired as indicated in color chart below.

Catalog number with "xx"	**Catalog number used to order a 4000K color temperature product**
KT-LED14.5T8-48G-8xx-DX2	KT-LED14.5T8-48G-840-DX2

22	27	30	35	40	50	65
2200K	2700K	3000K	3500K	4000K	5000K	6500K
Amber White	Warm White	Soft White	Neutral White	Cool White	Daylight White	Bright White

Return to Table of Contents

Floodlights | General Purpose



Color Select

CATALOG NUMBER	WATTAGE	SELECTABLE CCT	LUMENS	EFFICACY	INPUT VOLTAGE	HOUSING COLOR	OPTICS TYPE	DLC	CRI	METAL HALIDE EQUIVALENT
KT-FLED15-R1A-UNV-8CSB-VDIM	15W	3000K	1920	128 lm/W	120-277V	Bronze	7H x 7V	Yes	>80	70W MH
		4000K	2175	145 lm/W						
		5000K	2100	140 lm/W						
KT-FLED15-R1A-UNV-8CSB-VDIM-W	15W	3000K	1920	128 lm/W	120-277V	White	7H x 7V	Yes	>80	70W MH
		4000K	2175	145 lm/W						
		5000K	2100	140 lm/W						
KT-FLED35-R1A-UNV-8CSB-VDIM	35W	3000K	4480	128 lm/W	120-277V	Bronze	7H x 7V	Yes	>80	175W MH
		4000K	5075	145 lm/W						
		5000K	4900	140 lm/W						
KT-FLED35-R1A-UNV-8CSB-VDIM-W	35W	3000K	4480	128 lm/W	120-277V	White	7H x 7V	Yes	>80	175W MH
		4000K	5075	145 lm/W						
		5000K	4900	140 lm/W						
KT-FLED60-R1A-UNV-8CSB-VDIM	60W	3000K	7320	122 lm/W	120-277V	Bronze	7H x 7V	Yes	>80	250W MH
		4000K	8580	143 lm/W						
		5000K	8040	134 lm/W						
KT-FLED60-R1A-UNV-8CSB-VDIM-W	60W	3000K	7320	122 lm/W	120-277V	White	7H x 7V	Yes	>80	250W MH
		4000K	8580	143 lm/W						
		5000K	8040	134 lm/W						
KT-FLED75-R1A-UNV-8CSB-VDIM	75W	3000K	9150	122 lm/W	120-277V	Bronze	7H x 7V	Yes	>80	320W MH
		4000K	10725	143 lm/W						
		5000K	10050	134 lm/W						
KT-FLED75-R1A-UNV-8CSB-VDIM-W	75W	3000K	9150	122 lm/W	120-277V	White	7H x 7V	Yes	>80	320W MH
		4000K	10725	143 lm/W						
		5000K	10050	134 lm/W						
KT-FLED100-R1A-UNV-8CSB-VDIM	100W	3000K	12200	122 lm/W	120-277V	Bronze	7H x 7V	Yes	>80	400W MH
		4000K	14300	143 lm/W						
		5000K	13400	134 lm/W						
KT-FLED100-R1A-UNV-8CSB-VDIM-W	100W	3000K	12200	122 lm/W	120-277V	White	7H x 7V	Yes	>80	400W MH
		4000K	14300	143 lm/W						
		5000K	13400	134 lm/W						

Components

CATALOG NUMBER	DESCRIPTION
KTSP-10KV-C	External surge protector, compact design



Floodlights | General Purpose



Mounts and Brackets

CATALOG NUMBER	DESCRIPTION	
KT-FLED-WG-1-KIT	Wire guard for 15W Rectangular Series 1 LED floodlight	
KT-FLED-WG-2-KIT	Wire guard for 35W Rectangular Series 1 LED floodlight	
KT-FLED-WG-3-KIT	Wire guard for 60W Rectangular Series 1 LED floodlight	
KT-FLED-WG-4-KIT	Wire guard for 75W and 100W Rectangular Series 1 LED floodlight	
KT-FLED-SM-1-KIT	Surface mount kit, includes mounting hardware	
KT-FLED-SM-1-KIT-W	Surface mount kit, includes mounting hardware, white finish	
KT-FLED-RC-4	Round cover plate, bronze finish	
KT-FLED-RC-4-W	Round cover plate, white finish	

Floodlights | High Power



Power and Color Select

CATALOG NUMBER	SELECTABLE WATTAGE	SELECTABLE CCT	LUMENS	EFFICACY	INPUT VOLTAGE	HOUSING COLOR	OPTICS TYPE*	DLC	CRI	METAL HALIDE EQUIVALENT
KT-FLED140PS-R2B-UNV-8CSB-VDIM	140W	3000K	17500	125 lm/W	120-277V	Bronze	7H x 6V	Yes	>80	400W MH
		4000K	19600	140 lm/W						
KT-FLED140PS-R2C-UNV-8CSB-VDIM		5000K	18900	135 lm/W			6H x 6V			
	100W	3000K	13200	132 lm/W						
KT-FLED140PS-R2D-UNV-8CSB-VDIM		4000K	14500	145 lm/W			5H x 5V			
		5000K	14200	142 lm/W						
KT-FLED140PS-R2B-UNV-8CSB-VDIM-W	140W	3000K	17500	125 lm/W	120-277V	White	7H x 6V	Yes	>80	400W MH
		4000K	19600	140 lm/W						
KT-FLED140PS-R2C-UNV-8CSB-VDIM-W		5000K	18900	135 lm/W			6H x 6V			
	100W	3000K	13200	132 lm/W						
KT-FLED140PS-R2D-UNV-8CSB-VDIM-W		4000K	14500	145 lm/W			5H x 5V			
		5000K	14200	142 lm/W						
KT-FLED290PS-R2B-UNV-8CSB-VDIM	290W	3000K	34800	120 lm/W	120-277V	Bronze	7H x 6V	Yes	>80	1000W MH
		4000K	40600	140 lm/W						
KT-FLED290PS-R2C-UNV-8CSB-VDIM		5000K	37700	130 lm/W			6H x 6V			
	210W	3000K	25620	122 lm/W						
KT-FLED290PS-R2D-UNV-8CSB-VDIM		4000K	29820	142 lm/W			5H x 5V			
		5000K	27720	132 lm/W						
KT-FLED290PS-R2B-UNV-8CSB-VDIM-W	290W	3000K	34800	120 lm/W	120-277V	White	7H x 6V	Yes	>80	1000W MH
		4000K	40600	140 lm/W						
KT-FLED290PS-R2C-UNV-8CSB-VDIM-W		5000K	37700	130 lm/W			6H x 6V			
	210W	3000K	25620	122 lm/W						
KT-FLED290PS-R2D-UNV-8CSB-VDIM-W		4000K	29820	142 lm/W			5H x 5V			
		5000K	27720	132 lm/W						

Fixtures with 6H x 6V & 5H x 5V optics are available and assembled to order. Lead times may apply

Return to Table of Contents

Floodlights | High Power



High Voltage | Power and Color Select

CATALOG NUMBER	SELECTABLE WATTAGE	SELECTABLE CCT	LUMENS	EFFICACY	INPUT VOLTAGE	HOUSING COLOR	OPTICS TYPE*	DLC	CRI	METAL HALIDE EQUIVALENT
KT-FLED140PSHV-R2B-UNV-8CSB-VDIM	140W	3000K	17500	125 lm/W	277-480V	Bronze	7H x 6V	Yes	>80	400W MH
		4000K	19600	140 lm/W						
KT-FLED140PSHV-R2C-UNV-8CSB-VDIM		5000K	18900	135 lm/W			6H x 6V			
	100W	3000K	13200	132 lm/W						
KT-FLED140PSHV-R2D-UNV-8CSB-VDIM		4000K	14500	145 lm/W			5H x 5V			
		5000K	14200	142 lm/W						
KT-FLED140PSHV-R2B-UNV-8CSB-VDIM-W	140W	3000K	17500	125 lm/W	277-480V	White	7H x 6V	Yes	>80	400W MH
		4000K	19600	140 lm/W						
KT-FLED140PSHV-R2C-UNV-8CSB-VDIM-W		5000K	18900	135 lm/W			6H x 6V			
	100W	3000K	13200	132 lm/W						
KT-FLED140PSHV-R2D-UNV-8CSB-VDIM-W		4000K	14500	145 lm/W			5H x 5V			
		5000K	14200	142 lm/W						
KT-FLED290PSHV-R2B-UNV-8CSB-VDIM	290W	3000K	34800	120 lm/W	277-480V	Bronze	7H x 6V	Yes	>80	1000W MH
		4000K	40600	140 lm/W						
KT-FLED290PSHV-R2C-UNV-8CSB-VDIM		5000K	37700	130 lm/W			6H x 6V			
	210W	3000K	25620	122 lm/W						
KT-FLED290PSHV-R2D-UNV-8CSB-VDIM		4000K	29820	142 lm/W			5H x 5V			
		5000K	27720	132 lm/W						
KT-FLED290PSHV-R2B-UNV-8CSB-VDIM-W	290W	3000K	34800	120 lm/W	277-480V	White	7H x 6V	Yes	>80	1000W MH
		4000K	40600	140 lm/W						
KT-FLED290PSHV-R2C-UNV-8CSB-VDIM-W		5000K	37700	130 lm/W			6H x 6V			
	210W	3000K	25620	122 lm/W						
KT-FLED290PSHV-R2D-UNV-8CSB-VDIM-W		4000K	29820	142 lm/W			5H x 5V			
		5000K	27720	132 lm/W						

Fixtures with 6H x 6V & 5H x 5V optics are available and assembled to order. Lead times may apply

Components

CATALOG NUMBER	DESCRIPTION
KTSP-10KV-C	External surge protector, compact design



Glare Shields

CATALOG NUMBER	DESCRIPTION
KT-FLED-GS-R2-1-KIT	Glare shield for 140W
KT-FLED-GS-R2-2-KIT	Glare shield for 290W



Sports Light



Standard

CATALOG NUMBER	WATTAGE	CCT	LUMENS	EFFICACY	INPUT VOLTAGE	HOUSING COLOR	DIMMING	BEAM ANGLE	CRI	DLC	LEGACY EQUIVALENT
KT-SLFLED500-S1-20-YM-750-VDIM	500W	5000K	70,000	140 lm/W	120-277V	Gray	0-10V	20°	>70	Yes	1500W MH
KT-SLFLED500-S1-30-YM-750-VDIM								30°			
KT-SLFLED500-S1-40-YM-750-VDIM								40°			
KT-SLFLED750-M1-20-YM-750-VDIM	750W		105,000					20°			2000W MH
KT-SLFLED750-M1-30-YM-750-VDIM								30°			
KT-SLFLED750-M1-40-YM-750-VDIM								40°			

High Voltage

CATALOG NUMBER	WATTAGE	CCT	LUMENS	EFFICACY	INPUT VOLTAGE	HOUSING COLOR	DIMMING	BEAM ANGLE	CRI	DLC	LEGACY EQUIVALENT
KT-SLFLED500HV-S1-20-YM-750-VDIM	500W	5000K	70,000	140 lm/W	277-480V	Gray	0-10V	20°	>70	Yes	1500W MH
KT-SLFLED500HV-S1-30-YM-750-VDIM								30°			
KT-SLFLED500HV-S1-40-YM-750-VDIM								40°			
KT-SLFLED750HV-M1-20-YM-750-VDIM	750W		105,000					20°			2000W MH
KT-SLFLED750HV-M1-30-YM-750-VDIM								30°			
KT-SLFLED750HV-M1-40-YM-750-VDIM								40°			

Return to Table of Contents

Sports Light



Performance Accessories

CATALOG NUMBER	DESCRIPTION	
KT-TLP-UV-3PN	NEMA Type 3-pin photocell; 120-277V; 1800VA max	
KT-TLP-HV-3PN	NEMA Type 3-pin photocell; 277-480V; 1800VA max	
KT-SLFLED-EC-35	35' extension cord to remote mount LED driver for SLFLED fixtures	
KT-SLFLED-EC-65	65' extension cord to remote mount LED driver for SLFLED fixtures	
KT-SLFLED-SF-S1-KIT	Small housing, slipfitter mountkit for Series 1 Sports Light Flood. Fits 2 3/8" tenon	
KT-SLFLED-SF-M1-KIT	Medium housing, slipfitter mount kit for Series 1 Sports Light Flood. Fits 2 3/8" tenon	
KT-SLFLED-LASER-G	Green laser pointer for Sports Light Flood aiming. Includes hardware to mount to SLFLED fixtures	

Floodlights | Bullet



Power and Color Select

CATALOG NUMBER	SELECTABLE WATTAGE	SELECTABLE CCT	LUMENS	EFFICACY	INPUT VOLTAGE	HOUSING COLOR	DLC	CRI
KT-FLED25PS-C1E-UNV-8CSB-VDIM	25W	3000K	2971	119 lm/W	120-277V	Bronze	Yes	>80
		4000K	3292	132 lm/W				
		5000K	3273	131 lm/W				
	20W	3000K	2398	120 lm/W	120-277V			
		4000K	2609	130 lm/W				
		5000K	2580	129 lm/W				
	15W	3000K	1862	124 lm/W	120-277V			
		4000K	1998	133 lm/W				
		5000K	1986	132 lm/W				
KT-FLED25PS-C1E-UNV-8CSB-VDIM-W	25W	3000K	2971	119 lm/W	120-277V	White	Yes	>80
		4000K	3292	132 lm/W				
		5000K	3273	131 lm/W				
	20W	3000K	2398	120 lm/W	120-277V			
		4000K	2609	130 lm/W				
		5000K	2580	129 lm/W				
	15W	3000K	1862	124 lm/W	120-277V			
		4000K	1998	133 lm/W				
		5000K	1986	132 lm/W				

Return to Table of Contents

Wall Washers | RGBW Linear



LED Linear Light Bar

CATALOG NUMBER	LENGTH	WATTAGE	CCT	LUMENS	EFFICACY	INPUT VOLTAGE	LIGHT DISTRIBUTIONN	RATED LIFE
KT-WWLED12-L2A-M-RGBW-DMX	2ft	12W	RGBW	560	45 lm/W	120-277V	Medium	50,000 Hours
KT-WWLED24-L4A-M-RGBW-DMX	4ft	24W	RGBW	1110	45 lm/W	120-277V	Medium	50,000 Hours

Controllers/Interface

CATALOG NUMBER	DESCRIPTION	
KTSL-DMXC1-UV-WC	SmartLoop Wireless DMX Controller. 120-277V Input. Proprietary waterproof connector for use with Keystone RGBW wall wash fixtures	
KTSL-DMXC1-1-WC	SmartLoop Wireless DMX Controller. 120V Input with NEMA 5-15P. Proprietary connector for use with Keystone RGBW wall wash fixtures	
KT-WWLED-DMX-6-WC/XLR	46' long 3 wire input cord, 120-277V, with proprietary waterproof connector and standard 3-pin XLR connector, for use with Keystone RGBW wall wash fixtures when controlling via 3rd party DMX controller	

Linking Cables

CATALOG NUMBER	DESCRIPTION	
KT-WWLED-DMX-1-LCS	1' long linking cord set to daisy chain line voltage & DMX signal	
KT-WWLED-DMX-6-LCS	6' long linking cord set to daisy chain line voltage & DMX signal	
KT-WWLED-DMX-15-LCS	15' long linking cord set to daisy chain line voltage & DMX signal	

Mounts and Brackets

CATALOG NUMBER	DESCRIPTION	
KT-WWLED-LA-WMB-KIT	Wall Mount Bracket Kit for Linear Series A wall washers. Set of 2. Adjustable distance 12" to 24" setback from wall. (Compatible with standard fixture mounting or hinged bracket accessories.)	


Wall Packs | Slim



Power and Color Select

CATALOG NUMBER	SELECTABLE WATTAGE	SELECTABLE CCT	LUMENS	EFFICACY	INPUT VOLTAGE	HOUSING COLOR	DLC	CRI	METAL HALIDE EQUIVALENT
KT-WPLED35PS-M4-8CSB-VDIM	35W	3000K	4550	130 lm/W	120-277V	Bronze	Yes	>80	175W MH
		4000K	4655	130 lm/W					
		5000K	4620	130 lm/W					
	25W	3000K	3400	130 lm/W	120-277V				
		4000K	3525	130 lm/W					
		5000K	3475	130 lm/W					
	15W	3000K	2100	130 lm/W	120-277V				
		4000K	2160	130 lm/W					
		5000K	2160	130 lm/W					
KT-WPLED55PS-M4-8CSB-VDIM	55W	3000K	7260	132 lm/W	120-277V	Bronze	Yes	>80	250W MH
		4000K	7645	139 lm/W					
		5000K	7370	134 lm/W					
	45W	3000K	6120	136 lm/W	120-277V				
		4000K	6435	143 lm/W					
		5000K	6255	139 lm/W					
	35W	3000K	4900	140 lm/W	120-277V				
		4000K	5075	145 lm/W					
		5000K	5005	143 lm/W					
KT-WPLED80PS-M4-8CSB-VDIM	80W	3000K	10560	132 lm/W	120-277V	Bronze	Yes	>80	320W MH
		4000K	11280	141 lm/W					
		5000K	10960	137 lm/W					
	70W	3000K	9380	134 lm/W	120-277V				
		4000K	10010	143 lm/W					
		5000K	9800	140 lm/W					
	55W	3000K	7645	139 lm/W	120-277V				
		4000K	8030	146 lm/W					
		5000K	7975	145 LM/W					
KT-WPLED120PS-L4-8CSB-VDIM	120W	3000K	17040	142 lm/W	120-277V	Bronze	Yes	>80	400W MH
		4000K	17640	147 lm/W					
		5000K	16920	141 lm/W					
	100W	3000K	13900	139 lm/W	120-277V				
		4000K	14300	143 lm/W					
		5000K	13900	139 lm/W					
	80W	3000K	11280	141 lm/W	120-277V				
		4000K	11520	144 lm/W					
		5000K	11440	143 lm/W					

Mounts and Brackets

CATALOG NUMBER	DESCRIPTION	
KT-WPLED-BP-M	Standard bronze back plate for medium-sized wall pack to cover footprint of large HID housings	

Return to Table of Contents

Wall Packs | Traditional



Color Select

CATALOG NUMBER	WATTAGE	SELECTABLE CCT	LUMENS	EFFICACY	INPUT VOLTAGE	HOUSING COLOR	DLC	CRI	METAL HALIDE EQUIVALENT
KT-WPLED35-M1-8CSB-VDIM	35W	3000K	4885	140 lm/W	120-277V	Bronze	Yes	>80	150W MH
		4000K	5460	156 lm/W					
		5000K	5010	143 lm/W					
KT-WPLED35-M1-8CSB-VDIM-W	35W	3000K	4885	140 lm/W	120-277V	White	Yes	>80	150W MH
		4000K	5460	156 lm/W					
		5000K	5010	143 lm/W					
KT-WPLED55-M1-8CSB-VDIM	55W	3000K	7200	131 lm/W	120-277V	Bronze	Yes	>80	250W MH
		4000K	7690	140 lm/W					
		5000K	7450	135 lm/W					
KT-WPLED55-M1-8CSB-VDIM-W	55W	3000K	7200	131 lm/W	120-277V	White	Yes	>80	250W MH
		4000K	7690	140 lm/W					
		5000K	7450	135 lm/W					
KT-WPLED80-M1-8CSB-VDIM	80W	3000K	10955	137 lm/W	120-277V	Bronze	Yes	>80	320W MH
		4000K	11925	149 lm/W					
		5000K	11360	142 lm/W					
KT-WPLED80-M1-8CSB-VDIM-W	80W	3000K	10955	137 lm/W	120-277V	White	Yes	>80	320W MH
		4000K	11925	149 lm/W					
		5000K	11360	142 lm/W					
KT-WPLED120-L1-8CSB-VDIM	120W	3000K	16410	137 lm/W	120-277V	Bronze	Yes	>80	400W MH
		4000K	17865	149 lm/W					
		5000K	16900	141 lm/W					
KT-WPLED120-L1-8CSB-VDIM-W	120W	3000K	16410	137 lm/W	120-277V	White	Yes	>80	400W MH
		4000K	17865	149 lm/W					
		5000K	16900	141 lm/W					


Sensors

CATALOG NUMBER	DESCRIPTION	
KTS-MW3-UV-KO-K1	Microwave sensor kit, includes 120-277V input to 12V DC convertor and 12V input sensor head, IP65, bi-level control with adjustable hold time, dim level and standby time, installs via standard 1/2 in KO	
KTS-MW3-REMOTECONTROL	Remote control for KTS-xx3-12V sensors, used to set or adjust all sensor performance parameters	

Components

CATALOG NUMBER	DESCRIPTION	
KTSP-10KV-C	External surge protector, compact design	

Mounts and Brackets

CATALOG NUMBER	DESCRIPTION	
KT-WPLED-BP-M	Standard bronze back plate for medium-sized wall pack to cover footprint of large HID housings	

Return to Table of Contents

Wall Packs | Full Cutoff



Standard

CATALOG NUMBER	WATTAGE	LUMENS	EFFICACY	INPUT VOLTAGE	HOUSING COLOR	DLC	CRI	AVAILABLE CCT	METAL HALIDE EQUIVALENT
KT-WPLED40-M2-8xx-VDIM	40W	5200	130 lm/W	120-277V	Bronze	Yes	>80	4000K or 5000K	175W MH
KT-WPLED60-M2-8xx-VDIM	60W	7800	130 lm/W	120-277V	Bronze	Yes	>80	4000K or 5000K	250W MH
KT-WPLED100-M2-8xx-VDIM	100W	13000	130 lm/W	120-277V	Bronze	Yes	>80	4000K or 5000K	400W MH

Components

CATALOG NUMBER	DESCRIPTION	
KTSP-10KV-C	External surge protector, compact design	
KT-WPLED-PS-UV-KO	Dusk-to-dawn photocell, installed behind existing translucent KO on fixture	

Sensors

CATALOG NUMBER	DESCRIPTION	
KTS-MW3-UV-KO-K1	Microwave sensor kit, includes 120-277V input to 12V DC converter and 12V input sensor head, IP65, bi-level control with adjustable hold time, dim level and standby time, installs via standard 1/2 in KO	
KTS-MW3-REMOTECONTROL	Remote control for KTS-xx3-12V sensors, used to set or adjust all sensor performance parameters	

Mounts and Brackets

CATALOG NUMBER	DESCRIPTION	
KT-WPLED-BP-M	Standard bronze back plate for medium-sized wall pack to cover footprint of large HID housings	

Wall Packs | Adjustable



Power and Color Select

CATALOG NUMBER	SELECTABLE WATTAGE	SELECTABLE CCT	LUMENS	EFFICACY	INPUT VOLTAGE	HOUSING COLOR	DLC	CRI
KT-WPLED35PS-S3-8CSB-VDIM	35W	3000K	4375	125 lm/W	120-277V	Bronze	Yes	>80
		4000K	5075	145 lm/W				
		5000K	4725	135 lm/W				
	25W	3000K	3375	135 lm/W	120-277V			
		4000K	3750	150 lm/W				
		5000K	3625	145 lm/W				
	15W	3000K	2178	145 lm/W	120-277V			
		4000K	2325	155 lm/W				
		5000K	2250	150 lm/W				
KT-WPLED35PS-S3-8CSB-VDIM-W	35W	3000K	4375	125 lm/W	120-277V	White	Yes	>80
		4000K	5075	145 lm/W				
		5000K	4725	135 lm/W				
	25W	3000K	3375	135 lm/W	120-277V			
		4000K	3750	150 lm/W				
		5000K	3625	145 lm/W				
	15W	3000K	2178	145 lm/W	120-277V			
		4000K	2325	155 lm/W				
		5000K	2250	150 lm/W				
KT-WPLED75PS-M3-8CSB-VDIM	75W	3000K	9375	125 lm/W	120-277V	Bronze	Yes	>80
		4000K	10875	145 lm/W				
		5000K	10125	135 lm/W				
	60W	3000K	8100	135 lm/W	120-277V			
		4000K	9000	150 lm/W				
		5000K	8700	145 lm/W				
	45W	3000K	6319	140 lm/W	120-277V			
		4000K	6975	155 lm/W				
		5000K	6750	150 lm/W				
KT-WPLED75PS-M3-8CSB-VDIM-W	75W	3000K	9375	125 lm/W	120-277V	White	Yes	>80
		4000K	10875	145 lm/W				
		5000K	10125	135 lm/W				
	60W	3000K	8100	135 lm/W	120-277V			
		4000K	9000	150 lm/W				
		5000K	8700	145 lm/W				
	45W	3000K	6319	140 lm/W	120-277V			
		4000K	6975	155 lm/W				
		5000K	6750	150 lm/W				

Small Low-Profile | Traditional



Color Select

CATALOG NUMBER	WATTAGE	SELECTABLE CCT	LUMENS	EFFICACY	INPUT VOLTAGE	HOUSING COLOR	DLC	CRI	METAL HALIDE EQUIVALENT
KT-WPLED20-S1-8CSB-VDIM	20W	3000K	2500	125 lm/W	120-277V	Bronze	Yes	>80	70W MH
		4000K	2700	135 lm/W					
		5000K	2600	130 lm/W					
KT-WPLED20-S1-8CSB-VDIM-W	20W	3000K	2500	125 lm/W	120-277V	White	Yes	>80	70W MH
		4000K	2700	135 lm/W					
		5000K	2600	130 lm/W					
KT-WPLED20-S1-8CSB-VDIM-B	20W	3000K	2500	125 lm/W	120-277V	Black	Yes	>80	70W MH
		4000K	2700	135 lm/W					
		5000K	2600	130 lm/W					

Standard

CATALOG NUMBER	WATTAGE	LUMENS	EFFICACY	INPUT VOLTAGE	HOUSING COLOR	DLC	CRI	METAL HALIDE EQUIVALENT	AVAILABLE CCT
KT-WPLED20-S1-8xx-VDIM	20W	2500	125 lm/W	120-277V	Bronze	Yes	>80	70W MH	4000K or 5000K

Components

CATALOG NUMBER	DESCRIPTION	
KTSP-10KV-C	External surge protector, compact design	

Sensors

CATALOG NUMBER	DESCRIPTION	
KTS-MW3-UV-KO-K1	Microwave sensor kit, includes 120-277V input to 12V DC converter and 12V input sensor head, IP65, bi-level control with adjustable hold time, dim level and standby time, installs via standard 1/2 in KO	
KTS-MW3-REMOTECONTROL	Remote control for KTS-xx3-12V sensors, used to set or adjust all sensor performance parameters	

Return to Table of Contents

Canopy Fixtures




Power and Color Select

CATALOG NUMBER	NOMINAL SIZE	WATTAGE	SELECTABLE CCT	LUMENS	EFFICACY	INPUT VOLTAGE	DIMMING	CRI	DISTRIBUTION	HOUSING COLOR	LEGACY EQUIVALENT
KT-CLED60PS-M1-8CSB-VDIM	10" square	60W	3000K	7500	125 lm/W	120-277V	0-10V	>80	160°	Bronze	250W MH
			4000K	8400	140 lm/W						
			5000K	7800	130 lm/W						
		50W	3000K	6250	125 lm/W						
			4000K	7000	140 lm/W						
			5000K	6500	130 lm/W						
		40W	3000K	5000	125 lm/W						
			4000K	5600	140 lm/W						
			5000K	5200	130 lm/W						
KT-CLED40PS-S1-8CSB-VDIM	8" square	40W	3000K	5000	125 lm/W	120-277V	0-10V	>80	160°	Bronze	175W MH
			4000K	5600	140 lm/W						
			5000K	5200	130 lm/W						
		30W	3000K	3750	125 lm/W						
			4000K	4200	140 lm/W						
			5000K	3900	130 lm/W						
		20W	3000K	2500	125 lm/W						
			4000K	2800	140 lm/W						
			5000K	2600	130 lm/W						
KT-CLED40PS-S1-8CSB-VDIM-W	8" square	40W	3000K	5000	125 lm/W	120-277V	0-10V	>80	160°	White	175W MH
			4000K	5600	140 lm/W						
			5000K	5200	130 lm/W						
		30W	3000K	3750	125 lm/W						
			4000K	4200	140 lm/W						
			5000K	3900	130 lm/W						
		20W	3000K	2500	125 lm/W						
			4000K	2800	140 lm/W						
			5000K	2600	130 lm/W						
KT-CLED25PS-S1-8CSB-VDIM	8" square	25W	3000K	3125	125 lm/W	120-277V	0-10V	>80	160°	Bronze	100W MH
			4000K	3500	140 lm/W						
			5000K	3250	130 lm/W						
		20W	3000K	2500	125 lm/W						
			4000K	2800	140 lm/W						
			5000K	2600	130 lm/W						
		15W	3000K	1875	125 lm/W						
			4000K	2100	140 lm/W						
			5000K	1950	130 lm/W						

Standard

CATALOG NUMBER	NOMINAL SIZE	WATTAGE	LUMENS	EFFICACY	INPUT VOLTAGE	DIMMING	CRI	DISTRIBUTION	HOUSING COLOR	LEGACY EQUIVALENT	AVAILABLE CCT
KT-CLED40-S1-850-VDIM	8" square	40W	5600	140 lm/W	120-277V	0-10V	>80	160°	Bronze	175W MH	5000K

Accessories

CATALOG NUMBER	DESCRIPTION	
KT-CLED-LENS-M1-110-KIT	110° beam angle lens for 10" square canopy	
KT-CLED-LENS-S1-110-KIT	110° beam angle lens for 8" square canopy	
KT-CLED-BP-15	Mounting back plate for canopy fixtures, bronze	
KT-CLED-BP-15-W	Mounting back plate for canopy fixtures, white	

Return to Table of Contents

Area Lights | Stocking Special Solutions

with opticswap



Power and Color Select

CATALOG NUMBER	WATTAGE SELECTABLE	SELECTABLE CCT	LUMENS	EFFICACY	INPUT VOLTAGE	HOUSING COLOR	DISTRIBUTION (OPTIC TYPE)	PHOTOCELL INCLUDED	CRI	LEGACY EQUIV.
KT-ALED140PS-M2-OSB-PMA-8CSB-VDIM-P	140W	3000K	17950	128 lm/W	120-277V	Bronze	III Installed, IV and V Included	Yes	>80	400W MH
		4000K	20780	148 lm/W						
		5000K	19020	136 lm/W						
	100W	3000K	12720	127 lm/W						
		4000K	14750	148 lm/W						
		5000K	13530	135 lm/W						
	70W	3000K	9310	133 lm/W						
		4000K	10740	153 lm/W						
		5000K	9880	141 lm/W						
KT-ALED140PS-M2-OSB-PMA-8CSB-VDIM-P-W	140W	3000K	17950	128 lm/W	120-277V	White	III Installed, IV and V Included	Yes	>80	400W MH
		4000K	20780	148 lm/W						
		5000K	19020	136 lm/W						
	100W	3000K	12720	127 lm/W						
		4000K	14750	148 lm/W						
		5000K	13530	135 lm/W						
	70W	3000K	9310	133 lm/W						
		4000K	10740	153 lm/W						
		5000K	9880	141 lm/W						
KT-ALED140PS-M2-OSB-SF-8CSB-VDIM-P	140W	3000K	17950	128 lm/W	120-277V	Bronze	III Installed, IV and V Included	Yes	>80	400W MH
		4000K	20780	148 lm/W						
		5000K	19020	136 lm/W						
	100W	3000K	12720	127 lm/W						
		4000K	14750	148 lm/W						
		5000K	13530	135 lm/W						
	70W	3000K	9310	133 lm/W						
		4000K	10740	153 lm/W						
		5000K	9880	141 lm/W						
KT-ALED140PS-M2-OSB-SF-8CSB-VDIM-P-W	140W	3000K	17950	128 lm/W	120-277V	White	III Installed, IV and V Included	Yes	>80	400W MH
		4000K	20780	148 lm/W						
		5000K	19020	136 lm/W						
	100W	3000K	12720	127 lm/W						
		4000K	14750	148 lm/W						
		5000K	13530	135 lm/W						
	70W	3000K	9310	133 lm/W						
		4000K	10740	153 lm/W						
		5000K	9880	141 lm/W						

chart continued on next page

Area Lights | Stocking Special Solutions
with optic swap



Power and Color Select

CATALOG NUMBER	SELECTABLE WATTAGE	SELECTABLE CCT	LUMENS	EFFICACY	INPUT VOLTAGE	HOUSING COLOR	DISTRIBUTION	PHOTOCELL INCLUDED	CRI	LEGACY EQUIVALENT
KT-ALED290PS-L2-OSB-PMA-8CSB-VDIM-P	290W	3000K	36320	125 lm/W	120-277V	Bronze	III Installed, IV and V Included	Yes	>80	1000W MH
		4000K	42770	147 lm/W						
		5000K	38700	133 lm/W						
	210W	3000K	27300	130 lm/W						
		4000K	31710	151 lm/W						
		5000K	28980	138 lm/W						
	185W	3000K	22970	124 lm/W						
		4000K	27060	146 lm/W						
		5000K	24440	132 lm/W						
KT-ALED290PS-L2-OSB-PMA-8CSB-VDIM-P-W	290W	3000K	36320	125 lm/W	120-277V	White	III Installed, IV and V Included	Yes	>80	1000W MH
		4000K	42770	147 lm/W						
		5000K	38700	133 lm/W						
	210W	3000K	27300	130 lm/W						
		4000K	31710	151 lm/W						
		5000K	28980	138 lm/W						
	185W	3000K	22970	124 lm/W						
		4000K	27060	146 lm/W						
		5000K	24440	132 lm/W						
KT-ALED290PS-L2-OSB-SF-8CSB-VDIM-P	290W	3000K	36320	125 lm/W	120-277V	Bronze	III Installed, IV and V Included	Yes	>80	1000W MH
		4000K	42770	147 lm/W						
		5000K	38700	133 lm/W						
	210W	3000K	27300	130 lm/W						
		4000K	31710	151 lm/W						
		5000K	28980	138 lm/W						
	185W	3000K	22970	124 lm/W						
		4000K	27060	146 lm/W						
		5000K	24440	132 lm/W						
KT-ALED290PS-L2-OSB-SF-8CSB-VDIM-P-W	290W	3000K	36320	125 lm/W	120-277V	White	III Installed, IV and V Included	Yes	>80	1000W MH
		4000K	42770	147 lm/W						
		5000K	38700	133 lm/W						
	210W	3000K	27300	130 lm/W						
		4000K	31710	151 lm/W						
		5000K	28980	138 lm/W						
	185W	3000K	22970	124 lm/W						
		4000K	27060	146 lm/W						
		5000K	24440	132 lm/W						

Return to Table of Contents

Area Lights | Mainstream
with optic swap



Power and Color Select

CATALOG NUMBER	WATTAGE	SELECTABLE CCT	LUMENS	EFFICACY	INPUT VOLTAGE	HOUSING COLOR	DISTRIBUTION (OPTIC TYPE)	PHOTOCELL INCLUDED	CRI	LEGACY EQUIV.
KT-ALED140PSHV-M2-OSA-NM-8CSB-VDIM	140W	3000K	17950	128 lm/W	277-480V	Bronze	III Installed, V Included	No	>80	400W MH
		4000K	20780	148 lm/W						
		5000K	19020	136 lm/W						
	100W	3000K	12720	127 lm/W						
		4000K	14750	148 lm/W						
		5000K	13530	135 lm/W						
	70W	3000K	9310	133 lm/W						
		4000K	10740	153 lm/W						
		5000K	9880	141 lm/W						
KT-ALED290PSHV-L2-OSA-NM-8CSB-VDIM	290W	3000K	36320	125 lm/W	277-480V	Bronze	III Installed, V Included	No	>80	1000W MH
		4000K	42770	147 lm/W						
		5000K	38700	133 lm/W						
	210W	3000K	27300	130 lm/W						
		4000K	31710	151 lm/W						
		5000K	28980	138 lm/W						
	185W	3000K	22970	124 lm/W						
		4000K	27060	146 lm/W						
		5000K	24440	132 lm/W						

Standard

CATALOG NUMBER	WATTAGE	AVAILABLE CCT	LUMENS	EFFICACY	INPUT VOLTAGE	HOUSING COLOR	DISTRIBUTION (OPTIC TYPE)	PHOTOCELL INCLUDED	CRI	LEGACY EQUIV.
KT-ALED70-S2-OSA-NM-8XX-VDIM	70W	4000K or 5000K	10810	154 lm/W	120-277V	Bronze	III Installed, V Included	No	>80	250W MH
KT-ALED100-S2-OSA-NM-8XX-VDIM	100W	4000K or 5000K	14850	149 lm/W						320W MH
KT-ALED140-M2-OSA-NM-8XX-VDIM	140W	4000K or 5000K	20920	149 lm/W						400W MH
KT-ALED210-L2-OSA-NM-8XX-VDIM	210W	4000K or 5000K	31710	151 lm/W						750W MH
KT-ALED290-L2-OSA-NM-8XX-VDIM	290W	4000K or 5000K	42420	146 lm/W						1000W MH

Area Lights | Mainstream
with opticswap



Mounting Kits

CATALOG NUMBER	DESCRIPTION	HOUSING COLOR	
KT-ALED-PM-1-KIT	Fixed pole mount kit, suitable for round or square poles	Bronze	
KT-ALED-PMA-1-KIT	Adjustable pole mount kit, suitable for round or square poles	Bronze	
KT-ALED-SF-1-KIT	Slipfitter mount kit, fits 2 3/8" tenon	Bronze	
KT-ALED-TM-1-KIT	Trunnion mount kit	Bronze	

Performance Accessories

CATALOG NUMBER	DESCRIPTION	
KT-ALED-GS-S1-KIT	Reversible glare shield kit for small area light fixtures, bronze housing	
KT-ALED-GS-M1-KIT	Reversible glare shield kit for medium area light fixtures, bronze housing	
KT-ALED-GS-L1-KIT	Reversible glare shield kit for large area light fixtures, bronze housing	
KTSP-10KV-C	10kV surge protector, compact design	

Control Accessories

CATALOG NUMBER	DESCRIPTION	
KT-TLP-UV-3PN	NEMA 3-pin photocell 120-277V, 1800VA max, blue housing	
KT-TLP-HV-3PN	NEMA 3-pin photocell 200-480V, 1800VA max, yellow housing	
KT-RSC-7PN	NEMA 7-pin receptacle and shorting cap, black housing	

Return to Table of Contents

Area Lights | Mainstream
with opticswap



Wall Mount Tenon Adaptors FOR SLIPFITTER FIXTURE MOUNT

CATALOG NUMBER	DESCRIPTION
KT-WMT-S	Wall mount single 2 3/8" tenon, bronze housing
KT-WMT-S90	Wall mount single 2 3/8" tenon, 90°, bronze housing

Pole Mount Side Tenon Adaptors FOR SLIPFITTER FIXTURE MOUNT



CATALOG NUMBER	DESCRIPTION
KT-PMST-SQ-S	Pole mount single 2 3/8" tenon, side mount for square pole, bronze housing
KT-PMST-R-S	Pole mount single 2 3/8" tenon, side mount for round pole, bronze housing

Pole Mount Top Tenon Adaptors FOR SLIPFITTER FIXTURE MOUNT

CATALOG NUMBER	DESCRIPTION
KT-PMTT-4R-SV	Pole mount single 2 3/8" tenon, top mount vertical for 4" round pole, bronze housing
KT-PMTT-4SQ-SV	Pole mount single 2 3/8" tenon, top mount vertical for 4" square pole, bronze housing
KT-PMTT-5SQ-SV	Pole mount single 2 3/8" tenon, top mount vertical for 5" square pole, bronze housing
KT-PMTT-4SQ-S90	Pole mount single 2 3/8" tenon, top mount horizontal 90° for 4" square pole, bronze housing
KT-PMTT-4SQ-D180	Pole mount dual 2 3/8" tenon, top mount horizontal 180° for 4" square pole, bronze housing
KT-PMTT-4SQ-D90	Pole mount dual 2 3/8" tenon, top mount horizontal 90° for 4" square pole, bronze housing
KT-PMTT-4SQ-T90	Pole mount triple 2 3/8" tenon, top mount horizontal 90° for 4" square pole, bronze housing
KT-PMTT-4SQ-Q90	Pole mount quad 2 3/8" tenon, top mount horizontal 90° for 4" square pole, bronze housing

Bullhorn Adaptors FOR SLIPFITTER FIXTURE MOUNT

CATALOG NUMBER	DESCRIPTION
KT-BH-SF-D180	Dual bullhorn, in-line 180°, slips over 2 3/8" tenon
KT-BH-SF-T180	Triple bullhorn, in-line 180°, slips over 2 3/8" tenon
KT-BH-SF-T120	Triple bullhorn, 120°, slips over 2 3/8" tenon
KT-BH-SF-Q180	Quad bullhorn, in-line 180°, slips over 2 3/8" tenon
KT-BH-SF-Q90	Quad bullhorn, 90°, slips over 2 3/8" tenon

 KT-WMT-S	 KT-WMT-S90	 KT-PMST-SQ-S	 KT-PMTT-4R-SV	 KT-PMTT-4SQ-SV AND KT-PMTT-5SQ-SV
 KT-PMTT-4SQ-D90	 KT-PMTT-4SQ-D180	 KT-PMTT-4SQ-T90	 T-PMTT-4SQ-Q90	 KT-BH-SF-D180
 KT-BH-SF-T180	 KT-BH-SF-T120	 KT-BH-SF-Q180		 KT-BH-SF-Q90

Dusk-to-Dawn Fixture | Area Lights



Power and Color Select

CATALOG NUMBER	SELECTABLE WATTAGE	SELECTABLE CCT	LUMENS	EFFICACY	INPUT VOLTAGE	HOUSING COLOR	DISTRIBUTION	DLC	MOUNTING INCLUDED	CRI	METAL HALIDE EQUIVALENT
KT-ALED60PS-D2D-WM-8CSB-VDIM	60W	3000K	9000	150 lm/w	120-277V	Gray	V	Yes	No	>80	150-250W MH
		4000K	9250	154 lm/w							
		5000K	9120	152 lm/w							
	40W	3000K	6640	166 lm/w							
		4000K	6850	171 lm/w							
		5000K	6720	168 lm/w							
	30W	3000K	5010	167 lm/w							
		4000K	5200	173 lm/w							
		5000K	5100	170 lm/w							

Standard

CATALOG NUMBER	WATTAGE	CCT	LUMENS	EFFICACY	INPUT VOLTAGE	HOUSING COLOR	DISTRIBUTION	DLC	CRI	METAL HALIDE EQUIVALENT
KT-ALED40-D2D-WM-850-VDIM	40W	5000K	6150	155 lm/W	120-277V	Gray	V	Yes	>80	175W MH

Mounts and Brackets


CATALOG NUMBER	DESCRIPTION
KT-ALED-CA-D2D-KIT	24" curved arm mounting pole, for dusk-to-dawn area light, gray



Return to Table of Contents



Complimentary Lighting Layouts



As a maker of a wide variety of outdoor lighting products, Keystone knows how valuable providing solutions for lighting design can be.

That's why we can provide answers to your lighting questions to determine how many fixtures you need, what types of lamps are best for your applications, and how to save the maximum amount of energy, all within budget.

By utilizing industry-leading lighting layout design software, we provide accurate and dependable application renderings. For new constructions or retrofit, simply provide Keystone with a few key project details, and our lighting designers will get to work on your request.

Visit: keystonetech.com/lighting-layout

Ordering a free sample is always easy.

keystonetech.com/samples

samples@keystonetech.com

800.464.2680



The Keystone Difference

Our mission at Keystone is to change the way you think about lighting. We believe that lighting should be simple, hassle-free, and enjoyable. Keystone is Light Made Easy®.

- Fast Quotes
- Quick Delivery
- Trusted Brand Since 1945
- Complimentary Lighting Layouts
- No Questions Asked Return Policy
- Free Samples



SINCE 1945

KEYSTONE

LIGHT MADE EASY®

Keystone Technologies Philadelphia, PA 800.464.2680 keystonetech.com

LAMPS | FIXTURES | POWER SUPPLIES | CONTROLS

LIT-BR-OUTDOOR-FIX